



Steps to use the Qt Design Studio using the ModusToolbox™

Customer training workshop (CTW)

December 2025

public



Scope of work

- This document shows the steps to set up the Qt Design Studio and also use the CYT4DN evaluation kit. It also describes the procedure of debugging and editing of design using the Qt Design Studio from ModusToolbox™ (MTB) environment.
- **Devices and boards supported by ModusToolbox™**

Device series	Lite kit	Device
<u>TRAVEO™ T2G 2D cluster</u>	<u>KIT_T2G_C-2D-6M_LITE</u>	CYT4DNJBZS

Getting started

- This section explains the hardware setup. The following table lists the prerequisites for the setup
- This document is explained using TRAVEO™ T2G 2D cluster Lite evaluation kit which mounts the CYT4DN device as an example

Quantity	Description	Remarks
1	KIT_T2G_C-2D-6M_LITE	CYT4DNJBZS evaluation kit
2	Micro USB cable	Type-A to Type-C cable
1	PC	USB-A port
-	ModusToolbox™ software	v3.5 or later
-	Qt Design Studio	v4.7 or later
-	TRAVEO™ T2G Virtual Display Tool	Installer link

Note: It is recommended to use two cables: one to write to the flash via the ModusToolbox™ and another to output JPEG from the board. While both cables are not required simultaneously, having two can simplify the workflow.

Table of contents

1	Hardware setup	5
2	Install the Qt Design Studio	7
3	Install and setting the TRAVEO™ T2G Virtual Display Tool	13
4	Prerequisite to create a new application	15
5	Create a new application	17
6	Compiling and programming	21
7	Run and test	24
8	Steps to modify the image	26
9	References	28

Table of contents

1	Hardware setup	5
2	Install the Qt Design Studio	7
3	Install and setting the TRAVEO™ T2G Virtual Display Tool	13
4	Prerequisite to create a new application	15
5	Create a new application	17
6	Compiling and programming	21
7	Run and test	24
8	Steps to modify the image	26
9	References	28

Hardware setup

- This section explains the hardware setup.
- The KitProg3 USB connector (X400) is needed for communicating between the board and ModusToolbox™
- The FX3 connector (X500) is used for outputting the JPEG and graphics from the board


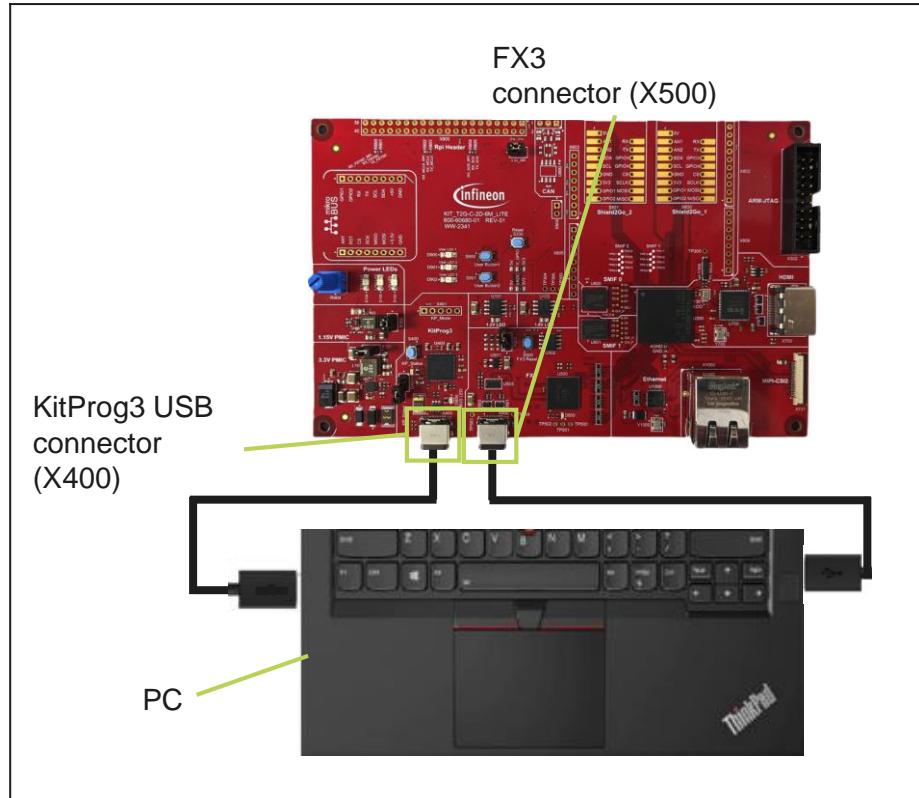


Table of contents

1	Hardware setup	5
2	Install the Qt Design Studio	7
3	Install and setting the TRAVEO™ T2G Virtual Display Tool	13
4	Prerequisite to create a new application	15
5	Create a new application	17
6	Compiling and programming	21
7	Run and test	24
8	Steps to modify the image	26
9	References	28

Install the Qt Design Studio (1/5)

1. To procure the license, go to [Qt + Infineon](#) for more details.
 - a. Add the valid details in the Evaluation form and click **Submit**.
 - b. Shortly after submission, you will receive your login credentials from Qt via email.

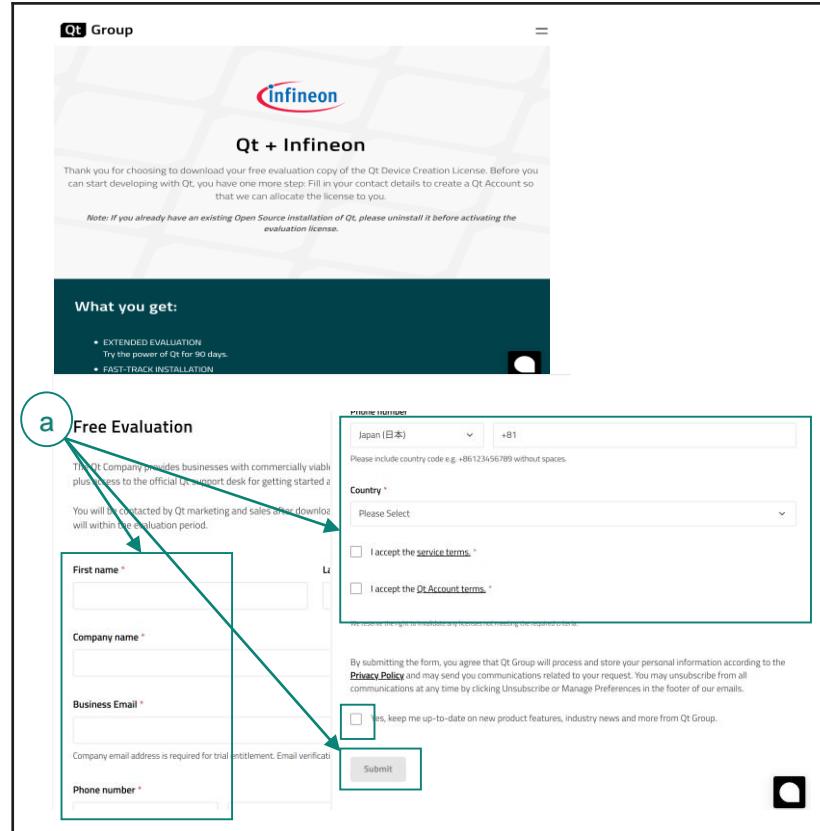

Qt Group

infineon

Qt + Infineon

Thank you for choosing to download your free evaluation copy of the Qt Device Creation License. Before you can start developing with Qt, you have one more step. Fill in your contact details to create a Qt Account so that we can allocate the license to you.

Note: If you already have an existing Open Source installation of Qt, please uninstall it before activating the evaluation license.

What you get:

- EXTENDED EVALUATION Try the power of Qt for 90 days.
- FAST-TRACK INSTALLATION

a Free Evaluation

The Qt Company provides businesses with commercially viable plus access to the official Qt support desk for getting started.

You will be contacted by Qt marketing and sales after download within the evaluation period.

First name *

Company name *

Business Email *

Phone number *

Japan (日本) +81

Please include country code e.g. +86123456789 without spaces.

Country *

Please Select

I accept the [service terms](#) *

I accept the [Qt Account terms](#) *


By submitting the form, you agree that Qt Group will process and store your personal information according to the [Privacy Policy](#) and may send you communications related to your request. You may unsubscribe from all communications at any time by clicking [Unsubscribe](#) or [Manage Preferences](#) in the footer of our emails.

Yes, keep me up-to-date on new product features, industry news and more from Qt Group.


Submit

Install the Qt Design Studio (2/5)

2. After you receive the email, you will be prompted to set a password.
 - a. When you click the **Set Password** button, the online installer will be downloaded automatically
 - b. Based on the process that is displayed in the latest qt-online-installer.exe, proceed with the installation of Qt Design Studio

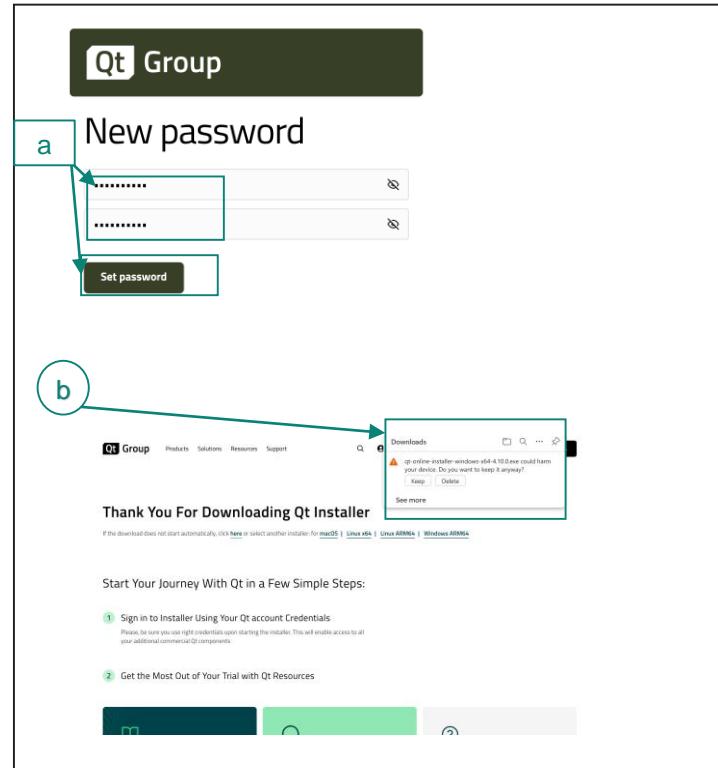


Install the Qt Design Studio (3/5)

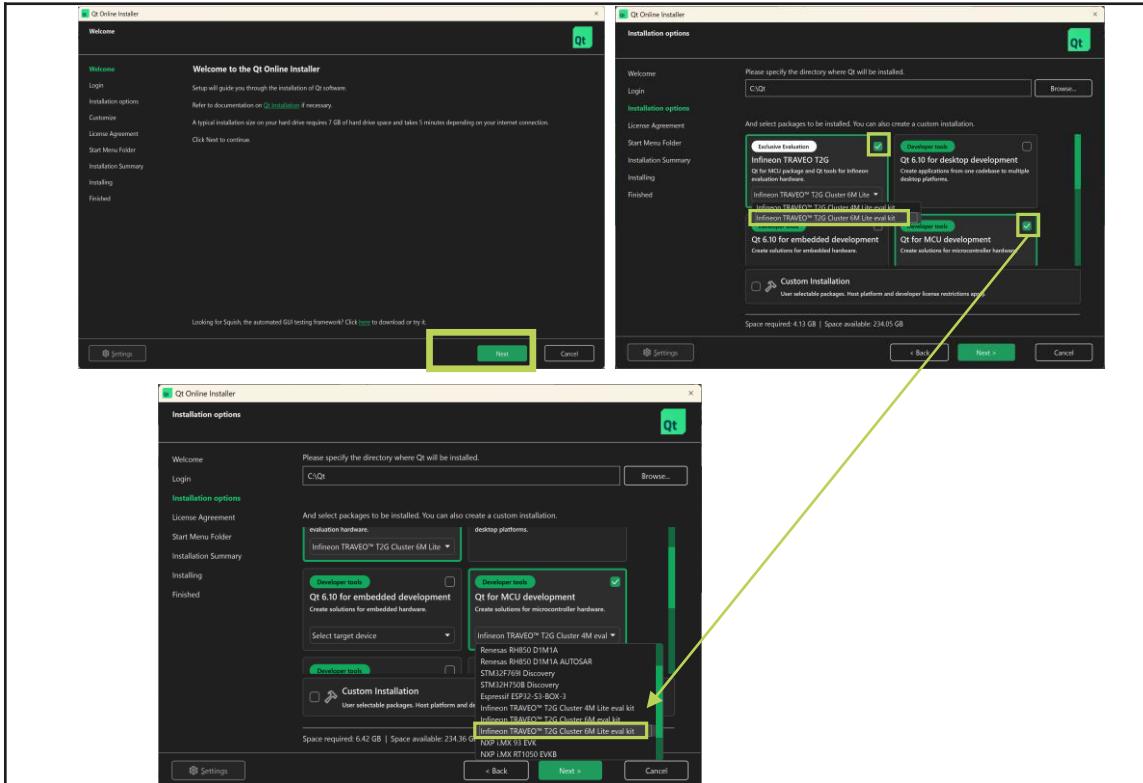

Note: During the installation process, ensure that Qt Design Studio is selected as an essential component. Select the check box if needed.

Install the Qt Design Studio (4/5)

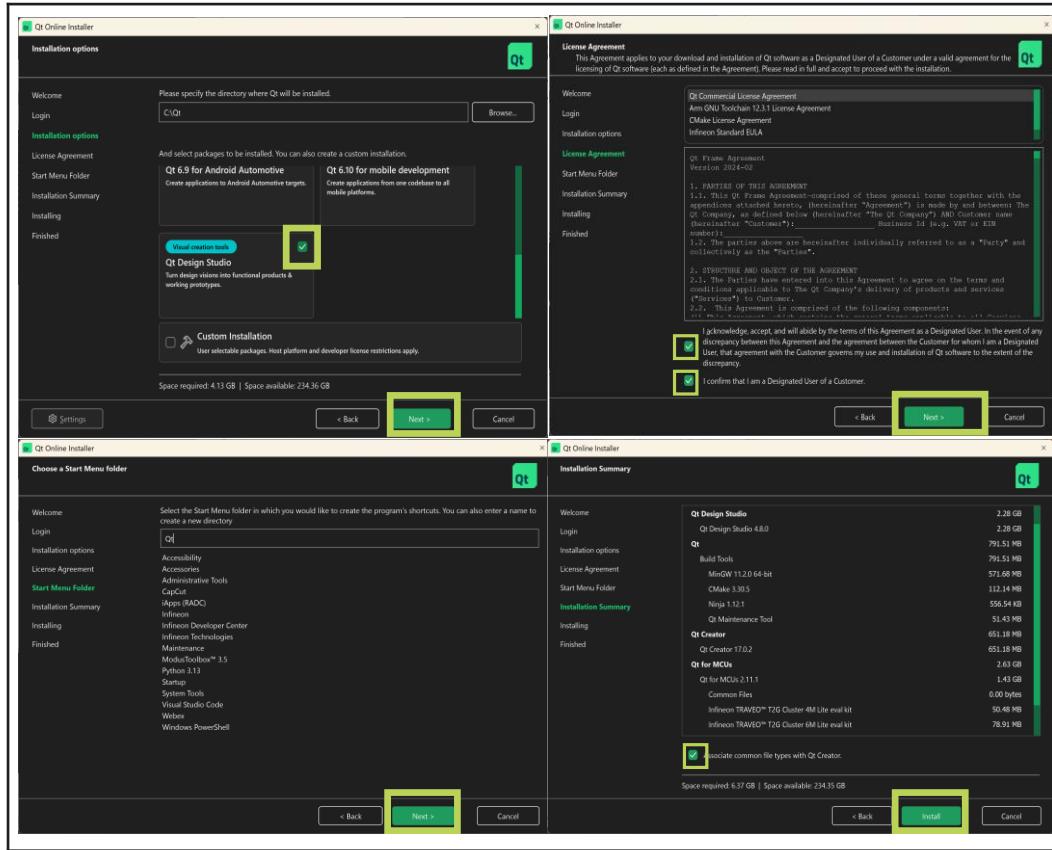


Note: During the installation process, ensure that Qt Design Studio is selected as an essential component. Select the check box if needed.

Install the Qt Design Studio (5/5)

4. For your reference,

- a. Check if your license is valid.
- b. Check the expiration date of your Qt Design Studio Enterprise license.

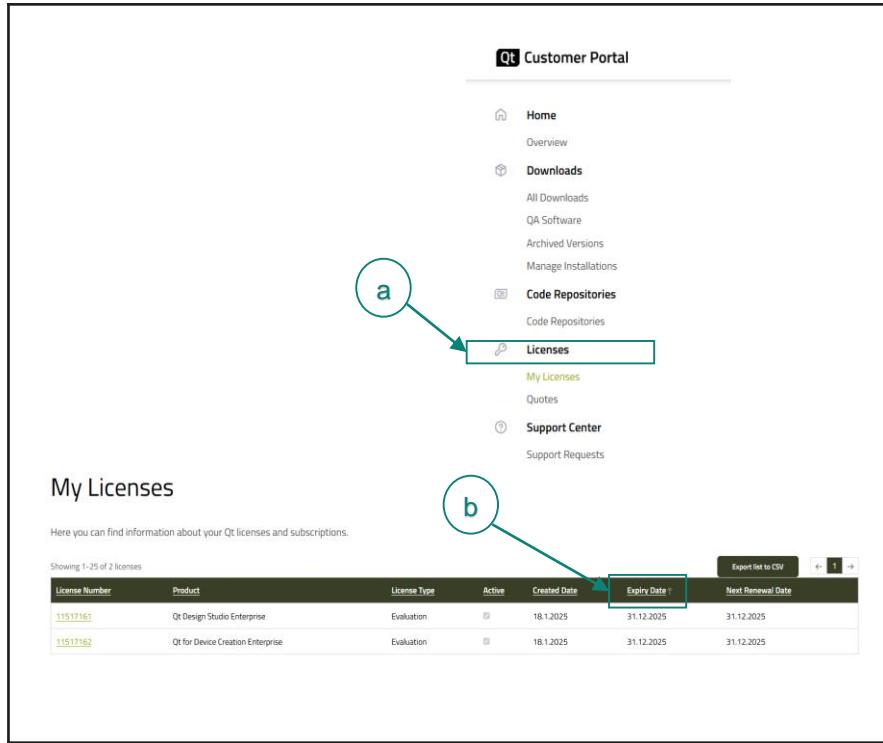

Qt Customer Portal

- Home
- Overview
- Downloads
 - All Downloads
 - QA Software
 - Archived Versions
 - Manage Installations
- Code Repositories
 - Code Repositories
- Licenses**
- My Licenses
- Quotes
- Support Center
 - Support Requests

My Licenses

Here you can find information about your Qt licenses and subscriptions.

Showing 1-25 of 2 licenses

License Number	Product	License Type	Active	Created Date	Expiry Date	Next Renewal Date
11517161	Qt Design Studio Enterprise	Evaluation	<input type="checkbox"/>	18.1.2025	31.12.2025	31.12.2025
11517162	Qt for Device Creation Enterprise	Evaluation	<input type="checkbox"/>	18.1.2025	31.12.2025	31.12.2025

Table of contents

1	Hardware setup	5
2	Install the Qt Design Studio	7
3	Install and setting the TRAVEO™ T2G Virtual Display Tool	13
4	Prerequisite to create a new application	15
5	Create a new application	17
6	Compiling and programming	21
7	Run and test	24
8	Steps to modify the image	26
9	References	28

Install and setting the TRAVEO™ T2G Virtual Display Tool



To download the software and display the image, follow the steps below:

1. Click the [Installer link](#) and proceed with the installation.
2. Run the following file from an installation folder.
TRAVEO_T2G_Virtual_Display_Tool.exe
3. To configure the tool for graphics-related code examples, use the following settings.
 - a. **Capture Sources:** Set to FX3
 - b. **Resolutions:** Set to 800x480
 - c. **Colour Mode:** Set to BGR Mode
4. Click the **Start Stream** button to begin streaming.

Note: The capture source FX3 will only be displayed when connected to the FX3 connector (X500).


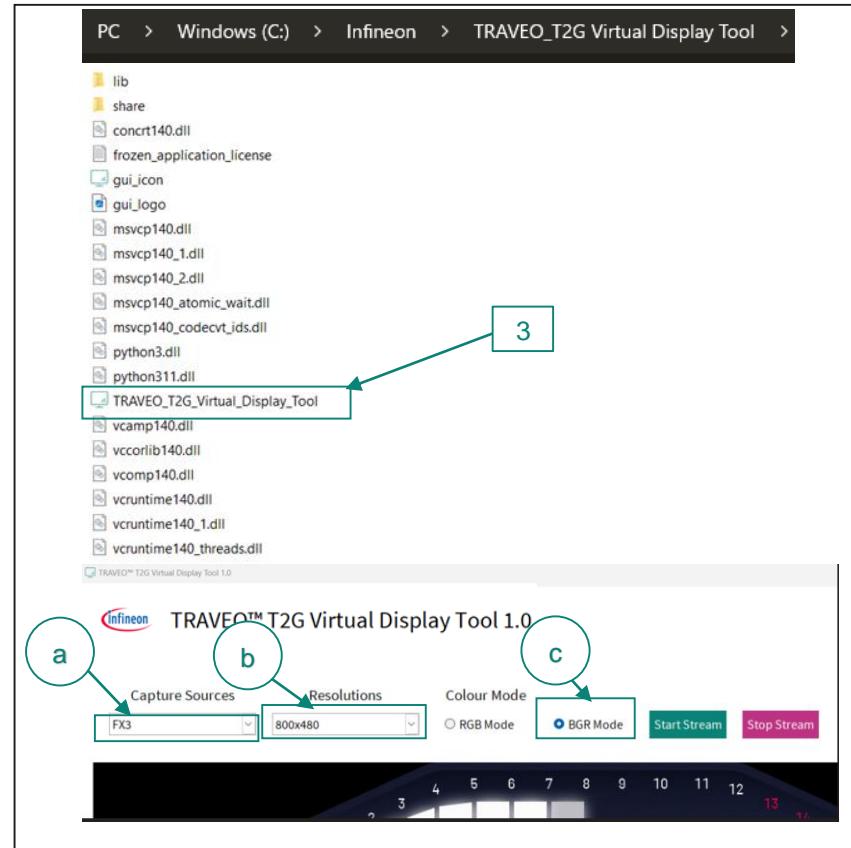


Table of contents

1	Hardware setup	5
2	Install the Qt Design Studio	7
3	Install and setting the TRAVEO™ T2G Virtual Display Tool	13
4	Prerequisite to create a new application	15
5	Create a new application	17
6	Compiling and programming	21
7	Run and test	24
8	Steps to modify the image	26
9	References	28

Prerequisite to create a new application

1. Support for additional code example:
 - a. In the **Start** menu, search for **Edit environment variable**.
 - b. In the popup window, click **New** to create a new variable under **New System Variable**.
 - c. Set the following environmental variables:
 - **Variable name:** QUL_DIR
 - **Variable value:** C:/Qt/QtMCUs/2.10.1

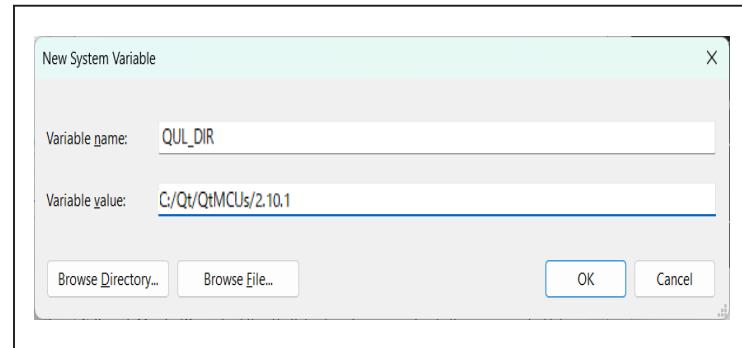


Note: When setting the “QUL_DIR” variable with Windows style path separators, it will fail, use the “/” symbol instead of the “\\” use forward slashes (/) instead of backslashes (\\) in the path, as Windows-style separators may cause errors. The above Variable value depends on the directory in which QDS is installed.

Table of contents

1	Hardware setup	5
2	Install the Qt Design Studio	7
3	Install and setting the TRAVEO™ T2G Virtual Display Tool	13
4	Prerequisite to create a new application	15
5	Create a new application	17
6	Compiling and programming	21
7	Run and test	24
8	Steps to modify the image	26
9	References	28

Create a new application (1/3)


1. Launch **ModusToolbox™** and connect the board and PC using a USB cable (KitProg3 USB connector) to power.
2. Use the Eclipse IDE for ModusToolbox™ software for compiling.
3. Create an application:
 - a. Click the **New Application** in the Quick Panel
4. Select the board support package (BSP) file and then click **Next**.

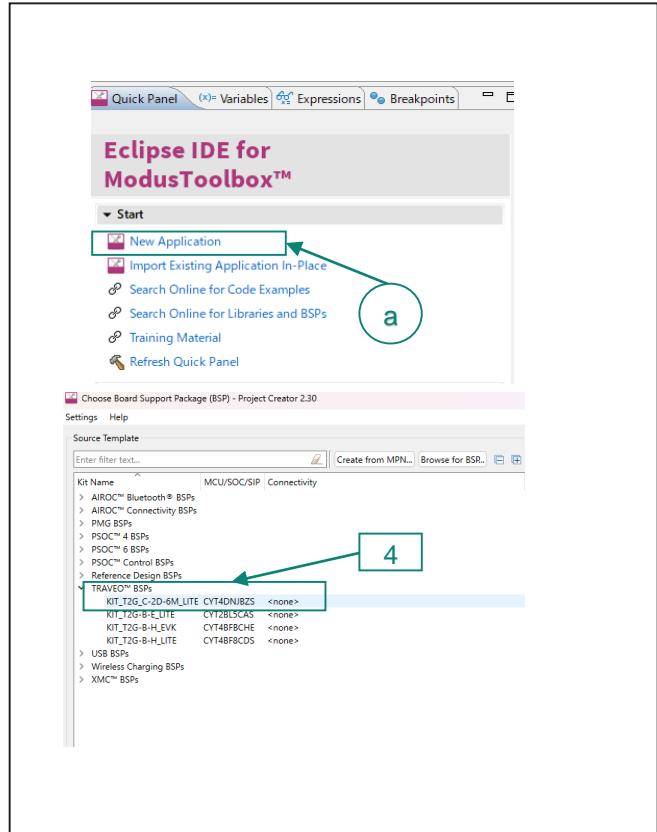

Create a new application (2/3)

5. Select the application of **Graphics** **JPEG_Output / Graphics_Empty** from Demonstration Graphics category. In this case, it is explained as **Graphics_JPEG_Output**.

6. Click the **Create** button to begin the project creation process.

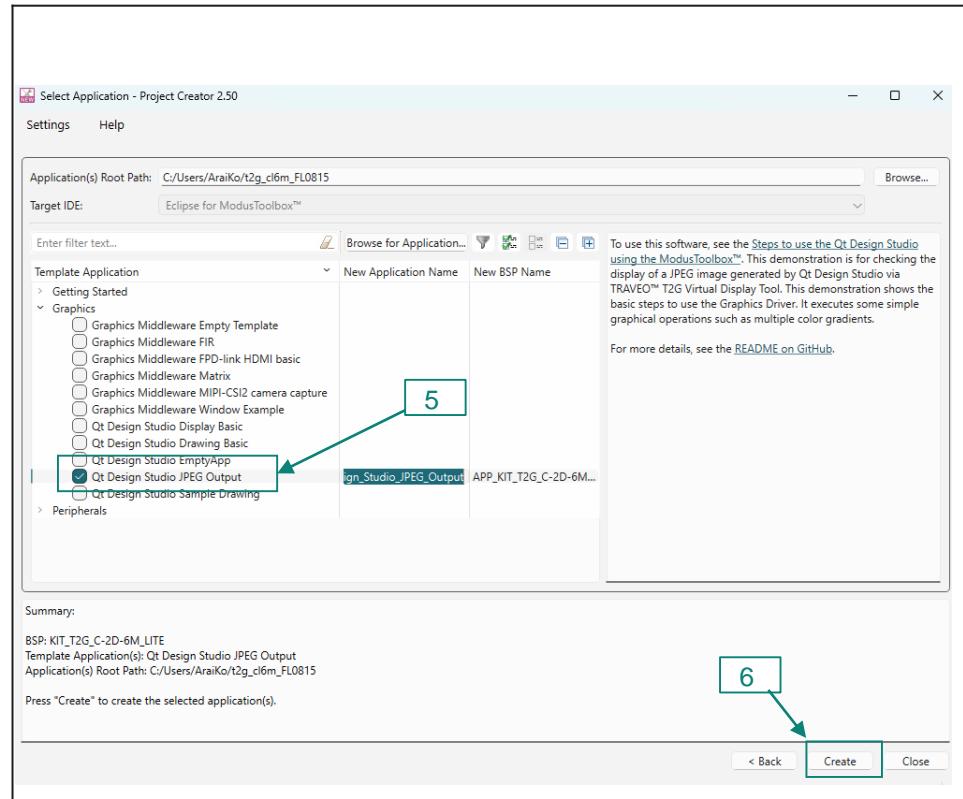

Create a new application (3/3)

7. Run command in the terminal: “make export_qmlproject” to generate the “QtMCUs”.
8. If the QtMCUs folder is created, the work as generation is complete.

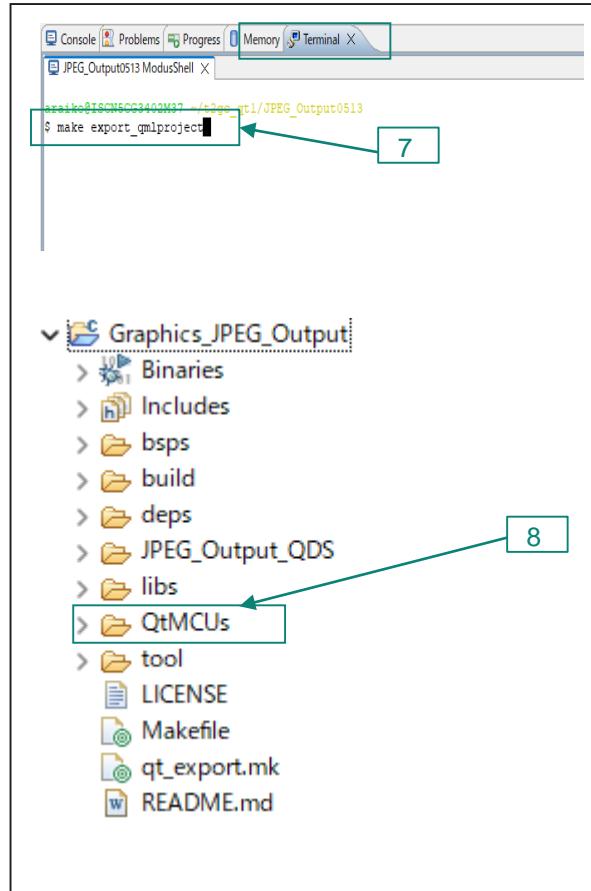



Table of contents

1	Hardware setup	5
2	Install the Qt Design Studio	7
3	Install and setting the TRAVEO™ T2G Virtual Display Tool	13
4	Prerequisite to create a new application	15
5	Create a new application	17
6	Compiling and programming	21
7	Run and test	24
8	Steps to modify the image	26
9	References	28

Compiling and programming

1. For compilation:

- In the Project Explorer, select the target application project (for example, JPEG_Output, as shown in figure).
- In the Quick Panel, scroll down and click **Build Project** in JPEG_Output (APP_KIT_T2G_C-2D-6M_LITE).

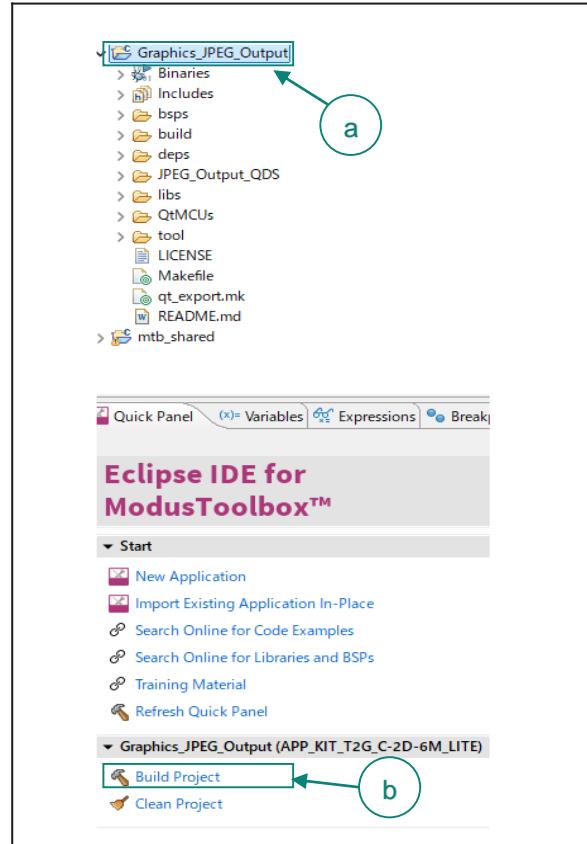

Compiling and programming (contd.)

2. For programming:

- Select the target application project in the Project Explorer.
- In the Quick Panel, and click **Graphics_JPEG_Output Program (KitProg3_MiniProg4)** in the Launches category.

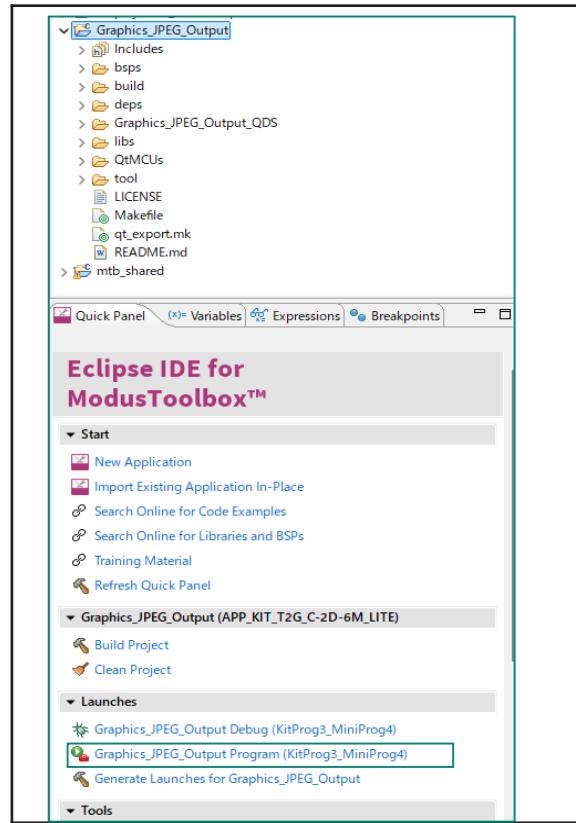


Table of contents

1	Hardware setup	5
2	Install the Qt Design Studio	7
3	Install and setting the TRAVEO™ T2G Virtual Display Tool	13
4	Prerequisite to create a new application	15
5	Create a new application	17
6	Compiling and programming	21
7	Run and test	24
8	Steps to modify the image	26
9	References	28

Run and test

3. To confirm the image display, do the following:

- a. Ensure that the USB cable is connected to the FX3 connector (X500) as described in the [Hardware setup](#)
- b. Launch the TRAVEO™ T2G Virtual Display Tool. See [Install the TRAVEO™ T2G Virtual Display Tool](#) for more details.
- c. A JPEG image is displayed as shown in the figure.

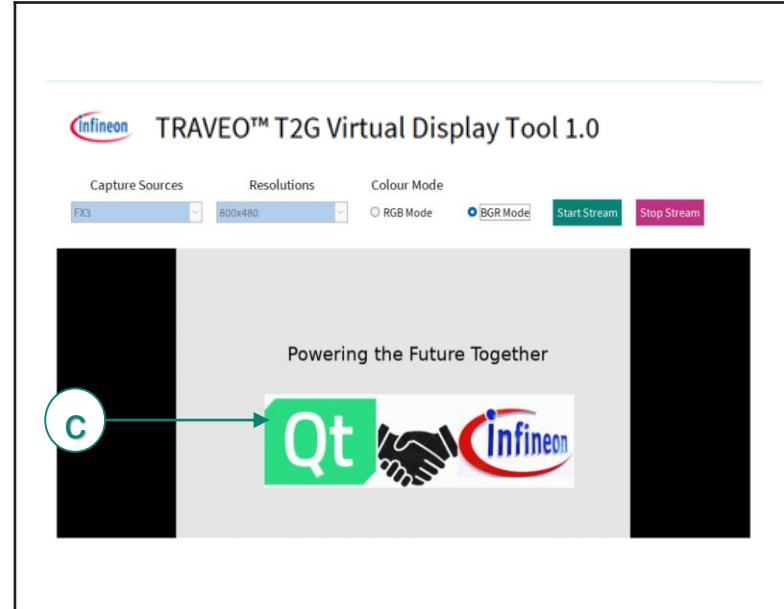


Table of contents

1	Hardware setup	5
2	Install the Qt Design Studio	7
3	Install and setting the TRAVEO™ T2G Virtual Display Tool	13
4	Prerequisite to create a new application	15
5	Create a new application	17
6	Compiling and programming	21
7	Run and test	24
8	Steps to modify the image	26
9	References	28

Steps to modify the image

This section demonstrates how to edit the JPEG image, such as changing the image, adjusting the resolution, modifying the text code, and more. You can modify the content using Qt Design Studio.

1. To Launch the Qt Design Studio for editing JPEG image:

- a. Go to the <project_name>_QDS folder.
- b. Double-click to open the <project_name>.qmlproject.
- c. You can edit it according to the general operation of Qt Design Studio.
- d. When finished modifying the image, exit to the Qt Design Studio.
- e. If you start this process again, you will see the new image file modified by Qt Design Studio in the TRAVEO™ T2G Virtual Display Tool.

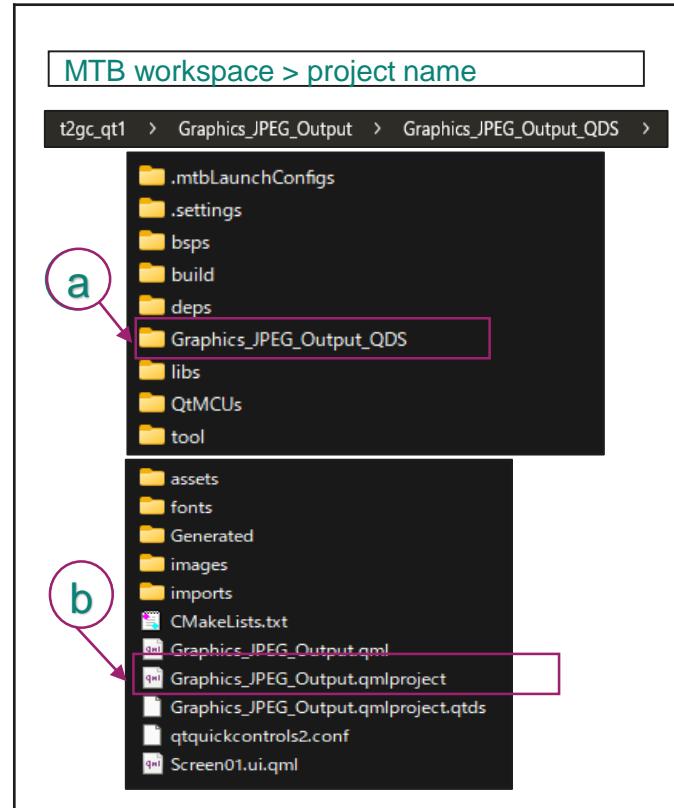


Table of contents

1	Hardware setup	5
2	Install the Qt Design Studio	7
3	Install and setting the TRAVEO™ T2G Virtual Display Tool	13
4	Prerequisite to create a new application	15
5	Create a new application	17
6	Compiling and programming	21
7	Run and test	24
8	Steps to modify the image	26
9	References	28

References

- **Datasheet**
 - [CYT4DN TRAVEO™ T2G 32-bit Automotive MCU based on Arm® Cortex®- M7 dual](#)
- **Architecture reference manual**
 - [TRAVEO™ T2G Automotive MCU body controller high architecture reference manual](#)
- **Registers reference manual**
 - [TRAVEO™ Automotive MCU: TVII-C-2D-6M cluster 2D registers reference manual](#)
- **PDL**
 - [Peripheral driver library \(PDL\)](#)
- **Training**
 - [TRAVEO™ T2G training](#)

Revision history

Document revision	Date	Description of change
**	2025-06-02	Initial release
*A	2025-12-08	Updated the slides: 5, 6, 7, and 8

