Please note that Cypress is an Infineon Technologies Company.
The document following this cover page is marked as “Cypress” document as this is the company that originally developed the product. Please note that Infineon will continue to offer the product to new and existing customers as part of the Infineon product portfolio.

Continuity of document content
The fact that Infineon offers the following product as part of the Infineon product portfolio does not lead to any changes to this document. Future revisions will occur when appropriate, and any changes will be set out on the document history page.

Continuity of ordering part numbers
Infineon continues to support existing part numbers. Please continue to use the ordering part numbers listed in the datasheet for ordering.

CE220061 – PSoC 6 MCU: Multi-Counter Watchdog Interrupts

Objective

This example demonstrates the operation of multi-counter watchdog timer (MCWDT) counters and interrupts in PSoC® 6 MCU.

Overview

This example uses two MCWDT PSoC Creator™ Components available in the PSoC 6 MCU devices to generate periodic events. These periodic events are used to drive GPIO pins.

Requirements

Tool: PSoC Creator™ 4.2

Programming Language: C (Arm® GCC 5.4-2016-q2-update, Arm MDK 5.22)

Associated Parts: All PSoC 6 MCU parts

Related Hardware: CY8CKIT-062-BLE PSoC 6 BLE Pioneer Kit

Design

The design shown in Figure 1 consists of two MCWDT_PDL PSoC Creator Components namely MCWDT_0 and MCWDT_1. Each MCWDT block has two 16-bit counters (Counter0 and Counter1) and one 32-bit counter (Counter2). All counters are clocked by either LFCLK (nominal 32 kHz) or by a cascaded counter.

Figure 1. MCWDT Interrupts Example Schematic

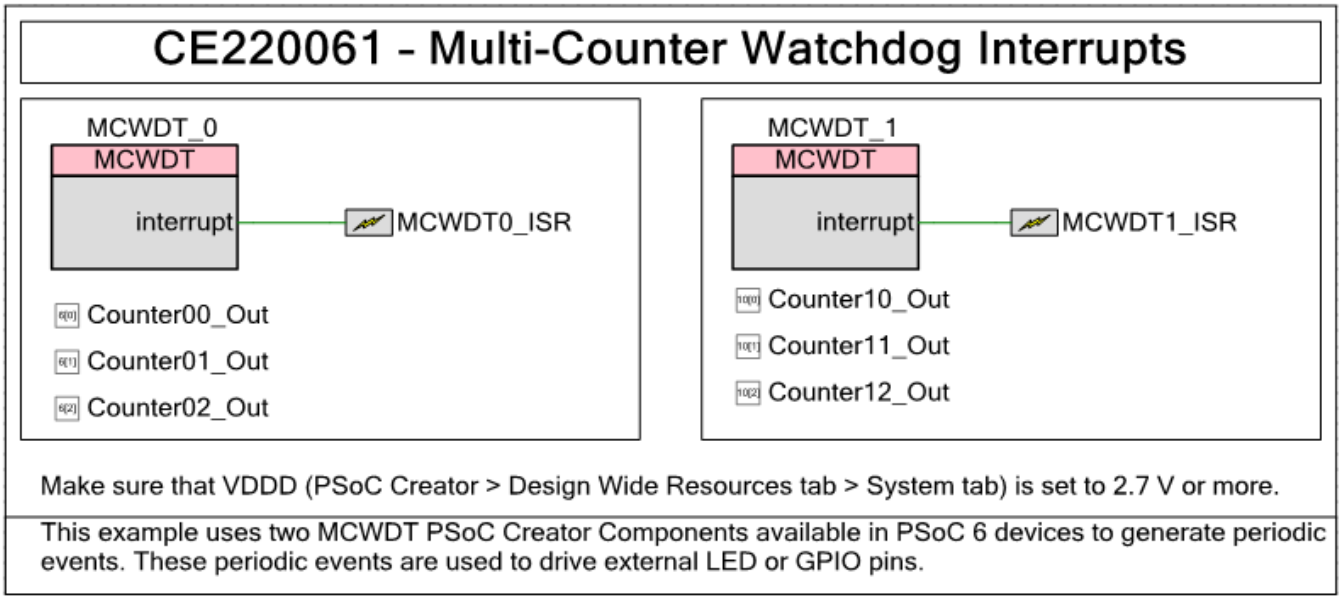


Table 1 shows the configuration of each counter in both the MCWDTs.

Table 1. MCWDT_0 and MCWDT_1 Configuration

	Counter0	Counter1	Counter2
MCWDT_0	• 16-bit counter • Clocked by LFCLK (32 kHz) • Free-running with a period of 65,536 counts • Interrupt mode (generates an interrupt when count reaches 65,536) • Drives Counter00_Out • Period of event = 2 s	• 16-bit counter • Clocked by LFCLK (32 kHz) • Clears on match with period 15,999+1 • Interrupt mode (generates an interrupt when count reaches 16,000) • Drives Counter01_Out • Period of event = 488 ms	• 32-bit counter • Clocked by MCWDT_0 - Counter1 interrupt • Interrupt mode (generates an interrupt when bit position 1 of counter toggles) • Drives Counter02_Out • Period of event = 976 ms
MCWDT_1	• 16-bit counter • Clocked by LFCLK (32 kHz) • Free-running with a period of 65,536 counts • Interrupt mode (generates an interrupt when count reaches 65,536) • Drives Counter10_Out • Period of event = 2 s	• 16-bit counter • Clocked by LFCLK (32 kHz) • Clear on match with period 32,768+1 • Interrupt mode (generates an interrupt when count reaches 32,769) • Drives Counter11_Out • Period of event = 1 s	• 32-bit counter • Clocked by LFCLK (32 kHz) • Interrupt mode (generates an interrupt when bit position 15 of counter toggles) • Drives Counter12_Out • Period of event = 1 s

Figure 2 shows the MCWDT_0 timing diagram.

Figure 2. MCWDT_0 Timing Diagram


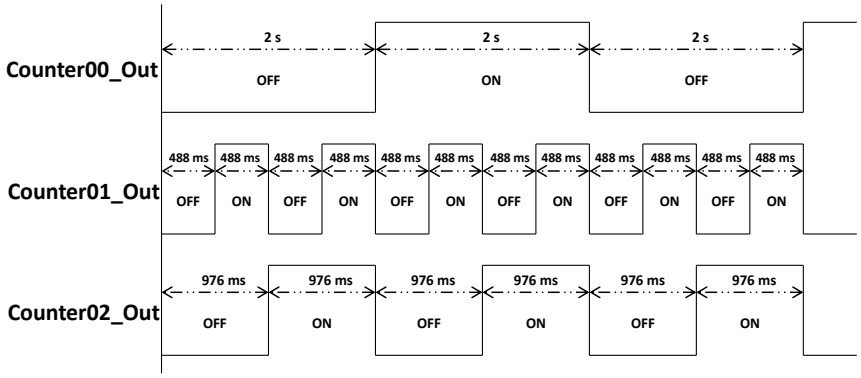


Figure 3 shows the MCWDT_1 timing diagram.

Figure 3. MCWDT_1 Timing Diagram

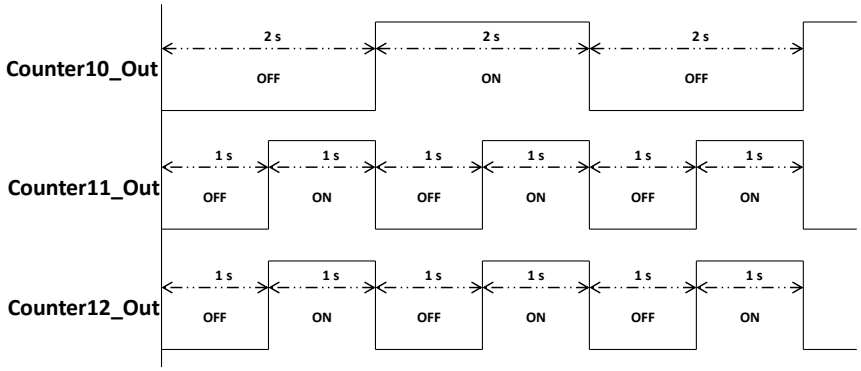

The firmware performs the following in the `main` function:

1. Initializes the interrupts for MCWDT_0 and MCWDT_1.
2. Configures the MCWDT_0 and MCWDT_1 Components.
3. Waits for the MCWDT_0 or MCWDT_1 interrupt in an infinite loop.

The firmware performs the following in the `MCWDT_0` ISR function:

1. Toggles the Counter00_Out pin for interrupt from MCWDT_0 Counter0.
2. Toggles the Counter01_Out pin for interrupt from MCWDT_0 Counter1.
3. Toggles the Counter02_Out pin for interrupt from MCWDT_0 Counter2.

The firmware performs the following in the `MCWDT_1` ISR function:

1. Toggles the Counter10_Out pin for interrupt from MCWDT_1 Counter0.
2. Toggles the Counter11_Out pin for interrupt from MCWDT_1 Counter1.
3. Toggles the Counter12_Out pin for interrupt from MCWDT_1 Counter2.

Design Considerations

This code example is designed to run on CY8CKIT-062-BLE with the PSoC 6 MCU. To port the design to other PSoC 6 MCU and kits, you must change the target device in Device Selector, and change the pin assignments in the ***cydwr*** settings. For single-core PSoC 6 MCU devices, port the code from *main_cm4.c* to *main.c* file as CM0+ CPU is not used in this code example.

This code example does not work at 1.8V (VDD) out of the box. Make sure that the switch "SW5" is set to select "3.3V" as VDD on the CY8CKIT-062-BLE PSoC 6 BLE Pioneer Kit.

Hardware Setup

The code example works with the default settings on the CY8CKIT-062-BLE PSoC 6 BLE Pioneer Kit. If the settings are different from the default values, see the “Selection Switches” table in the kit guide to reset to the default settings.

Operation

1. Connect CY8CKIT-062 BLE to a USB port on your PC.
2. Build and program the application into CY8CKIT-062 BLE. For more information on building a project or programming a device, see PSoC Creator Help.
3. Probe the following signals on a logic analyzer - Counter00_Out (P6[0]), Counter01_Out (P6[1]), Counter02_Out (P6[2]), Counter10_Out (P10[0]), Counter11_Out (P10[1]), Counter12_Out (P10[2]). Make sure that signal waveforms match the waveforms in Figure 2 and Figure 3.

Components

Table 2 lists the PSoC Creator Components used in this example and the hardware resources used by each Component.

Table 2. PSoC Creator Components


Component	Instance Name	Hardware Resources
Multi-Counter Watchdog (MCWDT_PDL)	MCWDT_0, MCWDT_1	Two MCWDT blocks of the System Resources Sub-System (SRSS)
System Interrupt (SysInt)	MCWDT0_ISR, MCWDT1_ISR	Two entries in the device interrupt vector table

Parameter Settings

Non-default settings for each Component is outlined in red in the following figure.


MCWDT_0 Component parameter settings are shown in Figure 4.

Figure 4. MCWDT_0 Component Parameter Settings

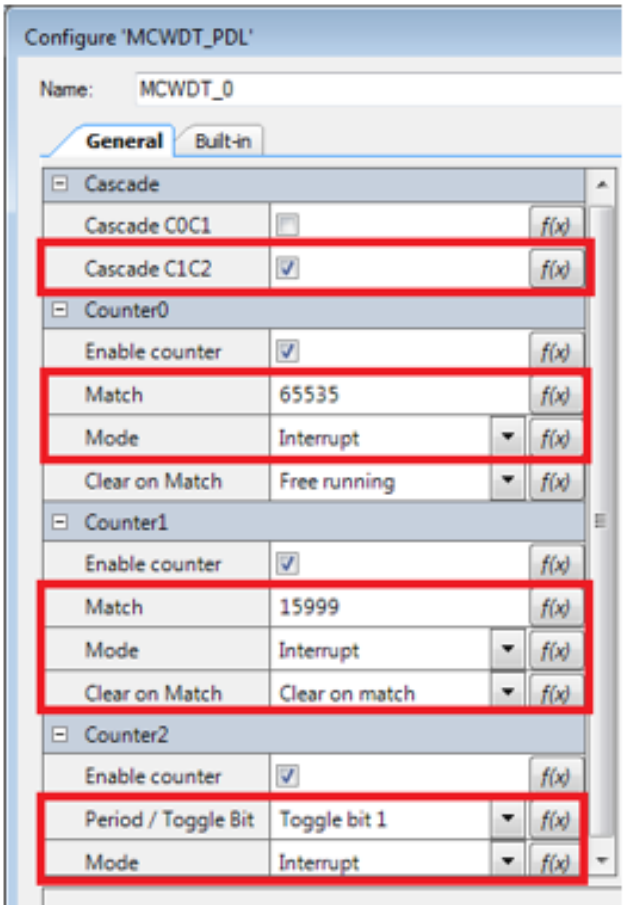

MCWDT_1 Component parameter settings are shown in Figure 5.

Figure 5. MCWDT_1 Component Parameter Settings

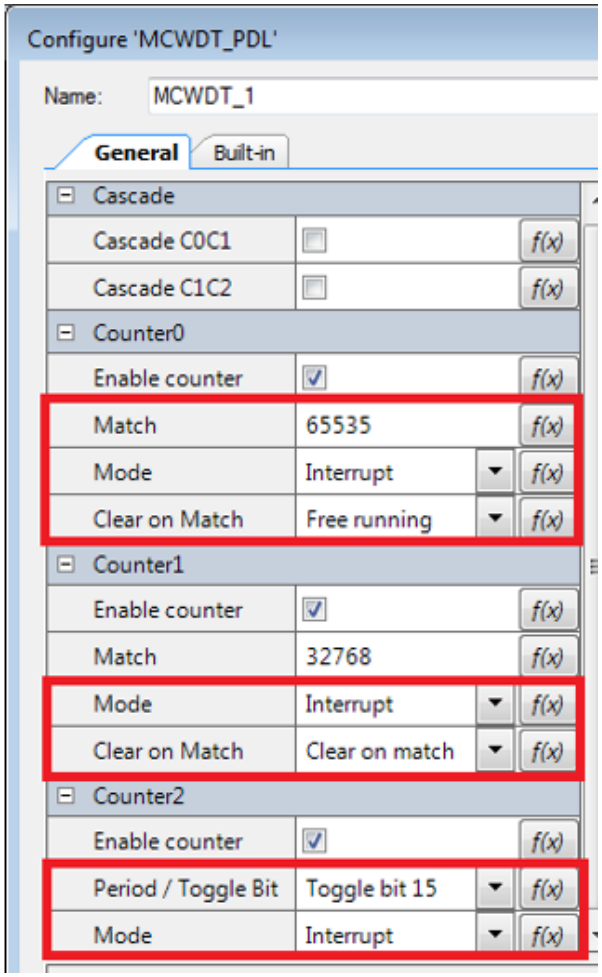

Design-Wide Resources

Table 3 shows the pin assignment for the code example.

Table 3. Pin Names and Location

Pin Name	Location
Counter00_Out	P6[0]
Counter01_Out	P6[1]
Counter02_Out	P6[2]
Counter10_Out	P10[0]
Counter11_Out	P10[1]
Counter12_Out	P10[2]

Related Documents

Application Notes	
AN210781 – Getting Started with PSoC 6 MCU with Bluetooth Low Energy (BLE) Connectivity	Describes PSoC 63 with Bluetooth Low Energy (BLE) Connectivity and how to build your first PSoC Creator project
PSoC Creator Component Datasheets	
MCWDT_PDL	Supports Multi-Counter Watchdog with two 16-bit counters and one 32-bit counter
System Interrupt	Interrupt vectoring and control
Device Documentation	
PSoC 6 MCU: PSoC 63 with BLE Datasheet	PSoC 6 MCU: PSoC 63 with BLE Architecture Technical Reference Manual
Development Kit (DVK) Documentation	
CY8CKIT-062-BLE PSoC 6 BLE Pioneer Kit	

Document History

Document Title: CE220061 – PSoC 6 MCU: Multi-Counter Watchdog Interrupts

Document Number: 002-20061

Revision	ECN	Orig. of Change	Submission Date	Description of Change
*A	5858250	VJYA	08/22/2017	Initial public release
*B	5918161	VJYA	11/03/2017	Updated project name
*C	6003197	VJYA	12/22/2017	Updated to latest PSoC Creator build

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at Cypress Locations.

Products

Arm® Cortex® Microcontrollers	cypress.com/arm
Automotive	cypress.com/automotive
Clocks & Buffers	cypress.com/clocks
Interface	cypress.com/interface
Internet of Things	cypress.com/iot
Memory	cypress.com/memory
Microcontrollers	cypress.com/mcu
PSoC	cypress.com/psoc
Power Management ICs	cypress.com/pmic
Touch Sensing	cypress.com/touch
USB Controllers	cypress.com/usb
Wireless Connectivity	cypress.com/wireless

PSoC® Solutions

PSoC 1 | PSoC 3 | PSoC 4 | PSoC 5LP | PSoC 6 MCU

Cypress Developer Community

Forums | WICED IOT Forums | Projects | Videos | Blogs | Training | Components

Technical Support

cypress.com/support

All other trademarks or registered trademarks referenced herein are the property of their respective owners.

Cypress Semiconductor
198 Champion Court
San Jose, CA 95134-1709

© Cypress Semiconductor Corporation, 2017. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. No computing device can be absolutely secure. Therefore, despite security measures implemented in Cypress hardware or software products, Cypress does not assume any liability arising out of any security breach, such as unauthorized access to or use of a Cypress product. In addition, the products described in these materials may contain design defects or errors known as errata which may cause the product to deviate from published specifications. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, WICED, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit cypress.com. Other names and brands may be claimed as property of their respective owners.