The following document contains information on Cypress products. The document has the series name, product name, and ordering part numbering with the prefix “MB”. However, Cypress will offer these products to new and existing customers with the series name, product name, and ordering part number with the prefix “CY”.

How to Check the Ordering Part Number

1. Go to www.cypress.com/pcn.
2. Enter the keyword (for example, ordering part number) in the **SEARCH PCNS** field and click **Apply**.
3. Click the corresponding title from the search results.
4. Download the Affected Parts List file, which has details of all changes

For More Information

Please contact your local sales office for additional information about Cypress products and solutions.

About Cypress

Cypress is the leader in advanced embedded system solutions for the world's most innovative automotive, industrial, smart home appliances, consumer electronics and medical products. Cypress' microcontrollers, analog ICs, wireless and USB-based connectivity solutions and reliable, high-performance memories help engineers design differentiated products and get them to market first. Cypress is committed to providing customers with the best support and development resources on the planet enabling them to disrupt markets by creating new product categories in record time. To learn more, go to www.cypress.com.

AN205380

FR, MB91460, Regulator Control

This application note describes the functionality of the Regulator Control and gives some examples.

Contents

1 Introduction....1
1.1 Key Features....1
2 Regulator Control....2
2.1 Block Diagram....2
2.2 Registers....2
2.3 Operation....3
3 Regulator Control Examples....5
3.1 Using Sub Regulator in SUB SLEEP Mode....5
4 Additional Information....6
Document History....7

1 Introduction

This application note describes the functionality of the Regulator Control and gives some examples.

1.1 Key Features

- MAIN-Regulator and SUB-Regulator
- MAIN-Regulator RUN/STANDY status readable
- Main-Regulator can be enabled or disabled during Sub-RUN and STOP/STOP with RTC running
- Selectable SUB-Regulator output voltage


2 Regulator Control

The Basic Functionality of Regulator Control

2.1 Block Diagram

Figure 1 shows the internal block diagram of the Regulator Control.

Figure 1. Regulator Control block diagram

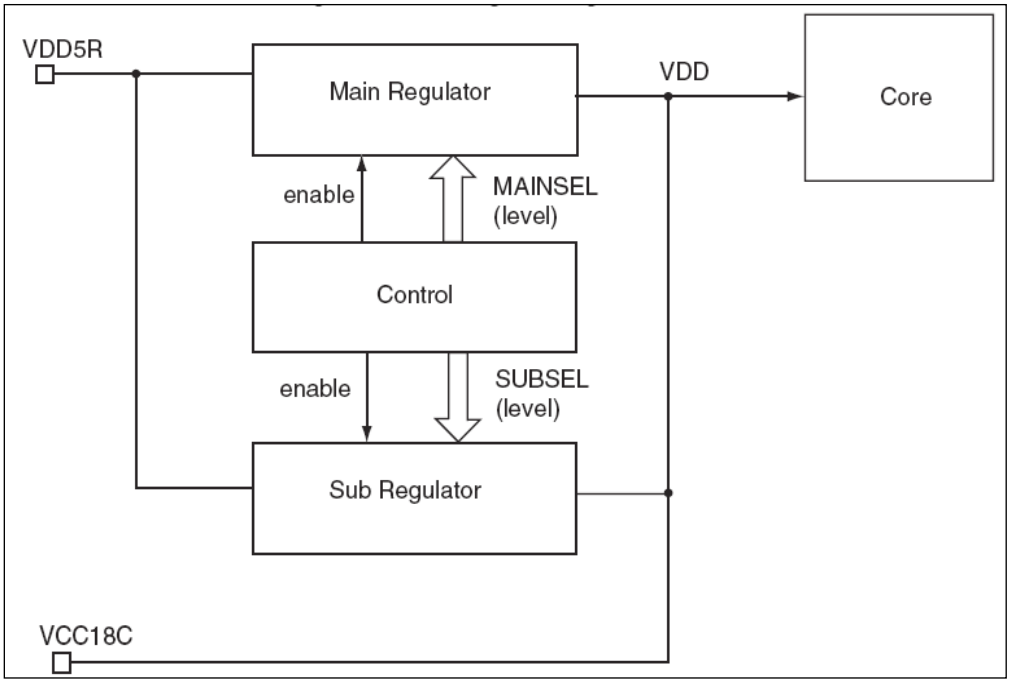

2.2 Registers

2.2.1 Regulator Control Register (REGCTR)

Table 1. REGCTR

Bit No.	Name	Explanation	Value	Operation
7-5	–	*Reserved*	-	-
4	MSTBO	Main Regulator Standby Output	0	Main regulator is in RUN mode
			1	Main regulator is in STANDBY mode
3-2	–	*Reserved*	-	-
1	MAINKPEN	Main Regulator enable in STOP state	0	Main regulator disabled in STOP state
			1	Main regulator enabled in STOP state
0	MAINDSBL	Main Regulator disable in Sub-RUN state	0	Main regulator enabled in Sub-RUN state
			1	Main regulator disabled in Sub-RUN state

2.2.2 Regulator Select Register (REGSEL)

Table 2. REGSEL

Bit No.	Name	Explanation	Value	Operation
7-6	–	Reserved	-	-
5,4	FLASHSEL, MAINSEL	Flash memory supply mode and Main Regulator supply mode	0,0	Flash memory and Main Regulator operation mode is 1.8V
			1,1	Flash memory and Main Regulator operation mode is 1.9V
3-0	SUBSEL	Sub-regulator voltage level	0,0,0,0	1.2V ± 0.1V
			0,0,0,1	1.3V ± 0.1V
			0,0,1,0	1.4V ± 0.1V
			0,0,1,1	1.5V ± 0.1V
			0,1,0,0	1.6V ± 0.1V
			0,1,0,1	1.7V ± 0.1V
			0,1,1,0	1.8V ± 0.1V
			0,1,1,1	1.9V ± 0.1V

2.3 Operation

The Main regulator is on by default in all modes except STOP and STOP with RTC running. The Sub regulator voltage levels would be only effective if the Main regulator is switched off (although one should take adequate measures before switching off the Main regulator). As the name suggests the Sub Regulator can be used in SUB RUN or SUB SLEEP modes. But it should be noted that Sub Regulator can't be used in these modes if the frequency of operation is RC 2MHz. This is because the Sub Regulator can't source the requisite power at this frequency. There is also a constraint that the flash memory can't be used while the Sub Regulator is being used. This is again because Sub Regulator can't source the requisite power to access flash.

Table 3. Regulator Operation Modes

Sr. No	Device Mode	Sub Mode	Used Regulator	Main Regulator Status	Sub Regulator Status	Constraints
1	RESET	INIT	MAIN	On 1.8V (Default) or 1.9V selectable by RGSEL	Off	SUB Regulator is designed for the lower power consumption hence it can't be used in this mode which requires more power.
2	RUN	PLL	MAIN	On 1.8V (Default) or 1.9V selectable by RGSEL	Off	SUB Regulator is designed for the lower power consumption hence it can't be used in this mode which requires more power.
		2MHz	MAIN			

Sr. No	Device Mode	Sub Mode	Used Regulator	Main Regulator Status	Sub Regulator Status	Constraints
3	SUB RUN	32kHz RC100kHz	MAIN or SUB	On 1.8V (Default) or 1.9V selectable by RGSEL Can be switched off using MAINDSBL bit of REGCTR	On Level configurable by SUBSEL bits of RGSEL	The code which does the switching from Main Regulator to SUB regulator should be executed from RAM as the flash won't be accessible after switching to SUB regulator. After switching back to MAIN Regulator one should poll the MSTBO bit of REGCTR and if it is 1 then only one should start executing code from flash again.
		RC2MHz	MAIN	On 1.8V (Default) or 1.9V selectable by RGSEL	Off	SUB Regulator can't be used since it would not be able to support the power requirements at 2MHz.
4	SLEEP	PLL 2MHz	MAIN MAIN	On 1.8V (Default) or 1.9V selectable by RGSEL	Off	SUB Regulator is designed for the lower power consumption hence it can't be used in this mode which requires more power.
5	SUB SLEEP	32kHz RC100kHz	MAIN or SUB	On 1.8V (Default) or 1.9V selectable by RGSEL Can be switched off using MAINDSBL bit of REGCTR	On Level configurable by SUBSEL bits of RGSEL	The code which does the switching from Main Regulator to SUB regulator should be executed from RAM as the flash won't be accessible after switching to SUB regulator. After switching back to MAIN Regulator one should poll the MSTBO bit of REGCTR and if it is 1 then only one should start executing code from flash again.
		RC2MHz	MAIN	On 1.8V (Default) or 1.9V selectable by RGSEL	Off	SUB Regulator cant be used since it would not be able to support the power requirements for all the active peripheral at 2MHz.
6	RTC	4MHz 32kHz RC100kHz RC2MHz	SUB	Off by default Can be switched on by setting MAINKPEN bit of REGCTR to 1	On by default Level configurable by SUBSEL bits of RGSEL	SUB Regulator is used since it can support the power requirements for all the active peripherals (RTC and CAN can be only active) at all these frequencies.
7	STOP	STOP STOP+HIZ	SUB	Off by default Can be switched on by setting MAINKPEN bit of REGCTR to 1	On by default Level configurable by SUBSEL bits of RGSEL	SUB Regulator is used since it can support the power requirements for all the active peripherals (RTC and CAN can be only active) at all these frequencies.

3 Regulator Control Examples

Examples for Regulator Control

3.1 Using Sub Regulator in SUB SLEEP Mode

The following example demonstrates to use the Sub Regulator in the SUB SLEEP Mode. It should be noted that this function should be located and executed from RAM as the FLASH memory is not accessible after the Main Regulator is disabled.

```
#pragma segment CODE = IRAM
void SetSubSleepMode (void)
{
    /* Set the MCU in the SUB-RUN Mode 32kHz*/
    . . .
    . . .
    . . .
    REGSEL_SUBSEL = 3;     // Set the Sub Regulator voltage to 1.5V
    REGCTR_MAINDSBL = 1;   // Disable Main regulator in Sub-RUN state
    STCR_SLEEP = 1;        // Go to SLEEP Mode

    /* In SLEEP Mode, any interrupt would cause the MCU to come out of the
       SLEEP Mode */
    __asm(" NOP ");        // Recovered from SUB-SLEEP Mode
    __asm(" NOP ");

    REGCTR_MAINDSBL = 0;       // Re-enable Main Regulator in Sub-RUN state
    while (1 != REGCTR_MSTBO); // Wait for the Main regulator to return to
          // RUN Mode
    /* Now one can set the MCU back to original operation mode such as RUN-PLL
*/
    . . .
    . . .
}
#pragma segment CODE
```

One should also set the define I_RAM to ON in order to instruct the linker to copy code in the section IRAM from FLASH to Instruction RAM.

```
;=============================================================================
; 4.4  Copy code from Flash to I-RAM
;=============================================================================
;
#set    I_RAM       ON        ; <<< select  if  code  in  section IRAM
;                                    should be copied
```

Please refer the application note mcu-an-300087 for more details about Flash to RAM copy.

Here the code which actually sets the MCU to the SUB RUN mode before going to SUB SLEEP mode and similarly the code which sets the MCU back in the original operation mode is not discussed because it out of the scope of this application note.

4 Additional Information

Information about CYPRESS Microcontrollers can be found on the following Internet page:

http://www.cypress.com/cypress-microcontrollers

Document History

Document Title: AN205380 - FR, MB91460, Regulator Control

Document Number: 002-05380

Revision	ECN	Orig. of Change	Submission Date	Description of Change
**	-	NOFL	06/12/2008	First Version; MPi
*A	5134064	NOFL	02/11/2016	Converted Spansion Application Note “MCU-AN-300096-E-V10” to Cypress format
*B	5872500	AESATMP9	09/04/2017	Updated logo and copyright.
*C	6070279	NOFL	02/18/2018	Sunset Review Migrated to new template Updated links

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at Cypress Locations.

Products

Arm® Cortex® Microcontrollers	cypress.com/arm
Automotive	cypress.com/automotive
Clocks & Buffers	cypress.com/clocks
Interface	cypress.com/interface
Internet of Things	cypress.com/iot
Memory	cypress.com/memory
Microcontrollers	cypress.com/mcu
PSoC	cypress.com/psoc
Power Management ICs	cypress.com/pmic
Touch Sensing	cypress.com/touch
USB Controllers	cypress.com/usb
Wireless Connectivity	cypress.com/wireless

PSoC® Solutions

PSoC 1 | PSoC 3 | PSoC 4 | PSoC 5LP | PSoC 6 MCU

Cypress Developer Community

Forums | WICED IOT Forums | Projects | Videos | Blogs | Training | Components

Technical Support

cypress.com/support

All other trademarks or registered trademarks referenced herein are the property of their respective owners.

Cypress Semiconductor
198 Champion Court
San Jose, CA 95134-1709

© Cypress Semiconductor Corporation, 2008-2018. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. No computing device can be absolutely secure. Therefore, despite security measures implemented in Cypress hardware or software products, Cypress does not assume any liability arising out of any security breach, such as unauthorized access to or use of a Cypress product. In addition, the products described in these materials may contain design defects or errors known as errata which may cause the product to deviate from published specifications. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, WICED, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit cypress.com. Other names and brands may be claimed as property of their respective owners.