PRODUCT BRIEF

BRIGHTLANE™ Q6222 central switch

9-port automotive Ethernet switch with integrated 1000BASE-T1 PHYs and MACsec P/N MV-Q6222

The BRIGHTLANE™ Q6222 (MV-Q222) is a secure, managed automotive Ethernet switch designed for use in numerous applications, including as a central switch in zonal network architectures. It offers 60 Gbps of non-blocking switching capacity and features a wide array of advanced security features. The device is a member of the fourth generation of Infineon automotive Ethernet switches.

The 9-port switch includes two integrated IEEEE 802.3-compliant 1000/100BASE-T1 PHYs, 2x RGMII/MII/RMII, 4x multi-speed 2.5 Gbps SerDes (2.5G/1 Gbps) and 5x multi-speed 10 Gbps SerDes (10G/5G/2.5G/1 Gbps). Additionally, two of the 10G SerDes can be configured as a PCIe Gen 3 x2 interface.

The port interface options offer flexible configurations for connectivity to external devices, such as 2.5/5/10GBASE-T1 PHYs, or uplinks to host SoCs. This makes the device ideal for In-Vehicle Networking (IVN) applications, such as Advanced Driver Assist Systems (ADAS), zonal control modules, and central gateways.


The MV-Q6222 includes a high-performance dual core Arm® R52 CPU that operates in lockstep, with dedicated on-chip memory to support Time Sensitive Networking (TSN) protocols such as Precision Time Protocol (PTP) and security firewall to protect from external malicious attacks.

The switch incorporates advanced security features including 802.1AE MACsec, which provides link security to prevent man-in-the- middle attacks; and a Denial of Service (DoS) engine.

A patented, enhanced TCAM implementation for Deep Packet Inspection (DPI) filters and classifies over 4,000 IPv4/IPv6 flows, and trusted boot functionality secures the vehicle network.

An embedded Hardware Security Module (HSM) enhances device security by supporting secure and encrypted boot and performs key management for features such as MACsec.

Block diagram

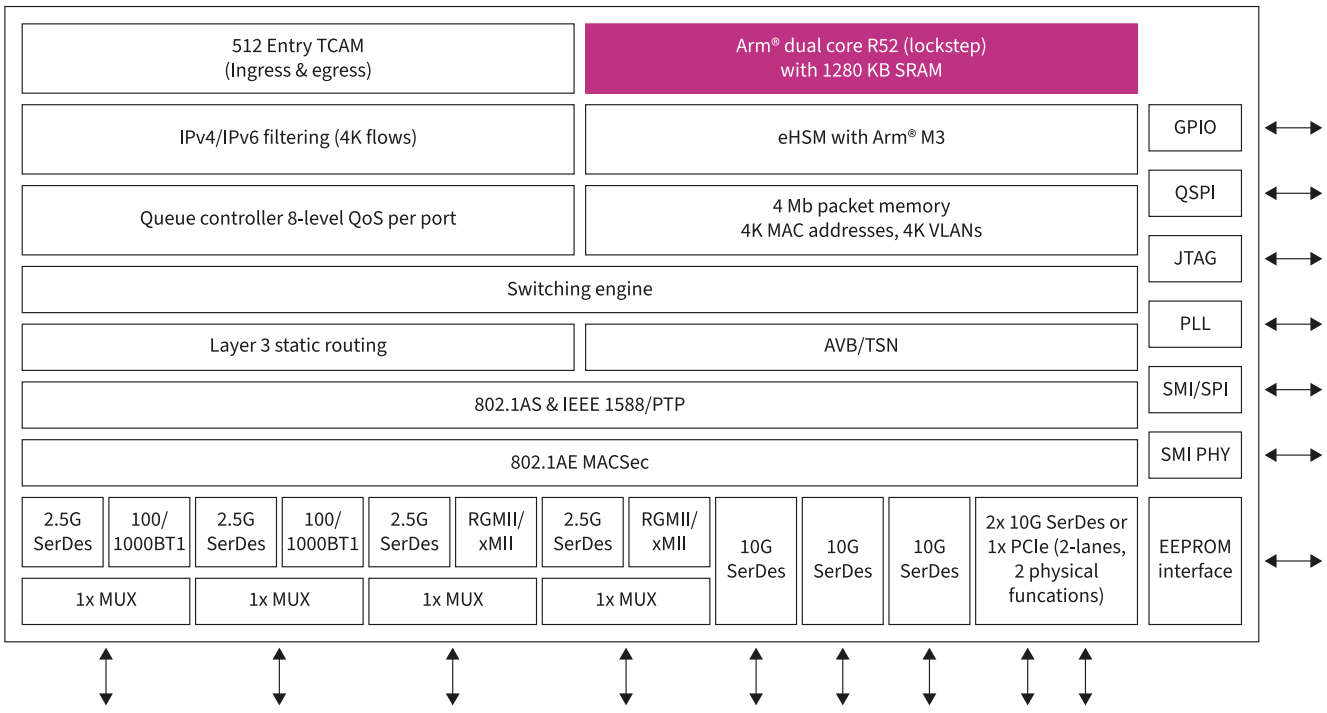

PRODUCT BRIEF

Key features

Features	Benefits
Processor	– Integrated dual core Arm® R52 CPU operating in lockstep
Security	– 802.1AE MACsec – Embedded Hardware Security Module (HSM) – Secure boot and encrypted boot support
Switch port interfaces	– 2x 1000BASE-T1/100BASE-T1 PHYs – 2x RGMII/MII/RMII – 4x multi-speed SerDes (2.5G/1 Gbps) – 5x multi-speed SerDes (10G/5G/2.5G/1 Gbps) – 1x PCIe Gen 3 x2 supporting single root I/O virtualization (SR-IOV)
I/O interfaces	– Configurable GPIO – JTAG interface for debugging – SMI/SPI interface for configuration – QSPI with configurable frequencies (19.2–83.3 MHz)
Time Sensitive Networking (TSN) support	– 802.1AS-2020 – 802.1Qat / Qav / Qbu / Qbv / Qci / Qcr – 802.1CB
Automotive qualified	– AEC-Q100 – Automotive grade 2 (-40 to +105°C)
Package characteristics	– 17 x 17 mm, 360 pin TFBGA, 0.8 mm pitch

Target applications

– Central gateway
– Zonal control module
– In-vehicle infotainment
– Advanced Driver Assistance Systems (ADAS)
– Body domain controller

Published by
Infineon Technologies AG
Am Campeon 1-15, 85579 Neubiberg
Germany

© 2025 Infineon Technologies AG
All rights reserved.

Public

Date: 08/2025

Important notice
Products are sold or provided and delivered by Infineon Technologies AG and its affiliates ("Infineon") subject to the terms and conditions of the frame supply contract or other written agreement(s) executed by a customer and Infineon or, in the absence of the foregoing, the applicable Sales Conditions of Infineon. General terms and conditions of a customer or deviations from applicable Sales Conditions of Infineon shall only be binding for Infineon if and to the extent Infineon has given its express written consent.

To the fullest extent permissible pursuant to applicable law, with respect to any information given in this document or in any associated documentation, Infineon disclaims all warranties and liabilities of any kind, whether express or implied, including but not limited to any warranties of merchantability, suitability of the products for the intended application or the specific use, or non-infringement of third-party rights.

Subject to the development and release of the products for series supply by Infineon, the technical specifications of the products are set forth in the relevant final data sheet provided by Infineon and, if any, agreed and signed specifications. Infineon's customers are required to evaluate the suitability of the products for the intended application or specific use.

The information given in this document is subject to change by Infineon at any time without notice.

Scan QR code and explore offering
www.infineon.com