Military 1 Mb (128K × 8) Static RAM

Features

- Pin- and function-compatible with the industrial version of CY7C1018CV33 and CY7C1019CV33
- High speed
  - t_{AA} = 10 ns
- Low active power
  - I_{CC} = 60 mA @ 10 ns
- Low CMOS standby power
  - I_{SB2} = 3 mA
- 2.0 V data retention
- 100% tested to military temperature range –55°C to 125°C
- Automatic power down when deselected
- CMOS for optimum speed/power
- Center power/ground pinout
- Easy memory expansion with $\overline{CE}$ and $\overline{OE}$ options
- Available in Pb-free 32L SOJ 400 MILS V32.4 (molded SOJ V33) package

Functional description

CY7C1019DV33 is a high-performance CMOS Static RAM organized as 131,072 words by 8 bits. Easy memory expansion is provided by an active LOW Chip Enable ($\overline{CE}$), an active LOW Output Enable ($\overline{OE}$), and three-state drivers. This device has an automatic power down feature that significantly reduces power consumption when deselected.

Writing to the device is accomplished by taking Chip Enable ($\overline{CE}$) and Write Enable ($\overline{WE}$) inputs LOW. Data on the eight I/O pins (I/O_0 through I/O_7) is then written into the location specified on the address pins (A_0 through A_{16}).

Reading from the device is accomplished by taking Chip Enable ($\overline{CE}$) and Output Enable ($\overline{OE}$) LOW while forcing Write Enable ($\overline{WE}$) HIGH. Under these conditions, the contents of the memory location specified by the address pins will appear on the I/O pins.

The eight input/output pins (I/O_0 through I/O_7) are placed in a High-Z state when the device is deselected ($\overline{CE}$ HIGH), the outputs are disabled ($\overline{OE}$ HIGH), or during a write operation ($\overline{CE}$ LOW, and $\overline{WE}$ LOW).

CY7C1019DV33 is available in Pb-free 32L SOJ 400 MILS V32.4 (molded SOJ V33) package.

Logic block diagram

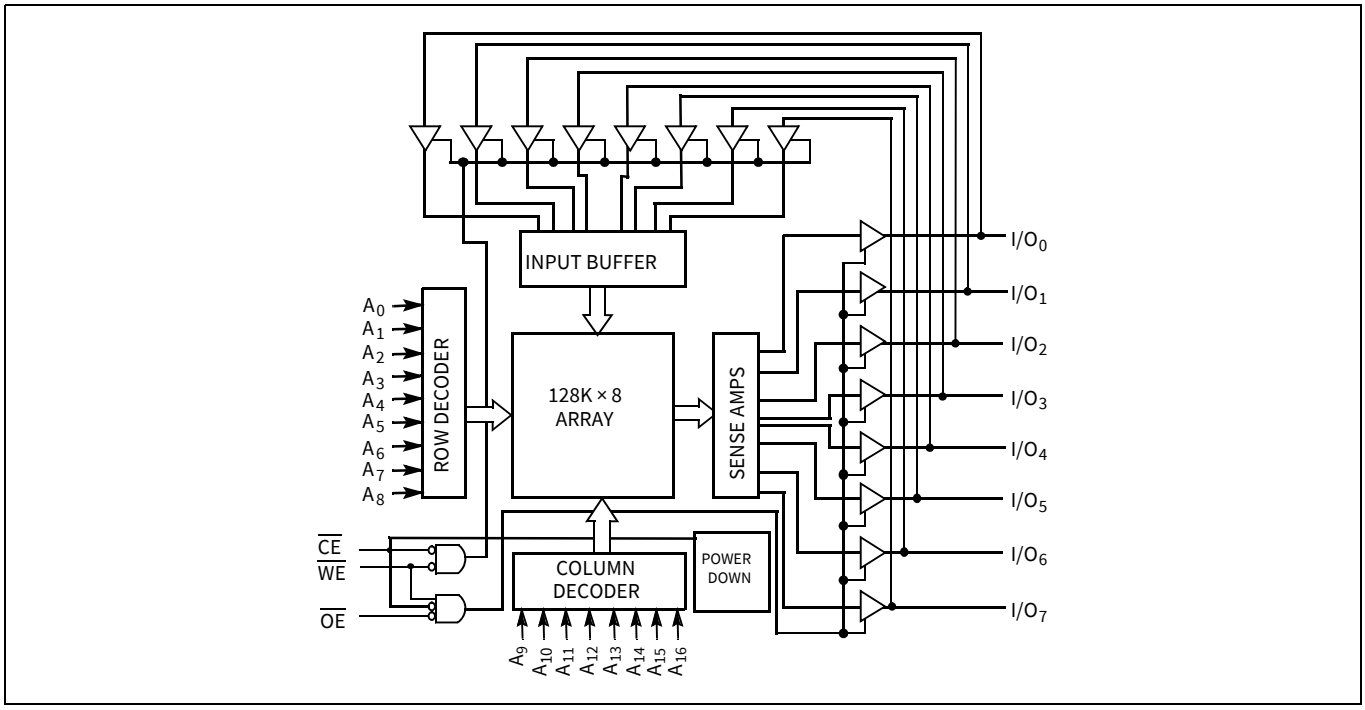


Table of contents

Features **1**
Functional description **1**
Logic block diagram **2**
Table of contents **3**
1 Selection guide **4**
2 Pin configurations **5**
3 Maximum ratings **6**
4 Operating range **7**
5 Electrical characteristics **8**
6 Capacitance **9**
7 Thermal resistance **10**
8 AC test loads and waveforms **11**
9 Data retention characteristics 12
10 Data retention waveform **13**
11 Switching characteristics **14**
12 Switching waveforms 15
13 Truth table **18**
14 Ordering Information **19**
14.1 Ordering code definitions 19
15 Package diagram **20**
16 Acronyms **21**
17 Document conventions **22**
17.1 Units of measure 22
Revision history **23**

1 Selection guide

Description	-10 (Military)	Unit
Maximum access time	10	ns
Maximum operating current	60	mA
Maximum standby current	3	

2 Pin configurations

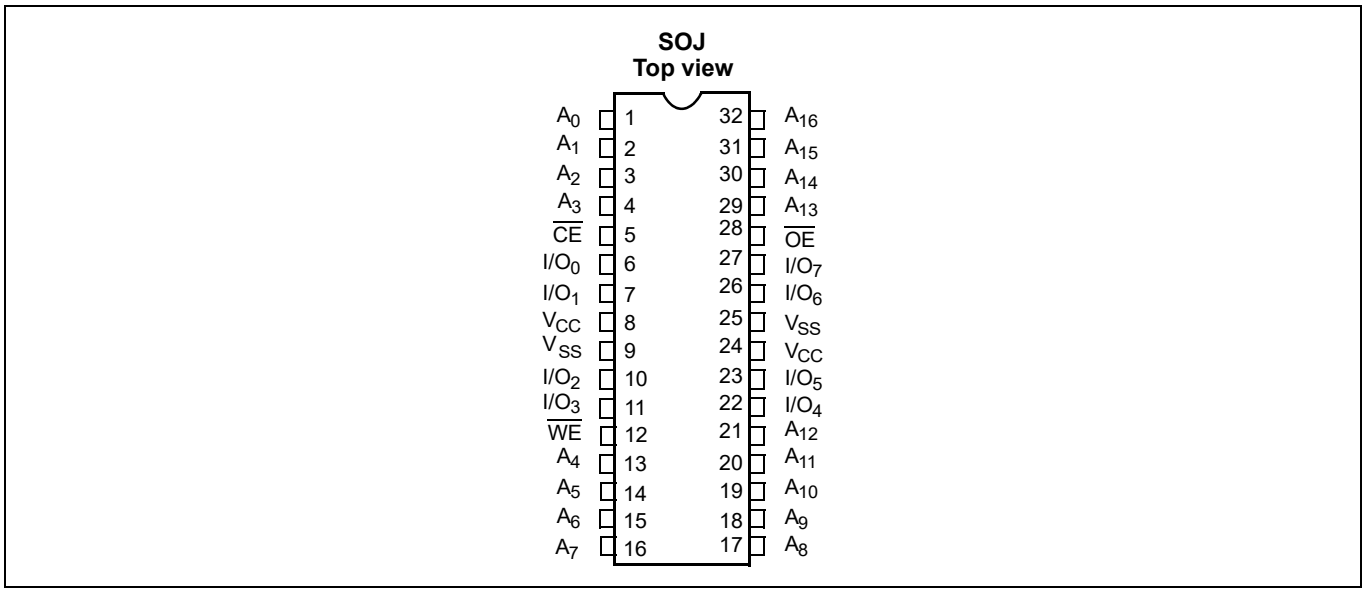


Figure 1 32L SOJ (top view)

3 Maximum ratings

Exceeding the maximum ratings may impair the useful life of the device. These user guidelines are not tested.

Storage temperature	–65°C to +150°C
Ambient temperature with power applied	–55°C to +125°C
Supply voltage on V_{CC} to relative GND[1]	–0.3 V to +4.6 V
DC voltage applied to outputs in High-Z state[1]	–0.3 V to V_{CC} + 0.3 V
DC input voltage[1]	–0.3 V to V_{CC} + 0.3 V
Current into outputs (LOW)	20 mA
Static discharge voltage (per MIL-STD-883, method 3015)	> 2001 V
Latch-up current	> 200 mA

Note

1. $V_{IL(min)}$ = –2.0 V and $V_{IH(max)}$ = V_{CC} + 1 V for pulse durations of less than 5 ns.

4 Operating range

Range	Ambient temperature	V_{CC}	Speed
Military	–55°C to +125°C	3.3 V ± 0.3 V	10 ns

5 Electrical characteristics

Over the operating range

Parameter	Description	Test conditions		-10 (Military)		Unit
				Min	Max	
V_{OH}	Output HIGH voltage	Min V_{CC}, I_{OH} = –4.0 mA		2.4	–	V
V_{OL}	Output LOW voltage	Min V_{CC}, I_{OL} = 8.0 mA		–	0.4	
V_{IH}	Input HIGH voltage	–		2.0	V_{CC} + 0.3	
V_{IL}	Input LOW voltage[2]			–0.3	0.8	
I_{IX}	Input leakage current	GND ≤ V_{IN} ≤ V_{CC}		–1	+1	µA
I_{OZ}	Output leakage current	GND ≤ V_{IN} ≤ V_{CC}, output disabled		–1	+1	µA
I_{CC}	V_{CC} operating supply current	V_{CC} = Max, I_{OUT} = 0 mA, f = f_{max} = $1/t_{RC}$	100 MHz	–	60	mA
			83 MHz		55	
			66 MHz		45	
			40 MHz		30	
I_{SB1}	Automatic CE power down current – TTL inputs	Max V_{CC}, $\overline{CE}$ ≥ V_{IH}, V_{IN} ≥ V_{IH} or V_{IN} ≤ V_{IL}, f = f_{MAX}		–	10	
I_{SB2}	Automatic CE power-down current – CMOS inputs	Max V_{CC}, $\overline{CE}$ ≥ V_{CC} – 0.3 V, V_{IN} ≥ V_{CC} – 0.3 V or V_{IN} ≤ 0.3 V, f = 0			3s	

Note

2. $V_{IL(min)}$ = –2.0 V and $V_{IH(max)}$ = V_{CC} + 1 V for pulse durations of less than 5 ns.

6 Capacitance

Parameter[3]	Description	Test conditions	Max	Unit
C_{IN}	Input capacitance	$T_A = 25°C, f = 1\ MHz, V_{CC} = 3.3\ V$	8	pF
C_{OUT}	Output capacitance		8	

Note
3. Tested initially and after any design or process changes affects these parameters.

7 Thermal resistance

Parameter[4]	Description	Test conditions	32L SOJ	Unit
Θ_{JA}	Thermal resistance (junction to ambient)	Still air, soldered on a 3 × 4.5 inch, four-layer printed circuit board	56.29	°C/W
Θ_{JC}	Thermal resistance (junction to case)		38.14	

Note
4. Tested initially and after any design or process changes affects these parameters.

8 AC test loads and waveforms

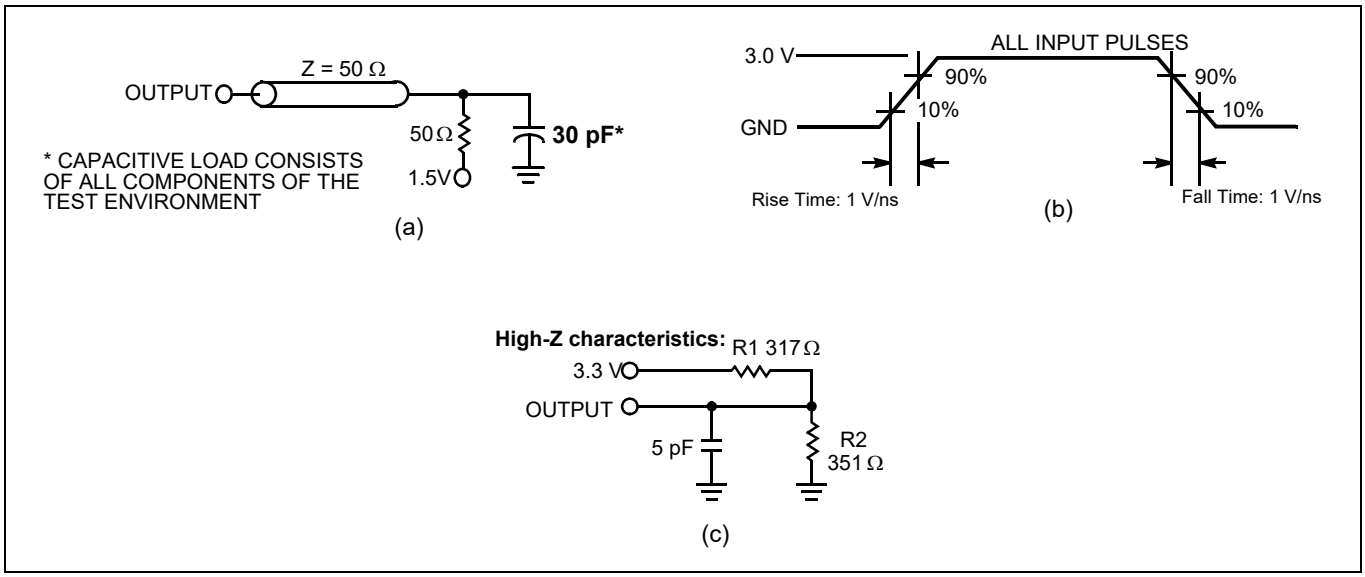


Figure 2 AC test loads and waveforms[5]

Note

5. AC characteristics (except High-Z) are tested using the load conditions shown in **Figure 2** (a). High-Z characteristics are tested for all speeds using the test load shown in **Figure 2** (c).

9 Data retention characteristics

Over the operating range

Parameter	Description	Conditions	Min	Max	Unit
V_{DR}	V_{CC} for data retention	–	2.0	–	V
I_{CCDR}	Data retention current	$V_{CC} = V_{DR} = 2.0\,V, \overline{CE} \geq V_{CC} - 0.3\,V,$ $V_{IN} \geq V_{CC} - 0.3\,V$ or $V_{IN} \leq 0.3\,V$	–	3	mA
t_{CDR} [6]	Chip deselect to data retention time	–	0	–	ns
t_R [7]	Operation recovery time		t_{RC}		

Notes

6. Tested initially and after any design or process changes affects these parameters.
7. Full device operation requires linear V_{CC} ramp from V_{DR} to $V_{CC(min)} \geq 50\,\mu s$ or stable at $V_{CC(min)} \geq 50\,\mu s$.

10 Data retention waveform

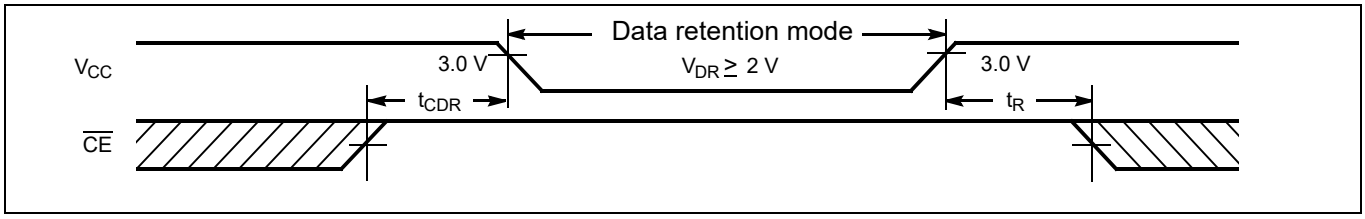


Figure 3 Data retention waveform

11 Switching characteristics

Over the operating range

Parameter[8]	Description	-10 (Industrial)		Unit
		Min	Max	
Read cycle				
t_{power}[9]	V_{CC} (typical) to the first access	100	–	µs
t_{RC}	Read cycle time	10	–	ns
t_{AA}	Address to data valid	–	10	
t_{OHA}	Data hold from address change	3	–	
t_{ACE}	$\overline{CE}$ LOW to data valid	–	10	
t_{DOE}	$\overline{OE}$ LOW to data valid		5	
t_{LZOE}[10]	$\overline{OE}$ LOW to Low-Z	0	–	
t_{HZOE}[10, 11]	$\overline{OE}$ HIGH to High-Z	–	5	
t_{LZCE}	$\overline{CE}$ LOW to Low-Z[10]	3	–	
t_{HZCE}[10, 11]	$\overline{CE}$ HIGH to High-Z	–	5	
t_{PU}[12]	$\overline{CE}$ LOW to power-up	0	–	
t_{PD}[12]	$\overline{CE}$ HIGH to power-down	–	10	
Write cycle[13, 14]				
t_{WC}	Write cycle time	10	–	ns
t_{SCE}	$\overline{CE}$ LOW to write end	8		
t_{AW}	Address set-up to write end	8		
t_{HA}	Address hold from write end	0		
t_{SA}	Address set-up to write start	0		
t_{PWE}	$\overline{WE}$ pulse width	7		
t_{SD}	Data setup to write end	5		
t_{HD}	Data hold from write end	0		
t_{LZWE}[10]	$\overline{WE}$ HIGH to Low-Z	3		
t_{HZWE}[10, 11]	$\overline{WE}$ LOW to High-Z	–	5	

Notes

8. Test conditions assume signal transition time of 3 ns or less, timing reference levels of 1.5 V, input pulse levels of 0 to 3.0 V.
9. t_{POWER} gives the minimum amount of time that the power supply should be at typical V_{CC} values until the first memory access can be performed.
10. At any given temperature and voltage condition, t_{HZCE} is less than t_{LZCE}, t_{HZOE} is less than t_{LZOE}, and t_{HZWE} is less than t_{LZWE} for any given device.
11. t_{HZOE}, t_{HZCE}, and t_{HZWE} are specified with a load capacitance of 5 pF as in **Figure 2** (c). Transition is measured when the outputs enter a High-Z state.
12. This parameter is guaranteed by design and is not tested.
13. The internal write time of the memory is defined by the overlap of $\overline{CE}$ LOW and $\overline{WE}$ LOW. $\overline{CE}$ and $\overline{WE}$ must be LOW to initiate a write, and the transition of any of these signals can terminate the write. The input data set-up and hold timing should be referenced to the leading edge of the signal that terminates the write.
14. The minimum write cycle time for Write Cycle no. 3 ($\overline{WE}$ controlled, $\overline{OE}$ LOW) is the sum of t_{HZWE} and t_{SD}.

12 Switching waveforms

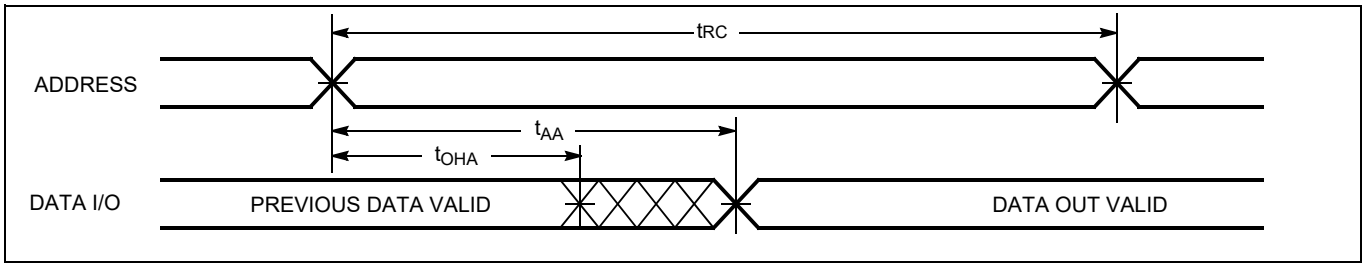


Figure 4 Read cycle no. 1 (address transition controlled)[15, 16]

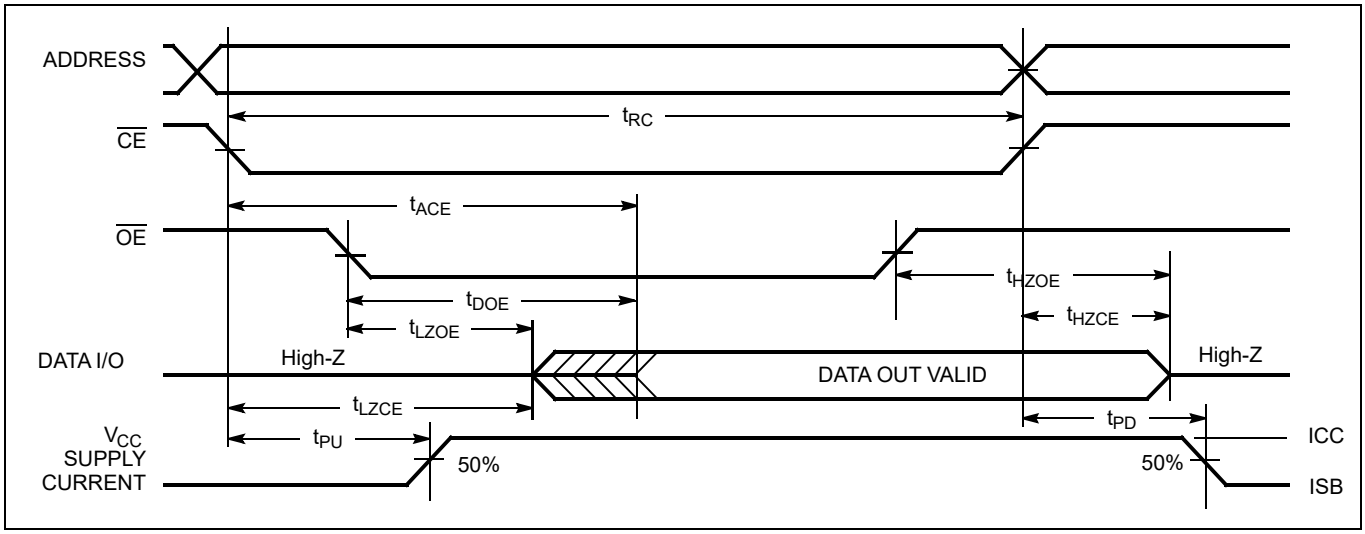


Figure 5 Read cycle no. 2 ($\overline{OE}$ controlled)[16, 17]

Notes
15. The device is continuously selected. $\overline{OE}$, $\overline{CE}$ = V_{IL}.
16. $\overline{WE}$ is HIGH for read cycle.
17. Address valid prior to or coincident with $\overline{CE}$ transition LOW.

Switching waveforms

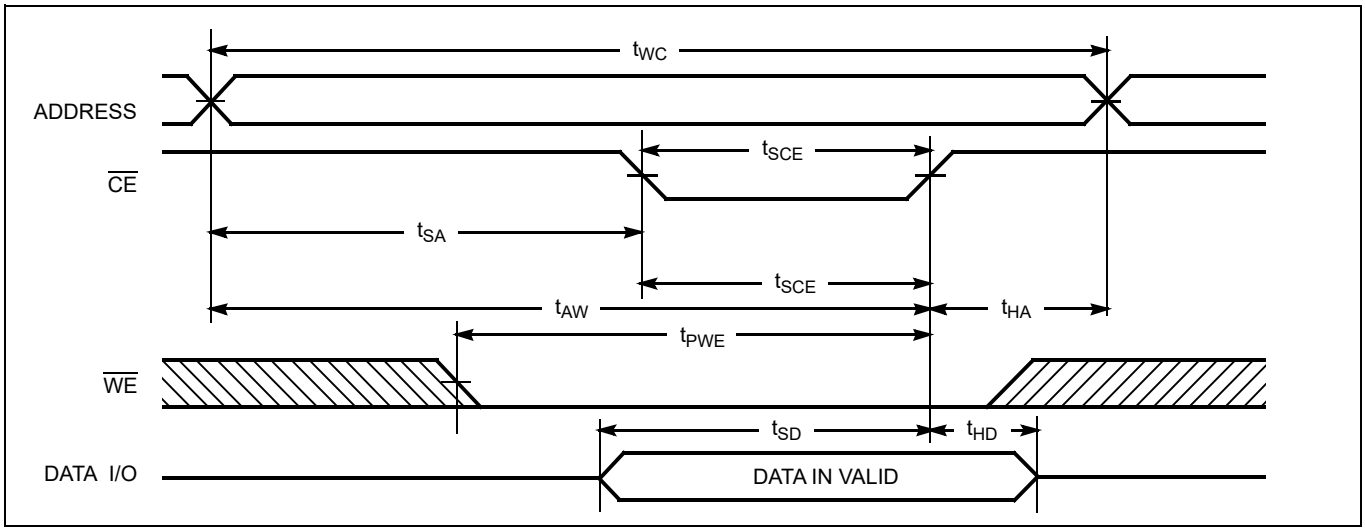


Figure 6 Write Cycle no. 1 (CE controlled)[18, 19]

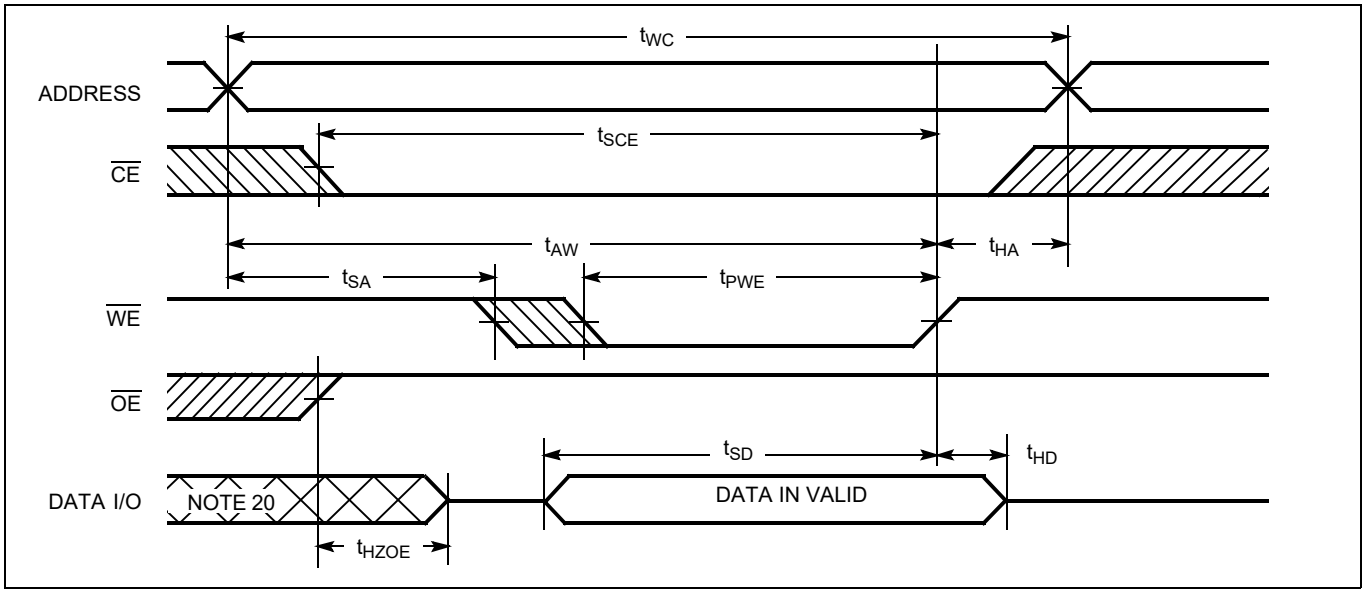


Figure 7 Write Cycle no. 2 (WE controlled, OE HIGH during write)[18, 19]

Notes
18. Data I/O is High-Z if OE = VIH.
19. If CE goes HIGH simultaneously with WE going HIGH, the output remains in a state.
20. During this period, the I/Os are in the output state and input signals are not applied.

Switching waveforms

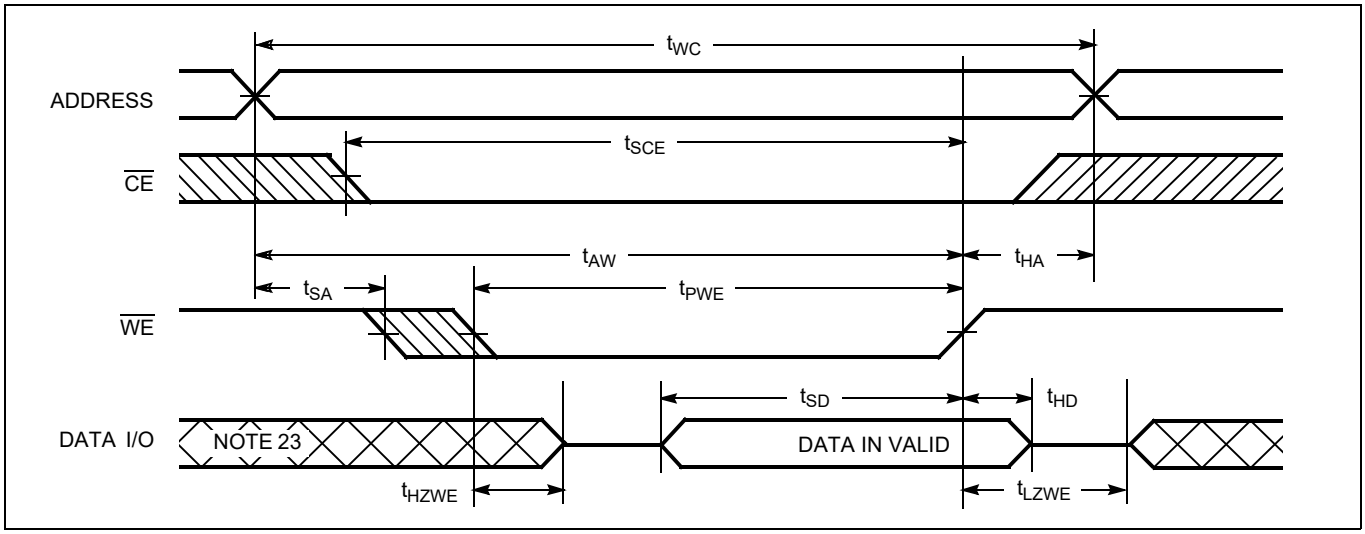


Figure 8 Write cycle no. 3 (WE controlled, OE LOW)[21, 22]

Notes

21. If CE goes HIGH simultaneously with WE going HIGH, the output remains in a High-Z state.
22. The minimum write cycle time for write cycle no. 3 (WE controlled, OE LOW) is the sum of t_{HZWE} and t_{SD}.
23. During this period the I/Os are in the output state and input signals are not applied.

13 Truth table


$\overline{CE}$	$\overline{OE}$	$\overline{WE}$	I/O_0–I/O_7	Mode	Power
H	X	X	High-Z	Power-down	Standby (I_{SB})
L	L	H	Data out	Read	Active (I_{CC})
L	X	L	Data in	Write	Active (I_{CC})
L	H	H	High-Z	Selected, outputs disabled	Active (I_{CC})

14 Ordering Information

Speed (ns)	Product	Package diagram	Package type	Operating range
10	CY7C1019DV33-10VXM	51-85033	32L SOJ 400 MILS V32.4 (molded SOJ V33) (Pb-free)	Military

Note Contact the local Infineon sales representative for availability of these parts.

14.1 Ordering code definitions

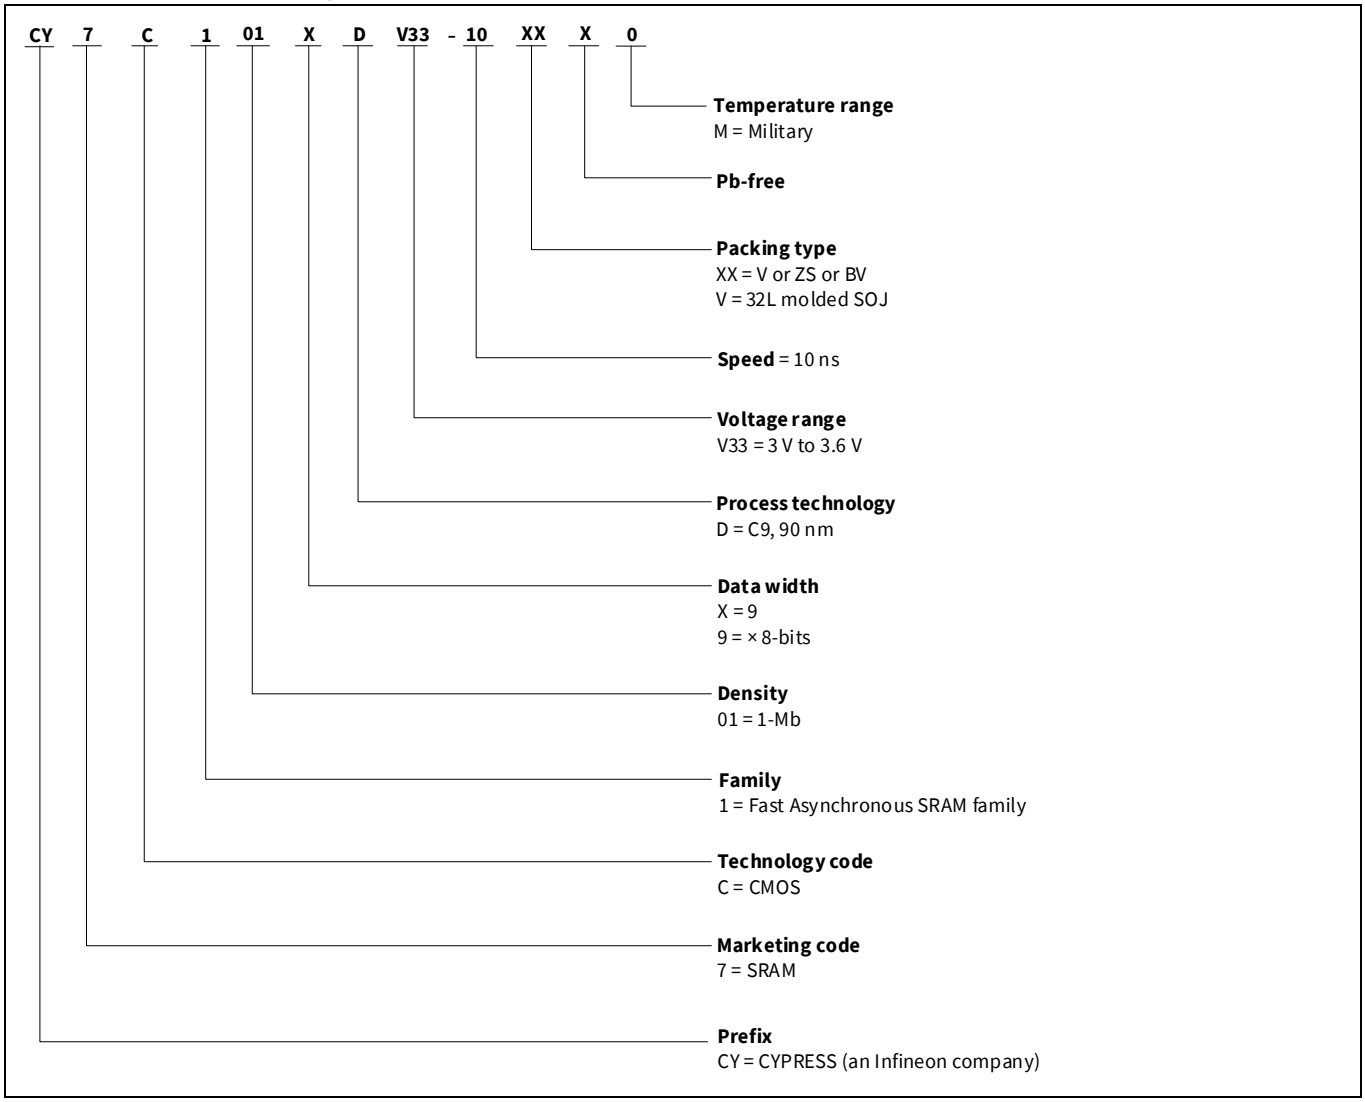

15 Package diagram

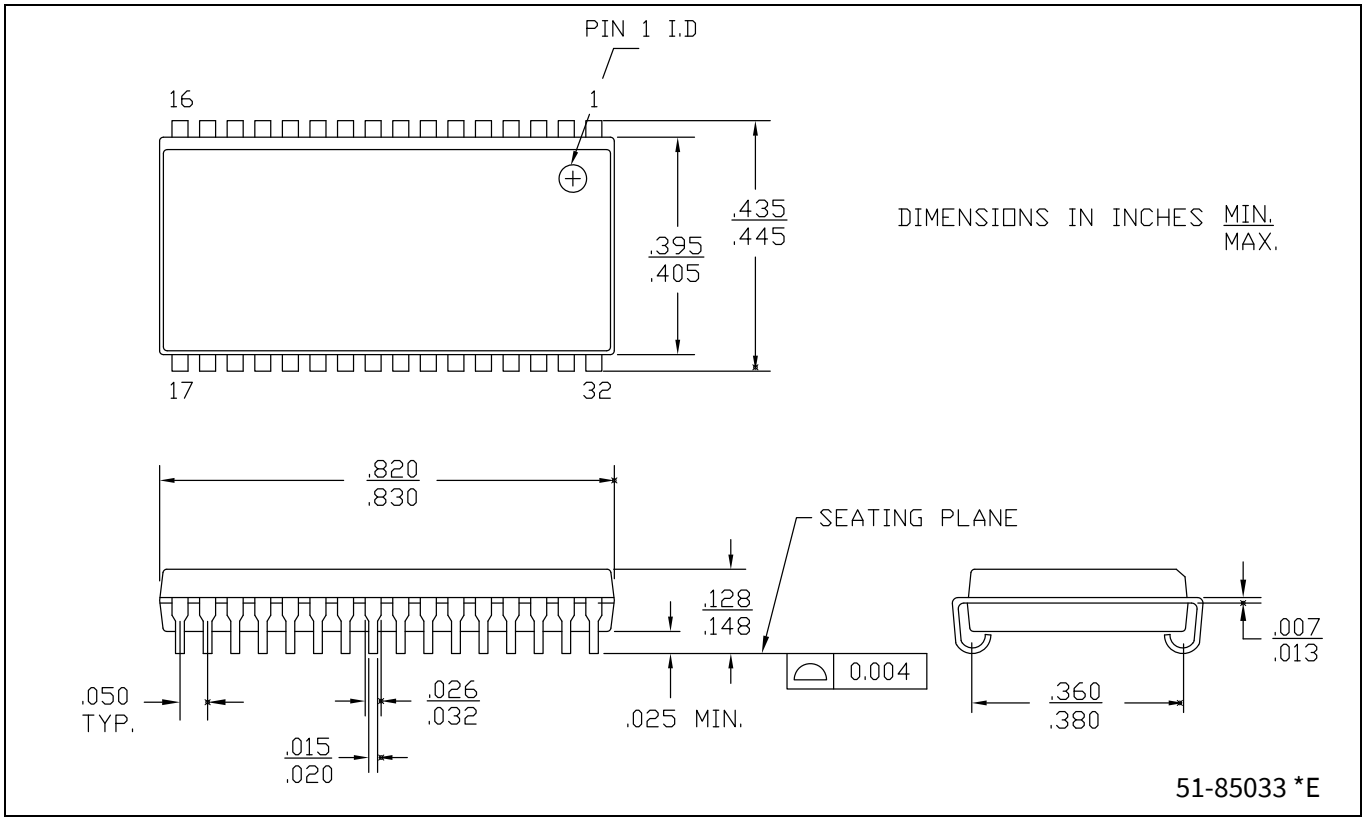


Figure 9 32L SOJ 400 MILS V32.4 (molded SOJ V33), package outline (PG-SOJ-32)

16 Acronyms

Table 1 Acronyms used in this document

Acronym	Description
$\overline{CE}$	Chip Enable
CMOS	complementary metal oxide semiconductor
I/O	Input/output
$\overline{OE}$	Output Enable
SOJ	Small outline J-lead
SRAM	Static Random Access Memory
TTL	Transistor-Transistor Logic
VFBGA	very fine-pitch ball grid array
$\overline{WE}$	Write Enable

17 Document conventions

17.1 Units of measure

Table 2 Units of measure

Symbol	Unit of measure
°C	degree celsius
MHz	megahertz
µA	microampere
µs	microsecond
mA	milliampere
mm	millimeter
ns	nanosecond
Ω	ohm
%	percent
pF	picofarad
V	volt
W	watt

Revision history

Document revision	Date	Description of changes
*A	2024-01-12	Updated document status to final.
*B	2024-01-22	Releasing to web.

Trademarks
All referenced product or service names and trademarks are the property of their respective owners.

Edition 2025-01-22
Published by

Infineon Technologies AG
81726 Munich, Germany

© 2025 Infineon Technologies AG. All Rights Reserved.

Do you have a question about this document?
Email:
erratum@infineon.com

Document reference
002-37614 Rev. *B

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics (“Beschaffenheitsgarantie”).

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer’s compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer’s products and any use of the product of Infineon Technologies in customer’s applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer’s technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies’ products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.