

Please note that Cypress is an Infineon Technologies Company.

The document following this cover page is marked as “Cypress” document as this is the company that originally developed the product. Please note that Infineon will continue to offer the product to new and existing customers as part of the Infineon product portfolio.

Continuity of document content

The fact that Infineon offers the following product as part of the Infineon product portfolio does not lead to any changes to this document. Future revisions will occur when appropriate, and any changes will be set out on the document history page.

Continuity of ordering part numbers

Infineon continues to support existing part numbers. Please continue to use the ordering part numbers listed in the datasheet for ordering.



THIS SPEC IS OBSOLETE

Spec No: 002-05005

Spec Title: AN205005 - F2MC-8FX Family MB95200 Series
8-Bit Microcontroller SOP28 PGM Adaptor

Replaced by: None

AN205005

F²MC-8FX Family MB95200 Series 8-Bit Microcontroller SOP28 PGM Adaptor

**Associated Part Family: MB95F350 Series
MB95200 Series**

This application note describes the MB95F350 SOP28 PGM adaptor and its usage.


Contents

1	Introduction.....	1	4.1Use MB95F350 Series USB Programmer to Program	7
2	Application Environment.....	2	4.2Use F2MC-8L/8FX SOFTUNE to Program.....	9
	2.1Mother Board	2	5 Schematic.....	13
	2.2Debug Tool.....	2	5.1SOP28 PGM Adaptor	13
	2.3SOFTUNE	3	6 PN Definition Rule	14
	2.4USB Programmer	3	7 PN List of Applicable MCUs	14
3	Hardware Connection.....	4	8 Additional Information.....	14
	3.1Independent Usage	4	Document History.....	15
	3.2Used with Mother Board	5		
4	Program Function	7		

1 Introduction

The MB95F350 SOP28 PGM adaptor is developed mainly as an independent on-board programming and debugging tool for MB95F350 series SOP24 package MCU. Its original function of programming and debugging after being installed on the MB95F350 series EV board still remains. The picture of MB95F350 series SOP28 PGM adaptor is shown in Figure 1. Two 12-pin connectors are used to connect with MB95F350 EV board. The PN of the MB95F350 SOP28 PGM is FMCDC-8FX-PGMA-01028127.

Figure 1. MB95F350 SOP28 PGM Adaptor

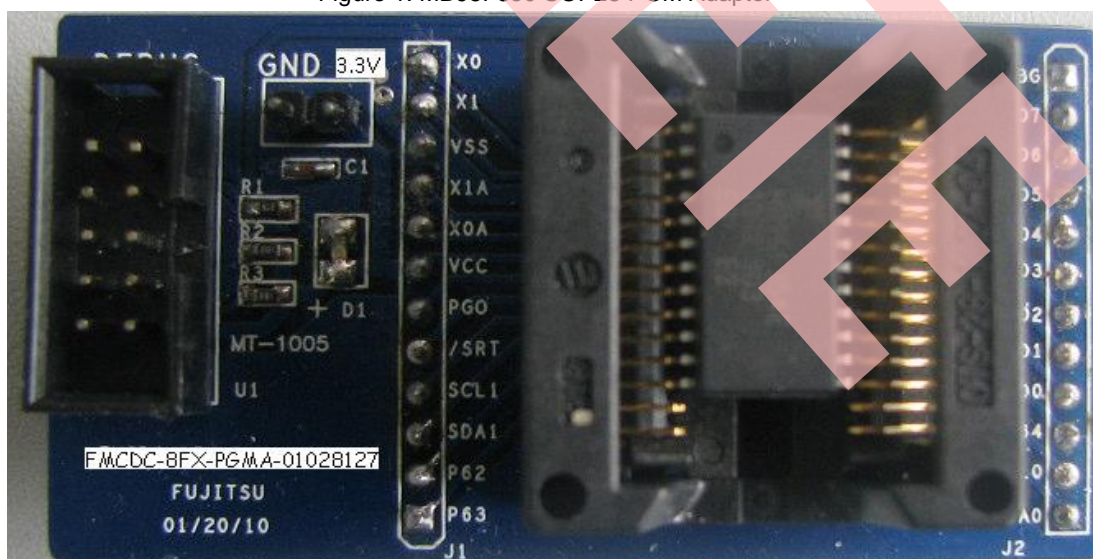


2 Application Environment

This section introduces application environment of MB95F350 SOP28 PGM adaptor.

2.1 Mother Board

The mother board of MB95F350 SOP28 PGM adaptor is MB95F350 EV board V1.0, as shown in Figure 2.
(PN: MB2146-460-E).

Figure 2. MB95F350 EV Board V1.0

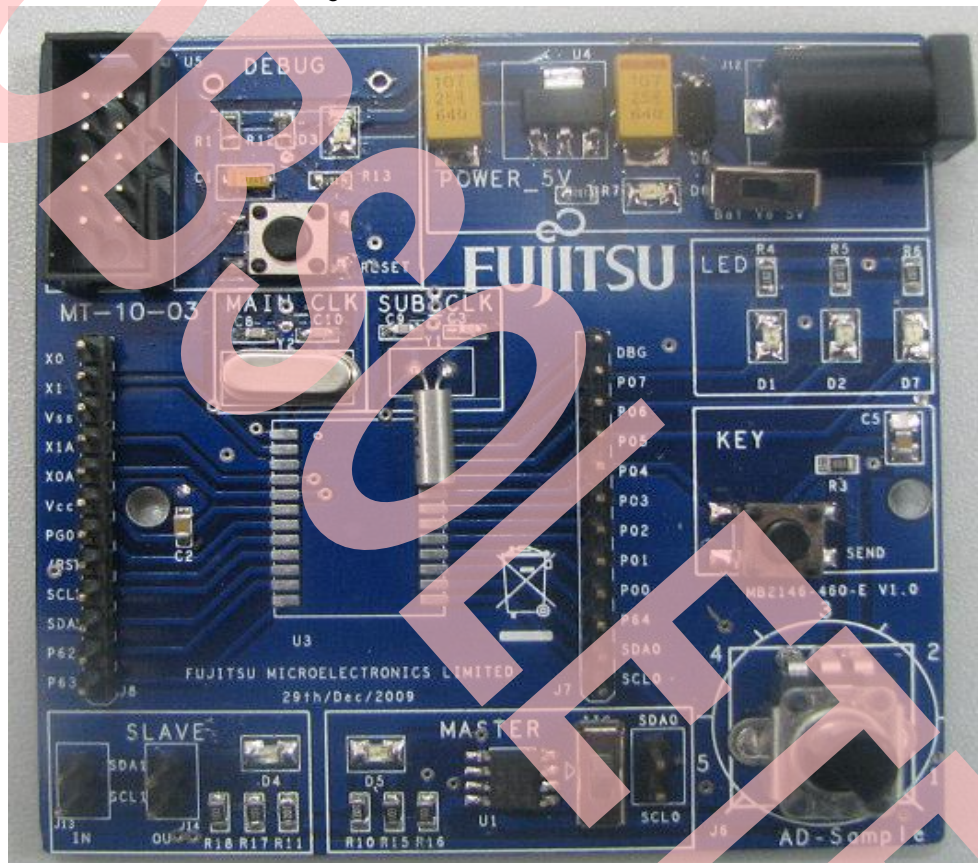

2.2 Debug Tool

The debug tool is BGMA (BGM Adaptor), the type of it is MB2146-08-E, as shown in Figure 3.

Figure 3. BGM Adaptor



2.3 SOFTUNE


SOFTUNE is used to program and debug, as software development environment. The version of it is F2MC-8L/8FX SOFTUNE Workbench V30L31, as shown in Figure 4.

Figure 4. SOFTUNE Version



2.4 USB Programmer

Figure 5. USB Programmer Version

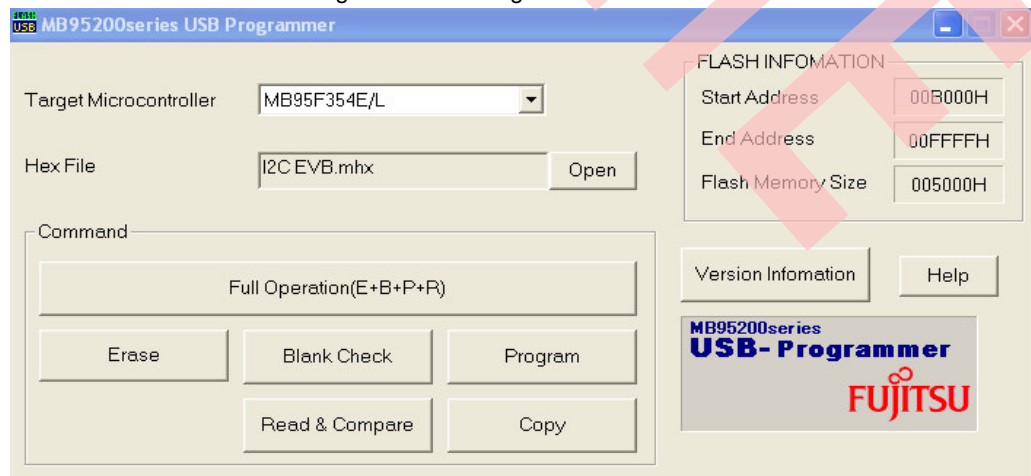

3 Hardware Connection


This section introduces hardware connection when it is used independently or with mother board.

MB95F350 SOP28 PGM adaptor can be used to program and debug independently or after being installed to the mother board. Hardware preparations for each case are described in Section 3.1. [Independent Usage](#) and Section 3.2. [Used with Mother Board](#) respectively.

3.1 Independent Usage


When using MB95F350 SOP28 PGM adaptor independently for programming, we should fix MCU on the socket first. Then following steps should be implemented.

Figure 6. Independent Usage Preparation

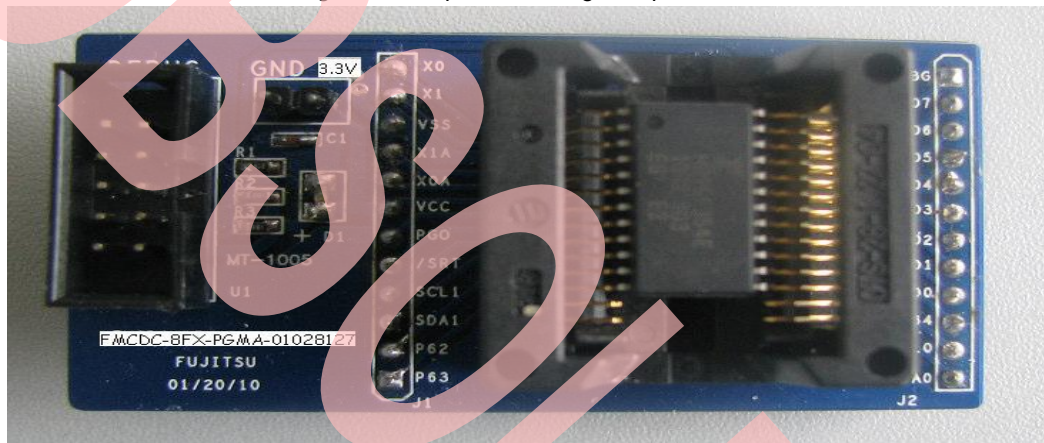

1. Connect BGMA to PC.
2. Connect PGM adaptor board to BGMA.
3. Power on the PGM adaptor board, the typical input voltage is 3.3 V.


Figure 7. Hardware Connection for Independent Usage

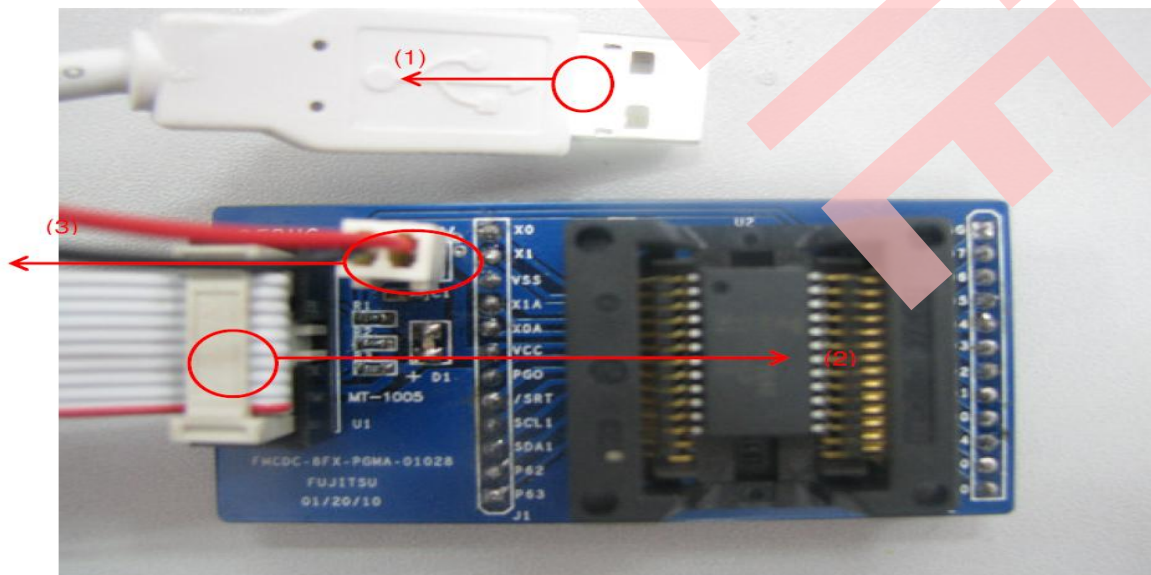

3.2 Used with Mother Board


1. MB95F350 series EV board V1.0 is the mother board of MB95F350 SOP28 PGM adaptor board. First remove the MB95F350 chip mounted on the mother board.

Figure 8. Remove MCU from Mother Board

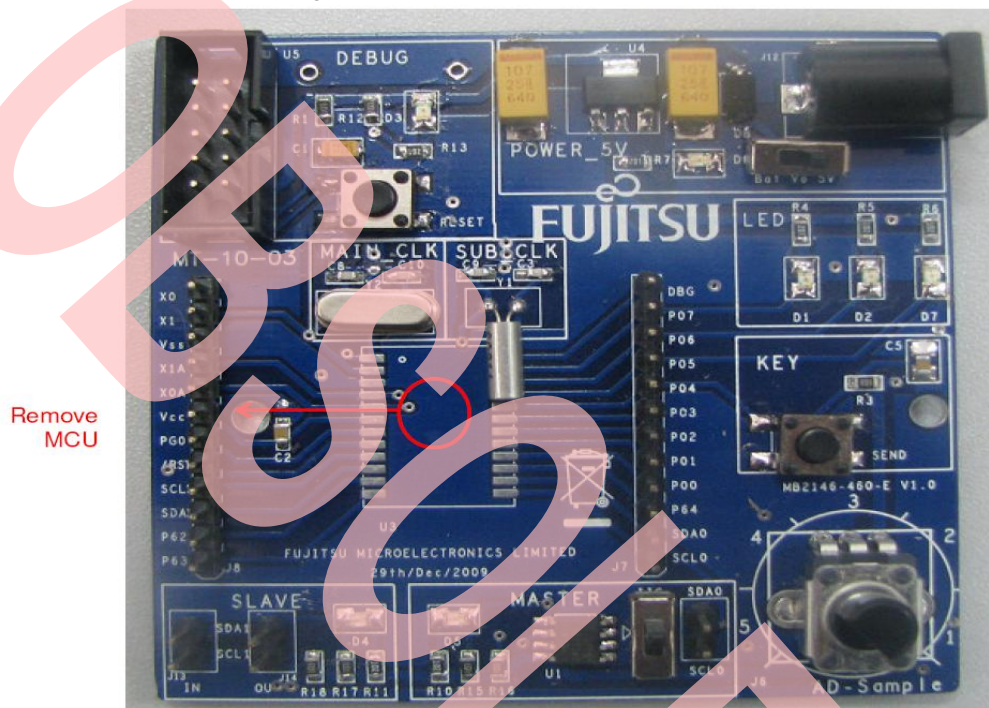


2. Install the chip onto the adaptor socket.

Figure 9. Make sure MCU on Adaptor Board

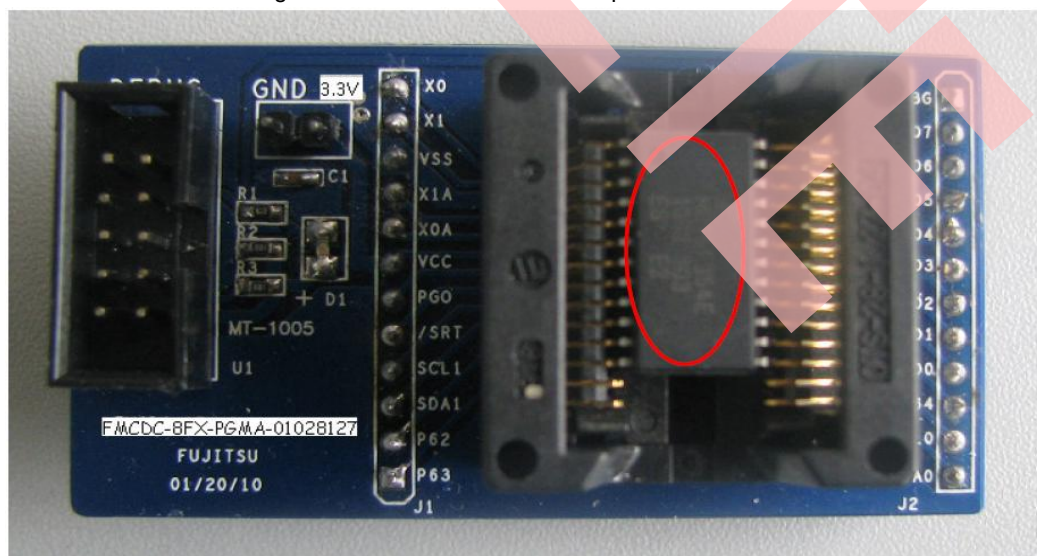


3. Fix the adaptor board to the mother board.

Figure 10. Fix Adaptor Board on the Mother Board

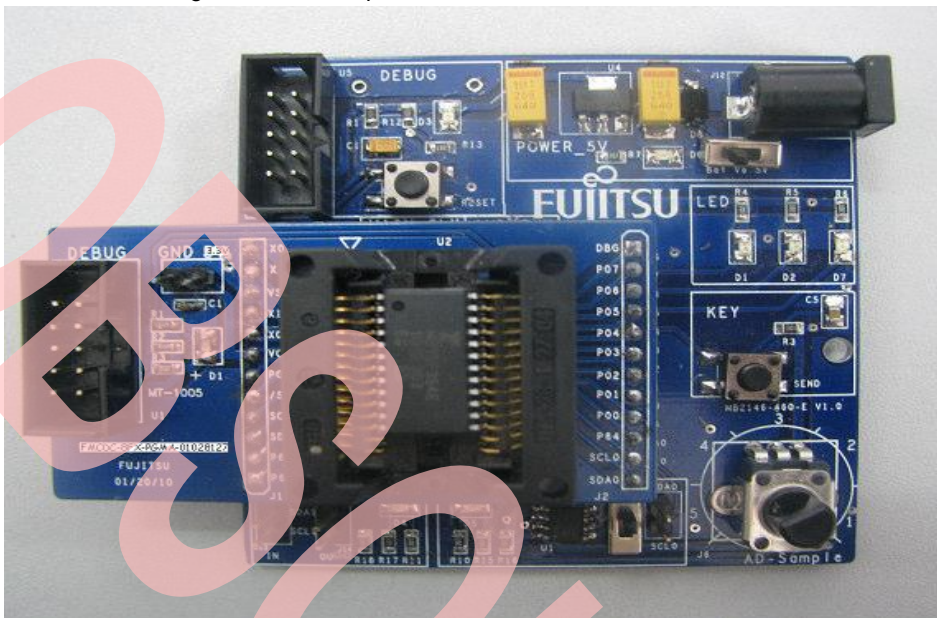

4. Connect BGMA to PC.
5. Connect PGM adaptor board to BGMA.
6. Power on the EV-board.

Figure 11. Process 4 - 6

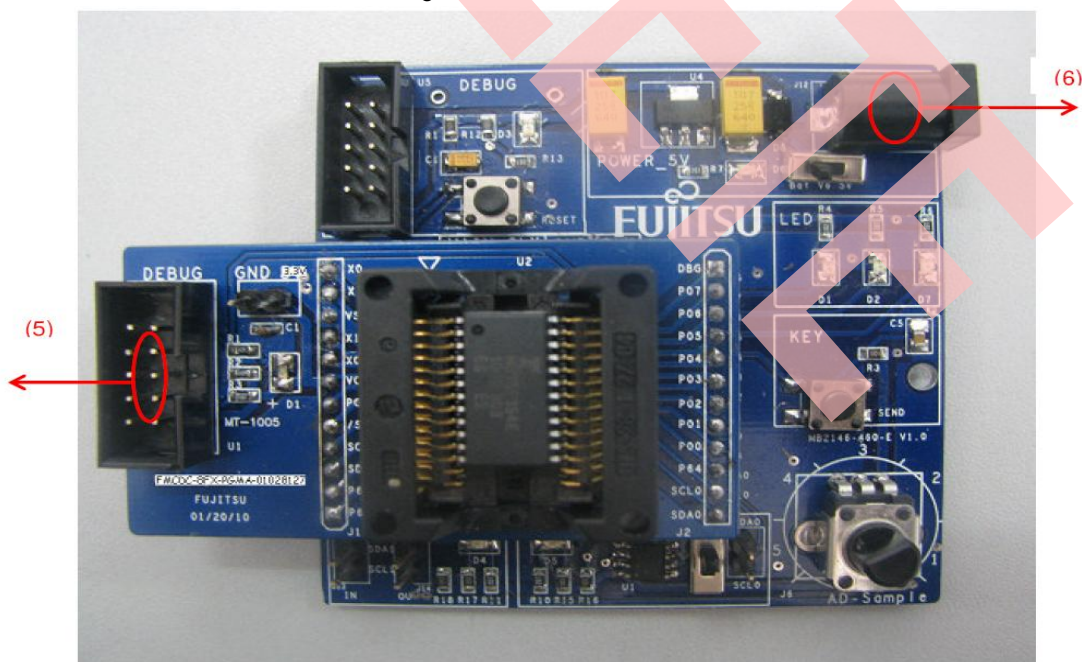

4 Program Function

This section introduces programming steps using either MB95F350 series USB programmer or F²MC-8L/8FX SOFTUNE Workbench V30L31.

MB95F350 series MCU can be programmed through MB95F350 series USB programmer or F²MC-8L/8FX SOFTUNE Workbench V30L31. Section 4.1. [Use MB95F350 Series USB Programmer to Program](#) and section 4.2. [Use F²MC-8L/8FX SOFTUNE to Program](#) introduces programming steps with MB95F350 series USB programmer and F²MC-8L/8FX SOFTUNE Workbench V30L31 respectively.

4.1 Use MB95F350 Series USB Programmer to Program

Figure 12. Open USB Programmer Window

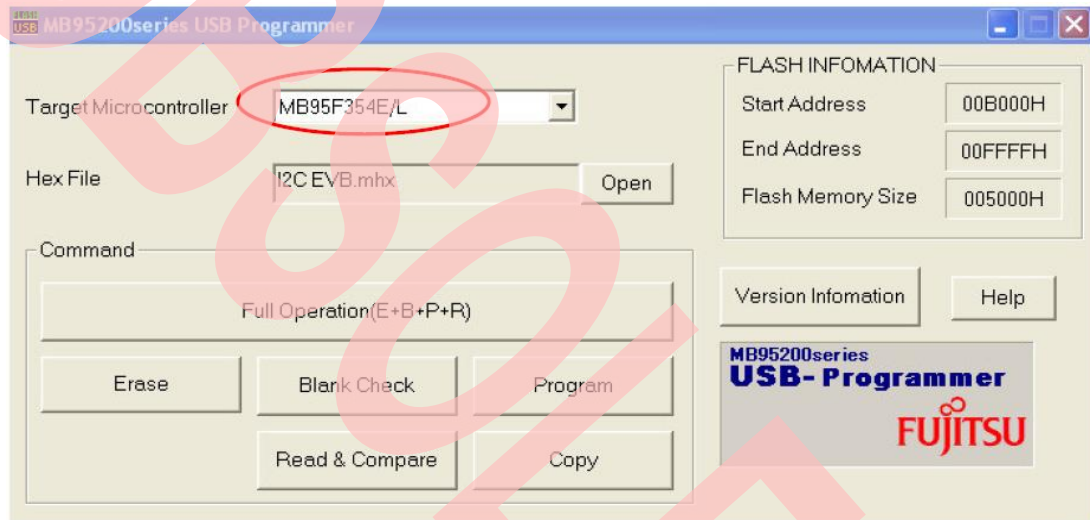


Figure 13. Open mhx File in ABS Folder

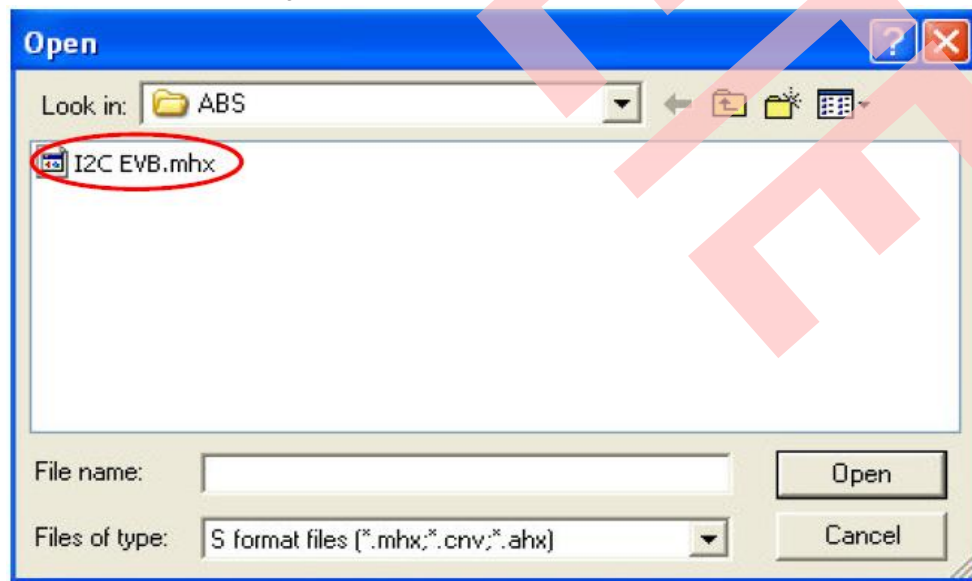


Figure 14. Click Full Operation

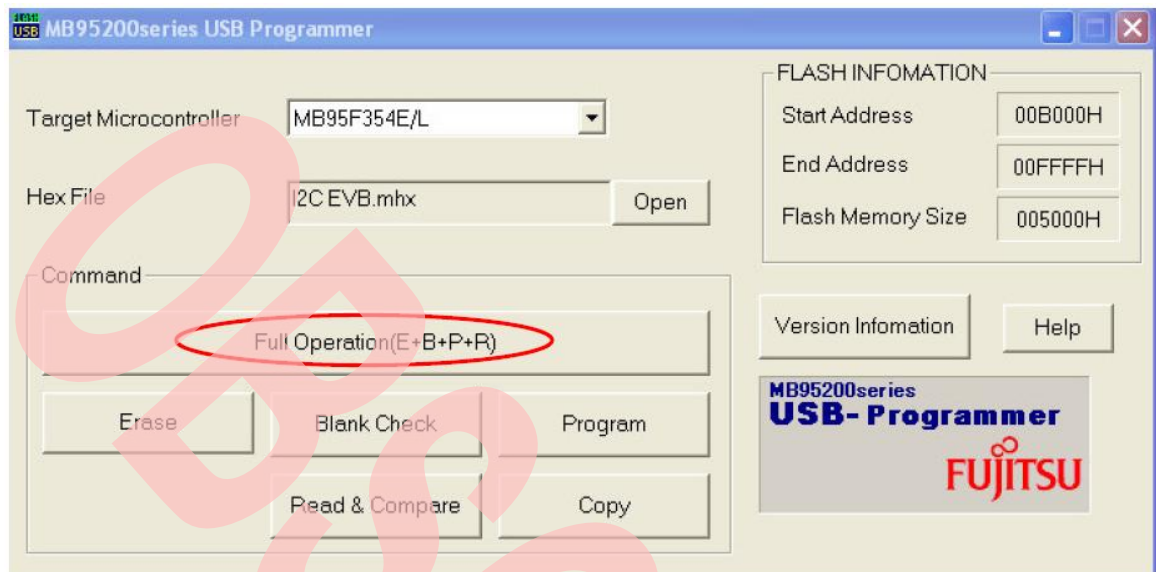


Figure 15. Start Erasing and Programming


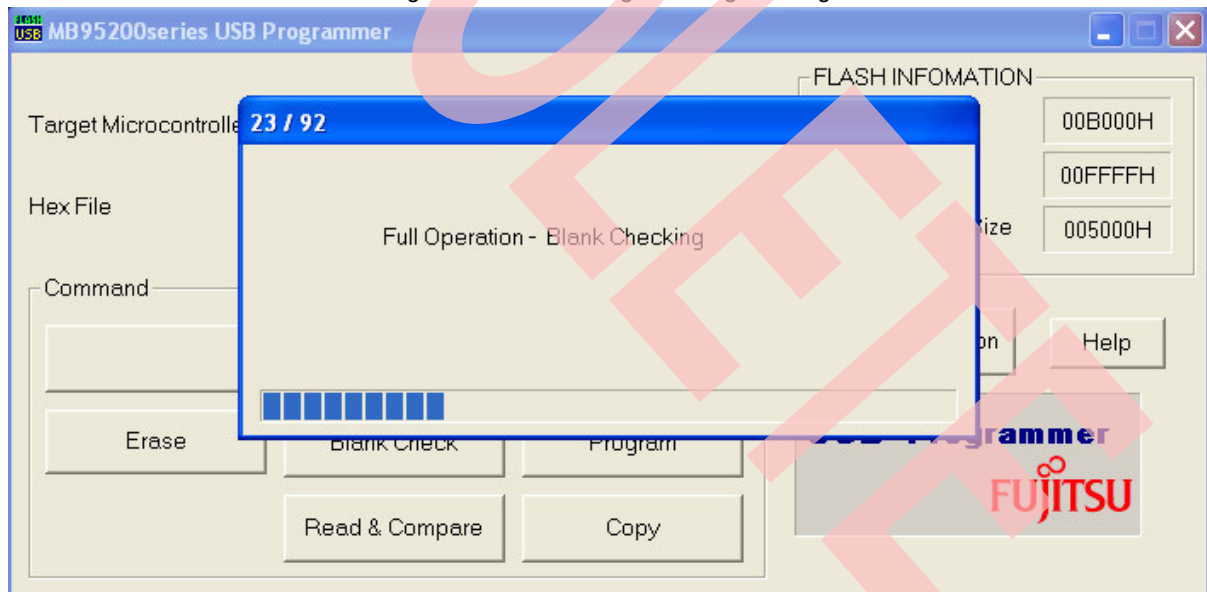



Figure 16. Star Erasing and Programming Finished

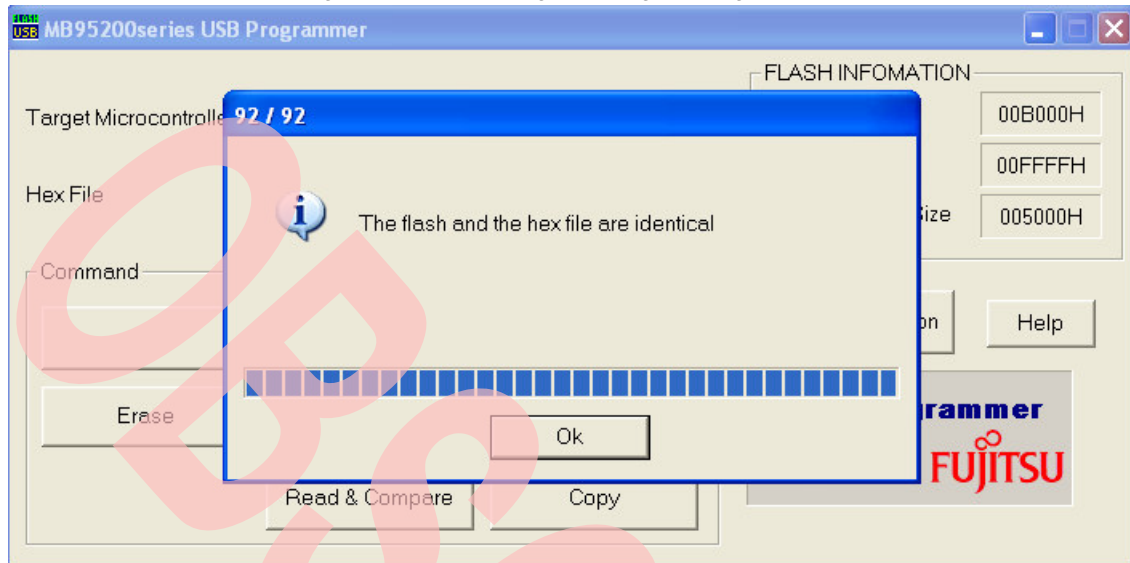

4.2 Use F2MC-8L/8FX SOFTUNE to Program


1. Open a project (e.g.: IIC_EV) using SOFTUNE.

Figure 17. Open Demo Project

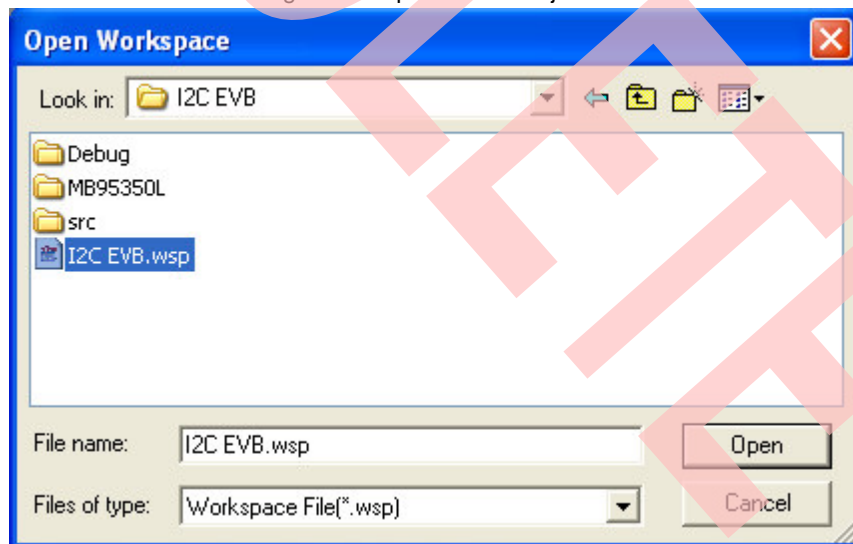

- Please select the MCU type by clicking Project-> Setup Project-> MCU.

Figure 18. Set MCU Type

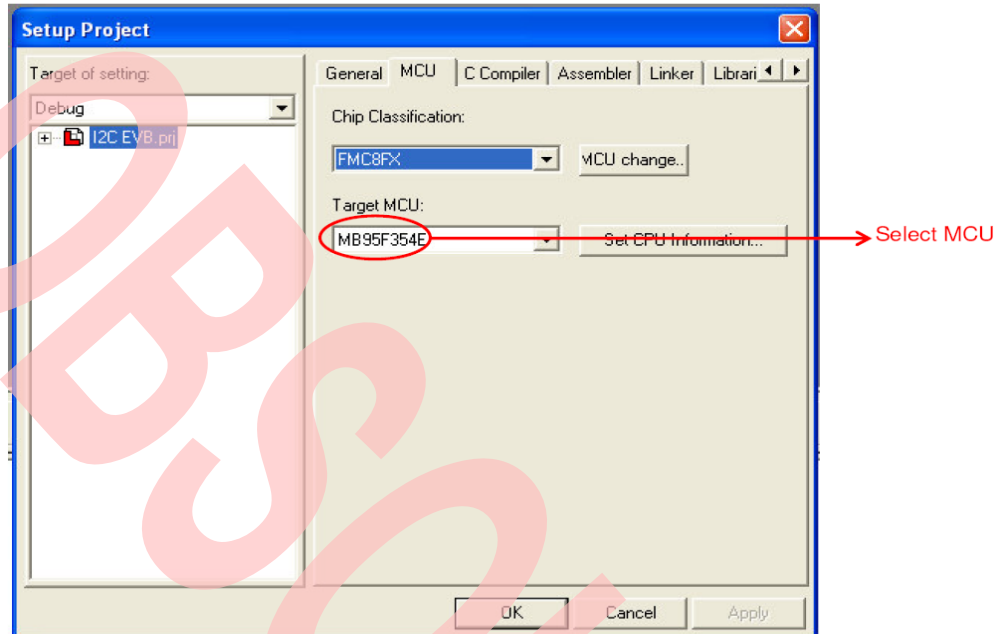

- Select Project -> Setup Project -> Linker, set **Disposition/Connection** in Category, then select **_INROM01** and click **Set Section....** After that, a dialog window will pop up as shown in Figure 20. Set **Const** (named **@INIT**) and **Dirconst** (named **@DIRINIT**) as shown in Figure 21 and Figure 22.

Figure 19. Disposition Display Window


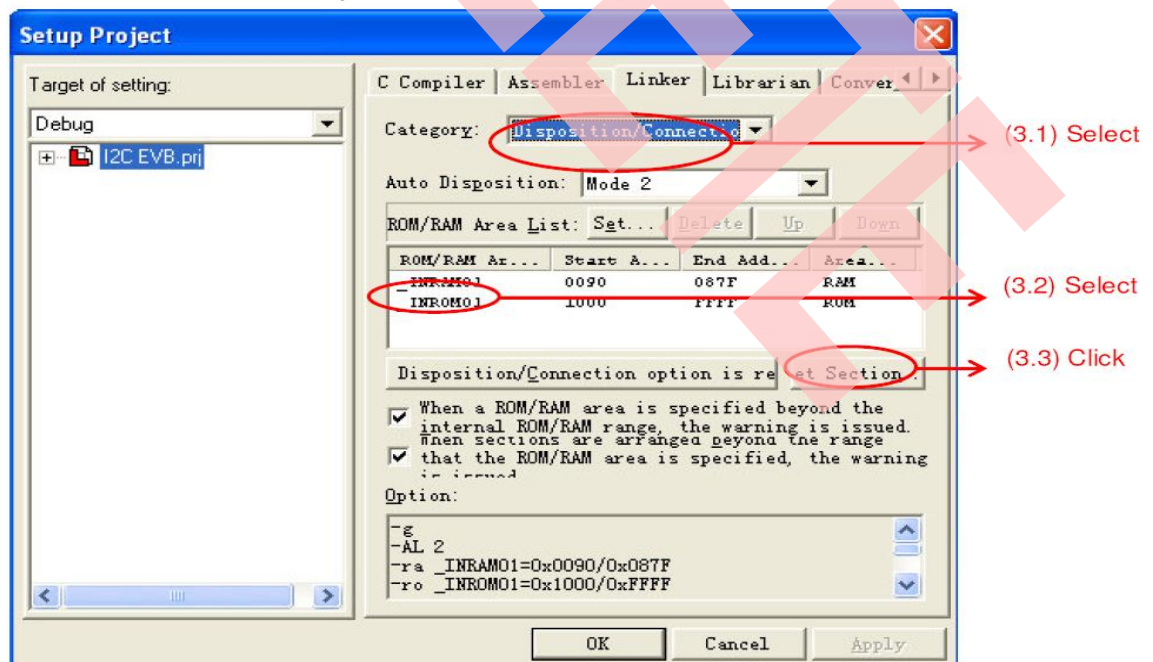


Figure 20. Section Setting Window

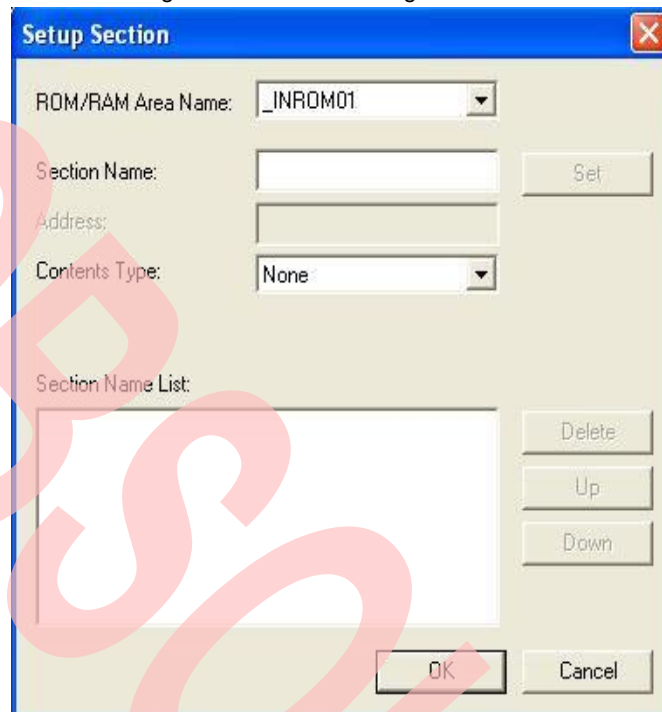

Setup Section

ROM/RAM Area Name:


Section Name:

Address:

Contents Type:

Section Name List:

Figure 21. Set Const Section

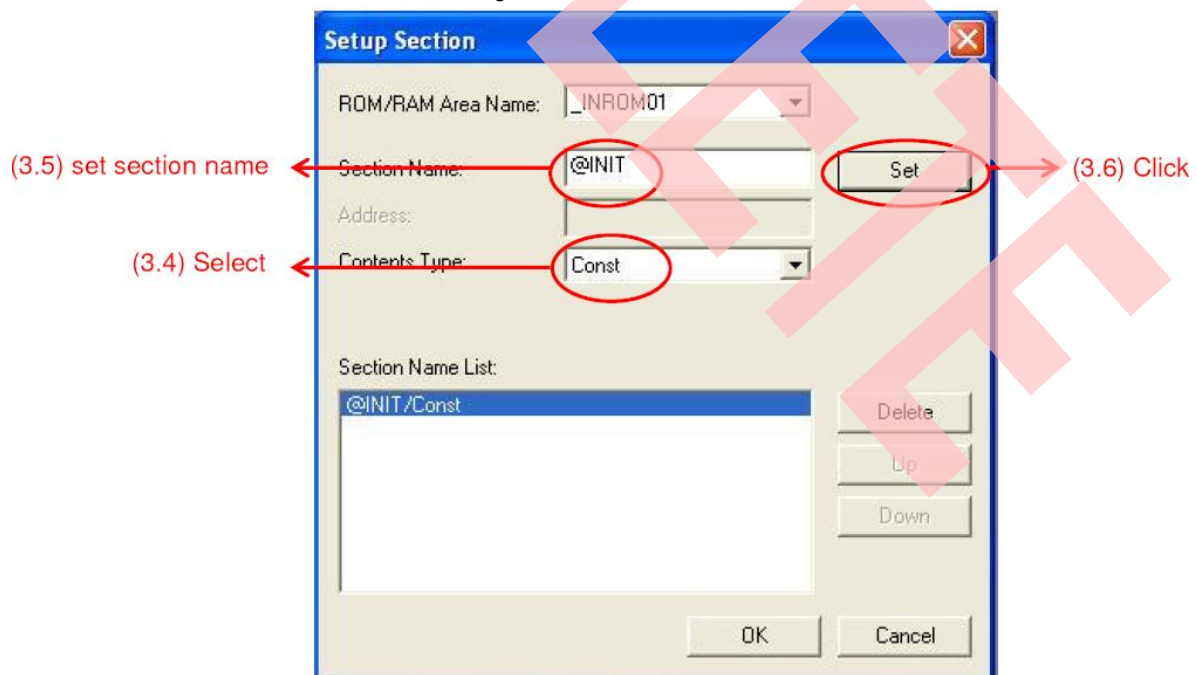

Setup Section

ROM/RAM Area Name:

Section Name: (3.5) set section name


Address:

Contents Type: (3.4) Select

Section Name List:


(3.6) Click

Figure 22. Set Dirconst Section

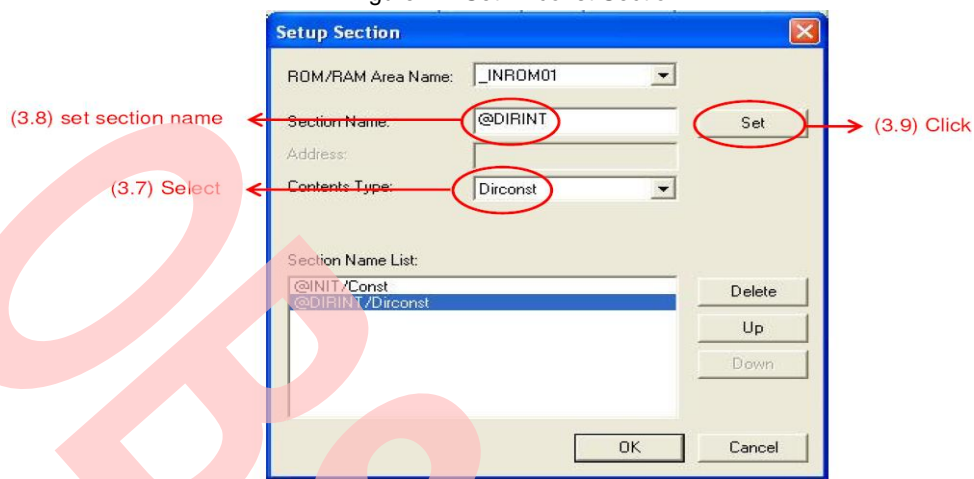

4. Compile project.
5. Start debugging.

Figure 23. Start Debugging

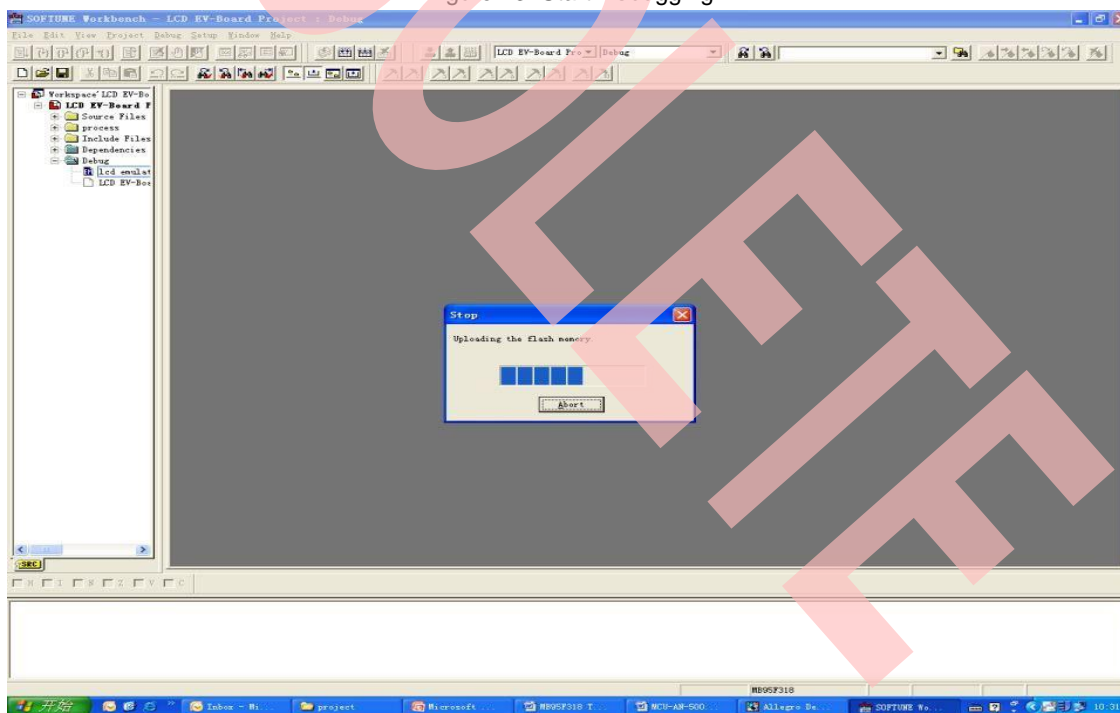

6. Run (code update).
7. End debugging.

Notes:


SOFTUNE environment can also be used to debug, however if users only need to do programming, Do not set any breakpoint before step 6, or error code will be programmed.

5 Schematic

This section demonstrates schematic of MB95F350 PGM adaptor.

5.1 SOP28 PGM Adaptor

Figure 24. SOP28 PGM Adaptor Schematic

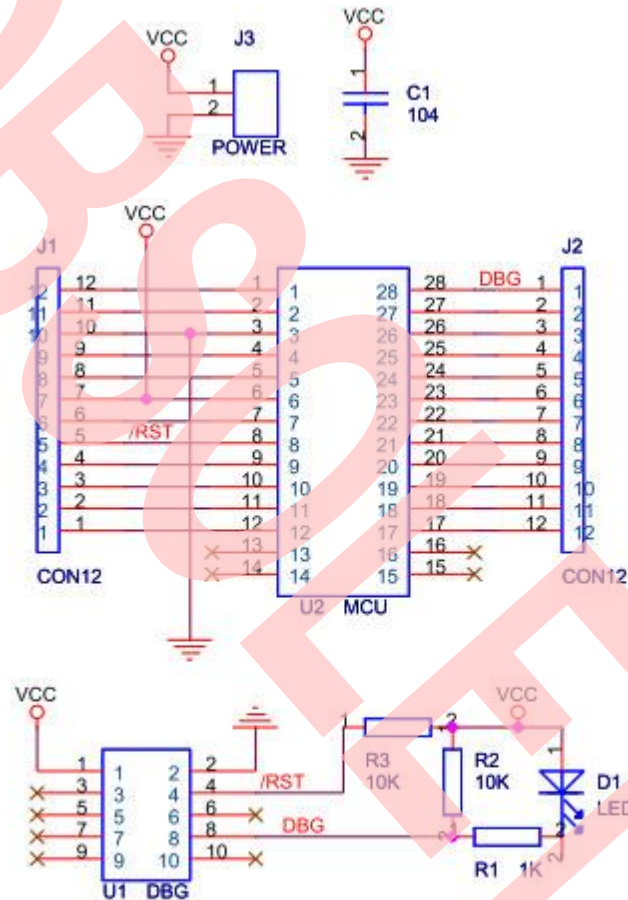

6 PN Definition Rule

The part number of PGM adaptor is FMCDC-8FX-PGMA-01028127;

01 - SOP

028 - Pin count (e.g. 028 means 28 pin MCU)

127 - Lead pitch (e.g. 127 means lead pitch 1.27 mm)

7 PN List of Applicable MCUs

MCU Series	Part Number	Footprint
MB95F350 series	MB95F352EPF-G-SNE2 MB95F352LPF-G-SNE2 MB95F353EPF-G-SNE2 MB95F353LPF-G-SNE2 MB95F354EPF-G-SNE2 MB95F354LPF-G-SNE2	SOP24

8 Additional Information

For more information on Cypress MB95F350 products, please visit our website:

<http://www.cypress.com/MB95F350>

For information on BGM adaptor, please visit our websites:

<http://www.cypress.com/Products/microcontrollers/8-bit-Proprietary-Core/Pages/mb2146-08e.aspx>

<http://www.cypress.com/documentation/development-kitsboards/mb2146-07-e>

For information on MB95F350 EV board, please visit our website:

<http://www.cypress.com/documentation/development-kitsboards/mb2146-460-e>

For information on USB Programmer, please visit our website:

<http://www.cypress.com/documentation/software-and-drivers/usb-programmer-tool-customer-programming-their-code-mcu-mb2146-07>

Document History

Document Title: AN205005 – F²MC-8FX Family MB95200 Series 8-Bit Microcontroller SOP28 PGM Adaptor

Document Number: 002-05005

Revision	ECN	Orig. of Change	Submission Date	Description of Change
**	-	HUAL	03/10/2010	Initial release
*A	5316682	HUAL	07/07/2016	Migrated Spansion Application Note MCU-AN-500076-E-10 to Cypress format. Document obsoleted.

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

Products

ARM® Cortex® Microcontrollers	cypress.com/arm
Automotive	cypress.com/automotive
Clocks & Buffers	cypress.com/clocks
Interface	cypress.com/interface
Lighting & Power Control	cypress.com/powerpsoc
Memory	cypress.com/memory
PSoC	cypress.com/psoc
Touch Sensing	cypress.com/touch
USB Controllers	cypress.com/usb
Wireless/Rf	cypress.com/wireless

PSoC® Solutions

[PSoC 1](#) | [PSoC 3](#) | [PSoC 4](#) | [PSoC 5LP](#)

Cypress Developer Community

[Forums](#) | [Projects](#) | [Videos](#) | [Blogs](#) | [Training](#) | [Components](#)

Technical Support

cypress.com/support

PSoC is a registered trademark and PSoC Creator is a trademark of Cypress Semiconductor Corporation. All other trademarks or registered trademarks referenced herein are the property of their respective owners.

 <p>CYPRESS Embedded in Tomorrow™</p>	Cypress Semiconductor		Phone : 408-943-2600
	198 Champion Court		Fax : 408-943-4730
	San Jose, CA 95134-1709		Website : www.cypress.com

© Cypress Semiconductor Corporation, 2010-2016. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit cypress.com. Other names and brands may be claimed as property of their respective owners.