



---

The following document contains information on Cypress products. The document has the series name, product name, and ordering part numbering with the prefix “MB”. However, Cypress will offer these products to new and existing customers with the series name, product name, and ordering part number with the prefix “CY”.

#### **How to Check the Ordering Part Number**

1. Go to [www.cypress.com/pcn](http://www.cypress.com/pcn).
2. Enter the keyword (for example, ordering part number) in the **SEARCH PCNS** field and click **Apply**.
3. Click the corresponding title from the search results.
4. Download the Affected Parts List file, which has details of all changes

#### **For More Information**

Please contact your local sales office for additional information about Cypress products and solutions.

#### **About Cypress**

Cypress is the leader in advanced embedded system solutions for the world's most innovative automotive, industrial, smart home appliances, consumer electronics and medical products. Cypress' microcontrollers, analog ICs, wireless and USB-based connectivity solutions and reliable, high-performance memories help engineers design differentiated products and get them to market first. Cypress is committed to providing customers with the best support and development resources on the planet enabling them to disrupt markets by creating new product categories in record time. To learn more, go to [www.cypress.com](http://www.cypress.com).

## FR Family, MB91460 Microcontroller Real-Time Clock

This application note describes the functionality of the Real-Time Clock and gives some examples.

### Contents

1	Introduction.....	1	3.4	Read the Time inside ISR.....	10
1.1	Key Features .....	1	3.5	Read the Time inside application.....	11
2	The Real-Time Clock.....	2	4	Additional Information.....	12
2.1	Block Diagrams.....	2		Document History.....	13
2.2	Registers.....	4		Worldwide Sales and Design Support.....	14
3	Real Time Clock Examples .....	7		Products.....	14
3.1	RTC with main clock source and without interrupts .....	7		PSoC® Solutions .....	14
3.2	Re-Initialize the RTC with Sub clock.....	8		Cypress Developer Community.....	14
3.3	Initialize the Sub-Second Register in ISR .....	9		Technical Support .....	14

## 1 Introduction

This application note describes the functionality of the Real-Time Clock and gives some examples.

### 1.1 Key Features

- Clock selectable as Main Clock, Sub Clock and RC Clock – 100KHz
- RTC is not deactivated during Stop Mode
- Interrupts selectable for: ½ second, 1 second, 1 minute, 1 hour, and 1 day

## 2 The Real-Time Clock

The Basic Functionality of the Real-Time Clock

### 2.1 Block Diagrams

Figure 1 shows the internal block diagram of the Real-Time Clock.

Figure 1. Real Time Clock block diagram


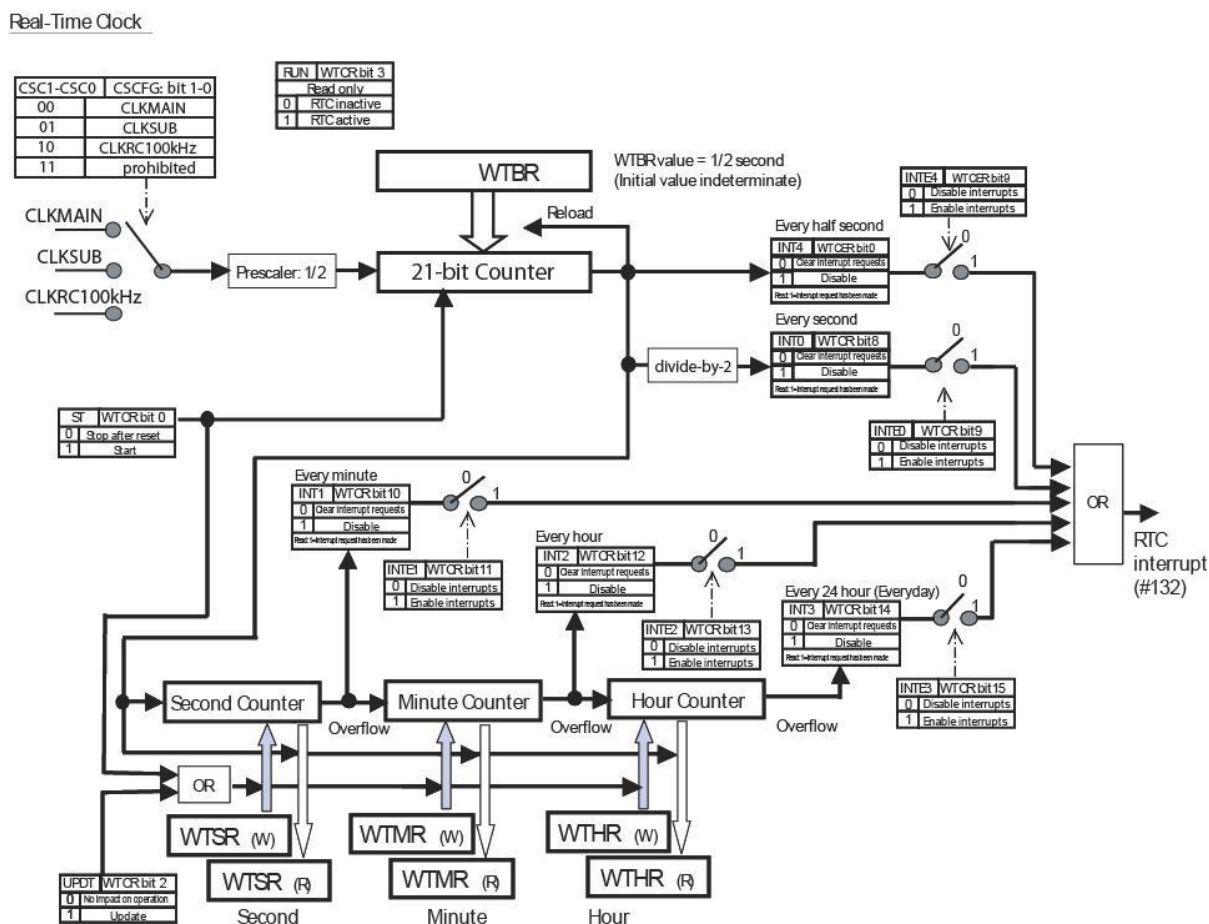


Figure 2 shows the simplified block diagram of the Real Time Clock.

Figure 2. Simplified Real Time Clock block diagram

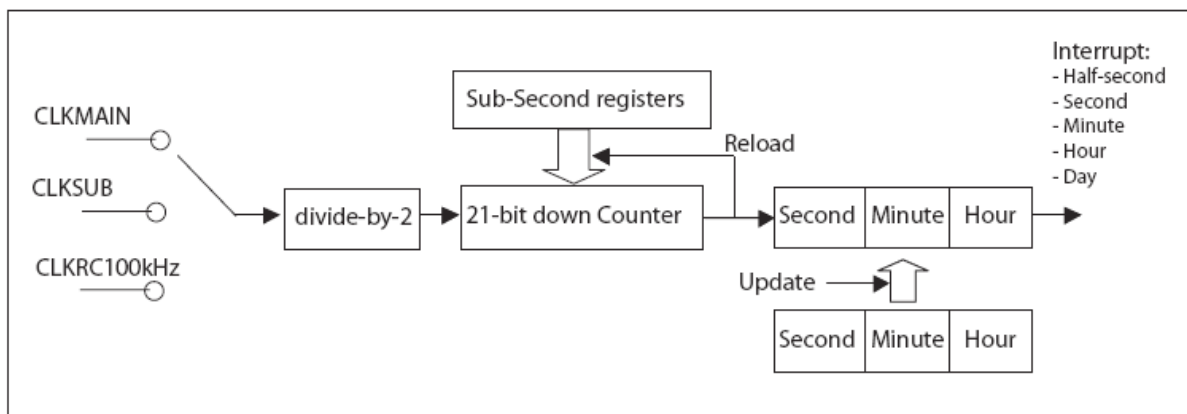

## 2.2 Registers

Please write always "0" to the "Reserved" bits when accessing a register, if not stated otherwise.

### 2.2.1 Timer Control Register (WTCR)

Table 1. WTCR

Bit No.	Name	Explanation	Value	Operation
15	INTE3	Interrupt Request at 1-Day (24 Hour)	0	Interrupt disabled
			1	Interrupt, if 24 Hour (1-Day)Counter overflow
14	INT3	1-Day Interrupt Flag/Clear	0	Write: Clear Request
			1	Interrupt Request
13	INTE2	Interrupt Request at 1-Hour	0	Interrupt disabled
			1	Interrupt, if 1 Hour Counter overflow
12	INT2	1-Hour Interrupt Flag/Clear	0	Write: Clear Request
			1	Interrupt Request
11	INTE1	Interrupt Request at 1-Minute	0	Interrupt disabled
			1	Interrupt, if Minute Counter overflow
10	INT1	1-Minute Interrupt Flag/Clear	0	Write: Clear Request
			1	Interrupt Request
9	INTE0	Interrupt Request at 1-Second	0	Interrupt disabled
			1	Interrupt, if Second Counter overflow
8	INT0	1-Second Interrupt Flag/Clear	0	Write: Clear Request
			1	Interrupt Request
7-5	-	Reserved	-	-
4	-	Undefined	-	-
3	RUN	Operation Status	0	RTC inactive
			1	RTC is active
2	UPDT	Update Counter with written Values into WTSR, WTHR, and WTMR	0	Write: No effect
			1	Write: Update
1	-	Undefined	-	-
0	ST	Start <sup>1</sup>	0	Clear Clock and Stop it
			1	Load Values and Start clock

<sup>1</sup> It is recommended to set the ST-Bit to "0", when changing the clock time of the RTC.

## 2.2.2 Timer Control Extended Register (WTCER)

Table 2. WTCER

Bit No.	Name	Explanation	Value	Operation
7	-	Undefined	-	-
6	-	Undefined	-	-
5	-	Undefined	-	-
4	-	Undefined	-	-
3	-	Undefined	-	-
2	-	Undefined	-	-
1	INTE4	Enable Interrupt Request at Half-Second (500 ms)	0	Interrupt disabled
			1	Interrupt, if Half-Second Counter overflow
0	INT4	Half-Second Interrupt Flag/Clear	0	Write: Clear Request
			1	Interrupt Request

## 2.2.3 Sub-Second Register (WTBR)

This register contains the 21-Bit reload value, which divides the clock source. The value to be programmed in WTBR register should be actual source clock-frequency (one among CLKMAIN, CLKSUB or CLKRC100KHz) divide by 4 in order to get half a second interrupt (0.5 s). This is also because there is a default prescaler of divide by 2 (please refer Figure 2).

The lower 8 Bits of this value is stored in WTBR2, the middle 8 Bits of this value is stored in WTBR1 and the remaining upper 5 Bits of the value in the lower 5 Bits of WTBR0.

The following table shows example values for different clock sources.

Table 3. Clock Source and WTBR values

Clock Source	WTBR decimal	WTBR hexadecimal
Main Clock 4 MHz	1000000	0x0F4240
RC Clock 100 kHz	25000	0x0061A8
Sub Clock 32768 Hz	8192	0x002000

Sub-Second Registers can be accessed via byte/half-word/word access.

## 2.2.4 Second/Minute/Hour Registers (WTSR, WTMR, WTHR)

The lower 6 Bits of the WTSR contains the actual second counter value. Writing a value to it memorizes the value. The Second-Counter is updated with this value by writing "1" to WTCR\_UPDT.

The lower 6 Bits of the WTMR contains the actual minute counter value. Writing and reading has the same behavior like for WTSR.

The lower 5 Bits of the WTHR contains the actual hour counter value. Writing and reading has the same behavior like for WTSR.

Please store only reasonable values to these registers. If values, that do not present a clock time, are used, the behavior of the RTC will be undefined.

These registers can be accessed via byte/half-word access.

## 2.2.5 Clock Source Selection

The RTC clock source can be selected using CSC[1:0] bits of Clock Source Configuration Register (CSCFG).

### Clock Source Configuration Register (CSCFG)

Table 4. WTCKSR

Bit No.	Name	Explanation	Value	Operation
1, 0	CKC1, 0	RTC Clock Select Selection	0, 0	Main Clock (CLKMAIN)
			0, 1	Sub Clock (CLKSUB)
			1, 0	RC Clock (CLKRC100kHz)
			1, 1	<i>prohibited</i>

The other bits of CSCFG register are not discussed here.

### 3 Real Time Clock Examples

Examples for the Real Time Clock

#### 3.1 RTC with main clock source and without interrupts

The above example demonstrates how to initialize RTC immediately after a Reset. Here it is considered that the Main Clock is 4 MHz.

```
#define DividerMC 1000000

void InitRTCAfterReset (void)
{
    WTBR = DividerMC;           // Set Sub-Second Prescaler

    WTCR_INTE0 = 0;             // No Interrupts
    WTCR_INTE1 = 0;
    WTCR_INTE2 = 0;
    WTCR_INTE3 = 0;
    WTCER_INTE4 = 0;
    CSCFG_CSC = 0;              // Main Clock Source

    WTSR = 56;                  // Seconds: 56
    WTMR = 34;                  // Minutes: 34
    WTHR = 12;                  // Hours: 12

    WTCR_ST = 1;                // ... and go!
}

void main(void)
{
    . . .

    InitRTCAfterReset (); // Init and start the RTC

    . . .
}
```

```
#define DividerSC 8192

void InitRTC (void)
{
    WTCR_ST = 0;           // Stop the RTC
    while (WTCR_RUN != 0); // Wait till the RTC stops

    WTBR2 = (0xFFFF & DividerSC); // Set Sub-Second Prescaler
    WTBR1 = (DividerSC >> 16);

    WTSR = 28;             // Seconds: 28
    WTMR = 59;             // Minutes: 59
    WTHR = 18;             // Hours: 18

    CSCFG_CK0 = 1;         // Sub Clock Source
    WTCR_ST = 1;           // ... and go!
}
```

### 3.2 Re-Initialize the RTC with Sub clock

The above examples demonstrates how to initialize the Sub-Second, Second, Minute & Hour registers if the RTC is already running. Here it is considered that the Sub Clock is 32.768 kHz.

### 3.3 Initialize the Sub-Second Register in ISR

```
#define DividerRC 25000

__interrupt void RealTimeClock (void)
{
    WTCR_INT0 = 0;           // Clear the interrupt flag
    WTBR2 = (0xFFFF & DividerRC); // Set Sub-Second Prescaler
    WTBR1 = (DividerRC >> 16);

}
```

The above examples demonstrates how to initialize the Sub\_Second register within the RTC interrupt service routine (if RTC is already running). Here the RTC does not need to be stopped since there is enough time to securely modify the registers until the next reload operation (next second interrupt). It should be noted that the RTC Second interrupt needs to be enabled.

```
void InitIrqLevels(void)
{
    . . .

    ICR58 = 30;    /* Real Time Clock          */
                  /* Calibration Unit           */
    . . .
}

__interrupt void RealTimeClock (void); // Prototype

. . .

#pragma intvect RealTimeClock 132    /* Real Time Clock          */
```

Please note, that the corresponding interrupt vector and level has to be defined in the `vectors.c` module of our standard template project.

```
extern unsigned char second, minute, hour;

__interrupt void RealTimeClock (void)
{
    WTCR_INT0 = 0;                // Clear the interrupt flag
    second = WTSR;
    minute = WTMR;
    hour = WTHR;
}
```

### 3.4 Read the Time inside ISR

It is recommended that the interrupts (INT0-4) should be used to read the time information, as this would eliminate the possibility of reading incorrect values from time (hour/minute/second) registers (in case of carry while reading). In the above example the Time information is read in the RTC Second (INT0) interrupt service routine.

Please note that the corresponding interrupt vector and level has to be defined in the *vectors.c* module as shown in the above example.

### 3.5 Read the Time inside application

```

#define TRUE      1
#define FALSE     0

unsigned char second, minute, hour;
unsigned char second1, minutel, hour1;
unsigned int time, timel;

void ReadTime (void)
{
    unsigned char result = FALSE;

    /* Normally this loop would exit at 1st iteration (e.g. 02:59:59 ->
       03:00:00). In some cases only this loop will have 2 iterations at the max
       (e.g. 02:59:59 -> 03:59:59 (1st Iteration), 03:00:00 -> 03:00:00 (2nd
       Iteration)).*/
    while (result != TRUE)
    {
        /* First Set of Time */
        second = WTSR;
        minute = WTMR;
        hour = WTHR;

        /* Second Set of Time */
        second1 = WTSR;
        minutel = WTMR;
        hour1 = WTHR;

        /* Calculating absolute seconds for first set of time */
        time = hour*3600 + minute*60 + second;

        /* Calculating absolute seconds for second set of time */
        timel = hour1*3600 + minutel*60 + second1;

        /* If the difference in the first & second set is 0 or 1 then the
           second set contains the latest accurate time information */
        if (((timel - time) == 1) || ((timel - time) == 0))
        {
            result = TRUE;
        }
        /* The following condition takes care of day change situation
           23:59:59 -> 00:00:00, and the second set contains the latest
           accurate time information */
        else if (time == 86399 && timel == 0)
        {
            result = TRUE;      // 23:59:59 -> 00:00:00
        }
    }
}

```

The above example demonstrates how the time can be read inside an application (without using interrupts). This also takes care of reading the time (hour/minute/second) registers at the very timing of changing over the hour or minute boundary.

Here the time registers are read twice. Then it is converted into absolute seconds value and if difference between the old and the new value is 0/1 or the old value is 86399 & the new value is 0 (i.e. 23:59:59 -> 00:00:00), then the second set (second1/minute1/hour1) is considered to contain the correct time information.

## 4 Additional Information

Information about CYPRESS Microcontrollers can be found on the following Internet page:

<http://www.cypress.com/cypress-microcontrollers>

The software example related to this application note is:

*91460\_rtc\_init\_read*

It can be found on the following Internet page:

<http://www.cypress.com/16fx>

## Document History

Document Title: AN205371 - FR Family, MB91460 Microcontroller Real-Time Clock

Document Number: 002-05371

Revision	ECN	Orig. of Change	Submission Date	Description of Change
**	—	NOFL	06/05/2008	First Version; MPi
*A	5128745	NOFL	02/07/2016	Converted Spansion Application Note "MCU-AN-300075-E-V10" to Cypress template.
*B	5870296	AESATMP9	09/01/2017	Updated logo and copyright.
*C	6060603	NOFL	02/06/2018	Updated hyperlinks across the document. Updated to new template. Completing Sunset Review.

## Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

## Products

ARM® Cortex® Microcontrollers	<a href="http://cypress.com/arm">cypress.com/arm</a>
Automotive	<a href="http://cypress.com/automotive">cypress.com/automotive</a>
Clocks & Buffers	<a href="http://cypress.com/clocks">cypress.com/clocks</a>
Interface	<a href="http://cypress.com/interface">cypress.com/interface</a>
Internet of Things	<a href="http://cypress.com/iot">cypress.com/iot</a>
Memory	<a href="http://cypress.com/memory">cypress.com/memory</a>
Microcontrollers	<a href="http://cypress.com/mcu">cypress.com/mcu</a>
PSoC	<a href="http://cypress.com/psoc">cypress.com/psoc</a>
Power Management ICs	<a href="http://cypress.com/pmic">cypress.com/pmic</a>
Touch Sensing	<a href="http://cypress.com/touch">cypress.com/touch</a>
USB Controllers	<a href="http://cypress.com/usb">cypress.com/usb</a>
Wireless Connectivity	<a href="http://cypress.com/wireless">cypress.com/wireless</a>

## PSoC® Solutions

[PSoC 1](#) | [PSoC 3](#) | [PSoC 4](#) | [PSoC 5LP](#) | [PSoC 6 MCU](#)

## Cypress Developer Community

[Community](#) | [Projects](#) | [Videos](#) | [Blogs](#) | [Training](#) | [Components](#)

## Technical Support

[cypress.com/support](http://cypress.com/support)



Cypress Semiconductor  
198 Champion Court  
San Jose, CA 95134-1709

© Cypress Semiconductor Corporation, 2008-2018. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spanion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spanion, the Spanion logo, and combinations thereof, WICED, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit [cypress.com](http://cypress.com). Other names and brands may be claimed as property of their respective owners.