

Please note that Cypress is an Infineon Technologies Company.

The document following this cover page is marked as “Cypress” document as this is the company that originally developed the product. Please note that Infineon will continue to offer the product to new and existing customers as part of the Infineon product portfolio.

Continuity of document content

The fact that Infineon offers the following product as part of the Infineon product portfolio does not lead to any changes to this document. Future revisions will occur when appropriate, and any changes will be set out on the document history page.

Continuity of ordering part numbers

Infineon continues to support existing part numbers. Please continue to use the ordering part numbers listed in the datasheet for ordering.

Downloading Firmware to CYW20702 Modules Using BlueTool™

Associated Part Family: CYW20702

This Application Note describes the step-by-step process of downloading a firmware file to a CYW20702 module using BlueTool™ software. It includes details on installing a driver to allow the CYW20702 module to be connected to a USB port on a Windows® machine.

1 Introduction

This Application Note describes the step-by-step process of downloading a firmware file to a CYW20702 module using BlueTool™ software. It includes details on installing a driver to allow the CYW20702 module to be connected to a USB port on a Windows® machine.

1.1 Cypress Part Numbering Scheme

Cypress is converting the acquired IoT part numbers from Broadcom to the Cypress part numbering scheme. Due to this conversion, there is no change in form, fit, or function as a result of offering the device with Cypress part number marking. The table provides Cypress ordering part number that matches an existing IoT part number.

Table 1. Mapping Table for Part Number between Broadcom and Cypress

Broadcom Part Number	Cypress Part Number
BCM20702	CYW20702

1.2 Acronyms and Abbreviations

In most cases, acronyms and abbreviations are defined on first use.

For a comprehensive list of acronyms and other terms used in Cypress documents, go to:
<http://www.cypress.com/glossary>.


2 IoT Resources

Cypress provides a wealth of data at <http://www.cypress.com/internet-things-iot> to help you to select the right IoT device for your design, and quickly and effectively integrate the device into your design. Cypress provides customer access to a wide range of information, including technical documentation, schematic diagrams, product bill of materials, PCB layout information, and software updates. Customers can acquire technical documentation and software from the Cypress Support Community website (<http://community.cypress.com/>).


3 Installing the USB Port Driver

Follow the steps below to install the USB Port driver for the CYW20702 module.

1. Copy the btwusb.inf file¹ located in C:\Drivers folder to C:\Program Files\CYPRESS.
2. Connect the Bluetooth module to the PC. The Hardware Update Wizard will open.
3. Select the **No, not this time** option, then click **Next**.

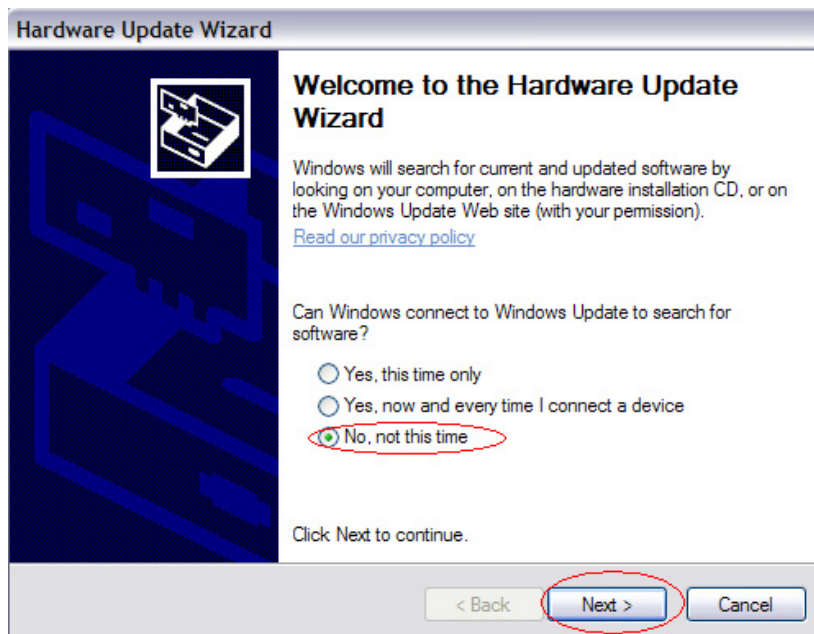


4. Select the **Install from a list or specific location (Advanced)** option, then click **Next**.

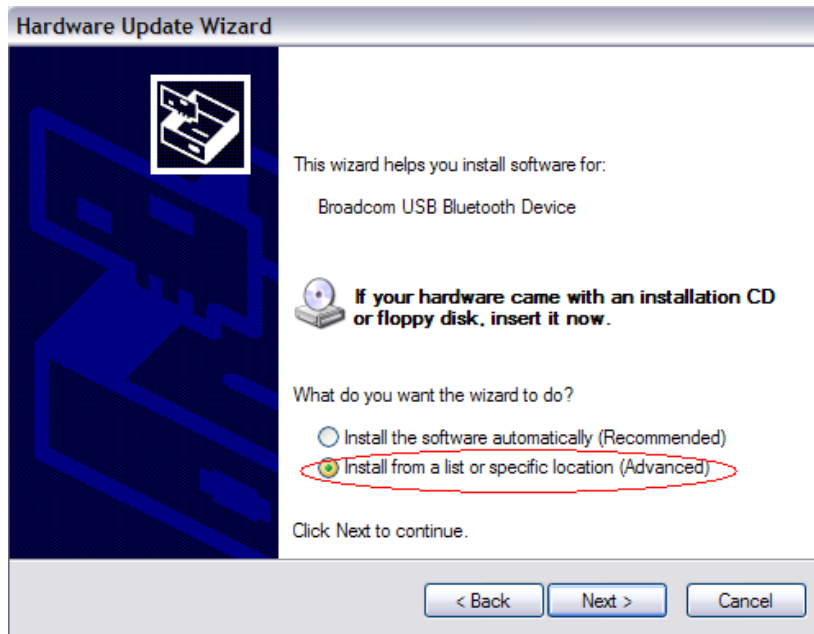


1. This file is provided by your Cypress Sales or Engineering support representative. (See IoT Resources on page 1)

5. Select the **Don't search. I will choose the driver to install** option, then click **Next**.

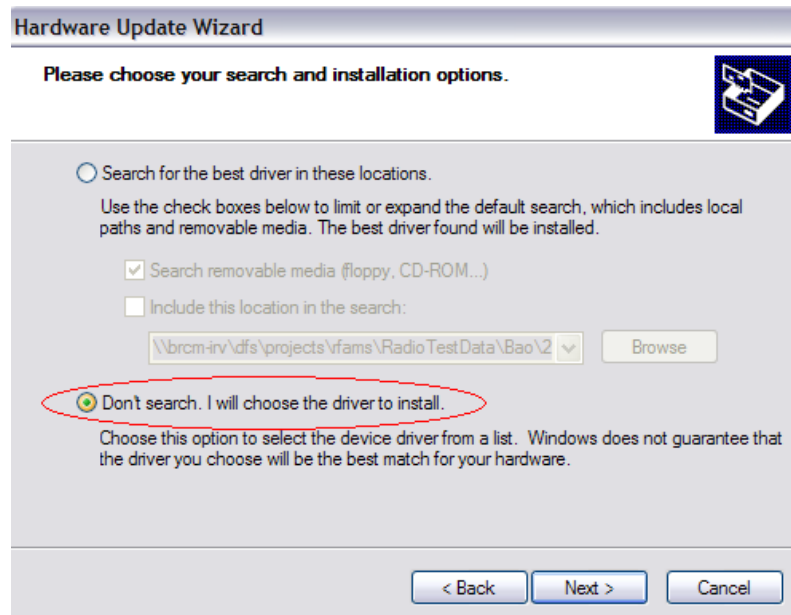


6. In the next window, select the **Have Disk...** option, then browse to **C:\Program Files\CYPRESS**.

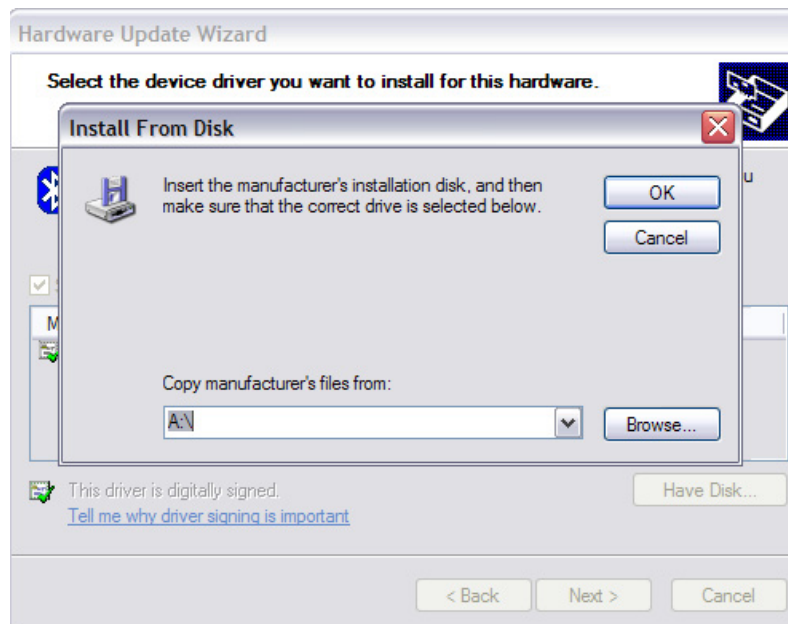

7. Select the **btwusb.inf** file, then click **OK**.

8. Select **Cypress USB Bluetooth Device**, then click **Next**. The wizard will start installing the driver.

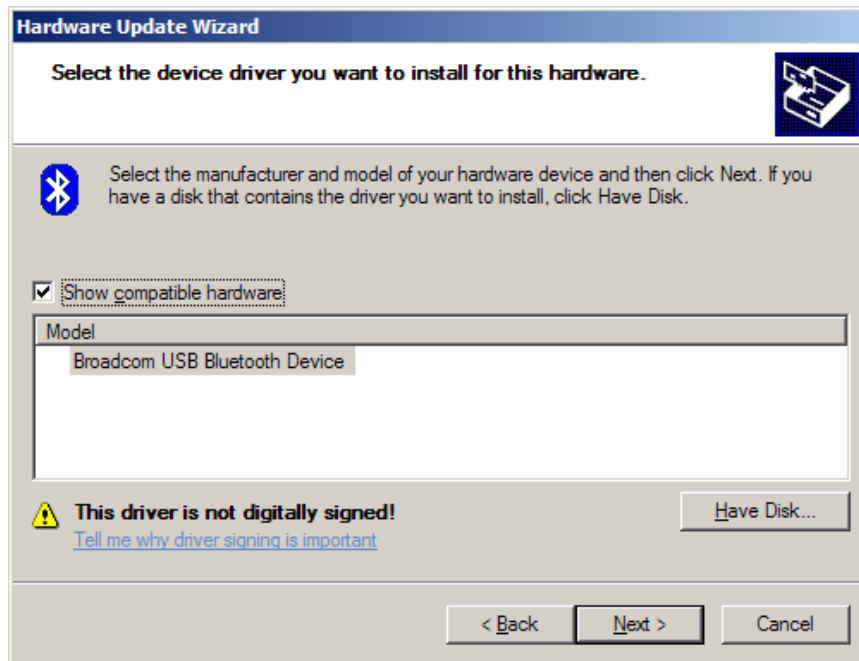


9. Click **Finish** when the installation is complete.

4 Downloading Firmware


Follow the steps below to download a firmware file into the CYW20702 module.

Note: Make sure you have the latest version of BlueTool installed in your PC.


1. Start the BlueTool application. A window like the one shown below will open.

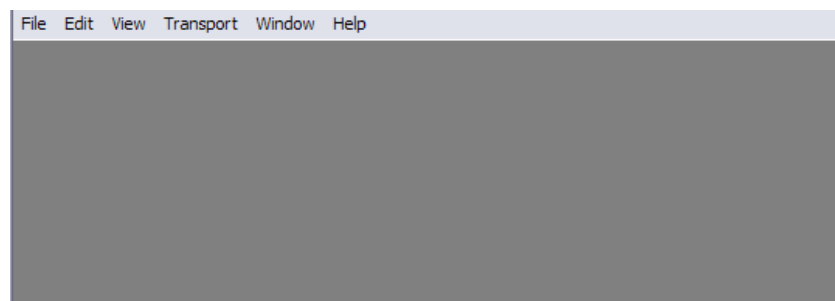


2. Open the **View** menu and select **Log Window**.

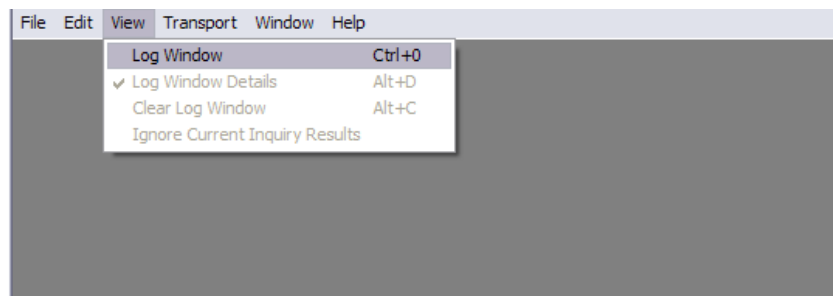


- Open the **Transport** menu and select **HCI Control**. The **Select HCI Control Window Transport** window will open.

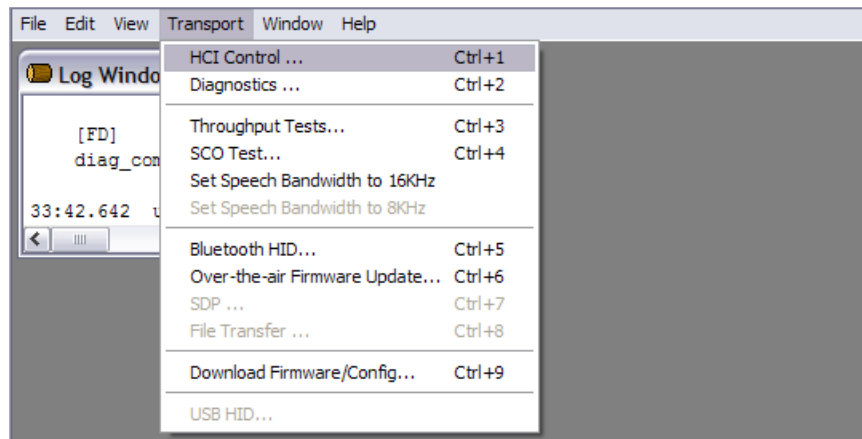


- Select the correct port from the **USB** list, then click **OK**. The HCI Control window will open.

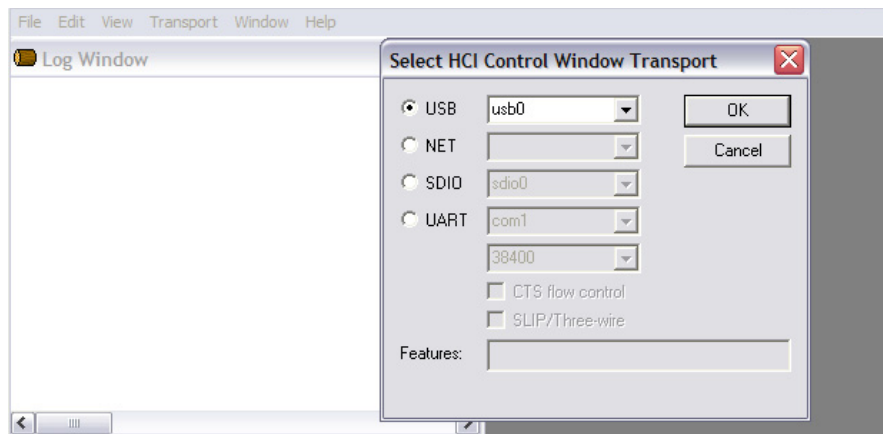


- Select **7.3: Host Controller & Baseband Commands (3 key)** from the **HCI Control: usb0** list. In the corresponding list of commands, double-click **Reset** to reset the CYW20702 module.

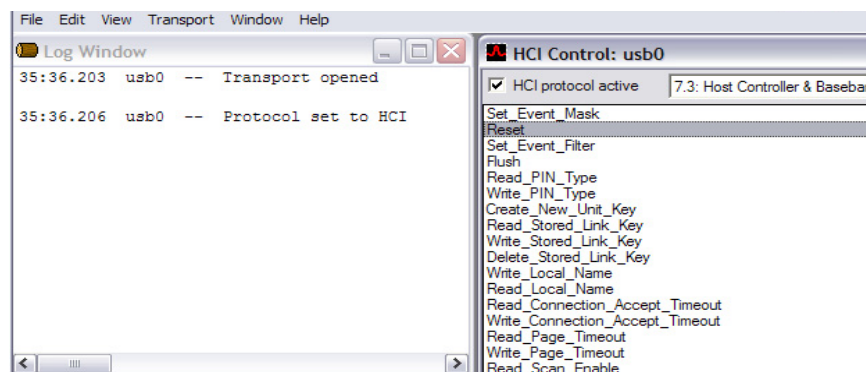


6. Check the **Log Window** field. If the reset was successful, **Status = 0x0 (0, "Success")** will be displayed in the field.

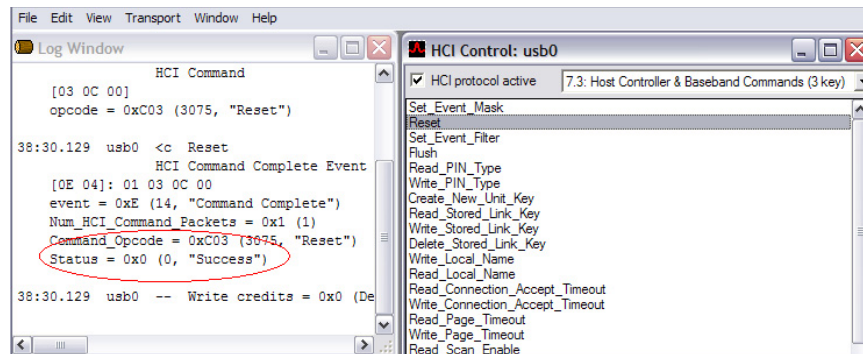

7. Select **0: Vendor-specific Commands (0 key)** from the **HCI Control: usb0** list. In the corresponding list of commands, double-click **Download_Minidriver**.

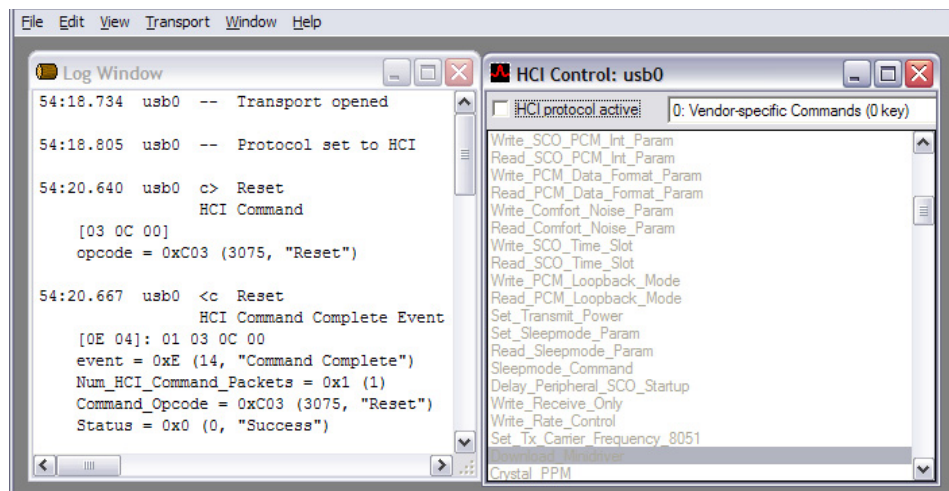

8. Open the **Transport** menu and select **Download Firmware/Config...**, then choose the correct USB port and click **OK**. The Download window will open as shown below.

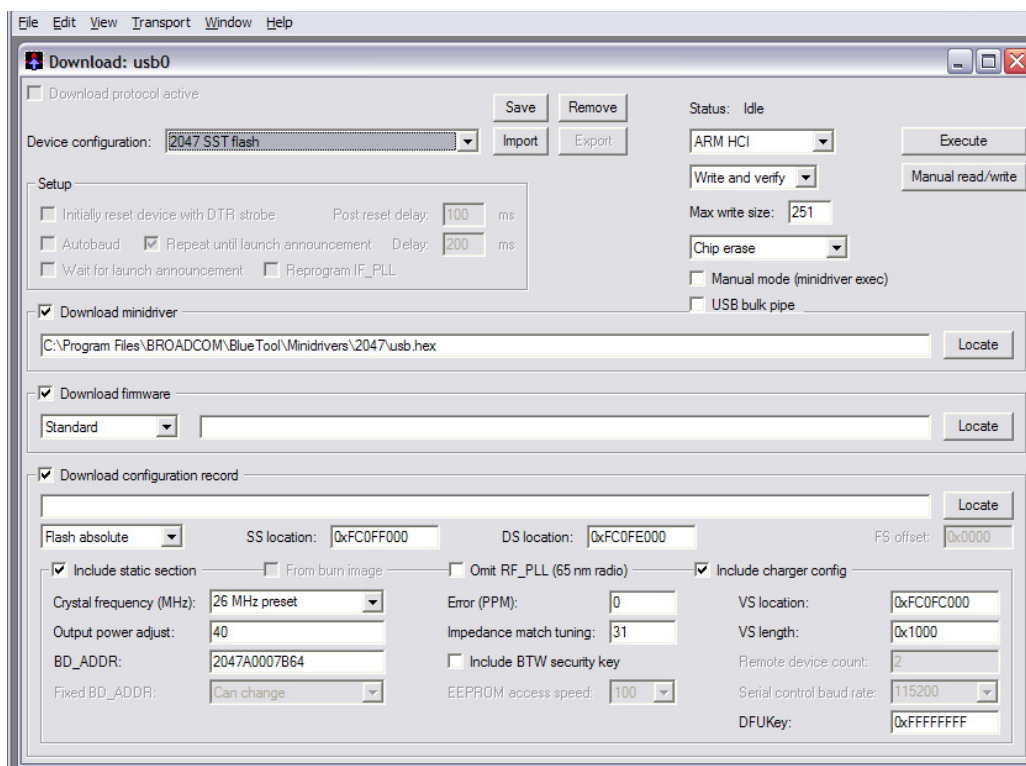

Download: usb0

☐ Download protocol active

Device configuration: **2047 SST flash**

Buttons: Save, Remove, Import, Export

Status: Idle

ARM HCI

Write and verify

Manual read/write

Max write size: 251

Chip erase

☐ Manual mode (minidriver exec)

☐ USB bulk pipe

☒ Download minidriver

C:\Program Files\BROADCOM\BlueTool\Minidrivers\2047\usb.hex

Locate

☒ Download firmware

Standard

Locate

☒ Download configuration record

Flash absolute

SS location: 0xFC0FF000

DS location: 0xFC0FE000

FS offset: 0x0000

☒ Include static section

☐ From burn image

☐ Omit RF_PLL (65 nm radio)

☒ Include charger config

Crystal frequency (MHz): 26 MHz preset

Output power adjust: 40

BD_ADDR: 2047A0007B64

Fixed BD_ADDR: Can change

Error (PPM): 0

Impedance match tuning: 31

☐ Include BTW security key

EEPROM access speed: 100

VS location: 0xFC0FC000


VS length: 0x1000

Remote device count: 2

Serial control baud rate: 115200

DFUKey: 0xFFFFFFFF

9. Click the **Import** button to import the *.btp file². A Download window similar to the one shown below will open.

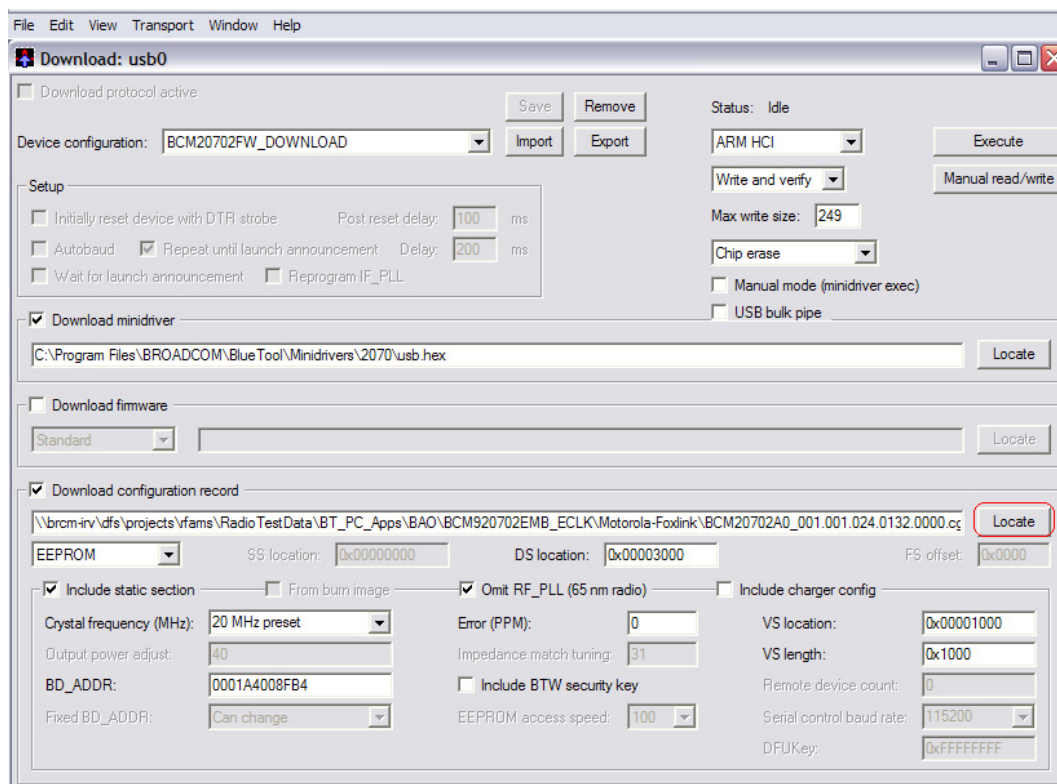

10. Click the **Locate** button and select the *.cgr² or *.cgs² configuration file.
11. **Crystal Frequency**: this value is set through the *.btp file. If the frequency is incorrect for the crystal installed on the CYW20702 module, manually enter the appropriate value.
12. **BD_ADDR**: enter the board address for the specific CYW20702 module.
13. Click **Execute** to start downloading the firmware.
14. Cycle the power on the device. The CYW20702 module is now ready for normal operation.

5 References

The references in this section may be used in conjunction with this document.

Note: Cypress provides customer access to technical documentation and software through its Customer Support Portal (CSP) and Downloads & Support site (see [IoT Resources on page 1](#)).

For Broadcom documents, replace the “xx” in the document number with the largest number available in the repository to ensure that you have the most current version of the document.

Document (or Item) Name	Broadcom Number	Cypress Number	Source
[1] CYW20702 Single-Chip Bluetooth Transceiver and Baseband Processor Data Sheet	20702-DS1xx-R	002-14773	community.cypress.com

² This file is provided by your Cypress Sales or Engineering support representative.

Document History

Document Title: AN214770 - Downloading Firmware to CYW20702 Modules Using BlueTool™**Document Number: 002-14770**

Rev.	ECN No.	Orig. of Change	Submission Date	Description of Change
**	—	—	06/27/2011	20702-AN300-R: Initial release
*A	5466350	UTSV	10/07/2016	Updated in Cypress template
*B	5841787	AESATP12	08/02/2017	Updated logo and copyright.

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturers' representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

Products

ARM® Cortex® Microcontrollers	cypress.com/arm
Automotive	cypress.com/automotive
Clocks & Buffers	cypress.com/clocks
Interface	cypress.com/interface
Internet of Things	cypress.com/iot
Memory	cypress.com/memory
Microcontrollers	cypress.com/mcu
PSoC	cypress.com/psoc
Power Management ICs	cypress.com/pmic
Touch Sensing	cypress.com/touch
USB Controllers	cypress.com/usb
Wireless Connectivity	cypress.com/wireless

PSoC® Solutions

[PSoC 1](#) | [PSoC 3](#) | [PSoC 4](#) | [PSoC 5LP](#) | [PSoC 6](#)

Cypress Developer Community

[Forums](#) | [WICED IOT Forums](#) | [Projects](#) | [Video](#) | [Blogs](#) | [Training](#) | [Components](#)

Technical Support

cypress.com/support

All other trademarks or registered trademarks referenced herein are the property of their respective owners.



© Cypress Semiconductor Corporation, 2011-2017. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spanion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1s) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spanion, the Spanion logo, and combinations thereof, WICED, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit cypress.com. Other names and brands may be claimed as property of their respective owners.