

Comparison of Traveo and Traveo II

About this document

Scope and purpose

AN218629 compares MCUs of the Traveo™ family with MCUs of the Traveo II family CYT2/CYT3/CYT4 series.

Associated Part Family

[Traveo Family](#), [Traveo II Family](#)

Table of contents

About this document.....	1
Table of contents.....	1
1 Introduction	4
2 Body Entry/High Products	5
2.1 Traveo II Family MCU Features	5
2.2 Product Overview	5
2.3 On-chip System Features	7
2.3.1 CPU	7
2.3.2 Memory Design	8
2.3.3 Debug	9
2.3.4 Mode Setting	9
2.3.5 Power Supply and Monitoring	10
2.3.5.1 Power Supply	10
2.3.5.2 Monitoring	10
2.3.6 Reset Factor	11
2.3.7 Clock System	12
2.3.8 Watchdog Timer	13
2.3.9 Low-Power Mode	14
2.3.10 Interrupt Structure	15
2.3.11 Data Transfer	16
2.3.12 TPU	17
2.3.13 Fault Report	18
2.3.14 Protection	19
2.3.15 Boot Process	20
2.3.16 Security	20
2.4 Peripherals	21
2.4.1 Timer	21
2.4.1.1 Base Timer: Reload Timer Mode	21
2.4.1.2 32-bit Free-run Timer	22
2.4.1.3 32-bit Reload Timer	23
2.4.1.4 32-bit Input Capture	24
2.4.1.5 Base Timer: PWC Timer Mode	25
2.4.1.6 QPRC	25

Table of contents

2.4.1.7	32-bit Output Compare.....	26
2.4.1.8	Base Timer: PWM Timer Mode	27
2.4.1.9	Base Timer: PPG Timer Mode	28
2.4.1.10	TCPWM: PWM_DT Mode.....	29
2.4.1.11	TCPWM: PWM_PR Mode.....	30
2.4.1.12	TCPWM: SR Mode	30
2.4.2	Serial Communication Block	31
2.4.2.1	UART	31
2.4.2.2	I ² C.....	32
2.4.2.3	SPI.....	34
2.4.2.4	LIN.....	36
2.4.3	CAN FD	38
2.4.4	I/O Interface.....	39
2.4.5	ADC	39
2.4.6	RTC.....	41
2.4.7	CRC.....	42
2.4.8	CXPI.....	42
2.4.9	FlexRay.....	43
2.4.10	SDHC Host Controller.....	43
2.4.11	Serial Memory Interface.....	44
2.4.12	Ethernet.....	44
2.5	Development Tools and Flash Programming Tools.....	45
2.6	MCAL Support.....	46
3	Cluster Products	47
3.1	Target Products and Traveo II Family MCU Features.....	47
3.2	Product Overview	48
3.3	On-chip System Features	48
3.3.1	CPU	48
3.3.2	Memory Design.....	49
3.3.3	Debug.....	50
3.3.4	Mode Setting	50
3.3.5	Power Supply and Monitoring	50
3.3.5.1	Power Supply	50
3.3.5.2	Monitoring.....	51
3.3.6	Reset Factor.....	51
3.3.7	Clock System	51
3.3.8	Watchdog Timer	52
3.3.9	Low Power Mode	52
3.3.10	Interrupt Structure.....	52
3.3.11	Data Transfer.....	52
3.3.12	TPU	53
3.3.13	Fault Report.....	53
3.3.14	Protection.....	53
3.3.15	Boot Process.....	54
3.3.16	Security.....	54
3.4	Peripherals.....	54
3.4.1	Timer.....	54
3.4.2	Serial Communication Block	54
3.4.2.1	UART	54
3.4.2.2	I ² C.....	54

Table of contents

3.4.2.3	SPI.....	54
3.4.2.4	LIN.....	54
3.4.3	CAN FD	54
3.4.4	I/O Interface.....	55
3.4.5	ADC	55
3.4.6	RTC.....	56
3.4.7	CRC.....	56
3.4.8	CXPI.....	56
3.4.9	Serial Memory Interface.....	57
3.4.10	Ethernet.....	58
3.4.11	Graphics Interface	58
3.4.12	Audio Interface	59
3.4.13	LCD Controller	59
3.5	Development Tools and Flash Programming Tools.....	59
3.6	MCAL Support.....	59
4	Related Documents	60
	Revision history.....	61

Introduction

1 Introduction

This application note compares Traveo family MCUs with Traveo II family MCUs. Both Traveo and Traveo II families are manufactured in 40-nm CMOS technology with embedded flash.

Several global system configurations are different between these two product families. While several resources have been enhanced, downward compatibility is maintained.

This application note consists of two main sections: one for automotive body segment, and the other for automotive cluster segment. The **Body Entry/High Products** section compares body products, while the **Cluster Products** section compares cluster products. The product lineup is listed in **Table 1**.

Table 1 MCU List for Comparison

Products	Traveo Family	Traveo II Family
Body Entry/High Products	S6J3428, S6J3429, and S6J342A Series	CYT2B7, CYT2B9, and CYT4BF Series
Cluster Products	S6J3200 Series	CYT4DN and CYT2C9 Series

Body Entry/High Products

2 Body Entry/High Products

2.1 Traveo II Family MCU Features

Table 2 Features of Traveo II Family MCUs

Function	CYT2B7 Series	CYT2B9 Series	CYT4BF Series
Flash Memory (Code Flash)	Up to 1088 KB	2112 KB	8256 KB
Flash Memory (Work Flash)	Up to 96 KB	128 KB	512 KB
SRAM0	Up to 64 KB	128 KB	512 KB
SRAM1	Up to 64 KB	128 KB	512 KB
CXPI	Not Supported	Supported	Not Supported
FlexRay	Not Supported	Not Supported	Supported
Secure Digital High Capacity (SDHC) Host Controller	Not Supported	Not Supported	Supported
Serial Memory Interface	Not Supported	Not Supported	Supported
Ethernet	Not Supported	Not Supported	Supported

2.2 Product Overview

Traveo II Family is a family of 32-bit MCUs based on the high-performance Arm® Cortex®-M series of CPUs, as [Figure 1](#) shows, intended for automotive body-control applications.

The Cortex-M4 processor is the main CPU designed for a short interrupt response time, high code density, and high 32-bit throughput while maintaining a strict cost and power consumption budget. A secondary Cortex-M0+ based CPU can implement security, safety, and protection features. Note that the CYT4BF series uses two Cortex-M7 processors for primary processing.

[Figure 1](#) through [Figure 3](#) show the major architecture components of the CYT2B7 series, CYT2B9 series, and CYT4BF series. There are four major subsystems: CPU subsystem, system resources, peripheral blocks, and I/O subsystem.

Body Entry/High Products

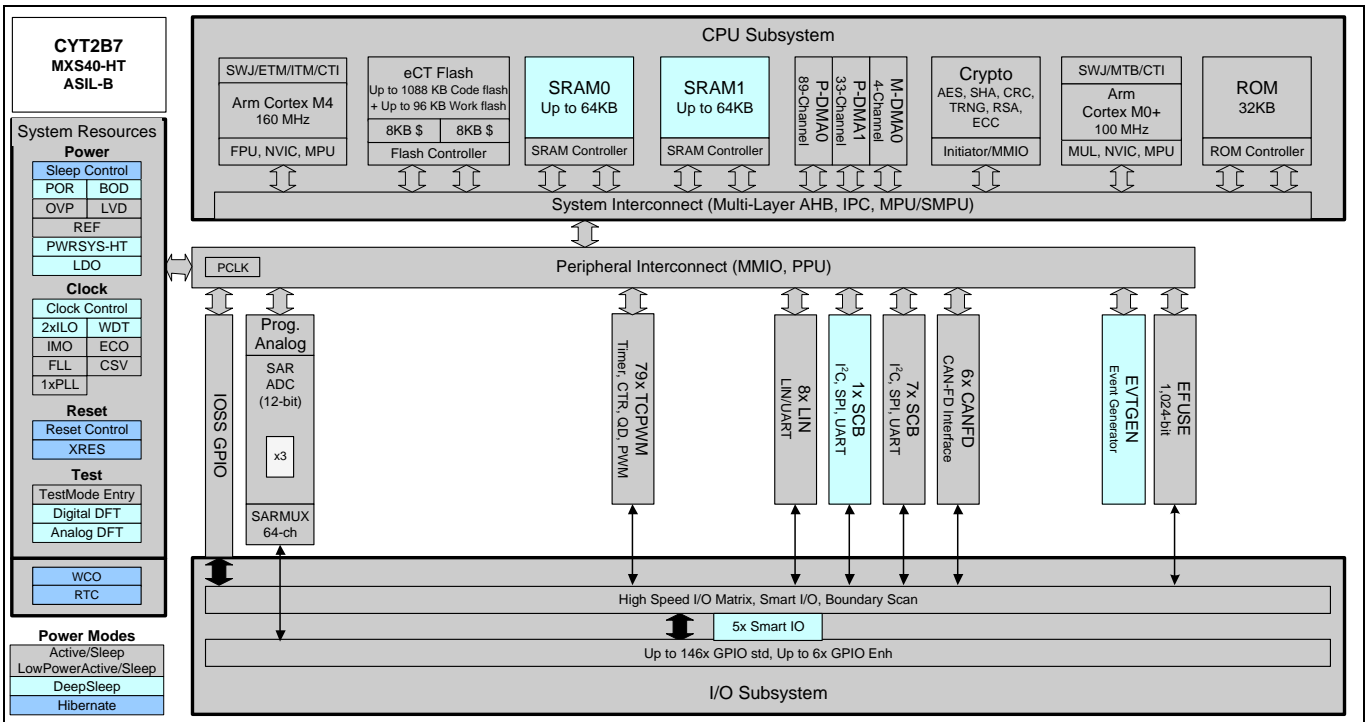


Figure 1 Block Diagram (CYT2B7 Series)

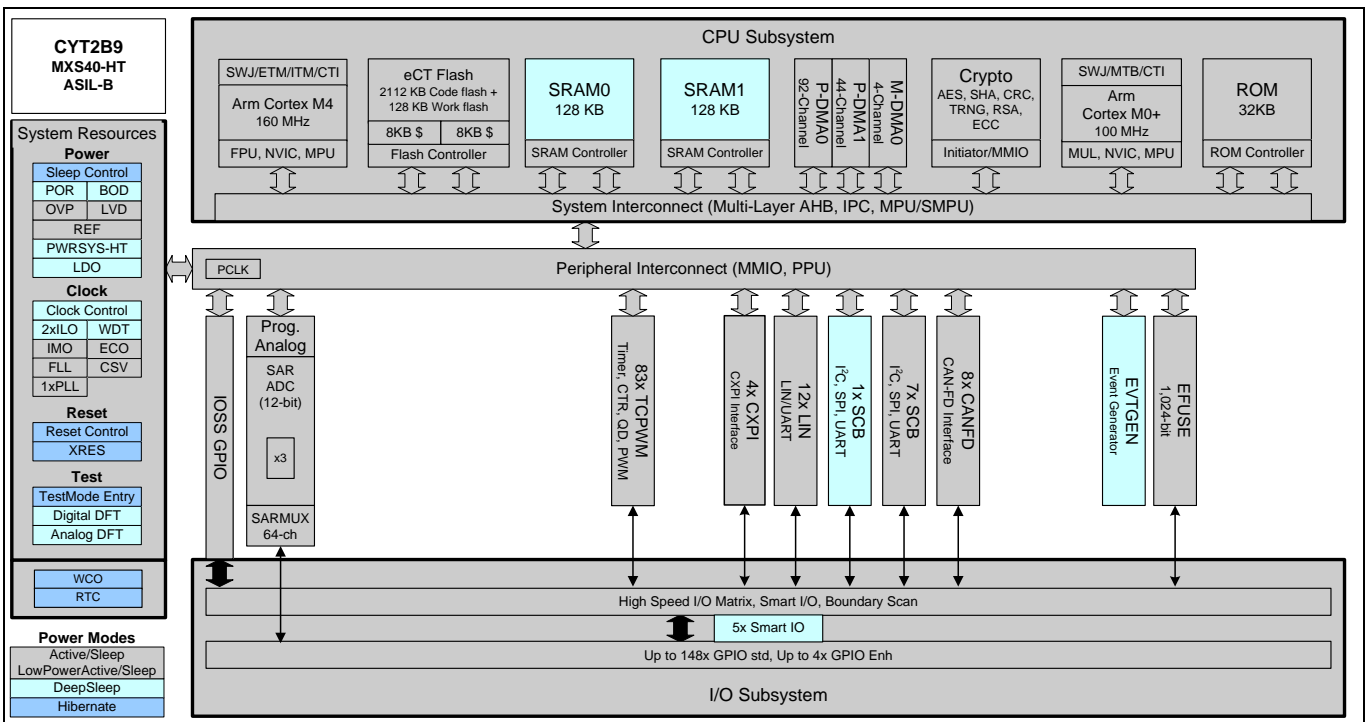


Figure 2 Block Diagram (CYT2B9 Series)

Body Entry/High Products

Item	Traveo Family	Traveo II Family			Remarks
		Main CPU		Secondary CPU	
		CYT2B7/B9 Series	CYT4BF Series		
TCM Interface	Supported Implemented TCRAM	Not supported	Supported (ITCM, DTCM)	Not supported	
Support for Interrupt Controller	Vector Interrupt Controller (VIC)	Nested Vector Interrupt Controller (NVIC)			

2.3.2 Memory Design

Table 4 lists the Code Flash features. The main differences are in program size, Read-While-Write operation, and redundancy.

Table 4 Differences in Code Flash

Code Flash	S6J3428/9/A Series	CYT2B7/B9, CYT4BF Series
ECC	SEC/DED	SEC/DED
Sector Size	32 KB, 8 KB	32 KB, 8 KB
Program Size	32 bits, 64 bits, 256 bits	64 bits, 256 bits, 4096 bits
Program and Erase Cycles/Retention	1000/20 years	1000/20 years
Read-While-Write Operation	Not supported	Supported

Table 5 lists the Work Flash features. The main differences are in the sector size, program and erase cycles, Read-While-Write operation, and redundancy. When compared to Traveo, Traveo II families support smaller sector size and higher program and erase cycles.

Table 5 Differences in Work Flash

Work Flash	S6J3428/9/A Series	CYT2B7/B9, CYT4BF Series
ECC	SEC/DED	SEC/DED
Sector Size	4 KB	2 KB, 128 B
Program Size	32 bits	32 bits
Program and Erase Cycles/Retention	1000/20 years 10000/10 years 100000/5 years	125000/20 years 250000/10 years
Read-While-Write Operation	Not supported	Supported

Table 6 lists the SRAM features. The main difference is the data retention in low power mode. Traveo II family supports data retention in DeepSleep mode.

Table 6 Differences in SRAM

SRAM	S6J3428/9/A Series	CYT2B7/B9, CYT4BF Series
ECC	SEC/DED	SEC/DED

Body Entry/High Products

SRAM	S6J3428/9/A Series	CYT2B7/B9, CYT4BF Series
Data Retention in Low Power Mode	Not supported (TCRAM and SRAM are not retained in Shutdown mode. Backup RAM is retained in Shutdown mode)	Supported (SRAM is retained in DeepSleep mode)

2.3.3 Debug

Traveo and Traveo II families support JTAG and SWD Debug Interface. [Table 7](#) shows the main differences in debugging.

Table 7 Differences in Debugging

Item	S6J3428/9/A Series	CYT2B7/B9, CYT4BF Series
Debug interface	JTAG SWD	JTAG SWD

2.3.4 Mode Setting

Traveo II family does not support the serial programming mode; therefore, there is no mode pin in Traveo II family. When the debugger is connected to JTAG, Traveo II family transitions to Debug mode and enables programming to flash.

Table 8 Differences in Mode Setting

Item	S6J3428/9/A Series	CYT2B7/B9, CYT4BF Series
Normal Mode	Setting by mode pin <ul style="list-style-type: none"> User Mode 	Debugger is not connected (SWD or JTAG) <ul style="list-style-type: none"> Boot mode/user mode/trusted mode Life cycle stage (Secure)
Board mode	Setting by mode pin <ul style="list-style-type: none"> Serial programming mode Parallel programming mode 	Debugger is connected (SWD or JTAG) <ul style="list-style-type: none"> Debug mode Life cycle stage (Normal_Provisioned /Secure/Secure_With_Debug/RMA/Corrupted)

Body Entry/High Products

2.3.5 Power Supply and Monitoring

The power supply of Traveo II family is the same as that of Traveo family, but signal names of power supply are different. Also, the type of power monitoring mode has been enhanced in Traveo II family.

2.3.5.1 Power Supply

Table 9 lists the power supply and differences in functionality.

Table 9 Power Supply

Power Supply		S6J3428/9/A Series		CYT2B7/B9, CYT4BF Series	
External	Digital	V_{CC}	2.7 to 5.5 V	V_{DDD}	2.7 to 5.5 V
	I/O			$V_{DDIO_1/2}$	2.7 to 5.5 V
				$V_{DDIO_3/4}$	2.7 to 3.6 V (only for CYT4BF series)
	Analog	AVCC0/1	2.7 to 5.5 V	V_{DDA}	2.7 to 5.5 V
Internal		C	1.2 V	V_{CCD}	1.1 V V_{CCD} of CYT4BF can be also external power supply (typical 1.15 V when V_{CCD} is external power supply)

2.3.5.2 Monitoring

Table 10 lists the differences in voltage between Traveo and Traveo II families.

Table 10 Voltage Monitoring

Monitoring	S6J3428/9/A Series	CYT2B7/B9, CYT4BF Series
Voltage Monitoring	<ul style="list-style-type: none"> Power-on reset (POR) LVD 	<ul style="list-style-type: none"> POR LVD Brownout detection (BOD) Overvoltage detection (OVD) Overcurrent detection (OCD)

Body Entry/High Products

2.3.6 Reset Factor

Note that all resets in Traveo II family are asynchronous resets. This difference is because the reset factor is optimized according to the Traveo II system. If you need the RAM retention Reset, see the [Architecture Technical Reference Manual \(TRM\)](#). **Table 11** lists the main differences in Reset Factor.

Table 11 Differences in Reset Factors

Reset Sources	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series	Remarks
POR	Yes	Yes	
BOD Reset	<ul style="list-style-type: none"> External LVD Reset Internal LVD Reset RAM retention LVD Reset 	<ul style="list-style-type: none"> External voltage BOD Reset¹ Internal voltage BOD Reset² Analog input voltage BOD Reset^{2,3} 	
OVD Reset	No	<ul style="list-style-type: none"> External voltage OVD Reset² Internal voltage OVD Reset³ Analog input voltage OVD Reset^{2,4} 	
OCD Reset	No	Internal voltage OCD Reset ³	
External Reset	RSTX pin	XRES_L pin	
Clock Stop Wait Timeout Reset	Yes	No, does not support synchronous reset	
Illegal Mode Detection Reset	Yes	No, does not have MD pin	
Profile Error Reset	Yes	No, does not support Profile setting	
Watchdog Timer (WDT) Reset	<ul style="list-style-type: none"> Hardware WDT Reset Software WDT Reset 	<ul style="list-style-type: none"> WDT Reset Multi-Counter WDT Reset 	See 2.3.8 Watchdog Timer
Internal System (Software) Reset	<ul style="list-style-type: none"> Software Reset Software trigger hard Reset 	<ul style="list-style-type: none"> Software Reset 	
Fault Detection Reset	No	Yes: via Fault report	

¹ Programmable Trip point (2 points)

² Fixed Trip point

³ Reset or Fault report can be selected

Body Entry/High Products

Reset Sources	S6J3428/9/A Series	CYT2B7/B9, CYT4BF Series	Remarks
Clock Supervision (CSV) Reset	<ul style="list-style-type: none"> Main Clock CSV Reset Sub Clock CSV Reset PLL Clock CSV Reset SSCG Clock CSV Reset Fast CR CSV Reset Slow CR CSV Reset 	<ul style="list-style-type: none"> CLK_REF CSV Reset ILO0 CSV Reset CLK_HF CSV Reset CLK_LF CSV Reset 	
Wakeup Reset	Yes (Power Domain Reset)	Yes (Hibernate Wake up Reset)	
Debugger Reset	<ul style="list-style-type: none"> TRSTX Software Reset 	<ul style="list-style-type: none"> NTRST Software Reset 	

2.3.7 Clock System

Compared to Traveo family clock system, Traveo II family (only CYT4B Series) has Spread Spectrum Clock Generator functions. In Traveo II family, frequency-locked loop (FLL) featuring fast startup and low power is implemented. [Table 12](#) lists the main differences in clock system.

See the [datasheet](#) for the AC characteristics of each clock.

Table 12 Differences in Clock System

Clock System		Traveo Family (S6J3428/9/A Series)	Traveo II Family (CYT2B Series)	Traveo II Family (CYT4B Series)
Internal Clock Source		Fast CR: 4 MHz (Using source clock after reset) Slow CR: 100 kHz	IMO: 8 MHz (Using source clock after reset) ILO0/1: 32 kHz	
External Clock Source		Main clock: 3.6 to 16 MHz Sub clock: 32.768 kHz	ECO: 3.988 to 33.33 MHz WCO: 32.768 kHz EXT_CLK ¹ : 0.25 to 100 MHz	
High-Speed Clock Generation	PLL	PLL x1 Input: 3.6 to 17.6 MHz Output: 200 to 320 MHz SSCG PLL x1 Input: 3.6 to 32MHz Output: 200 up to 320 MHz	PLL x1 Input: 3.988 to 33.34 MHz Output: 11 to 160 MHz SSCG not supported	PLL without SSCG x2 Input: 3.988 to 33.34 MHz Output: 11 to 200 MHz PLL with SSCG x2 Input: 3.988 to 33.34 MHz Output: 25 to 400 MHz
	FLL	Not implemented	FLL x1 Input: 0.25 to 80 MHz Output: 24 to 100 MHz	FLL x1 Input: 0.25 to 80 MHz Output: 24 to 100 MHz
Clock Gear		Supported	Not implemented	

¹ It can be sourced from a designated I/O pin.

Body Entry/High Products

Clock System	Traveo Family (S6J3428/9/A Series)	Traveo II Family (CYT2B Series)	Traveo II Family (CYT4B Series)
Clock Supervision	Main clock Sub clock PLL clock SSCG clock Slow CR Fast CR	CLK_REF (IMO or ECO or EXT_CLK) CLK_HF (PLL and FLL) ILO0 CLK_LF (ILO1 or WCO)	

2.3.8 Watchdog Timer

Table 13 lists the watchdog timer (hardware) features. The main differences are counter clock, maximum timeout, and the behavior during low-power mode and debugging.

Table 13 Differences in Watchdog Timer (Hardware)

Watchdog Timer (Hardware)	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Trigger	Reset	Reset
Counter Clock	<ul style="list-style-type: none"> Fast internal clock: 4 MHz Slow internal clock: 100 kHz 	<ul style="list-style-type: none"> Internal low speed oscillator: 32 kHz
Counter	32 bits	32 bits
Maximum Timeout	12 hours	38.33 hours
Window Function	Supported	Supported
Warning Interrupt	Supported	Supported
Timeout Expiration Action	Reset or nonmaskable interrupt (NMI)	Reset
Behavior During Low-Power Mode	Stop	Register can select stop or run
Behavior During Debugging	Stop at debugging state	Register can select stop or run

Table 14 lists the multi-counter watchdog timer (software) features. The main differences are counter clock, counter, maximum timeout, and the behavior during debugging.

Table 14 Differences in Multi-Counter Watchdog Timer (Software)

Multi-counter Watchdog Timer (Software)	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Trigger	User program	User program
Counter Clock	<ul style="list-style-type: none"> Fast internal clock: 4 MHz Slow internal clock: 100 kHz Main clock: 4 to 16 MHz Sub clock: 32 kHz 	<ul style="list-style-type: none"> Internal low-speed oscillator: 32 kHz Watch crystal oscillator: 32 kHz
Counter	32 bits	2 * 16-bit, 32 bits only for interrupt
Maximum Timeout	36.4 hours	2.11 seconds
Window Function	Supported	Supported

Body Entry/High Products

Multi-counter Watchdog Timer (Software)	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Warning Interrupt	Supported	Supported
Timeout Expiration Action	Reset or NMI	Reset or Fault
Behavior During Low-Power Mode	Register can select stop or run.	Register can select stop or run.
Behavior During Debugging	Stop at debugging state	Register can select stop or run.

2.3.9 Low-Power Mode

Table 15 lists the low-power modes. Traveo II family supports almost all low-power modes with DeepSleep mode.

Table 15 Differences of Low-Power Modes

Low Power Mode	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Sleep <ul style="list-style-type: none"> CPU: Halt Peripheral: Active SRAM retention 	Supported: Sleep <ul style="list-style-type: none"> TCRAM/SRAM/Backup RAM retention 	Supported: Sleep <ul style="list-style-type: none"> SRAM retention
Timer <ul style="list-style-type: none"> CPU: Halt Peripheral: Halt except RTC, GPIO SRAM retention 	Supported: Timer <ul style="list-style-type: none"> TCRAM/SRAM/Backup RAM retention 	Supported: DeepSleep <ul style="list-style-type: none"> Peripheral: OFF except RTC, Event generator, GPIO SRAM retention
Stop <ul style="list-style-type: none"> CPU: Halt Peripheral: Halt except GPIO SRAM retention 	Supported: Stop <ul style="list-style-type: none"> TCRAM/SRAM/Backup RAM retention 	Supported: DeepSleep <ul style="list-style-type: none"> Peripheral: OFF except RTC, Event generator, GPIO SRAM retention
Partial wakeup (Shutdown) <ul style="list-style-type: none"> CPU: OFF Peripheral: OFF except RTC, ADC, GPIO Partial RAM retention 	Supported: Partial wakeup <ul style="list-style-type: none"> ADC is triggered by RTC Backup RAM retention 	Supported: DeepSleep <ul style="list-style-type: none"> Peripheral: OFF except RTC, Event generator, GPIO ADC and LIN are triggered by Event generator SRAM retention (Full/Partial)
Timer (Shutdown) <ul style="list-style-type: none"> CPU: OFF Peripheral: OFF except RTC, GPIO Partial RAM retention 	Supported: Timer (Shutdown) <ul style="list-style-type: none"> Backup RAM retention 	Supported: DeepSleep <ul style="list-style-type: none"> Peripheral: OFF except RTC, Event generator, GPIO SRAM retention (Full/Partial)
Stop (Shutdown) <ul style="list-style-type: none"> CPU: OFF Peripheral: OFF except GPIO Partial RAM retention 	Supported: Stop (Shutdown) <ul style="list-style-type: none"> Backup RAM retention 	Supported: DeepSleep <ul style="list-style-type: none"> SRAM retention (Full/Partial)

Body Entry/High Products

2.3.10 Interrupt Structure

The interrupt structure of Traveo and Traveo II families differ based on the CPU. Traveo family (Cortex-R5) interrupt controller used vector interrupt controller (VIC), while Traveo II family (Cortex-M4//M7/M0+) uses nested vector interrupt controller (NVIC). **Table 16** lists the main differences in interrupt structure.

Traveo family controls system interrupts such as enable/disable, levels, and level masks with an external interrupt controller. Each CPU of Traveo II family has eight interrupt inputs, and controls interrupts within the CPU, thereby performing high-speed interrupt processing.

Traveo II family uses up to 1023 system interrupts assigned to eight groups. All interrupts within a group has the same priority. Four of the 1023 system interrupts can be assigned as NMI.

Traveo II family implements wakeup interrupt controller (WIC), which enables interrupt detection for CPU wakeup in DeepSleep power mode.

Table 16 Differences of Interrupt Structure

Item	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series		Remarks
		Cortex-M4/M7	Cortex-M0+	
CPU core	Cortex-R5F	Cortex-M4/M7	Cortex-M0+	
Supported Interrupt Controller in CPU	VIC	NVIC		
Number of IRQ inputs of CPU	1	8	8	
Number of NMI Inputs of CPU	1	1	1	
Priority Level	Interrupt: 32 levels NMI: 16 levels	Interrupt: 8 levels NMI: None	Interrupt: 4 levels NMI: None	
Number of System Interrupts	Up to 512	Up to 1023		¹
Vector Address	Assigned for each system interrupt	Assigned for each IRQ input. Multiple system interrupts share a CPU interrupt handler as provided by the VTOR table.		
WIC	Not Supported	Supported		

¹ System Interrupts are interrupts generated from peripheral functions and external inputs. For the list of system interrupts supported by the device variants, see the following documents:

- Traveo Family: Hardware Manual by the device variants.
- Traveo II Family: Architecture Technical Reference Manual by the device variants.

Body Entry/High Products

2.3.11 Data Transfer

For data transfer, Traveo II family has two types of DMA with different purposes: Peripheral DMA (P-DMA) and Memory DMA (M-DMA). [Table 17](#) lists the main differences in data transfer.

P-DMA focuses on achieving low latency for a large number of channels. P-DMA has a single data transfer engine that is shared by all channels.

M-DMA focuses on achieving high memory bandwidth for a small number of channels. M-DMA has a dedicated data transfer engine for each channel.

The DMA transfer specification of Traveo family is set by the register. In Traveo II family, transfer is specified by the descriptor in SRAM. P/M-DMA of Traveo II family can perform transfer chaining with descriptor setting.

Table 17 Differences of Data Transfer

Item	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series		Remarks
Function Name	DMAC	P-DMA	M-DMA	
Data Transfer Specifics	Register	Descriptor in memory		
Data Size	8-/16-/32-/64-bit	8-/16-/32-bit		
Transfer Mode	<ul style="list-style-type: none"> Single Block Burst 	<ul style="list-style-type: none"> Single 1D/2D CRC transfer Descriptor chaining 	<ul style="list-style-type: none"> Single 1D/2D Memory copy Scatter Descriptor chaining 	
Activation Trigger	<ul style="list-style-type: none"> Hardware Software 	<ul style="list-style-type: none"> Hardware Software Transfer completion trigger output 	<ul style="list-style-type: none"> Software Transfer completion trigger output 	
Channel Arbitration Schemes	<ul style="list-style-type: none"> Fixed Dynamic Round robin 	<ul style="list-style-type: none"> Fixed four levels Round-robin in the same priority group 		
Interrupt Generation	<ul style="list-style-type: none"> Transfer Completion Error occurrence 	<ul style="list-style-type: none"> Transfer completion Error occurrence 		
Protection Schemes	Dedicated MPU <ul style="list-style-type: none"> Access range User/Privilege Read/Write 	SMPU and PPU <ul style="list-style-type: none"> Access range User/Privileged Read/Write Secure/Non-secure Protection Contexts 		See 2.3.14 Protection .

Body Entry/High Products

2.3.12 TPU

Traveo family has a dedicated timer for timing protection (TPU). However, Traveo II family does not have a dedicated timer. Traveo II family uses a TCPWM timer for timing protection.

The TCPWM timer is a general-purpose timer that can generate interrupts for overflow, underflow, and compare matches. This interrupt can be implemented as NMI, which can provide the TPU function. **Figure 4** shows the configuration of the TPU and **Figure 5** shows an example of the operation.

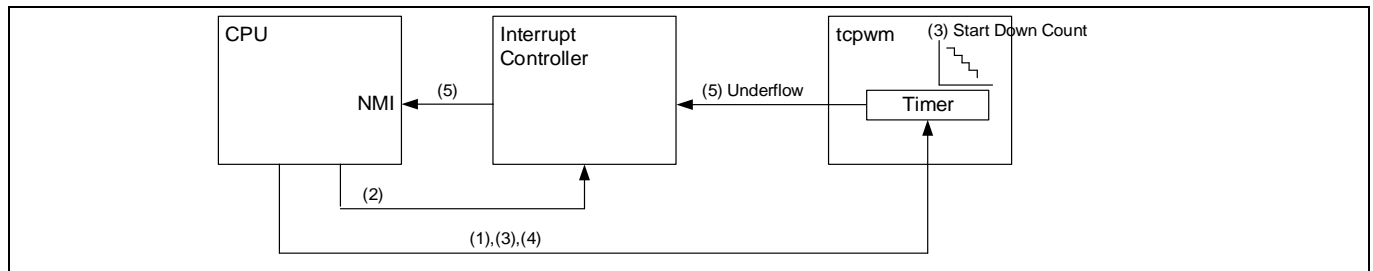


Figure 4 Timing Protection Implementation Example

1. Configure the TCPWM initial values (for example, using DownCount mode), and set the upper limit of the measurement time as the initial time.
2. Set the TCPWM interrupt to NMI.
3. Software starts the timer at the start point of the measurement process.
4. Software stops the timer at the end point of the measurement process.
5. If the counter under-flowed before the software stops the timer, the Underflow interrupt of the TCPWM is notified as an NMI to the CPU via the interrupt controller.

Note: The interrupt controller can notify the system interrupt as NMI, including the TCPWM interrupt.

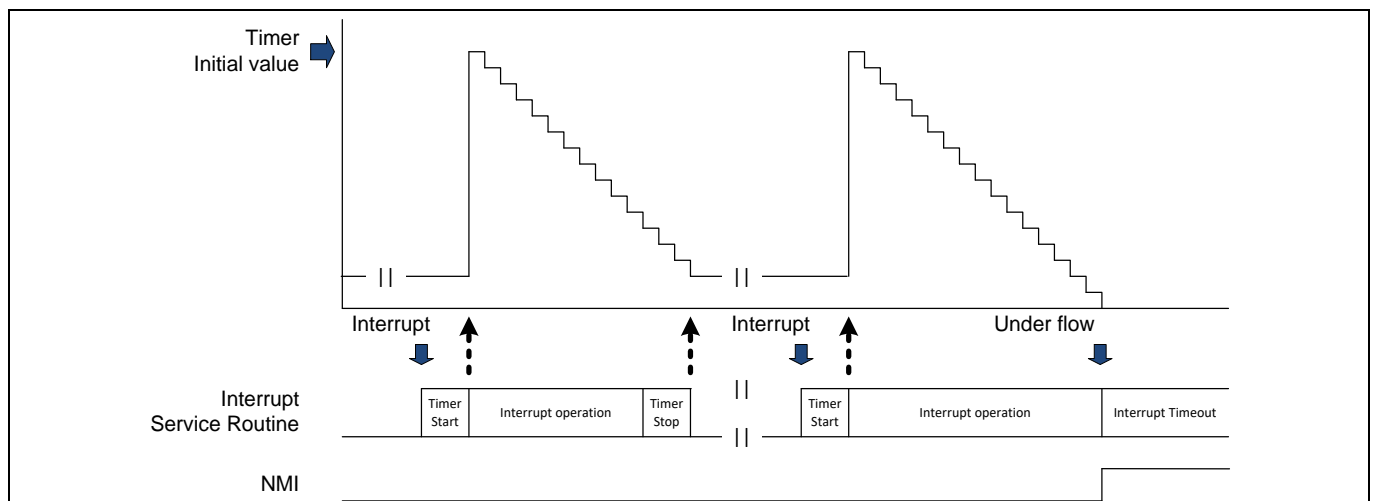


Figure 5 Timing Protection Example (Monitoring of the Interrupt Service Routine Operation Time)

Body Entry/High Products

2.3.13 Fault Report

Fault report is a new feature of Traveo II family. **Figure 6** shows a block diagram of the Fault structure.

The centralization of faults by Fault report structures for a system-wide consistent handling of faults simplifies software development.

Fault report captures up to 96¹ failures such as MPU/SMPU/PPU protection violations, SRAM controller ECC errors, peripheral-specific errors, and so on. When Fault report captures a fault, it generates a notification signal such as fault interrupt, trigger output, external pin output, and fault reset request. Each of these output signals can be enabled or disabled.

The fault interrupt can be mapped to the CPU NMI as a system interrupt. In addition, Fault report provides the fault source and additional fault-specific information.

For more details, see the Traveo II **Architecture Technical Reference Manual** (TRM).

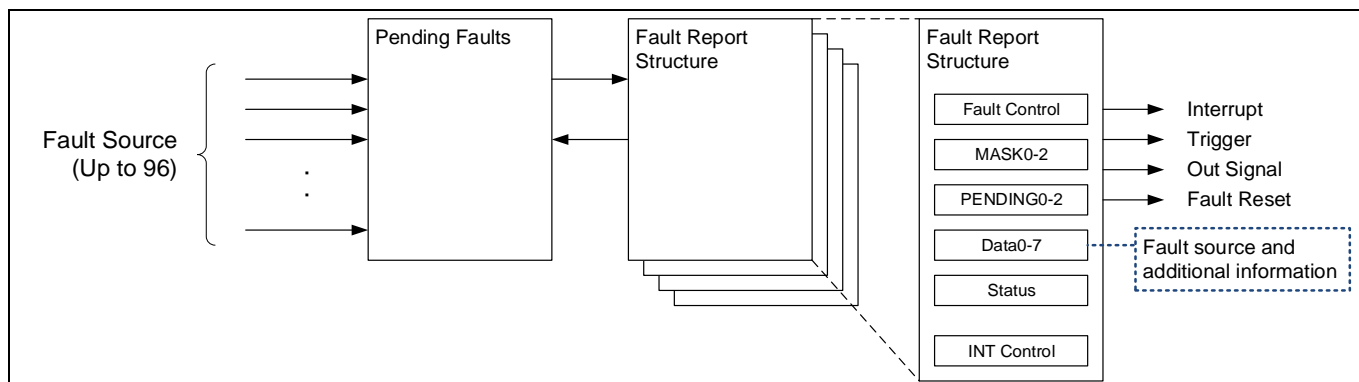


Figure 6 Fault Structure

¹ For the list of system interrupts supported by the device variants, see the Technical Reference Manual.

Body Entry/High Products

2.3.14 Protection

The Protection function of Traveo family consists of the CPU's Memory Protection Unit (MPU), DMA's MPU, and Peripheral Protection Unit (PPU). Traveo II family consists of MPU, Shared Memory Protection Unit (SMPU), and PPU. [Table 18](#) lists the main differences in Protection Units.

In Traveo II family, memory protection is provided by MPU and SMPU. MPU is implemented as part of the CPU and bus infrastructure. P-DMA, M-DMA, and encrypted components do not have MPU. Instead, they inherit the access control attributes of programmed bus transfer.

SMPU is shared by all masters; PPU is a protection unit for peripheral registers.

Traveo II family supports a new protection attribute (Secure/Non-secure), and protection contexts. Protection contexts can change the access restriction without changing the setting of the protection unit.

For more details, see the [Technical Reference Manual](#).

Table 18 Differences in Protection Configuration and Access Attribute

Item	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series	Remarks
MPU implemented in the CPU	Cortex-R5: 16 Regions Access Attribute: <ul style="list-style-type: none"> Access Range Privileged/Unprivileged Read/Write Execute (Code or Data) 		
MPU implemented in the bus infrastructure	Not supported	16 Regions Access Attribute: <ul style="list-style-type: none"> Access Range Privileged/Unprivileged Read/Write Execute (Code or Data) 	For external master such as debugger
SMPU	Not supported	16 Regions Access Attribute: <ul style="list-style-type: none"> Access Range Privileged/Unprivileged Read/Write Execute (Code or Data) Secure/Non-secure Protection Contexts 	
PPU	Access Attribute: <ul style="list-style-type: none"> USER/Privilege Read/Write 	Access Attribute: <ul style="list-style-type: none"> Access Range Privileged/Unprivileged Read/Write Execute (Code or Data) Secure/Non-secure Protection Contexts 	

Body Entry/High Products

Item	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series	Remarks
MPU16-AHB	Access Attribute: <ul style="list-style-type: none"> Access range USER/Privilege Read/Write 	Not supported. DMA access protection is provided by SMPU and PPU.	

2.3.15 Boot Process

The boot process of both Traveo and Traveo II families is executed after reset and before the application program starts. The boot process is executed by the Cortex-R5 processor in Traveo family, and is executed by the secure master (Cortex-M0+ processor) in Traveo II family.

The boot process in Traveo family mainly executes based on the operation mode and the security setting that the debugger connection authenticates, secure boot processing, and hardware watchdog timer according to the flash marker.

In Traveo II family, the boot process consists of ROM boot and flash boot. The ROM boot process determines the Protection State and validates the flash boot process. The flash boot process configures the protection unit such as SMPU and PPU, and verify the application program code in the flash memory. In addition, activates the boot loader.

For more details, see the [Technical Reference Manual](#).

2.3.16 Security

Table 19 lists the security features. Traveo II family supports lifecycle stages, device protection states, and Hardware Security Module (HSM).

Table 19 Differences of Security

Security	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Lifecycle stages Device protection states	Not supported	Supported <ul style="list-style-type: none"> Lifecycle stages Protection states
Flash protection	Supported	Supported
Debugger security	Supported	Supported
Hardware-based encryption	Supported Secure Hardware Extension (SHE)	Supported Enhanced Secure Hardware Extension (eSHE) and HSM support are enabled by third-party firmware.

Body Entry/High Products

2.4 Peripherals

2.4.1 Timer

The Timer function of Traveo family consists of a Base timer, Reload timer, Free-run timer, Input Capture, Output compare, and Quadrature Position/Revolution Counter (QPRC).

Traveo II family implements TCPWM with integrated multiple timer functions. The TCPWM has seven operation modes. All TCPWM channels can be operated by selecting one of the seven modes. [Table 20](#) lists the corresponding modes of each function.

Table 20 TCPWM Channel Modes

Function Name	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Timer Mode	Base timer: Reload Timer mode Free-run Timer Reload Timer	TCPWM: Timer mode
Capture Mode	Input Capture Base timer: PWC Timer mode	TCPWM: Capture mode
Quadrature Decoder	QPRC	TCPWM: QUAD mode
PWM Mode	Output compare Base timer: PWM Timer mode Base timer: PPG Timer mode	TCPWM: PWM mode
PWM with Dead Time	Not supported	TCPWM: PWM_DT mode
Pseudo-Random PWM	Not supported	TCPWM: PWM_PR mode
Shift Register	Not supported	TCPWM: SR mode

2.4.1.1 Base Timer: Reload Timer Mode

The Base Timer Reload mode in Traveo family is a timer that counts down from a set value. When the timer value reaches '0', the timer stops or starts counting down from the set value again. Also, an event can be generated if the timer value is '0'. In Traveo II family, the same operation is possible using TCPWM Timer mode. [Table 21](#) lists the main differences in Base Timer Reload Timer modes between Traveo and Traveo II families.

Table 21 Differences in Base Timer: Reload Timer Mode

Counter	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Timer Function	Base Timer: Reload Timer mode	TCPWM: Timer mode
Counter Width	16 bits or 32 bits (uses two 16-bit timer)	16 bits or 32 bits
Count Mode	Down	Up, Down, Up-down1/2

Body Entry/High Products

Counter	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Operation Clock	Internal clock: 12 types: /1, /2, /4, /8, /16, /32, /64, /128, /256, /512, /1024 or /2048	Internal clock: 8 types: /1, /2, /4, /8, /16, /32, /64 or /128
	External clock: Rising-edge, falling-edge, or both-edge	Not supported ¹
Operation mode	One shot mode: Stop event is underflow	One shot mode: Stop event depends on count mode. (underflow, overflow or both)
	Reload mode	Reload mode
Gate function	Supported	Supported
Activation	Software	Software: via Trigger Multiplexer
	External trigger	External trigger
	External Timer Match Starting	Not supported
Event Generation	Underflow	TC event: TC event depends on count mode. (underflow, overflow or both)
	Timer Activation trigger	Not Supported
	Not supported	Compare match event
Debug Mode	Supported	Supported

2.4.1.2 32-bit Free-run Timer

The Free-run timer in Traveo family counts up or up-down within a set value. In Traveo II family, the same operation is possible using TCPWM Timer mode. However, in Traveo II family there is no interrupt mask count function. [Table 22](#) lists the main differences in Free-run Timer.

Table 22 Differences in 32-bit Free-run Timer

Counter	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Timer function	32-bit Free-run Timer	TCPWM: Timer mode
Counter width	32 bits	16 bits or 32 bits
Count mode	Up, Up-down	Up, Down, Up-down ^{1/2}
Operation clock	Internal clock: 9 types: /1, /2, /4, /8, /16, /32, /64, /128 or /256	Internal clock: 8 types: /1, /2, /4, /8, /16, /32, /64 or /128
	External clock: Both-edge	Not supported ²

¹ The external clock cannot be used as the timer's count clock. However, when the count event is used in the rising edge (supported falling and both edge) detection mode, the timer will count with count event detection. In this case, the count event can be used as the external clock.

² The external clock cannot be used as the timer's count clock. However, when the count event is used in the rising edge (supported falling and both edge) detection mode, the timer will count with count event detection. In this case, the count event can be used as the external clock.

Body Entry/High Products

Counter	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Operation mode	Not Supported	One shot mode: Stop event depends on the count mode (underflow, overflow, or both)
	Reload mode	Reload mode
Buffer function	Supported	Supported
Activation	Software	Software: via Trigger Multiplexer
	Not supported	External trigger
Event Generation	Compare clear Zero Detection	TC event: TC event depends on count mode (underflow, overflow, or both)
	Not supported	Compare match event
	Interrupt mask count Function	Not Supported
Debug Mode	Supported	Supported

2.4.1.3 32-bit Reload Timer

The 32-bit Reload mode in Traveo family is a timer that counts down from a set value. In Traveo II family, the same operation is possible using TCPWM Timer mode. [Table 23](#) lists the main differences in 32-bit Reload Timer.

Table 23 Differences of 32-bit Reload Timer

Counter	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Timer Function	32-bit Reload Timer	TCPWM: Timer mode
Counter Width	32 bits	16 bits or 32 bits
Count Mode	Down	Up, Down, Up-down1/2
Operation Clock	Internal clock: 6 types: /1, /2, /4, /8, /16 or /32	Internal clock: 8 types: /1, /2, /4, /8, /16, /32, /64 or /128
	External clock: Rising-edge, falling-edge, or both edges	Not supported ¹
Operation Mode	One shot mode: Stop event is underflow	One shot mode: Stop event depends on count mode (underflow, overflow, or both)
	Reload mode	Reload mode
Gate Function	Supported	Supported
Activation	Software	Software: via Trigger Multiplexer
	External trigger	External trigger

¹ The external clock cannot be used as the timer's count clock. However, when the count event is used in the rising edge (supported falling and both edge) detection mode, the timer will count with count event detection. In this case, the count event can be used as the external clock.

Body Entry/High Products

Counter	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Event Generation	Underflow	TC event: TC event depends on count mode (underflow, overflow, or both)
	Not supported	Compare match event
Simultaneous Soft Start	Supported	Supported: via Trigger Multiplexer
Debug Mode	Supported	Supported

2.4.1.4 32-bit Input Capture

The 32-bit input capture function in Traveo family measures the input pulse width and external clock cycle based on the value of the 32-bit free-run timer. In Traveo II family, the same operation is possible using the TCPWM capture mode.

In Traveo family, the Input capture function is a linkage function with the free-run timer, but Traveo II family has an independent timer for each TCPWM channel. Therefore, Traveo II family does not need a different timer for the Input Capture function. [Table 24](#) lists the main differences in 32-bit Input Capture.

Table 24 Differences in 32-bit Input Capture

Counter	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Timer Function	32-bit Input Capture	TCPWM: Capture mode
Counter Width	32 bits	16 bits or 32 bits
Count Mode	Follow Free-run Timer	Up, Down, Up-down1/2
Operation Mode	Follow Free-run Timer	One shot mode: Stop event depends on count mode. (underflow, overflow or both)
		Reload mode
Clock Pre-scaling	Follow Free-run Timer	Internal clock: 8 types: /1, /2, /4, /8, /16, /32, /64 or /128
Capture Event	Rising-edge, falling-edge, or both-edge	Supported: via Trigger Multiplexer
Buffer Function	Not supported	Double buffer Counter value is copied to the capture register and capture register is copied to the capture buffer register when a Capture event is detected.
Event Generation	Capture event detection	Counter value is captured.

Body Entry/High Products

2.4.1.5 Base Timer: PWC Timer Mode

Base Timer: PWC Timer mode in Traveo family measures the time and cycle between any input pulse events by using a counter.

Traveo II family does not have the same operation mode. However, the TCPWM capture mode can measure via software the time between two events using two buffers. **Figure 7** shows an example of the operation.

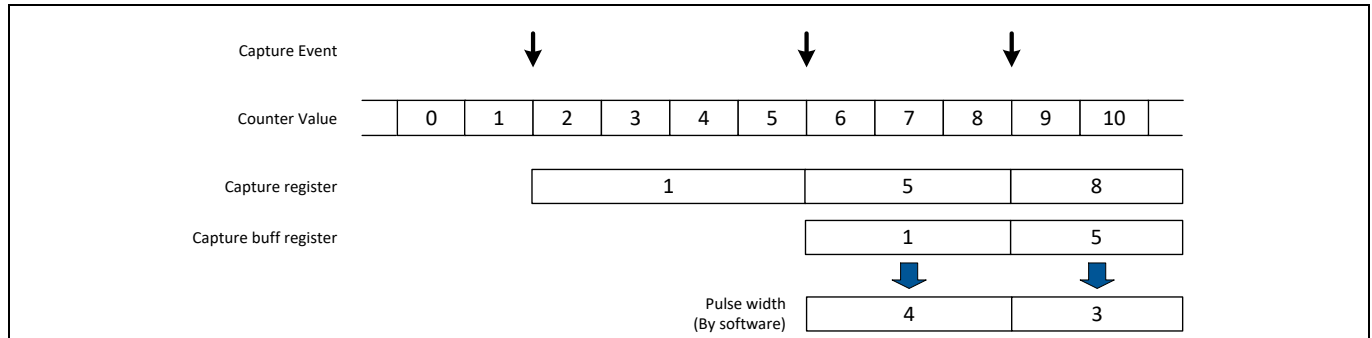


Figure 7 Example for Pulse Width Count Measurements

2.4.1.6 QPRC

The Quadrature decoder is used to measure the position of position encoder. Both Traveo and Traveo II families implement Quadrature Decoder.

Both support x 1, x 2, x 4 count modes. However, Revolution counter operation mode is not supported in Traveo II family. **Table 25** lists the main differences in QPRC.

Table 25 Differences in QPRC

Counter	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Timer function	QPRC	TCPWM: QUAD mode
Counter width	Two 16 bits (Position counter, Revolution counter)	16 bits or 32 bits
Position counter Operation mode	Up/Down count mode	Up/Down Rotary mode
	Not Supported	x 1 encoding
	Phase difference count mode x2 mode	x 2 encoding
	Count edge: phi_B	Count edge: phi_A
	Phase difference count mode x4 mode	x 4 encoding
	Count mode with direction	Not Supported
Revolution counter Operation mode	RC_mode1	Not supported
	RC_mode2	
	RC_mode3	

Body Entry/High Products

Counter	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Event Generation	Count inversion	Not Supported
	Zero index	tc event with Reload/Index event
	Overflow	Supported QUAD_RANGE1_CMP, QUAD_RANGE1_CAPT
	Under flow	Supported QUAD_RANGE1_CMP, QUAD_RANGE1_CAPT
	PC and RC match	Not Supported
	PC match	Supported: QUAD_RANGE0_CMP QUAD_RANGE1_CMP
	PC match and RC match	Not Supported
	Out range	Not Supported
Capture	Not Supported	Supported: QUAD_RANGE1_CAPT
Debug Mode	Not Supported	Supported

2.4.1.7 32-bit Output Compare

The 32-bit output compare in Traveo family generates the PWM waveform with 32-bit Free-run timer. In addition, events can be generated at compare match. In Traveo II family, the same operation is possible using TCPWM PWM mode. [Table 26](#) lists the main differences in 32-bit Reload Timer.

Table 26 Differences in 32-bit Output Compare

Counter	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Timer function	32-bit Output compare	TCPWM: PWM mode
Counter width	32 bits	16 bits or 32 bits
Count mode	Up, Up-down	Up, Down, Up-down1/2
Operation clock	9 types Internal Clock • /1, /2, /4, /8, /16, /32, /64, /128 or /256	Internal clock: 8 types • /1, /2, /4, /8, /16, /32, /64 or /128
	External clock • Both-edge	Not supported ¹
Buffer function	Supported	Supported
Compare registers per channel	Two	Two

¹ External clock cannot be used as the timer's count clock. But, when the count event is used in rising edge (supported falling and both edge) detection mode, timer will count by count event detection. In this case, count event can be used as external clock.

Body Entry/High Products

Counter	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Output pins per channel	Two <ul style="list-style-type: none"> OUT0 for compare register 0 OUT1 for compare register 1 	Two <ul style="list-style-type: none"> LINE_OUT is an output LINE_COMPL_OUT is a complementary output
One shot mode	Not Supported	One shot mode: <ul style="list-style-type: none"> Stop event depends on count mode. (underflow, overflow or both)
Signal output	Invert mode	Supported
	Set/Reset mode	Supported
Activation	Software	Software: via Trigger Multiplexer
	Not supported	External trigger
	Compare match	Supported
	Not Supported	TC event: <ul style="list-style-type: none"> TC event depends on count mode. (underflow, overflow or both)
Kill modes	Not supported	Supported
Debug Mode	Supported	Supported

2.4.1.8 Base Timer: PWM Timer Mode

Base Trimer PWM mode in Traveo family can output waveforms of the set cycle either singly or continuously upon the detection of a trigger. In this mode, cycle and duty are set to generate PWM waveform.

In Traveo II family, the same operation is possible using TCPWM PWM mode. [Table 27](#) lists the main differences in Base Timer PWM Mode.

Table 27 Differences in Base Timer: PWM Timer Mode

Counter	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Timer Function	Base Timer: PWM mode	TCPWM: PWM mode
Counter Width	16 bits	16 bits or 32 bits
Count Mode	Down	Up, Down, Up-down1/2
Operation Clock	Internal clock: 12 types /1, /2, /4, /8, /16, /32, /64, /128, /256, /512, /1024 or /2048	Internal clock: 8 types /1, /2, /4, /8, /16, /32, /64 or /128
	External clock: Rising-edge, falling-edge, or both-edge	Not supported ¹
Operation Mode	One shot mode: Stop event is underflow	One shot mode: Stop event depends on count mode. (underflow, overflow or both)
	Continuous mode	Reload mode

¹ The external clock cannot be used as the timer's count clock. However, when the count event is used in the rising edge (supported falling and both edge) detection mode, the timer will count with count event detection. In this case, the count event can be used as the external clock.

Body Entry/High Products

Counter	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Start Delay	Supported	Not Supported ¹
Buffer Function	Supported	Supported
Activation	Software	Software: via Trigger Multiplexer
	External trigger	External trigger
	External Timer Match Starting	Not supported
Signal Output	1: Inverted output when cycle and duty match	2: Inverted output when compare match LINE_OUT and LINE_COMPL_OUT
	Right-aligned PWM	Left-aligned, Right-aligned, Center-aligned, Asymmetric PWM
	Output polarity control	Supported
Trigger Output	A/D convertor activation	Supported
Event Generation	Underflow	TC event: TC event depends on count mode. (underflow, overflow or both)
	Duty match	Supported: compare match
	Start Trigger Detection	Not Supported
Debug Mode	Supported	Supported

2.4.1.9 Base Timer: PPG Timer Mode

The Base Trimer PPG mode in Traveo family can output single or continuous waveforms with the configured cycle either when a trigger is detected. In this mode, 'L' width and 'H' width are set to generate the PPG waveform.

In Traveo II family, the same operation is possible using TCPWM mode. [Table 28](#) lists the main differences in Base Timer: PPG Timer Mode.

Table 28 Differences in Base Timer: PPG Timer Mode

Counter	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Timer Function	Base Timer: PPG mode	TCPWM: PWM mode
Counter Width	16 bits	16 bits or 32 bits
Count Mode	Down	Up, Down, Up-down1/2
Operation Clock	Internal clock: 12 types /1, /2, /4, /8, /16, /32, /64, /128, /256, /512, /1024 or /2048	Internal clock: 8 types: /1, /2, /4, /8, /16, /32, /64 or /128
	External clock: Rising-edge, falling-edge, or both-edge	Not supported ²

¹ Counters can be pre-loaded with values reflecting the desired phase shift and then started synchronously. Note that during the initial (start delay) period, some counters can already generate the PWM output, depending on the duty cycle.

² The external clock cannot be used as the timer's count clock. However, when the count event is used in the rising edge (supported falling and both edge) detection mode, the timer will count with count event detection. In this case, the count event can be used as the external clock.

Body Entry/High Products

Counter	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Operation mode	One shot mode: Stop event is underflow	One shot mode: Stop event depends on count mode. (underflow, overflow or both)
	Continuous mode	Reload mode
Activation	Software	Software: via Trigger Multiplexer
	External trigger	External trigger
Signal Output	1 Inverted output when cycle and duty match	2 <ul style="list-style-type: none"> Inverted output when compare match LINE_OUT and LINE_COMPL_OUT
Event Generation	Underflow	TC event: TC event depends on count mode. (underflow, overflow or both)
	Start Trigger Detection	Not Supported
Debug Mode	Supported	Supported

2.4.1.10 TCPWM: PWM_DT Mode

This mode adds Dead time to the PWM output waveform. This function is not supported in Traveo family. **Figure 8** shows an example of the operation. The PWM_DT functionality is the same as the PWM functionality except for the following differences:

- PWM_DT supports dead time insertion; PWM does not support dead time insertion.
- PWM_DT does not support clock pre-scaling; PWM supports clock pre-scaling.

For more details, see the [Technical Reference Manual](#).

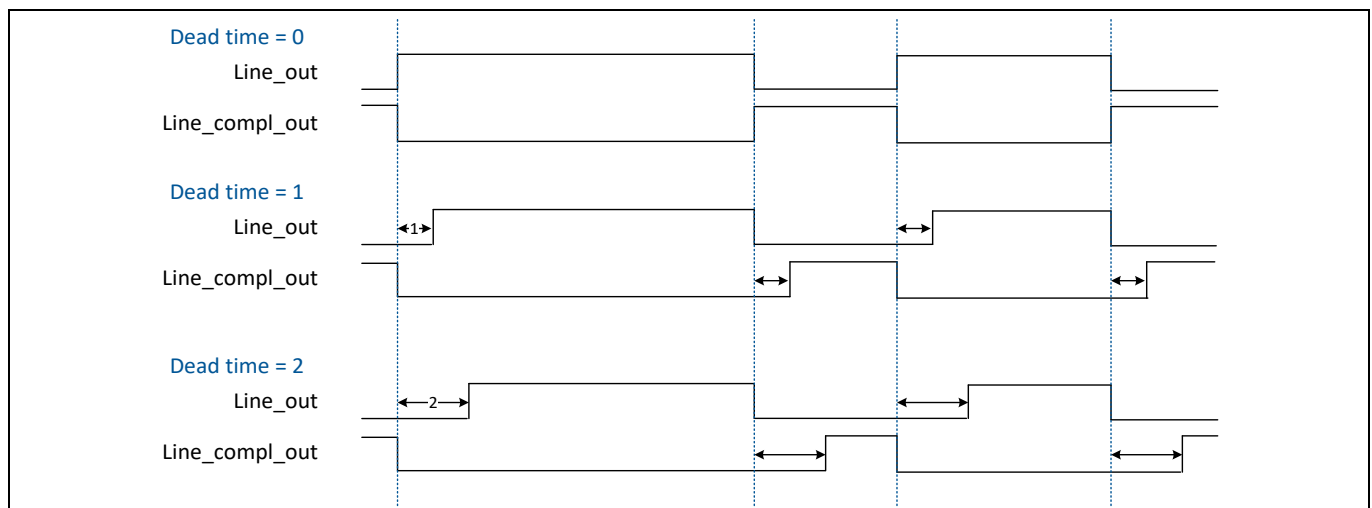


Figure 8 Dead Time Timing

Body Entry/High Products

2.4.1.11 TCPWM: PWM_PR Mode

This functionality changes the counter value using the linear feedback shift register (LFSR). This results in a pseudo random number sequence; the generated signal has frequency/noise characteristics different from a regular PWM signal. This function is not supported in Traveo family. **Figure 9** shows an example of the operation.

For more details, see the [Technical Reference Manual](#).

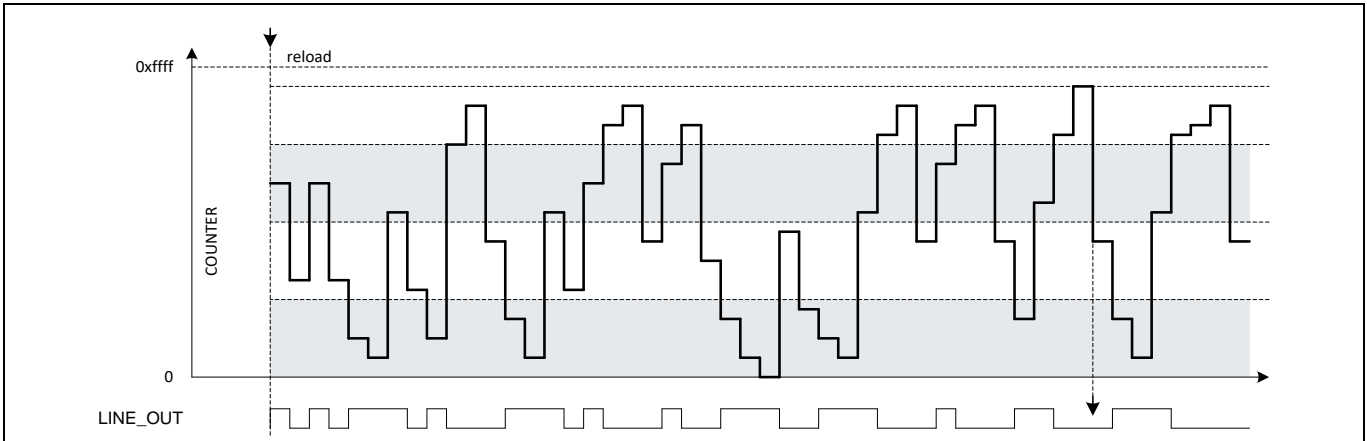


Figure 9 PWM_PR Output

2.4.1.12 TCPWM: SR Mode

This functionality shifts the counter value to the right. This implements a signal delay function from the trigger input to the line output, which can be used for functions such as detecting frequency shift keying (FSK) signals. This function is not supported in Traveo family. **Figure 10** shows an example of the operation. For more details, see the TRM.

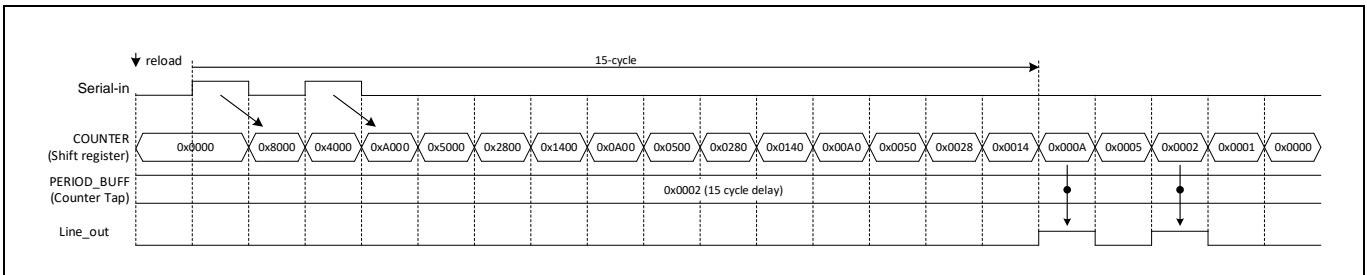


Figure 10 SR Mode Operation

PWM line output is generated from an XOR combination of enabled counter taps (bit position) defined by PERIOD_BUFF.

Body Entry/High Products

2.4.2 Serial Communication Block

The serial communication function realized by MFS on Traveo family is realized by SCB in Traveo II family. In Traveo II family, the LIN function is realized by a dedicated module.

Table 29 Differences in Serial Communication Block

Item	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series	
Function name	Multi-Function Serial (MFS)	Serial communication Block (SCB)	LIN
Supported function	<ul style="list-style-type: none"> • UART • CSIO (SPI Supported) • I2C • LIN (v2.1) 	<ul style="list-style-type: none"> • UART • SPI • I2C 	LIN (v 2.2A)

2.4.2.1 UART

Traveo II family SCB (UART) data transmission and reception are always executed in FIFO mode. In Traveo II family, eight out of nine SCB blocks support full UART, and one SCB does not support UART mode. [Table 30](#) lists the main differences.

Table 30 Differences in UART

Item	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Data	Transmission and reception FIFOs (64 bytes each) (when FIFOs are used)	Transmission/reception FIFO (32/256/512 bytes each) (FIFO mode only)
Serial Input	Oversampling is performed 3 times by the bus clock. The reception value is determined by majority decision.	<ul style="list-style-type: none"> • Use clk_scb • Use input clock (clk_scb) as “oversampling multiple” of interface clock
Transfer Format	Asynchronous	Asynchronous
Baud Rate	Dedicated baud rate generator (15-bit reload counter configuration)	CTRL.OVS register supported
	The external clock input can be adjusted by the reload counter.	<ul style="list-style-type: none"> • Baud rate= $\text{clk_scb} / (\text{OVS} + 1) * \text{OVS} = 7-15$
Data Length	5 to 9 bits (for normal mode), or 7 to 8 bits (for multi-processor mode)	4 to 16 bits (Standard/Multi-processor mode)
Signaling Method	NRZ	NRZ
	Inverted NRZ	Not supported
Start Bit Detection	Synchronized to falling edges of the start bit (for NRZ method)	Synchronized with the start bit falling edge (NRZ system)
	Synchronized to rising edges of the start bit (for inverted NRZ method)	Not supported

Body Entry/High Products

Item	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Reception Error Detection	Framing error	Framing error
	Overrun error	Not supported
	Parity error (Normal mode only)	Parity support (Odd parity and even parity)
Hardware Flow Control	Transmission/reception auto control by CTS and RTS	Transmission/reception auto control by CTS and RTS
Interrupt Request	Reception interrupt	Reception interrupt (Frame error, Parity error)
	Reception FIFO interrupt	Reception FIFO interrupt (RX FIFO is full, RX FIFO is not empty, RX FIFO overflow, RX FIFO underflow)
	Transmission interrupt	Transmission interrupt (TX done)
	Transmission FIFO interrupt	Transmission FIFO interrupt (TX FIFO is not full, TX FIFO is empty TX FIFO overflow, TX FIFO underflow)
	DMA transfer is supported for both transmission and reception	Not supported
	Status interrupt	Not supported
Master/Slave-Type Communication Function (Multi-Processor Mode)	1 (master) -to-n (slave) communication is supported. (Both master and slave systems are supported.)	1 (Master)-to-n (slave) communication is supported (Both master and slave systems are supported)
FIFO option	Transmission and reception FIFOs are provided	Transmission and reception FIFOs are supported
	Transmission FIFO and reception FIFO can be selected	Not supported
	Transmission data can be retransmitted	Not supported
	The timing of the reception FIFO interrupt can be changed by software	The timing of the reception FIFO interrupt can be changed by software
	Independent FIFO reset is supported	Independent FIFO reset is supported

2.4.2.2 I²C

Traveo II family SCB (I²C) data transmission and reception are always executed in FIFO mode. In Traveo II family, eight out of nine SCB blocks support full I²C and one SCB supports only I²C slave mode. [Table 31](#) lists the main differences.

Table 31 Differences in I²C

Item	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Data Buffer	Full duplex-double buffer (FIFO is unused).	Single memory buffer. (EZ I ² C /Command-RESP).
	Transmission/reception FIFO (16 bytes each) (when FIFO is used).	Transmission/reception FIFO (32/256/512 bytes each) (FIFO mode only).

Body Entry/High Products

Item	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Serial Input	For serial clock and data input, noise from 2 to up to 38 bus clocks is filtered out.	Filtering glitches up to 50 ns.
Transfer Mode	Synchronization	Synchronization
Baud Rate	Dedicated baud rate generator provided (comprising 15-bit reload counter).	<ul style="list-style-type: none"> • Slow mode (50 kbps) • Standard mode (100 kbps) • Fast mode (400 kbps) • Fast mode plus (1000 kbps)
Data Length	8 bits	8 bits
Signaling Method	NRZ	NRZ
Interrupt Request	Reception interrupt	Reception interrupt. (I ² C STOP detection at the end of each transfer, I ² C STOP detection at the end of a read transfer).
	Transmission interrupt	Transmission interrupt. (I ² C STOP detection at the end of each transfer, I ² C STOP detection at the end of a write transfer).
	Status interrupt (INT interrupt, stop condition interrupt, repeated start detection interrupt, serial timer interrupt).	Status interrupt. (I ² C master lost arbitration, I ² C master received NACK, I ² C master received ACK, I ² C bus error, I ² C slave lost arbitration, I ² C slave received NACK, I ² C slave received ACK, I ² C slave received STOP, I ² C slave received START, I ² C slave address matched, I ² C bus error).
	Transmission FIFO interrupt (A transmission FIFO overrun error occurs when the transmission FIFO is not higher than the interrupt trigger level or when the transmission FIFO is empty).	Transmission FIFO interrupt (TX FIFO is not full, TX FIFO is empty, TX FIFO overflow, TX FIFO underflow).
	Reception FIFO interrupt (reception FIFO under run)	Reception FIFO interrupt (RX FIFO is full, RX FIFO is not empty, RX FIFO overflow, RX FIFO underflow).
	A DMA transfer support function is provided for both transmission and reception.	Not supported
	Not supported	Wake up request on address match

Body Entry/High Products

Item	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
FIFO	<ul style="list-style-type: none"> Transmission and reception FIFOs are provided (64 bytes for the transmission FIFO and 64 bytes for the reception FIFO). The transmission FIFO and reception FIFO can be selected. Transmission data can be retransmitted. The reception FIFO interrupt timing can be changed by software. Independent FIFO reset is supported. 	<ul style="list-style-type: none"> Transmission/reception FIFO (32/256/512 bytes). The transmission FIFO and reception FIFO can be selected. Transmission data can be retransmitted. The reception FIFO interrupt timing can be changed by software.
Clock Stretching	Supported	Supported
I ² C Mode	Supported <ul style="list-style-type: none"> Master Slave Multi-master 	Supported <ul style="list-style-type: none"> Master Slave Multi-master

2.4.2.3 SPI

Traveo II family SCB (SPI) data transmission and reception are always executed in FIFO mode. In Traveo II family, eight out of nine SCB blocks support full SPI, and one SCB supports only SPI slave mode. [Table 32](#) lists the main differences.

Table 32 Differences in SPI

Item	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Data Buffer	Transmission and reception FIFOs (64 bytes each) (when FIFO is used)	Transmission/reception FIFO (32/256/512 bytes each) (FIFO mode only)
Transfer Format	Clock synchronization (no start/stop bits)	Clock synchronization (no start/stop bits)
	Master/slave functions	Master/slave functions
	Supports SPI (supports both master and slave)	Supports SPI (supports both master and slave)
Baud Rate	A dedicated baud rate generator is provided (configured from a 15-bit reload counter, during master operation). Maximum 8 Mbps	<ul style="list-style-type: none"> CTRL.OVS register supported Baud rate= $\text{clk_scb} / (\text{OVS} + 1)$ *OVS=3-15, Maximum 12 Mbps
	External clock input is enabled (during slave operation)	Supports externally clocked slave operation
Data Length	5 to 16, 20, 24, and 32 bits	Data frame size programmable from 4 bits to 32 bits

Body Entry/High Products

Item	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Interrupt Request	Reception interrupt <ul style="list-style-type: none"> Reception completion Overrun error Reception block transfer error 	Not supported
	Reception FIFO interrupt <ul style="list-style-type: none"> Reception FIFO under run 	Reception FIFO interrupt <ul style="list-style-type: none"> RX FIFO is full RX FIFO is not empty RX FIFO overflow RX FIFO underflow
	Transmission interrupt <ul style="list-style-type: none"> Transmission data empty Transmission bus idle Chip error interrupt Transmission block transfer error 	Transmission interrupt <ul style="list-style-type: none"> SPI master transfer done SPI Bus Error SPI slave deselected after any EZSPI transfer occurred SPI slave deselected after a write EZSPI transfer occurred
	Transmission FIFO interrupt <ul style="list-style-type: none"> When the transmission FIFO is not higher than the interrupt trigger level When the transmission FIFO is empty, transmission FIFO overrun 	Transmission FIFO interrupt <ul style="list-style-type: none"> TX FIFO is not full TX FIFO is empty TX FIFO overflow TX FIFO underflow
	DMA Transfer support function is provided for both transmission and reception	Not supported
	Status interrupt <ul style="list-style-type: none"> Serial timer interrupt 	Status interrupt <ul style="list-style-type: none"> Wake up request on slave select SPI STOP detection at the end of each transfer SPI STOP detection at the end of a write transfer SPI STOP detection at the end of a read transfer
Serial Chip Select	<ul style="list-style-type: none"> Four-channel control (independent control, rounding control) The setup/hold/deselect times can be made variable The active level can be selected for each channel 	<ul style="list-style-type: none"> Supports up to four slave select lines
Synchronous Mode	Master or slave function	Master or slave function

Body Entry/High Products

Item	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
FIFO Option	<ul style="list-style-type: none"> Incorporates transmission and reception FIFOs (64 bytes for transmission FIFO, 64 bytes for reception FIFO) The transmission and reception FIFOs can be selected Transmission data can be retransmitted The timing of the reception FIFO interrupt can be changed by software Independent FIFO reset is supported 	<ul style="list-style-type: none"> Transmission/reception FIFO equipped (transmission FIFO: 32/256/512 bytes, reception FIFO: 32/256/512 bytes) Reception FIFO interrupt timing can be modified by software FIFO reset is supported independently

2.4.2.4 LIN

The Traveo II family LIN block supports autonomous forwarding of LIN frames. [Table 33](#) lists the main differences.

Table 33 Differences in LIN

Item	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Serial Input	Over sampling is performed by the bus clock 3 times. The reception value is determined by the rule of majority.	3 times oversample (noise filter) at sample point.
Transfer Mode	Asynchronous	Asynchronous
Baud Rate	<ul style="list-style-type: none"> Dedicated baud rate generator is provided (consisting of a 15-bit reload counter). The external clock can be adjusted by the reload counter. Auto baud rate adjustment with Sync Field reception. 	<ul style="list-style-type: none"> Set for each channel. baud rate adjustment by receiving Sync Field by application.
Data Length	8 bits	8 bits
Signaling Method	NRZ	NRZ
Start Bit Detection	Synchronized with falling edges of the start bit	Synchronized with falling edges of the start bit
Error Detection	<ul style="list-style-type: none"> Framing error Overrun error Transmitter bit error Receive synchronization error Receiver PID error Receiver frame error Response checksum error Timeout detection 	<ul style="list-style-type: none"> Transmitter bit error Receive synchronization error Receiver frame error Receiver PID parity error Response checksum error Receiver noise detection

Body Entry/High Products

Item	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Interrupt Request	Reception interrupt <ul style="list-style-type: none"> Reception completion Reception block transfer error 	Reception interrupt <ul style="list-style-type: none"> RX break wakeup done RX header sync done RX header done RX response done
	Reception FIFO interrupt <ul style="list-style-type: none"> Reception FIFO underrun 	Not supported
	Transmission interrupt <ul style="list-style-type: none"> TX data empty TX bus idle TX block transfer error 	Transmission interrupt <ul style="list-style-type: none"> TX header done TX response done TX wakeup done
	Status interrupts <ul style="list-style-type: none"> LIN Break Field detection Serial timer interrupt 	Status interrupts <ul style="list-style-type: none"> Receiver noise detection Time out detection
	Interrupt request to ICU <ul style="list-style-type: none"> LIN Sync Field detection: LSYN 	Not supported
	Transmission FIFO interrupt <ul style="list-style-type: none"> When the transmission FIFO is within the interrupt threshold When the transmission FIFO is empty Transmission FIFO overrun 	Not supported
	DMA transfer is supported for both transmission and reception.	Not supported
LIN Bus Option	<ul style="list-style-type: none"> Support for LIN Protocol Revision 2.1 Master device operation (auto and manual mode) Slave device operation (only manual mode) Auto header transmission Auto response transmission Auto response reception Detection of the start/stop edge of the LIN sync field connected to an input capture LIN break field generation (manual mode) LIN break delimiter generation (manual mode) LIN break field detection (manual mode) 	<ul style="list-style-type: none"> LIN protocol support in hardware according to ISO 17987 standard Master device operation (auto mode) Slave device operation (auto mode) Auto header transmission Auto response transmission Auto response reception
Wakeup Pulse	<ul style="list-style-type: none"> Reception not supported Transmission not supported 	<ul style="list-style-type: none"> Reception supported Transmission supported

Body Entry/High Products

Item	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
LIN Transceiver Control	<ul style="list-style-type: none"> Not supported 	<ul style="list-style-type: none"> Supported
UART protocol	<ul style="list-style-type: none"> Not supported 	<ul style="list-style-type: none"> Supported

2.4.3 CAN FD

Table 34 lists the CAN FD features. Traveo II family shares the message RAM and Timestamp function for global channel control. Traveo II family supports the receive FIFO top pointer for DMA transfer.

Table 34 Differences in CAN FD

CAN FD	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Classical CAN	Supported	Supported
CAN FD	Supported	Supported
TTCAN	Not supported	Supported
Message Buffer ¹	<ul style="list-style-type: none"> 64 (Extended ID]) + 128 (Standard ID]) Rx filters 2 * 64 MSG Rx FIFO + 64 MSG dedicated Rx buffers 32 MSG dedicated Tx buffers 32 event Tx FIFO 	<ul style="list-style-type: none"> 64 (Extended ID]) + 128 (Standard ID]) Rx filters 2 * 64 MSG Rx FIFO + 64 MSG dedicated Rx buffers 32 MSG dedicated Tx buffers 32 event Tx FIFO
Message Handler	1	1
Message RAM Access	Direct access	Direct access
Message RAM	Dedicated type	Shared type
Message RAM with ECC	Supported	Supported
Timestamp Function	Supported	Supported <ul style="list-style-type: none"> Shared Timestamp counter
Receive FIFO Top Pointer	Not supported	Supported

¹ For Traveo and Traveo II the listed numbers indicate the maximum addressable message buffers; utilization depends on available MRAM size.

Body Entry/High Products

2.4.4 I/O Interface

Table 35 lists the I/O interface features. The main differences are the input threshold selection, output drive strength selection, noise filter, and Smart IO.

Table 35 Differences in I/O Interface

I/O Interface	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Input Threshold Selection <ul style="list-style-type: none"> CMOS (0307) Automotive (0508) TTL 	Supported except TTL	Supported
Output Drive Strength Selection	Supported <ul style="list-style-type: none"> 1 mA 2 mA 3 mA only for I2C 5 mA 	Supported <ul style="list-style-type: none"> 0.5 mA 1 mA 2 mA 5 mA 6 mA only for GPIO (IOL) 10 mA only for HSIO_STD (Only for CYT4BF)
Pull-up/Pull-down	Supported <ul style="list-style-type: none"> 50 kΩ (typ) 	Supported <ul style="list-style-type: none"> 50 kΩ (typ)
High-Z State	Supported	Supported
Port Status Hold During Low-Power Mode	Supported	Supported
Noise Filter	Supported per port pin <ul style="list-style-type: none"> Max 100 ns 	Supported per port group <ul style="list-style-type: none"> Max 50 ns
Smart IO	Not supported	Supported

2.4.5 ADC

Table 36 lists the ADC features. The main differences are the result data format, averaging, and pre-conditioning.

Table 36 Differences in ADC

ADC	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
12-bit Resolution	Supported	Supported
Logical Channel	Supported	Supported
Software Trigger	Supported	Supported
Hardware Trigger	Supported	Supported
Idle Trigger (Continuous)	Supported <ul style="list-style-type: none"> Idle trigger 	Supported <ul style="list-style-type: none"> Continuous

Body Entry/High Products

ADC	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Result Data per Each Channel	Supported <ul style="list-style-type: none"> Single buffer 	Supported <ul style="list-style-type: none"> Double buffer
Result Data Format	<ul style="list-style-type: none"> Unsigned (fixed) Right alignment (fixed) 8-bit/10-bit/12-bit 	<ul style="list-style-type: none"> Sign/unsigned Left/right alignment Max 16-bit (Sign/zero extension), Programmable right shift
Programmable Sample Time per Each Channel	Supported <ul style="list-style-type: none"> Select one from four 16-bit register ≥ 7 cycles 	Supported <ul style="list-style-type: none"> 12-bit registers per each channel ≥ 11 cycles
Comparison Time	≥ 16 cycles (16-bit register)	15 cycles (Fixed)
Range Detection	Supported <ul style="list-style-type: none"> Select one from eight thresholds (above/below) register per each channel Inside/Outside 	Supported <ul style="list-style-type: none"> Thresholds (above/below) registers per each channel Inside/Outside/Above/Below
Pulse Detection	Supported <ul style="list-style-type: none"> 8-bit Positive counter 5-bit Negative counter 	Supported <ul style="list-style-type: none"> 8-bit Positive counter 5-bit Negative counter
Averaging	Not supported	Supported
Group Scan	Supported	Supported
Preemption Types when Group Interrupted	Supported <ul style="list-style-type: none"> Resume Restart Stop 	Supported <ul style="list-style-type: none"> ABORT_RESUME ABORT_RESTART ABORT_CANCEL FINISH_RESUME
Priority	Supported <ul style="list-style-type: none"> 16 priorities per channel 	Supported <ul style="list-style-type: none"> 8 priorities per group
Interrupt	Supported <ul style="list-style-type: none"> Per channel/group conversion done Per channel range detect Per channel pulse detect Group interrupted 	Supported <ul style="list-style-type: none"> Per channel range detect Per channel pulse detect Per channel/group overflow Group/channel done Group cancelled
DMA Request	Supported	Supported
Calibration	Supported <ul style="list-style-type: none"> Analog calibration 	Supported <ul style="list-style-type: none"> Analog calibration Alternate calibration Coherent calibration update

Body Entry/High Products

ADC	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Pre-conditioning	Not supported	Supported <ul style="list-style-type: none"> Off VREFL VREFH Diagnostic reference voltage
Diagnostic Reference Voltage	Supported <ul style="list-style-type: none"> AVRL AVRH 	Supported <ul style="list-style-type: none"> 10 voltage levels from VREFL to VREFH
Power Down Mode	Supported	Supported
Debug Mode	Supported	Supported
Software Abort	Supported <ul style="list-style-type: none"> Forced stop 	Supported <ul style="list-style-type: none"> IP disable

2.4.6 RTC

Table 37 lists the RTC features. The main differences are the source clock, interrupts, and the counters of half-second/month/year.

Table 37 Differences of RTC

RTC	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Source Clock	Main clock oscillator (4 MHz) Sub clock oscillator (32 kHz) Internal low speed oscillator (100 kHz)	Watch Crystal oscillator (32 kHz) Internal low speed oscillator (32 kHz)
Half-second Counter	Supported	Not supported <ul style="list-style-type: none"> Event Generator can count less than a second
Second Counter	Supported	Supported
Minute Counter	Supported	Supported
Hour Counter	Supported	Supported
Day Counter	Supported	Supported
Month Counter	Not supported	Supported
Year Counter	Not supported	Supported
Automatic Leap Year Correction	Not supported	Supported
Interrupt	Each counter (Day/Hour/Minute/Second/Half-second)	Two independent alarms (Month + Day + Hour + Minute + Second)
Calibration	Supported <ul style="list-style-type: none"> Automatic calibration by main clock 	Supported <ul style="list-style-type: none"> Calibration by waveform output and software

Body Entry/High Products

2.4.7 CRC

In Traveo family, CRC was implemented in a dedicated CRYPT and DMA module.

Table 38 Differences in CRC

Item	S6J3428/9/A Series	CY2B7/B9, CYT4BF Series
Method	Supported CRC module <ul style="list-style-type: none"> • CCITT CRC16 (polynomial = "0x1021") • IEEE-802.3 CRC32 (polynomial = "0x04C11DB7") 	Supported CRYPT module and DMA module <ul style="list-style-type: none"> • CCITT CRC16 (polynomial = "0x1021") • IEEE-802.3 CRC32 (polynomial = "0x04C11DB7")

2.4.8 CXPI

Traveo II family has a CXPI module only in CYT2B9 series MCUs.

CXPI supports the following:

- CXPI protocol support in hardware according to ISO/WD 20794-4
- Master node
 - Autonomous request field and response transfer processing
- Network access method
 - Event-triggered method
 - Polling method
- Carrier sense multiple access and collision resolution (CSMA/CR)
- Data signal encoding/decoding format
 - Non-return to zero (NRZ) mode
 - Pulse width modulation (PWM) mode
- Wake pulse generation
- Clock detection
- 8-bit checksum for normal frame and 16-bit checksum for long frame
- 400x bit time oversampling
- Error detection
- Timeout detection
- Message buffers for the following:
 - Protected identifier (PID) field
 - Frame information (FI) field
 - 16x depth transmission and reception FIFO buffer
 - Checksum field
- Test modes include hardware error injection

Body Entry/High Products

2.4.9 FlexRay

Traveo II family has a FlexRay module only in CYT4BF Series MCUs.

FlexRay provides the following functionalities:

- Conformance with FlexRay protocol specification v2.1
- Data rates of up to 10 Mbps on each channel
- Up to 128 message buffers configurable
- 8 KB Message RAM for storage. This can be 128 message buffers with max. 48-bytes data section or up to 30 message buffers with 254-byte data section.
- Configuration of message buffers with different payload lengths possible
- One configurable Receive FIFO
- Each message buffer can be configured as Receive buffer, as Transmit buffer, or as part of the Receive FIFO
- Host access to message buffers via Input and Output Buffer
- Input Buffer: Holds message to be transferred to the Message RAM
- Output Buffer: Holds message read from the Message RAM
- Filtering for slot counter, cycle counter, and channel
- Maskable module interrupts
- Network Management supported

FlexRay consists of the following major six sub-blocks implementing these interfaces:

- FlexRay protocol specification 2.1, and supports up to a 10 Mbps data rate
- CIF MMIO registers
- DMA control
- Synchronization trigger generator
- Decoder acts between the AHB interface and other functional blocks
- AHB slave interface drives the host requests to this FlexRay module

The following interfaces are supported:

- 32-bit AHB-lite interface to the Host processor. Only word (32-bit) transactions are supported. Half-word (16-bit) and byte (8-bit) transactions return bus error responses.
- FlexRay physical layer interface
- Interrupts to the Host processor.
- Trigger interface (DMA and External synchronization)

2.4.10 SDHC Host Controller

Traveo II family has a SDHC Host Controller module only in CYT4BF Series MCUs.

The SDHC Interface provides the following functionalities:

- Standard compliance:
 - SD 6.0 / SDIO 4.10 / eMMC 5.1
 - SD SDR50: 50 MB/s (4-bits data @ 100 MHz)
 - eMMC 52 MHz DDR: 104 MB/s (8 bits data @ 52 MHz DDR)
 - HCI 4.2 (Host Controller Interface) spec shared by SD and eMMC

Body Entry/High Products

- AHB master interface
 - With ADMA3
 - Supports data prefetch for back to back WRITE operations
- Single ported RAM for packet storage
 - Automatic packing/unpacking of data to fit buffer width
- AHB slave interface for configuration/control/status

2.4.11 Serial Memory Interface

Traveo II family has a Serial Memory Interface (SMIF) only in CYT4BF Series MCUs.

SMIF provides an SPI master interface to serial memory devices that support a single, dual, or quad SPI protocol. SMIF provides the following functionality:

- HyperBus protocol
- SPI mode 0: clock polarity (CPOL) and clock phase (CPHA) are both '0'.
- Support for single, dual and quad SPI protocols.
- Support for dual-quad SPI mode: the use of two quad SPI memory devices to increase data bandwidth for SPI read and write transfers.
- Support for single data rate (SDR) and dual data rate (DDR) transfers.
- Support for up to four external memory devices. Support for device capacities in the range of [64 KB, 4 GB] in power of 2 multiples.
- Execute-in-place (XIP) and memory-mapped input/output (MMIO) operation modes.
 - XIP operation mode supports both SPI read and write transfers.
- Support of a 4-KB XIP read cache.
- XIP operation mode supports on-the-fly encryption for write data and on-the-fly decryption for read data.
- SPI interface logic supports stalling of SPI transfers to address back pressure on FIFOs.
- SPI interface logic supports an asynchronous SPI transmit and receive interface clock.
- SPI interface logic supports multiple interface receive clocks.
- SPI interface logic supports flexible external memory devices data signal connections.

2.4.12 Ethernet

Traveo II family has an Ethernet module only in CYT4BF Series MCUs.

Ethernet provides an interface to an external PHY to get Ethernet functionality. Ethernet provides the following functionality:

- 10, 100, and 1000 Mbps full-duplex operation
- RGMII, RMII, and GMII interfaces supported
- AXI Interface (64-bit)
- Support for up four Tx and 1 Rx Priority queues
- Support for 802.1AS and 1588 precision clock synchronization protocol
- Support for 1588 one-step clock for Tx Sync frames
- Optional IEEE 1588 timestamp unit
- Support for 802.3az EEE
- Support for 802.1Qbb priority-based flow control

Body Entry/High Products

- Receive and transmit IP, TCP, and UDP checksum offload
- Automatic pad and CRC generation on transmitted frames
- MDIO interface for PHY management
- Supports 802.1Qav traffic shaping on two highest-priority transmit queues
- Supports strict priority, DWRR, or Enhanced Transmission Selection (ETS - 802.1Qaz) on transmit queues

2.5 Development Tools and Flash Programming Tools

Traveo and Traveo II families supports Green Hills Software (GHS) and IAR tools. In addition to these tools, Traveo II family also supports the tools from other vendors such as iSystem, Lauterbach, and Segger.

Table 39 lists the main differences between development tools and Flash programming.

Table 39 Development Tools and Flash Programming Tools

Tools	S6J3428/9/A Series		CY2B7/B9, CYT4BF Series	
	Emulators/Probes	Software/Compiler	Emulators/Probes	Software/Compiler
Development Tool	GHS Probe	GHS Multi (v2015.1.6 or later)	GHS Probe (5.4.4)	GHS Multi V7 (Version 7.1.4)
	IAR I-JET	EWARM (v7.30.4 or later)	IAR I-JET	EWARM (8.11)
	–	–	iSystem i-TAG Family Lauterbach TRACE 32-ICE	–
Flash Programming Tool	GHS Probe	GHS Multi (v2015.1.6 or later)	GHS Probe (5.4.4)	GHS Multi V7 (Version 7.1.4)
	IAR I-JET	EWARM (v7.30.4 or later)	IAR I-JET	EWARM (8.11)
	Serial Interface Cable (with serial programming mode)	Flash programmer	Cypress MiniProg3	Cypress Programmer (CYP)
	Minato	–	Segger J-Link	J-Flash
	BPM Micro		Segger Flasher arm	J-Flash
	DTS INSIGHT		(for mass- production)	

Body Entry/High Products

2.6 MCAL Support

Table 40 lists MCAL features. The main differences are AUTOSAR revision, compiler, and OCU module.

Table 40 Differences in MCAL Support

MCAL	Traveo Family	Traveo II Family
AUTOSAR Revision	4.0.3	4.2.2
Compiler	GHS MULTI V2015.1.6	GHS MULTI V2017.1.4
MCU module	Supported	Supported
WDG module	Supported	Supported
GPT module	Supported	Supported
FLS module	Supported	Supported
SPI module	Supported	Supported
LIN module	Supported	Supported
CAN module	Supported	Supported
ICU module	Supported	Supported
PWM module	Supported	Supported
ADC module	Supported	Supported
DIO module	Supported	Supported
PORT module	Supported	Supported
OCU module	Not supported	Supported

Cluster Products

3 Cluster Products

3.1 Target Products and Traveo II Family MCU Features

Table 41 Target Products

MCU Family	MCU Series
Traveo family	S6J3200 series
Traveo II family	CYT4DN series, CYT2C9 series

Table 42 Comparison of Traveo and Traveo II Family MCUs

Function	Traveo family	Traveo II family	
	S6J3200 Series	CYT4DN Series	CYT2C9 Series
Flash Memory (Code Flash)	2112 KB	6336 KB	2112 KB
Flash Memory (Work Flash)	112 KB	128 KB	128 KB
SRAM0	256 KB	256 KB	256 KB
SRAM1	–	256 KB	–
SRAM2	–	128 KB	–
CXPI	Not Supported	Supported	Supported
Graphics Interface	Video output <ul style="list-style-type: none"> • DRGB x2 • RSDS x1 • LVDS (FDP-Link) x1 Video input <ul style="list-style-type: none"> • RGB/YUV/ITU656 x1 Graphics Engine <ul style="list-style-type: none"> • 2D graphics engine (2.5D effects) • 3D graphics engine 	Video output <ul style="list-style-type: none"> • DRGB x2 • LVDS (FDP-Link) x2 Video input <ul style="list-style-type: none"> • RGB/YUV/ITU656 x1 • MIPI CSI-2 x1 Graphics Engine <ul style="list-style-type: none"> • 2D graphics engine (2.5D effects) 	Not Supported
Audio	I ² S x2 Not Supported TDM PCMPWM x2 Sound Generator x1, Sound Waveform Generator x1 Mixer x5 Audio DAC x1	I ² S x4 TDM x4 PCMPWM x2 Sound Generator x1 Mixer x2 Audio DAC x1	I ² S x2 TDM x2 PCMPWM x1 Sound Generator x5 Mixer x1 Not Supported Audio DAC
Serial Memory Interface	Supported (HSSPI, HyperBus)	Supported	Not Supported
Ethernet	Supported	Supported	Not Supported
LCD Controller	Supported	Not Supported	Supported

Cluster Products

3.2 Product Overview

Figure 11 show the major architecture components of the CYT4DN series.

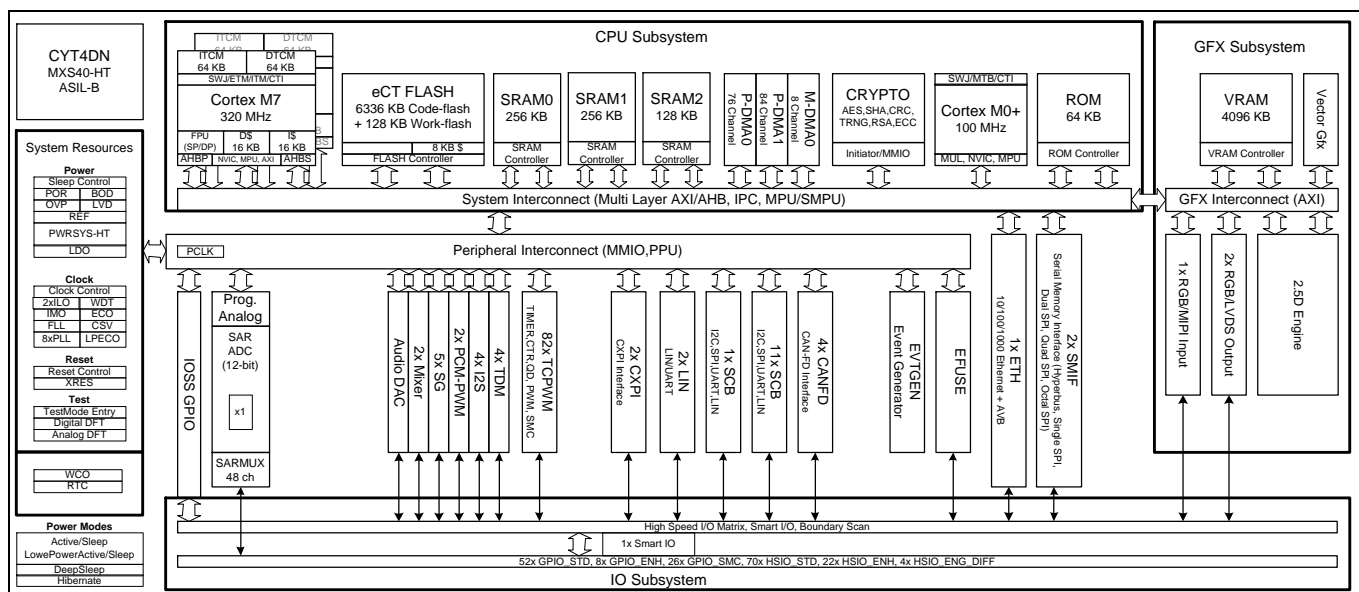


Figure 11 Block Diagram (CYT4DN Series)

3.3 On-chip System Features

3.3.1 CPU

Traveo family has a single Cortex-R5 processor, while Traveo II family is a dual-processing CPU (two Cortex-M7s and a Cortex-M0+ processor). In Traveo II family, dual-processing CPUs are configured as the CPU subsystem; two Cortex-M7 processors are the main CPU and Cortex-M0+ processor is the secondary CPU that can implement security, safety, and protection features. Note that as the CPU core changes, MCU features change according to the core specification.

Table 43 Differences in CPU

Item	Traveo Family (S6J3280 Series)	Traveo II Family (CYT4DN Series)		Remarks
		Main CPU	Secondary CPU	
CPU Core	Cortex-R5F	Cortex-M7 (x2)	Cortex-M0+	
Operation Frequency	Up to 240 MHz	Up to 320 MHz	Up to 100 MHz	Product specifications
FPU	Single/Double precision	Single/Double precision	None	
MPU	16 regions	16 regions	8 regions	¹
Cache Memory	I-cache 16 KB/ D-cache 16 KB	I-cache 16 KB/ D-cache 16 KB	None	
TCM Interface	Supported Implemented TCRAM	Supported	Not supported	

¹ Traveo II has S MPU as memory protection in addition to the CPU's internal MPU. Refer to 2.3.14 Protection.

Cluster Products

Item	Traveo Family (S6J3280 Series)	Traveo II Family (CYT4DN Series)		Remarks
		Main CPU	Secondary CPU	
Support for Interrupt Controller	Vector Interrupt Controller (VIC), Software nested interrupt	Nested Vector Interrupt Controller (NVIC)		

3.3.2 Memory Design

Table 44 lists the Code Flash features. The main differences are in program size, Read-While-Write operation, and redundancy.

Table 44 Differences in Code Flash

Code Flash	S6J3280 Series	CYT4DN Series
ECC	SEC/DED	SEC/DED
Sector Size	64 KB, 8 KB	32 KB, 8 KB
Program Size	8 bits, 16 bits, 32 bits, 64 bits	64 bits, 256 bits, 4096 bits
Program and Erase Cycles/Retention	1000/20 years	1000/20 years
Read-While-Write Operation	Not supported	Supported

Table 45 lists the Work Flash features. The main differences are in the sector size, program and erase cycles, Read-While-Write operation, and redundancy. Comparing with Traveo, Traveo II families supports smaller sector size and higher program and erase cycles.

Table 45 Differences in Work Flash

Work Flash	S6J3280 Series	CYT4DN Series
ECC	SEC/DED	SEC/DED
Sector Size	4 KB	2 KB, 128 B
Program Size	32 bits	32 bits
Program and Erase Cycles/Retention	1000/20 years 10000/10 years 100000/5 years	125000/20 years 250000/10 years
Read-While-Write Operation	Not supported	Supported

Table 46 lists the SRAM features. The main difference is the data retention in low power mode. Traveo II family supports data retention in DeepSleep mode.

Cluster Products

Table 46 Differences in SRAM

SRAM	S6J3280 Series	CYT4DN Series
ECC	SEC/DED	SEC/DED
Data Retention in Low Power Mode	Not supported (TCRAM and SRAM are not retained in Shutdown mode. Backup RAM is retained in Shutdown mode)	Supported (SRAM is retained in DeepSleep mode)

3.3.3 Debug

Traveo and Traveo II families support JTAG and SWD Debug Interface. [Table 47](#) shows the main differences in debugging.

Table 47 Differences in Debugging

Item	S6J3280 Series	CYT4DN Series
Debug interface	JTAG	JTAG SWD

3.3.4 Mode Setting

This section is as same as the Body Entry/High Products. See section [2.3.4 Mode Setting](#).

3.3.5 Power Supply and Monitoring

The power supply of Traveo II family is the same as that of Traveo family, but signal names of power supply are different. Also, the type of power monitoring mode has been enhanced in Traveo II family.

3.3.5.1 Power Supply

[Table 48](#) lists the power supply and differences in functionality.

Table 48 Power Supply

Power Supply		S6J3280 Series		CYT4DN Series	
External	Digital	V _{CC5}	4.5 to 5.5 V	V _{DDD}	2.7 to 5.5 V
		V _{CC12}	1.1 to 1.3 V	V _{CCD}	1.09 to 1.21 V
	I/O	V _{CC53}	3.0 to 3.6 V/ 4.5 to 5.5 V	V _{DDIO_GPIO}	2.7 to 5.5 V
		DV _{CC}	4.5 to 5.5 V	V _{DDIO_SMC}	2.7 to 5.5 V
		V _{CC3}	3.0 to 3.6 V	V _{DDIO_HSIO} , V _{DDIO_SMIF_HV}	3.0 to 3.6 V
		–	–	V _{DDIO_SMIF}	1.7 to 2.0 V
	Analog	AV _{CC3_DAC}		V _{DDHA_FPD0} , V _{DDHA_FPD1}	3.0 to 3.6 V
		V _{CC3_LVDS_Tx}		V _{DDA_FPD0} , V _{DDA_FPD1}	1.09 to 1.21 V
		V _{CC3_LVDS_PLL}		V _{DDPLL_FPD0} , V _{DDPLL_FPD1}	1.09 to 1.21 V
		–	–	V _{DDA_MIPI}	1.09 to 1.21 V
		AV _{CC5}	4.5 to 5.5 V	V _{DDA_ADC}	2.7 to 5.5 V

Cluster Products

3.3.5.2 Monitoring

This section is as same as the Body Entry/High Products. See section [2.3.5.2 Monitoring](#).

3.3.6 Reset Factor

This section is as same as the Body Entry/High Products. See section [2.3.6 Reset Factor](#).

3.3.7 Clock System

Compared to the Traveo family clock system, Traveo II family has Spread Spectrum Clock Generator (SSCG). Traveo II family does not have Clock Gear functions. In Traveo II family, frequency-locked loop (FLL) featuring fast startup and low power is implemented. LPECO that operates in DeepSleep and Hibernate mode is added. [Table 49](#) lists the main differences in the clock system.

See the datasheet for the AC characteristics of each clock.

Table 49 Differences in Clock System

Clock System		S6J3200 Series	CYT4DN Series	CYT2C9 Series
Internal Clock Source		Fast CR: 4 MHz (Using source clock after reset) Slow CR: 100 kHz	IMO: 8 MHz (Using source clock after reset) ILO0/1: 32 kHz	IMO: 8 MHz (Using source clock after reset) ILO0/1: 32 kHz
External Clock Source		Main clock: 3.6 to 16 MHz Sub clock: 32.768 kHz	ECO: 3.988 to 33.33 MHz WCO: 32.768 kHz LPECO: 4 to 8MHz EXT_CLK ¹ : 0.25 to 100 MHz	ECO: 3.988 to 33.33 MHz WCO: 32.768 kHz LPECO: 4 to 8MHz EXT_CLK ² : 0.25 to 100 MHz
High-Speed Clock Generation	PLL	PLL x4 Input: 3.6 to 32 MHz Output: max. 400 MHz (PLL1) SSCG PLL x4 Input: 3.6 to 32 MHz Output: max. 400 MHz (SSCG3)	PLL without SSCG x3 Input: 3.988 to 33.34 MHz Output: max. 200 MHz PLL with SSCG x5 Input: 3.988 to 33.34 MHz Output: max. 400 MHz	PLL without SSCG x2 Input: 3.988 to 33.34 MHz Output: max. 200 MHz PLL with SSCG x1 Input: 3.988 to 33.34 MHz Output: max. 400 MHz
	FLL	Not implemented	FLL x1 Input: 0.25 to 80 MHz Output: 24 to 100 MHz	FLL x1 Input: 0.25 to 80 MHz Output: 24 to 100 MHz
Clock Gear		Supported	Not implemented	Not implemented

¹ It can be sourced from a designated I/O pin.

² It can be sourced from a designated I/O pin.

Cluster Products

Clock System	S6J3200 Series	CYT4DN Series	CYT2C9 Series
Clock Supervision	Main clock Sub clock PLL clock SSCG clock Slow CR Fast CR	CLK_REF (IMO or ECO or EXT_CLK) CLK_HF (PLL and FLL) ILO0 CLK_LF (ILO1 or WCO)	CLK_REF (IMO or ECO or EXT_CLK) CLK_HF (PLL and FLL) ILO0 CLK_LF (ILO1 or WCO)

3.3.8 Watchdog Timer

The watchdog timer (hardware) features are same as the features listed in [Table 13](#).

[Table 50](#) lists the multi-counter watchdog timer (software) features. The main differences are counter clock, counter, maximum timeout, and the behavior during debugging.

Table 50 Differences in Multi-Counter Watchdog Timer (Software)

Multi-counter Watchdog Timer (Software)	S6J3280 Series	CYT4DN Series
Trigger	User program	User program
Counter Clock	<ul style="list-style-type: none"> Fast internal clock: 4 MHz Slow internal clock: 100 kHz Main clock: 4 to 16 MHz Sub clock: 32 kHz 	<ul style="list-style-type: none"> Internal low-speed oscillator: 32 kHz Watch crystal oscillator: 32 kHz ECO via Prescaler and Low Power External Clock Oscillator (LPECO) via Prescaler can also be used for MCWDT.
Counter	32 bits	2 * 16-bit, 32 bits only for interrupt
Maximum Timeout	36.4 hours	2.11 seconds
Window Function	Supported	Supported
Warning Interrupt	Supported	Supported
Timeout Expiration Action	Reset or NMI	Reset or Fault
Behavior During Low-Power Mode	Can select stop/run by register	Can select stop/run by register
Behavior During Debugging	Stop at debugging state	Can select stop/run by register

3.3.9 Low Power Mode

This section is as same as the Body Entry/High Products. See section [2.3.9 Low-Power Mode](#).

3.3.10 Interrupt Structure

This section is as same as the Body Entry/High Products. See section [2.3.10 Interrupt Structure](#).

3.3.11 Data Transfer

This section is as same as the Body Entry/High Products. See section [2.3.11 Data Transfer](#).

Cluster Products

3.3.12 TPU

This section is as same as the Body Entry/High Products. See section [2.3.12 TPU](#).

3.3.13 Fault Report

This section is as same as the Body Entry/High Products. See section [2.3.13 Fault Report](#).

3.3.14 Protection

The Protection function of Traveo family consists of the CPU's Memory Protection Unit (MPU), DMA's MPU, and Peripheral Protection Unit (PPU). Traveo II family consists of MPU, Shared Memory Protection Unit (SMPU), and PPU. [Table 51](#) lists the main differences in Protection Units.

In Traveo II family, memory protection is provided by MPU and SMPU. MPU is implemented as part of the CPU and bus infrastructure. P-DMA, M-DMA, and encrypted components do not have MPU. Instead, they inherit the access control attributes of programmed bus transfer.

SMPU is shared by all masters; PPU is a protection unit for peripheral registers.

Traveo II family supports a new protection attribute (Secure/Non-secure), and protection contexts. Protection contexts can change the access restriction without changing the setting of the protection unit.

For more details, see the [Technical Reference Manual](#).

Table 51 Differences in Protection Configuration and Access Attribute

Item	S6J3280 Series	CYT4DN Series	Remarks
MPU implemented in the CPU	Cortex-R5: 16 Regions Access Attribute: <ul style="list-style-type: none"> Access Range Privileged/Unprivileged Read/Write Execute (Code or Data) 	Cortex- M0+: 8 Regions Cortex-M7: 16 Regions Access Attribute: <ul style="list-style-type: none"> Access Range Privileged/Unprivileged Read/Write Execute (Code or Data) 	
MPU implemented in the bus infrastructure	Not supported	16 Regions Access Attribute: <ul style="list-style-type: none"> Access Range Privileged/Unprivileged Read/Write Execute (Code or Data) 	For external master such as debugger
SMPU	Not supported	16 Regions Access Attribute: <ul style="list-style-type: none"> Access Range Privileged/Unprivileged Read/Write Execute (Code or Data) Secure/Non-secure Protection Contexts 	

Cluster Products

Item	S6J3280 Series	CYT4DN Series	Remarks
PPU	Access Attribute: <ul style="list-style-type: none"> • USER/Privilege • Read/Write 	Access Attribute: <ul style="list-style-type: none"> • Access Range • Privileged/Unprivileged • Read/Write • Execute (Code or Data) • Secure/Non-secure • Protection Contexts 	
MPU16-AHB	Access Attribute: <ul style="list-style-type: none"> • Access range • USER/Privilege • Read/Write 	Not supported. DMA access protection is provided by SMPU and PPU.	

3.3.15 Boot Process

This section is as same as the Body Entry/High Products. See section [2.3.15 Boot Process](#).

3.3.16 Security

This section is as same as the Body Entry/High Products. See section [2.3.16 Security](#).

3.4 Peripherals

3.4.1 Timer

This section is as same as the Body Entry/High Products. See section [2.4.1 Timer](#).

3.4.2 Serial Communication Block

3.4.2.1 UART

This section is as same as the Body Entry/High Products. See section [2.4.2.1 UART](#).

3.4.2.2 I²C

This section is as same as the Body Entry/High Products. See section [2.4.2.2 I²C](#).

3.4.2.3 SPI

This section is as same as the Body Entry/High Products. See section [2.4.2.3 SPI](#).

3.4.2.4 LIN

This section is as same as the Body Entry/High Products. See section [2.4.2.4 LIN](#).

3.4.3 CAN FD

This section is as same as the Body Entry/High Products. See section [2.4.3 CAN FD](#).

Cluster Products

3.4.4 I/O Interface

Table 52 lists the I/O interface features. The main differences are the input threshold selection, output drive strength selection, noise filter, and Smart IO.

Table 52 Differences in I/O Interface

I/O Interface	S6J3280 Series	CYT4DN Series
Input Threshold Selection <ul style="list-style-type: none"> CMOS (0307) Automotive (0508) TTL 	Supported except TTL	Supported
Output Drive Strength Selection	Supported <ul style="list-style-type: none"> 1 mA 2 mA 3 mA only for I2C 5 mA 6 mA only for MediaLB 10 mA / 20 mA only for 3 V I/O 30 mA only for SMC 	Supported <ul style="list-style-type: none"> 0.1 mA only for HSIO_ENH 0.5 mA 1 mA 2 mA 3 mA only for HSIO_ENH 5 mA 6 mA only for GPIO (IOL) 10 mA only for HSIO_STD 30 mA only for GPIO_SMC
Pull-up / Pull-down	Supported <ul style="list-style-type: none"> 50 kΩ (typ) 	Supported <ul style="list-style-type: none"> 50 kΩ (typ)
High-Z State	Supported	Supported
Port Status Hold during Low-Power Mode	Supported	Supported
Noise Filter	Supported per port pin <ul style="list-style-type: none"> Max 100 ns 	Supported per port group <ul style="list-style-type: none"> Max 50 ns
Smart IO	Not supported	Supported

3.4.5 ADC

This section is as same as the Body Entry/High Products. See section [2.4.5 ADC](#).

Cluster Products

3.4.6 RTC

Table 53 lists the RTC features. The main differences are the source clock, interrupts, and the counters of half-second/month/year.

Table 53 Differences of RTC

RTC	S6J3280 series	CYT4DN Series
Source Clock	Main clock oscillator (4 MHz) Sub clock oscillator (32 kHz) Internal low speed oscillator (100 kHz)	Watch Crystal oscillator (32 kHz) Internal low speed oscillator (32 kHz) Low Power External Clock oscillator
Half-second Counter	Supported	Not supported <ul style="list-style-type: none"> Event Generator can count less than a second.
Second Counter	Supported	Supported
Minute Counter	Supported	Supported
Hour Counter	Supported	Supported
Day Counter	Supported	Supported
Month Counter	Not supported	Supported
Year Counter	Not supported	Supported
Automatic Leap Year Correction	Not supported	Supported
Interrupt	Each counter (Day/Hour/Minute/Second/Half-second)	Two independent alarms (Month + Day + Hour + Minute + Second)
Calibration	Supported <ul style="list-style-type: none"> Automatic calibration by main clock 	Supported <ul style="list-style-type: none"> Calibration by waveform output and software

3.4.7 CRC

This section is as same as the Body Entry/High Products. See section [2.4.7 CRC](#).

3.4.8 CXPI

Traveo II family has a CXPI module in CYT4DN and CYT2C9 series MCUs.

CXPI supports the following:

- CXPI protocol support in hardware according to ISO/WD 20794-4
- Master node
 - Autonomous request field and response transfer processing
- Network access method
 - Event-triggered method
 - Polling method
- Carrier sense multiple access and collision resolution (CSMA/CR)
- Data signal encoding/decoding format

Cluster Products

- Non-return to zero (NRZ) mode
- Pulse width modulation (PWM) mode
- Wake pulse generation
- Clock detection
- 8-bit checksum for normal frame and 16-bit checksum for long frame
- 400x bit time oversampling
- Error detection
- Timeout detection
- Message buffers for the following:
 - Protected identifier (PID) field
 - Frame information (FI) field
 - 16x depth transmission and reception FIFO buffer
 - Checksum field
- Test modes include hardware error injection

3.4.9 Serial Memory Interface

Traveo II family has SMIF only in CYT4DN Series MCUs.

SMIF provides an SPI master interface to serial memory devices that support a single, dual, or quad SPI protocol. SMIF provides the following functionalities:

- HyperBus protocol
- SPI mode 0: clock polarity (CPOL) and clock phase (CPHA) are both '0'.
- Support for single, dual, and quad SPI protocols.
- Support for dual-quad SPI mode: use of two quad SPI memory devices to increase data bandwidth for SPI read and write transfers.
- Support for single data rate (SDR) and dual data rate (DDR) transfers.
- Support for up to four external memory devices. Support for device capacities in the range of [64 KB, 4 GB] in power of 2 multiples.
- Execute-in-place (XIP) and memory-mapped input/output (MMIO) operation modes.
 - XIP operation mode supports both SPI read and write transfers.
- Support of a 4-KB XIP read cache in AHB-Lite Bus.
- XIP operation mode supports on-the-fly encryption for write data and on-the-fly decryption for read data.
- SPI interface logic supports stalling of SPI transfers to address back pressure on FIFOs.
- SPI interface logic supports an asynchronous SPI transmit and receive interface clock.
- SPI interface logic supports multiple interface receive clocks.
- SPI interface logic supports flexible external memory devices data signal connections.
- Supports Data Learning Pattern (DLP) function.

Cluster Products

3.4.10 Ethernet

Traveo II family has an Ethernet module only in CYT4DN Series MCUs.

Ethernet provides an interface to an external PHY to get Ethernet functionality. Ethernet provides the following functionalities:

- 10, 100, and 1000 Mbps full-duplex operation
- RGMII, RMII, and GMII interfaces supported
- AXI Interface (64-bit)
- Support for up four Tx and 1 Rx Priority queues
- Support for 802.1AS and 1588 precision clock synchronization protocol
- Support for 1588 one-step clock for Tx Sync frames
- Optional IEEE 1588 timestamp unit
- Support for 802.3az EEE
- Support for 802.1Qbb priority-based flow control
- Receive and transmit IP, TCP, and UDP checksum offload
- Automatic pad and CRC generation on transmitted frames
- MDIO interface for PHY management
- Supports 802.1Qav traffic shaping on two highest-priority transmit queues
- Supports strict priority, DWRR, or Enhanced Transmission Selection (ETS - 802.1Qaz) on transmit queues

3.4.11 Graphics Interface

Table 54 lists the Graphics interface features. Traveo family comes with highly-efficient 2D/3D graphics engines. Traveo II family supports a 2D graphics engine. Both Traveo and Traveo II families have features with advanced feature-sets for memory saving, safety, and high image quality to help manufacturers take advantage of the lower overall system costs.

Table 54 Differences in Graphics Interface

Item	S6J3280 Series	CYT4DN Series
RSDS output	1 unit available	Not available
LVDS (FPD-Link) output	1 unit available	2 units available single (max display size: 1920 x 720) or 1 unit available dual (max display size is 2880 x 1080)
DRGB output	2 units available	2 units available
ITU656, YUV, RGB video input	1 unit available	1 unit available
MIPI CSI-2 video input	Not available	1 unit available
MediaLB	1 unit available	Not available
Ethernet AVB	1 unit available	1 unit available
Graphics Engine	2D graphics engine (2.5D effects) 3D graphics engine	2D graphics engine (2.5D effects)
VRAM	2048 KB	4096 KB

Cluster Products

3.4.12 Audio Interface

Table 55 lists the Audio interface features. Both Traveo and Traveo II families support Sound Processing.

Table 55 Differences in Audio Interface

Item	Traveo Family (S6J3200 Series)	Traveo II Family (CYT4DN Series)
PCMPWM	1 unit available	2 units available
TDM	Not Supported	4 time-division multiplexing (TDM) Interface available
SG	1 unit available	1 unit available
SWFG	1 unit available	Not available
Mixer	2 units available	2 units available
Audio DAC	Stereo 1ch available	Stereo 1ch available
I ² S	2 units available	4 units available

3.4.13 LCD Controller

Traveo family S6J3200 Series and Traveo II family CYT2C9 Series have an LCD controller. **Table 56** lists the differences in LCD Controller.

Table 56 Differences in LCD Controller

Item	S6J3200 Series	CYT2C9 Series
Segments	Up to 32 segments (SEG)	Up to 32 segments (SEG)
Commons	4 commons (COM)	4 commons (COM)
Configurable Pin Assignment	Not Supported	Any GPIO pin can be configured as either COM or SEG.
Power Efficient Waveform	Not Supported	Type A (standard) and Type B (low-power)
Duty Drive	Duty Selection: 1/2, 1/3, and 1/4 Bias Selection: 1/2 and 1/3	Duty Selection: 1/2, 1/3, and 1/4 Bias Selection: 1/2, 1/3, and Digital correlation
Static Drive	Supported	Not Supported
Device Power Modes	RUN/PSS timer	Active/Sleep/DeepSleep
Digital Contrast Control	Not Available	Available

3.5 Development Tools and Flash Programming Tools

This section is as same as the Body Entry/High Products. See section **2.5 Development Tools and Flash Programming Tools**.

3.6 MCAL Support

This section is as same as the Body Entry/High Products. See section **2.6 MCAL Support**.

Related Documents

4 Related Documents

Body Entry/High Products:

Traveo family series datasheets and hardware manuals:

- <https://www.cypress.com/node/502741> **S6J3400 Series Datasheet**
- **S6J3400 Series Hardware Manual**
- **Traveo Family Hardware Manual Platform Part for S6J3400 Series**

Traveo II family series datasheets and technical reference manuals:

- Device datasheet (Contact **Technical Support**)
 - CYT2B7 Datasheet 32-Bit Arm® Cortex®-M4F Microcontroller Traveo™ II Family
 - CYT2B9 Datasheet 32-Bit Arm® Cortex®-M4F Microcontroller Traveo™ II Family
 - CYT4BF Datasheet 32-Bit Arm® Cortex®-M7 Microcontroller Traveo™ II Family
 - CYT3BB/4BB Datasheet 32-Bit Arm® Cortex®-M7 Microcontroller Traveo™ II Family
- Body Controller Entry Family (Contact **Technical Support**)
 - Traveo™ II Automotive Body Controller Entry Family Architecture Technical Reference Manual (TRM)
 - Traveo™ II Automotive Body Controller Entry Registers Technical Reference Manual (TRM) for CYT2B7
 - Traveo™ II Automotive Body Controller Entry Registers Technical Reference Manual (TRM) for CYT2B9
- Body Controller High Family (Contact **Technical Support**)
 - Traveo™ II Automotive Body Controller High Family Architecture Technical Reference Manual (TRM) for CYT4BF
 - Traveo™ II Automotive Body Controller High Registers Technical Reference Manual (TRM) for CYT3BB/4BB

Cluster Products:

Traveo family series datasheets and hardware manuals:

- **S6J3200 Series Datasheet**
- **S6J3200 Series Hardware Manual**
- **Traveo Family Hardware Manual Platform Part for S6J3200 Series**

Traveo II family series datasheets and technical reference manuals:

- Device datasheet (Contact **Technical Support**)
 - CYT4DN Datasheet 32-Bit Arm® Cortex®-M7 Microcontroller Traveo™ II Family
- Cluster 2D Family (Contact **Technical Support**)
 - Traveo™ II Automotive Cluster Family Architecture Technical Reference Manual (TRM)
 - Traveo™ II Automotive Cluster Registers Technical Reference Manual (TRM)

Revision history

Revision history

Document version	Date of release	Description of changes
**	2017-12-19	New application note.
*A	2019-02-20	Added items shown below: Figure 2 and Figure 3 of the Section “2.1. Block Diagram”, Section “2.1 Features Specific Functions of Traveo II Family MCUs”, Section “4.8 CXPI” and Part Numbers of CYT2B9 Series MCU, Section “4.9 FlexRay”, “4.10 Secure Digital Host Controller”, “4.11 Serial Memory Interface”, “4.12 Ethernet” and Part Numbers of CYT4BF Series MCU
*B	2019-08-08	Added Cluster Products Specifications.
*C	2020-03-23	Added items shown below: Traveo II Family Cluster Products of the “Table 1. MCU List for Comparison”. Expanded Target Products for Cluster Entry series following tables at “3. Cluster Products”: Table 41. Target Products, Table 42. Comparison of Traveo and Traveo II Family MCUs, and Table 48. Differences in Clock System.
*D	2021-03-18	Updated to Infineon template.

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2021-03-18

Published by

Infineon Technologies AG

81726 Munich, Germany

© 2021 Infineon Technologies AG.

All Rights Reserved.

Do you have a question about this document?

Go to www.cypress.com/support

Document reference

002-18629 Rev. *D

IMPORTANT NOTICE

The information contained in this application note is given as a hint for the implementation of the product only and shall in no event be regarded as a description or warranty of a certain functionality, condition or quality of the product. Before implementation of the product, the recipient of this application note must verify any function and other technical information given herein in the real application. Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind (including without limitation warranties of non-infringement of intellectual property rights of any third party) with respect to any and all information given in this application note.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office (www.infineon.com).

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.