

# Smart I/O usage setup in XMC7000 family

## About this document

### Scope and purpose

AN234023 describes how to use Smart I/O in XMC7000 MCUs. Smart I/O adds a programmable logic circuitry between a peripheral and a GPIO port, thereby integrating board-level glue logic.

### Associated part family

XMC7000 family XMC7100/XMC7200 series

## Table of contents

<b>About this document</b> .....	<b>1</b>
<b>Table of contents</b> .....	<b>1</b>
<b>1 Introduction</b> .....	<b>2</b>
1.1 Applications of Smart I/O .....	2
1.2 Bypass of Smart I/O .....	3
<b>2 Structure of Smart I/O</b> .....	<b>4</b>
2.1 Clock and reset .....	5
2.2 Synchronizer .....	6
2.3 3-inputs lookup tables (LUT [x]) .....	6
2.3.1 LUT [x] output configuration .....	7
2.3.2 LUT [x] input selection .....	7
2.3.3 LUT [x] operation.....	9
2.4 Data unit (DU) .....	11
2.4.1 Input selection.....	11
2.4.2 Operation of data unit.....	12
<b>3 Smart I/O configuration</b> .....	<b>18</b>
<b>4 Example configuration</b> .....	<b>19</b>
4.1 Use case to change routing from I/O pins to HSIOM by inverting polarity.....	19
4.1.1 Configuration and example code .....	22
4.2 Use case to reset detection/stability circuitry .....	27
4.2.1 Configuration and example code .....	32
<b>5 Glossary</b> .....	<b>39</b>
<b>6 Related documents</b> .....	<b>40</b>
<b>7 Other references</b> .....	<b>41</b>
<b>Revision history</b> .....	<b>42</b>


## Introduction

# 1 Introduction

This application note describes how to use and set up Smart I/O in Infineon XMC7000 family XMC7100/XMC7200 series MCUs.

Smart I/O adds programmable logic to an I/O port. Smart I/O integrates Boolean logic functionality such as AND, OR, and XOR into a port. It also pre- or post-processes the signals between high-speed I/O matrix (HSIOM) and I/O port. For example, Smart I/O can enable digital glue logic for input signals using multiple flip-flops without CPU intervention. HSIOM multiplexes GPIOs sharing multiple functions into peripheral devices selected by the user. See the [Architecture Technical Reference Manual \(TRM\)](#) for details of HSIOM.

To understand the functionality described and terminology used in this application note, see the Smart I/O chapter in the [Architecture TRM](#). **Figure 1** shows examples of typical signal paths.

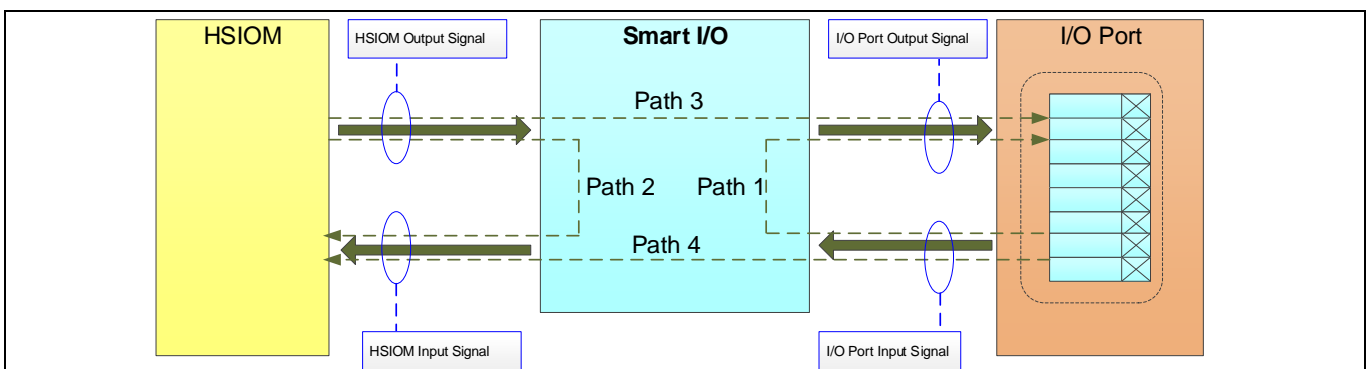

**Figure 1** Smart I/O Interface

Path 1: Implements self-contained logic functions that directly operate on I/O port signals

Path 2: Implements self-contained logic functions that operate on HSIOM signals

Path 3: Logic converted HSIOM output signals route to I/O port

Path 4: Logic converted I/O port input signals route to HSIOM

For each signal path, the Smart I/O function gives an option for a programmable output. This application note shows the example usage and configuration of the Smart I/O function.

## 1.1 Applications of Smart I/O

Smart I/O can be used whenever simple logic operations and routing are required to be performed on signals to or from the I/O pins. Typical applications include the following:

- **Change routing to/from pins:** This function allows rerouting signals from the fixed-function peripherals to non-dedicated pins on the same port.
- **Invert the polarity of signal:** This function inverts the polarity of output signals, such as the SPI signal, before it goes out from a pin.
- **Clock or signal buffer:** This function drives a GPIO input signal, which has to drive a heavier load for one pin, through two GPIO buffers.
- **Detect a pattern on pins:** This function detects the patterns of several signal inputs and outputs the programmable signal depending on the result of the detection.

These applications of Smart I/O can work in low-power mode (DeepSleep), therefore can be used as a wakeup interrupt.

## Introduction

### 1.2 Bypass of Smart I/O

When the Smart I/O function is not used, it will be automatically bypassed by setting the `SMARTIO_PRTx_CTL.ENABLE1` bit to “0”: Disabled. It is also possible to bypass any I/O pin in the Port group using the `SMARTIO_PRTx_CTL.BYPASS` bits. When `BYPASS` bits are set to “1”: Bypass, HSIOM, and I/O port are connected directly.

*Note: The bypass setting must be configured before enabling the Smart I/O.  
(`SMARTIO_PRTx_CTL.ENABLE` set to “1”: Enabled)*

**Table 1** shows the description of the `SMARTIO_PRTx_CTL` register for bypass setting. See the [Registers TRM](#) for details.

**Table 1 Register for Bypass setting**

Register	Bit field	Setting
SMARTIO_PRTx_CTL	BYPASS [7:0]	Bypass Smart I/O ‘0’: No bypass (Smart I/O is present in the signal path) ‘1’: Bypass (Smart I/O is absent in the signal path)
	ENABLED [31]	Enable Smart I/O 0: Disabled (Signals are bypassed: default) 1: Enabled (Should only be set to ‘1’ when Smart I/O is completely configured.)

<sup>1</sup> Subscripts x in register names used in this sentence are Port number.

Structure of Smart I/O

## 2 Structure of Smart I/O

Figure 2 shows the block diagram of Smart I/O. Smart I/O is positioned in the signal path between the HSIOM and the I/O port.

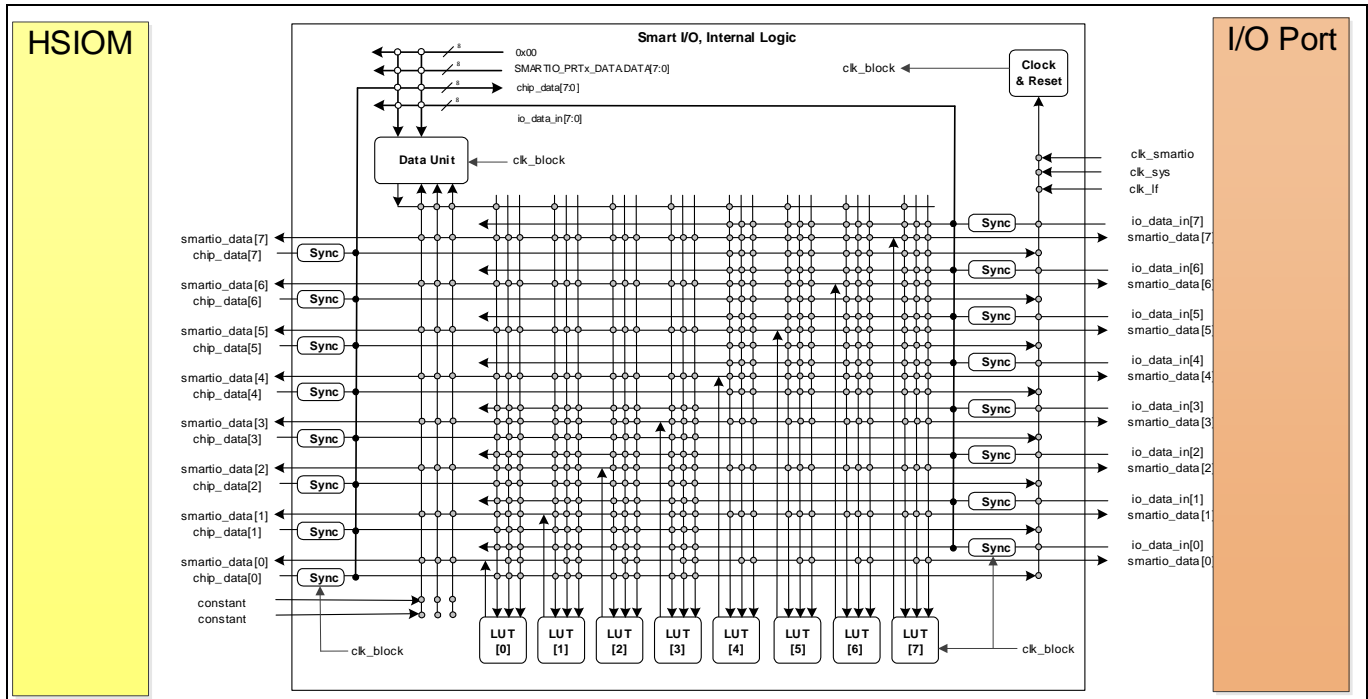


Figure 2 Block diagram of Smart I/O

The Smart I/O consists of the following components:

- Clock and reset
- Synchronizer (Sync)
- 3-input lookup tables (LUT [x]): x = 0 to 7
- Data unit (DU)

Smart I/O is implemented for the specified I/O cell. Smart I/O can provide programmable signals to HSIOM and I/O port with a combination of these components. See the Package Pin List and Alternate Functions of [Device datasheet](#) for details on the I/O port that can be used as Smart I/O.

The  $io\_data\_in [7:0]$  is the input signal from the I/O port, while the  $chip\_data [7:0]$  is the input signal from HSIOM. These signals are input to Smart I/O via the Sync components (synchronizer). The  $smartio\_data [7:0]$  is the output signal from Smart I/O. These signals are routed or modified by Smart I/O and output to the I/O port or HSIOM.

The  $clk\_block$  is used for all components in Smart I/O. The  $clk\_block$  can be selected from the I/O port input signals ( $io\_data\_in [7:0]$ ), HSIOM input signals ( $chip\_data [7:0]$ ),  $clk\_smartio$ , and  $clk\_lf$ . The  $clk\_smartio$  is derived from the system clock ( $clk\_sys/CLK\_HF$ ) using a peripheral clock divider, and the  $clk\_smartio$  is input in the Clock and Reset block. See the Clocking system chapter of [Architecture TRM](#) for details on  $clk\_smartio$  and  $clk\_lf$ .


Eight lookup tables (LUT [x]) are implemented for each Smart I/O unit. LUT [x] can provide the programmable output, and it can decide the connection of signals between HSIOM and the I/O port. This means that the eight lookup tables offer a flexible routing combination of input channel and output.

## Structure of Smart I/O

The data unit can provide enhanced functionality for the output signal. Clock and reset block are used to synchronize the signals of HSIOM, I/O port, and each block in Smart I/O. Synchronizer controls the synchronization/asynchronization of the HSIOM input and the I/O port input.

### 2.1 Clock and reset

Smart I/O can provide reset signals and clock selection. **Figure 3** shows the selection logic of the configuration of clock and reset.

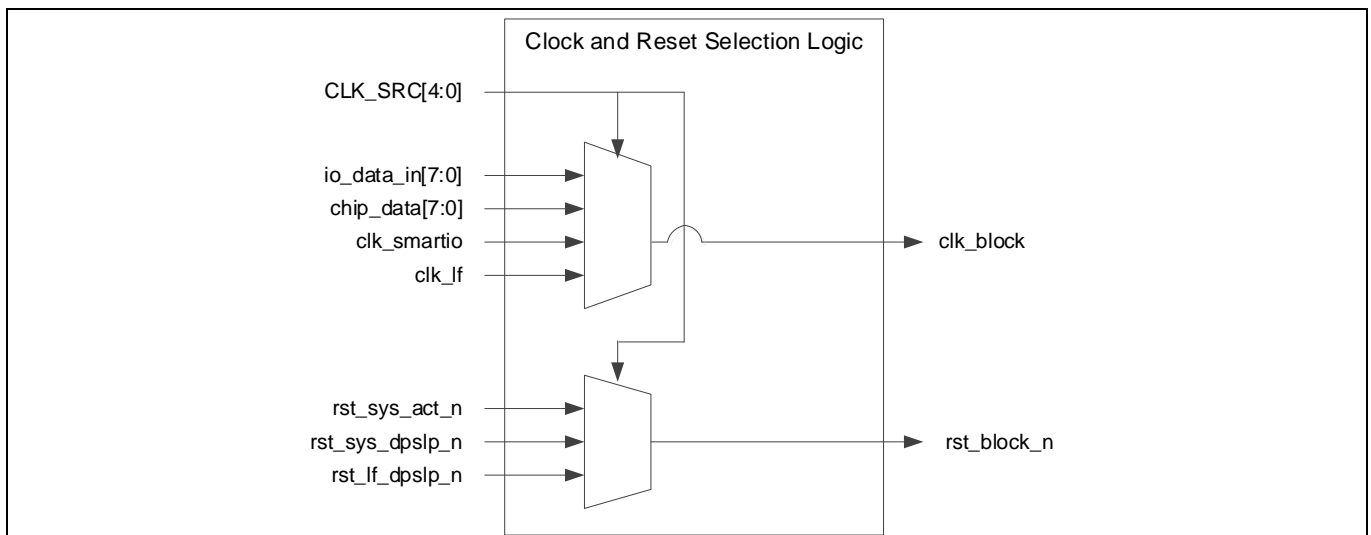

**Figure 3** Functional image of clock and reset setting

When `io_data_in [7:0]` and `chip_data [7:0]` are selected as the clock source, the clocks have no associated reset. When `clk_smartio` is selected as the clock source, either `rst_sys_act_n` or `rst_sys_dpslp_n` can be used depending on the operating power mode: Active or DeepSleep. When `clk_lf` is selected as the clock source, `rst_lf_dpslp_n` can be used. The clock (`clk_block`) and reset (`rst_block_n`) can be set by the `SMARTIO_PRTx_CTL.CLOCK_SRC [12:8]` register.

The following clock sources are available for selection:

- `io_data_in [7:0]`: These are I/O port input signals.
- `chip_data [7:0]`: These are HSIOM input signals.
- `clk_smartio`: This clock is derived from the system clock `clk_sys/CLK_HF`.
- `clk_lf`: This clock is a low-frequency system clock. This clock is only available in DeepSleep mode.

The following reset sources are available for selection:

- `rst_sys_act_n`: Smart I/O is active only in Active power mode with the clock from the peripheral divider.
- `rst_sys_dpslp_n`: Smart I/O is active in all power modes except in DeepSleep mode with the clock from the peripheral divider.
- `rst_lf_dpslp_n`: Smart I/O is active in all power modes with the clock from ILO.

## Structure of Smart I/O

**Table 2** shows the configuration of the SMARTIO\_PRTx\_CTL.CLOCK\_SRC [12:8] register. See the [Registers TRM](#) for details.

**Table 2 Register for clock and reset setting**

Register	Bit field	Setting
SMARTIO_PRTx_CTL	CLOCK_SRC [12:8]	Clock (clk_block)/Reset (rst_block_n) source selection: <ul style="list-style-type: none"> <li>0 ... 7: io_data_in[0]/1 ... io_data_in[7]/'1'</li> <li>8... 15: chip_data[0]/1 ...chip_data[7]/'1'</li> <li>16: clk_smartio/rst_sys_act_n</li> <li>17: clk_smartio/rst_sys_dpslp_n</li> <li>19: clk_lf/rst_lf_dpslp_n</li> <li>20... 30: Clock source is a constant '0'.</li> <li>31: asynchronous mode/'1'. Select this when a clockless operation is configured.</li> </ul>

## 2.2 Synchronizer

Each input signal at the I/O port and HSIOM can be used either in synchronous or asynchronous mode. The synchronizer synchronizes the input signal with the Smart I/O clock (clk\_block).

**Table 3** shows the synchronizer setting register and configuration. See the [Registers TRM](#) for details.

**Table 3 Register for synchronizer setting**

Register	Bit field	Setting
SMARTIO_PRTx_SYNC_CTL	IO_SYNC_EN [7:0]	Synchronization of the io_data_in [7:0] signals with clk_block 0: No synchronization 1: Synchronization
	CHIP_SYNC_EN [15:8]	Synchronization of the chip_data [7:0] signals with clk_block 0: No synchronization 1: Synchronization

## 2.3 3-inputs lookup tables (LUT [x])

Each LUT [x] has three inputs and one output. All inputs (Tr0\_in, Tr1\_in, Tr2\_in) of each LUT [x] block should be selected. If there is only one input operation, provide the input to all three input sources (Tr0\_in, Tr1\_in, Tr2\_in). Each LUT [x] takes three input signals and generates an output based on the configuration set in the register. **Figure 4** shows the basic block diagram of each LUT [x]. The output pattern can be set by the register.



**Figure 4 LUT [x] block diagram**

Structure of Smart I/O

### 2.3.1 LUT [x] output configuration

The output signal (Tr\_out) of LUT [x] can be programmed using SMARTIO\_PRTx\_LUT\_CTLy.LUT[7:0]<sup>1</sup> is based on three input sources (Tr2\_in, Tr1\_in, Tr0\_in). **Table 4** shows an example of setting each LUT [x].

**Table 4** LUT [x] output setting

Tr 2_in	Tr 1_in	Tr 0_in	Tr_out	Tr_out (Example 1)	Tr_out (Example 2)
0	0	0	A	0	0
0	0	1	B	0	0
0	1	0	C	0	1
0	1	1	D	0	0
1	0	0	E	1	1
1	0	1	F	1	0
1	1	0	G	1	0
1	1	1	H	1	0

Eight output patterns (A to H) are generated for three input signals. Each output from A to H is a Boolean value of 0 or 1. This output pattern value [H, G, F, E, D, C, B, A] is set in the LUT [7:0].

In case of example 1, the output pattern is [H, G, F, E, D, C, B, A] = [1, 1, 1, 1, 0, 0, 0, 0]. Therefore, the value "0xF0" is set to LUT [7:0]. Also, in the case of example 2, the output pattern is [H, G, F, E, D, C, B, A] = [0, 0, 0, 1, 0, 1, 0, 0]. Therefore, the set value is "0x14" to LUT [7:0].

**Table 5** shows the SMARTIO\_PRTx\_LUT\_CTLy.LUT [7:0] register for LUT [x] output setting. See the **Registers TRM** for details.

**Table 5** Register for setting the output from LUT [x]

Register	Bit field	Setting
SMARTIO_PRTx_LUT_CTLy	LUT [7:0]	LUT [x] configuration. Depending on the LUT opcode (LUT_OPC), internal state and LUT [x] input signals tr0_in, tr1_in, and tr2_in, the LUT [x] configuration is used to determine the LUT[x] output signal and the next sequential state.

### 2.3.2 LUT [x] input selection

The input sources (Tr0\_in, Tr1\_in, Tr2\_in) of each LUT [x] can be selected from the following:

- Data unit output
- Other LUT [x] output signal (Tr\_out)
- Input signal from HSIOM (chip\_data [7:0])
- Input signal from I/O port (io\_data\_in [7:0])

LUT[7] to LUT[4] operate on io\_data/chip\_data[7] to io\_data/chip\_data[4], whereas LUT[3] to LUT[0] operate on io\_data/chip\_data[3] to io\_data/chip\_data[0].

<sup>1</sup> Subscripts y in register names used in this sentence are LUT number.

## Structure of Smart I/O

The input sources can be configured with LUT\_TR0\_SEL [3:0], LUT\_TR1\_SEL [11:8], and LUT\_TR2\_SEL [19:16] in the SMARTIO\_PRTx\_LUT\_SELy register. **Table 6** shows the SMARTIO\_PRTx\_LUT\_SELy register and input selection setting. Note that Data Unit output can only be input to tr0\_in. See the **Registers TRM** for details.

**Table 6 Register for LUT [x] input source setting**

Register	Bit field	Setting
SMARTIO_PRTx_LUT_SELy	LUT_TR0_SEL [3:0]	LUT [x] input signal tr0_in source selection: 0: Data unit output 1: LUT [1] output 2: LUT [2] output 3: LUT [3] output 4: LUT [4] output 5: LUT [5] output 6: LUT [6] output 7: LUT [7] output 8: chip_data [0] (for LUT [0], [1], [2], [3]); chip_data [4] (for LUT [4], [5], [6], [7]) 9: chip_data [1] (for LUT [0], [1], [2], [3]); chip_data [5] (for LUT [4], [5], [6], [7]) 10: chip_data [2] (for LUT [0], [1], [2], [3]); chip_data [6] (for LUT [4], [5], [6], [7]) 11: chip_data [3] (for LUT [0], [1], [2], [3]); chip_data [7] (for LUT [4], [5], [6], [7]) 12: io_data_in [0] (for LUT [0], [1], [2], [3]); io_data_in [4] (for LUT [4], [5], [6], [7]) 13: io_data_in [1] (for LUT [0], [1], [2], [3]); io_data_in [5] (for LUT [4], [5], [6], [7]) 14: io_data_in [2] (for LUT [0], [1], [2], [3]); io_data_in [6] (for LUT [4], [5], [6], [7]) 15: io_data_in [3] (for LUT [0], [1], [2], [3]); io_data_in [7] (for LUT [4], [5], [6], [7])
	LUT_TR1_SEL [11:8] / LUT_TR2_SEL [19:16]	LUT [x] input signal tr1_in / tr2_in source selection: 0: LUT [0] output 1: LUT [1] output 2: LUT [2] output 3: LUT [3] output 4: LUT [4] output 5: LUT [5] output 6: LUT [6] output 7: LUT [7] output 8: chip_data [0] (for LUT [0], [1], [2], [3]); chip_data [4] (for LUT [4], [5], [6], [7]) 9: chip_data [1] (for LUT [0], [1], [2], [3]); chip_data [5] (for LUT [4], [5], [6], [7])



Structure of Smart I/O

Register	Bit field	Setting
		10: chip_data [2] (for LUT [0], [1], [2], [3]); chip_data [6] (for LUT [4], [5], [6], [7]) 11: chip_data [3] (for LUT [0], [1], [2], [3]); chip_data [7] (for LUT [4], [5], [6], [7]) 12: io_data_in [0] (for LUT [0], [1], [2], [3]); io_data_in [4] (for LUT [4], [5], [6], [7]) 13: io_data_in [1] (for LUT [0], [1], [2], [3]); io_data_in [5] (for LUT [4], [5], [6], [7]) 14: io_data_in [2] (for LUT [0], [1], [2], [3]); io_data_in [6] (for LUT [4], [5], [6], [7]) 15: io_data_in [3] (for LUT [0], [1], [2], [3]); io_data_in [7] (for LUT [4], [5], [6], [7])

Each LUT [x] has limited connections with input/output of HSIOM and I/O port signals. Sometimes, multiple LUT [x] are necessary for a complete flexible routing.

The LUT [x] and data unit do not include any combinatorial loops. However, when one LUT [x] interacts with the other or to the data unit, inadvertent combinatorial loops are possible. To overcome this limitation, the SMARTIO\_PRTx\_CTL.PIPELINE\_EN bit is used. When set, all outputs (LUT [x] and data unit) are registered before branching out to other components. **Table 7** shows PIPELINE\_EN setting. This bit is set to “1” (Enabled) to ensure low power consumption, if Smart I/O is not used. See the **Registers TRM** for details.

**Table 7 PIPELINE\_EN setting**

Register	Bit Field	Setting
SMARTIO_PRTx_CTL	PIPELINE_EN [25]	Enable for pipeline register: 0: Disabled (Register is bypassed) 1: Enabled (Default value)

### 2.3.3 LUT [x] operation

Each LUT [x] has the following four operations selected by a 2-bit Op Code field. The four operations are:

#### Combinatorial

LUT [x] is purely combinatorial. Each LUT [x] output is the result of the LUT mapping truth table, and will only be delayed by the LUT [x] combinatorial path (Basic mode).




**Figure 5 Combinatorial**

## Structure of Smart I/O

### Gated input 2


LUT [x] input 2 is registered. Other inputs are directly connected to LUT [x]. The output is combinatorial (Input synchronization).

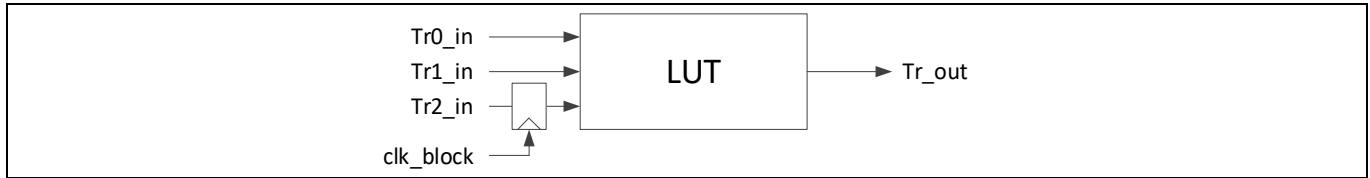

**Figure 6** Gated input 2

### Gated output


Inputs are directly connected to LUT [x] and the output is registered (Output synchronization).

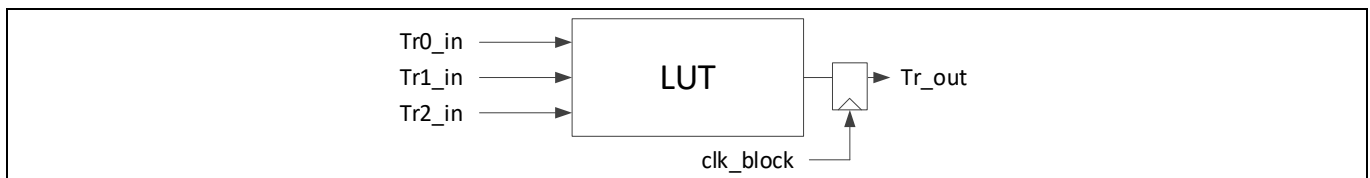

**Figure 7** Gated output

### Set/reset flip-flop

Input signals are used to control an S/R flip-flop.

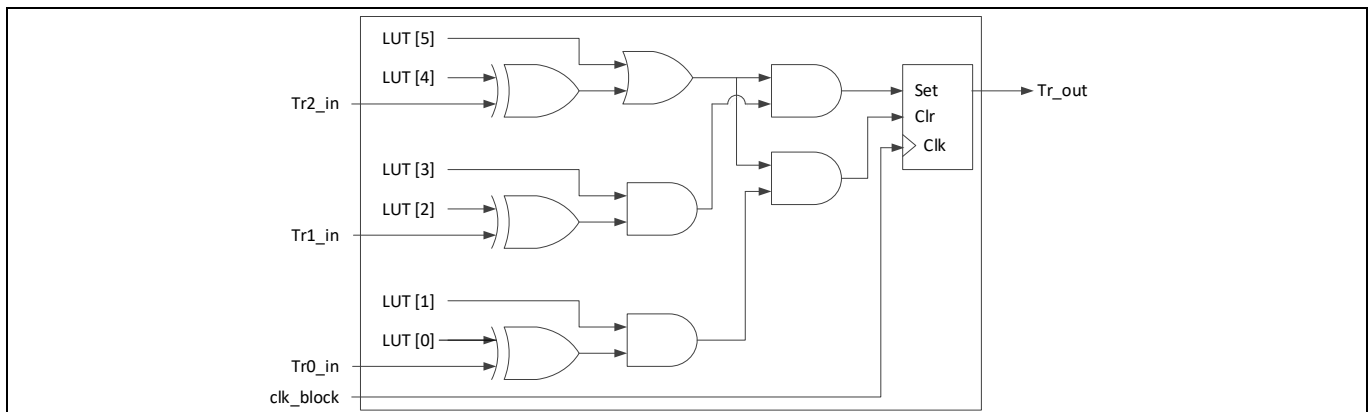

**Figure 8** S/R flip-flop enable

These four operations can be set with the register shown in [Table 8](#). See the [Registers TRM](#) for details.

**Table 8** Register for LUT [x] mode setting

Register	Bit field	Setting
SMARTIO_PRTx_LUT_CTLy	LUT_OPC [9:8]	0: Combinatorial 1: Gated Input 2 2: Gated Output 3: Set/reset flip-flop

Structure of Smart I/O

2.4 Data unit (DU)

Each Smart I/O block includes a data unit (DU) component. DU consists of a simple 8-bit data path. It is capable of performing simple increment, decrement, increment/decrement, shift, and AND/OR operations. DU can generate a programmable output (Tr\_out) signal based on two 8-bit data inputs that DATA0 (data0\_in [7:0]) and DATA1 (data1\_in [7:0]). The internal state is captured in flip-flops. The DU behavior can be controlled by up to three input signals (Tr0\_in, Tr1\_in, Tr2\_in). **Figure 9** shows the basic block diagram of the data unit.

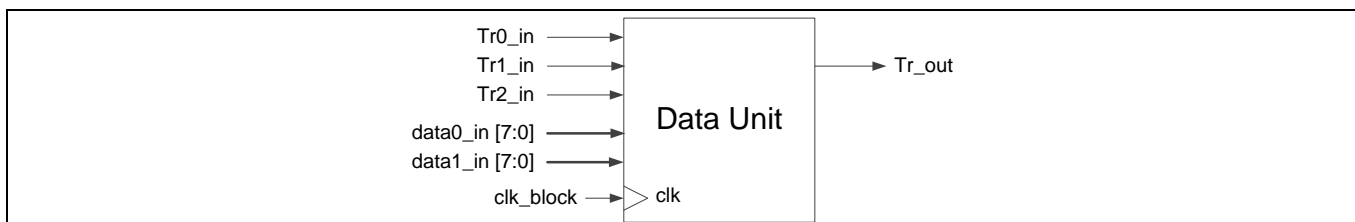


Figure 9 Data unit block diagram

2.4.1 Input selection

DU has up to three control input signals. These signals can be selected as input from the following.

- Constant “0”
- Constant “1”
- DU output
- LUT [x] outputs

The number of control signals required depends on the DU operation code.

These inputs can be configured with the SMARTIO\_PRTx\_DU\_SEL register. **Table 9** shows the SMARTIO\_PRTx\_DU\_SEL register and input selection setting. See the **Registers TRM** for details.

Table 9 Register for DU inputs source setting

Register	Bit field	Setting
SMARTIO_PRTx_DU_SEL	DU_TR0_SEL [3:0] / DU_TR1_SEL [11:8] / DU_TR2_SEL [19:16]	Data unit input signal “tr0_in” / “tr1_in” / “tr2_in” source selection: 0: Constant ‘0’ 1: Constant ‘1’ 2: Data unit output 3- 10: LUT [x] outputs Otherwise: Undefined

DATA 0 and DATA 1 use input data for DU logic to be initialized. These data can be selected from the following:

- Constant 0x00
- io\_data\_in [7:0]
- chip\_data\_in [7:0]
- DATA [7:0] bits of SMARTIO\_PRTx\_DATA register

The data width handled by the data unit can be changed between 1 bit and 8 bits. **Table 10** shows the configuration registers for input data to DU.

Structure of Smart I/O

**Table 10 Register for DU data setting**

Register	Bit field	Setting
SMARTIO_PRTx_DU_SEL	DU_DATA0_SEL [25:24] / DU_DATA1_SEL [29:28]	Data unit input data “data0_in” / “data1_in” source selection: 0: 0x00 1: chip_data [7:0]. 2: io_data_in [7:0]. 3: SMARTIO_PRTx_DATA.DATA [7:0] MMIO register field.
SMARTIO_PRTx_DATA	DATA [7:0]	Data unit input data source
SMARTIO_PRTx_DU_CTL	DU_SIZE [2:0]	Size/width of the data unit (in bits) is DU_SIZE+1.

**2.4.2 Operation of data unit**

The DU operation is defined by SMARTIO\_PRTx\_DU\_CTL.DU\_OPC [11:8]. **Table 11** shows the configuration registers for the DU operation code setting. See the **Registers TRM** for details.

**Table 11 DU operation code configuration**




Register	Bit field	Setting
SMARTIO_PRTx_DU_CTL	DU_OPC [11:8]	Data unit opcode specifies the data unit operation: "1": INCR "2": DECR "3": INCR_WRAP "4": DECR_WRAP "5": INCR_DECR "6": INCR_DECR_WRAP "7": ROR "8": SHR "9": AND_OR "10": SHR_MAJ3 "11": SHR_EQL Otherwise: Undefined Default Value: Undefined

**Table 12** shows each DU operation.


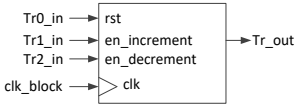
The ‘Operation’ column in **Table 12** shows the operation outline and the pseudo-code. In the pseudo-code, “Combinational:” indicates that the operations are independent of previous output states. "Registered:" indicates that data operates on inputs and previous output states (registered using flip-flops).

## Structure of Smart I/O



**Table 12 DU operation**

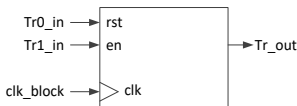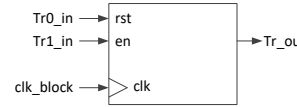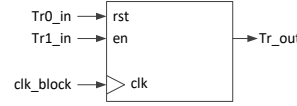Operation code	Operation
<p>DU_OPC [11:8] = 1: INCR</p>	<p>INCR increments data by 1 from an initial value (DATA 0) until it reaches a final value (DATA 1).</p> <pre> du_size = Size - 1 mask = (1 &lt;&lt; (DU_SIZE+1)) - 1 data_eq1_data1 = (data &amp; mask) == DATA1 &amp; mask                     </pre> <p><b>Combinational:</b></p> <pre> Tr_out = data_eq1_data1                     </pre>  <p><b>Registered:</b></p> <pre> data &lt;= data; if (Tr0_in)     data &lt;= DATA0 &amp; mask; else if (Tr1_in)     data &lt;= data_eq1_data1? data: (data + 1) &amp; mask;                     </pre>
<p>DU_OPC [11:8] = 2: DECR</p>	<p>DECR decrements data from an initial value (DATA 0) until it reaches '0'.</p> <pre> du_size = Size - 1 mask = (1 &lt;&lt; (DU_SIZE+1)) - 1 data_eq1_0 = (data &amp; mask) == 0                     </pre> <p><b>Combinational:</b></p> <pre> Tr_out = data_eq1_0                     </pre>  <p><b>Registered:</b></p> <pre> data &lt;= data; if (Tr0_in)     data &lt;= DATA0 &amp; mask; else if (Tr1_in)     data &lt;= data_eq1_0 ? data: (data - 1) &amp; mask;                     </pre>
<p>DU_OPC [11:8] = 3: INCR_WRAP</p>	<p>INCR_WRAP operates similar to INCR, but instead of stopping at DATA 1, it wraps around to DATA 0.</p> <pre> du_size = Size - 1 mask = (1 &lt;&lt; (DU_SIZE+1)) - 1 data_eq1_data1 = (data &amp; mask) == DATA1 &amp; mask                     </pre> <p><b>Combinational:</b></p> <pre> Tr_out = data_eq1_data1                     </pre>  <p><b>Registered:</b></p> <pre> data &lt;= data; if (Tr0_in)     data &lt;= DATA0 &amp; mask; else if (Tr1_in)                     </pre>



## Structure of Smart I/O

Operation code	Operation
<p>DU_OPC [11:8] = 4: DECR_WRAP</p>	<pre>data &lt;= data_eq1_data1? DATA0 &amp; mask: (data + 1) &amp; mask;</pre> <p>DECR_WRAP works similar to DECR. Instead of stopping at '0', it wraps around to DATA0.</p> <pre>du_size = Size - 1 mask = (1 &lt;&lt; (DU_SIZE+1)) - 1 data_eq1_0 = (data &amp; mask) == 0</pre> <p><b>Combinational:</b></p> <pre>Tr_out = data_eq1_0</pre> <p><b>Registered:</b></p> <pre>data &lt;= data; if (Tr0_in)     data &lt;= DATA0 &amp; mask; else if (Tr1_in)     data &lt;= data_eq1_0? DATA0 &amp; mask: (data + 1) &amp; mask;</pre> 
<p>DU_OPC [11:8] = 5: INCR_DECR</p>	<p>INCR_DECR is a combination of INCR and DECR. Depending on the trigger signals, it either starts incrementing or decrementing. Increment stops at DATA 1 and decrement stops at '0'.</p> <pre>du_size = Size - 1 mask = (1 &lt;&lt; (DU_SIZE+1)) - 1 data_eq1_0 = (data &amp; mask) == 0 data_eq1_data1 = (data &amp; mask) == DATA1 &amp; mask</pre> <p><b>Combinational:</b></p> <pre>Tr_out = data_eq1_data1   data_eq1_0</pre> <p><b>Registered:</b></p> <pre>data &lt;= data; if (Tr0_in)     data &lt;= DATA0 &amp; mask; else if (Tr1_in)     data &lt;= data_eq1_data1? data: (data + 1) &amp; mask; else if (Tr2_in)     data &lt;= data_eq1_0? data: (data - 1) &amp; mask;</pre> 

## Structure of Smart I/O

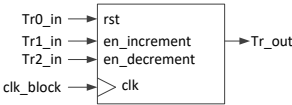
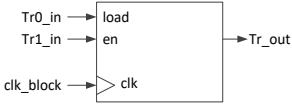
Operation code	Operation
<p>DU OPC [11:8] = 6: INCR_DECR_WRAP</p>	<p>INCR_DECR_WRAP has the same functionality as INCR_DECR with wrap around to DATA 0 on reaching the limits (DATA 1 or '0').</p> <pre> du_size = Size - 1 mask = (1 &lt;&lt; (DU_SIZE+1)) - 1 data_eq1_0 = (data &amp; mask) == 0 data_eq1_data1 = (data &amp; mask) == DATA1 &amp; mask                     </pre> <p><b>Combinational:</b></p> $Tr\_out = data\_eq1\_data1 \mid data\_eq1\_0$  <p><b>Registered:</b></p> <pre> data &lt;= data; if (Tr0_in)     data &lt;= DATA0 &amp; mask; else if (Tr1_in)     data &lt;= data_eq1_data1? DATA0 &amp; mask: (data + 1) &amp; mask; else if (Tr2_in)     data &lt;= data_eq1_0 ? DATA0 &amp; mask: (data - 1) &amp; mask;                     </pre>
<p>DU OPC [11:8] = 7: ROR</p>	<p>POR rotates the data right and the LSB is sent out. The data for rotation is taken from DATA 0.</p> <pre> du_size = Size - 1 mask = (1 &lt;&lt; (DU_SIZE+1)) - 1                     </pre> <p><b>Combinational:</b></p> $Tr\_out = data [0]$  <p><b>Registered:</b></p> <pre> data &lt;= data; if (Tr0_in)     data &lt;= DATA0 &amp; mask; else if (Tr1_in) {     data &lt;= data [7:1] &amp; mask;     data [du_size] &lt;= data [0] }                     </pre>

## Structure of Smart I/O

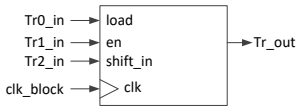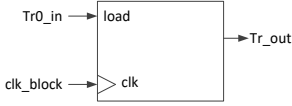Operation code	Operation
<p>DU OPC [11:8] = 8: SHIR</p>	<p>SHIR performs the shift register operation. Initial data (DATA 0) is shifted out and data on tr2_in is shifted in.</p> <p><math>du\_size = Size - 1</math>  <math>mask = (1 \ll (DU\_SIZE+1)) - 1</math></p> <p><b>Combinational:</b>  <math>Tr\_out = data [0]</math></p> <p><b>Registered:</b></p> <pre> data &lt;= data; if (Tr0_in)     data &lt;= DATA0 &amp; mask; else if (Tr1_in) {     data &lt;= data [7:1] &amp; mas.,     data [du_size] &lt;= Tr2 }                     </pre> 
<p>DU OPC [11:8] = 9: AND_OR</p>	<p>ANDs data1 and data0 along with mask; then, ORs all bits of the ANDed output</p> <p><math>du\_size = Size - 1</math>  <math>mask = (1 \ll (DU\_SIZE+1)) - 1</math></p> <p><b>Combinational:</b>  <math>Tr\_out =   (data \&amp; DATA1 \&amp; mask)</math></p> <p><b>Registered:</b></p> <pre> data &lt;= data; if (Tr0_in)     data &lt;= DATA0 &amp; mask;                     </pre> 




## Structure of Smart I/O

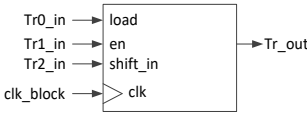Operation code	Operation
<p>DU_OPC [11:8] = 10: SHR_MAJ3 (Majority 3)</p>	<p>SHR_MAJ3 performs the same functionality as SHR. Instead of sending the shifted-out value, it sends a '1', if at least two samples are high in the last three samples/shifted-out values of data [0]. Otherwise, it sends a '0'. This function sends out the majority of the last three samples.</p> <pre> du_size = Size - 1 mask = (1 &lt;&lt; (DU_SIZE+1)) - 1  Combinational:   Tr_out = data == 0x03   data == 0x05   data == 0x06   data == 0x07  Registered: data &lt;= data;   if (Tr0_in)     data &lt;= DATA0 &amp; mask; else if (Tr1_in) {   data &lt;= (0, data [7:1])   data [du_size] &lt;= Tr2_in }                     </pre> 
<p>DU_OPC [11:8] = 11: SHR_EQL (Match DATA1)</p>	<p>SHR_EQL performs the same operation as SHR. Instead of shift-out, the output is the comparison result (DATA 0 == DATA 1).</p> <pre> du_size = Size - 1 mask = (1 &lt;&lt; (DU_SIZE+1)) - 1 data_eq1_data1 = (data &amp; mask) == DATA1 &amp; mask  Combinational:   Tr_out = data_eq1_data1  Registered: data &lt;= data;   if (Tr0_in)     data &lt;= DATA0 &amp; mask; else if (Tr1_in) {   data &lt;= (0, data [7:1]) &amp;   data [du_size] &lt;= Tr2_in }                     </pre> 

## Smart I/O configuration

### 3 Smart I/O configuration

Figure 10 shows an example of the configuration flow of Smart I/O.

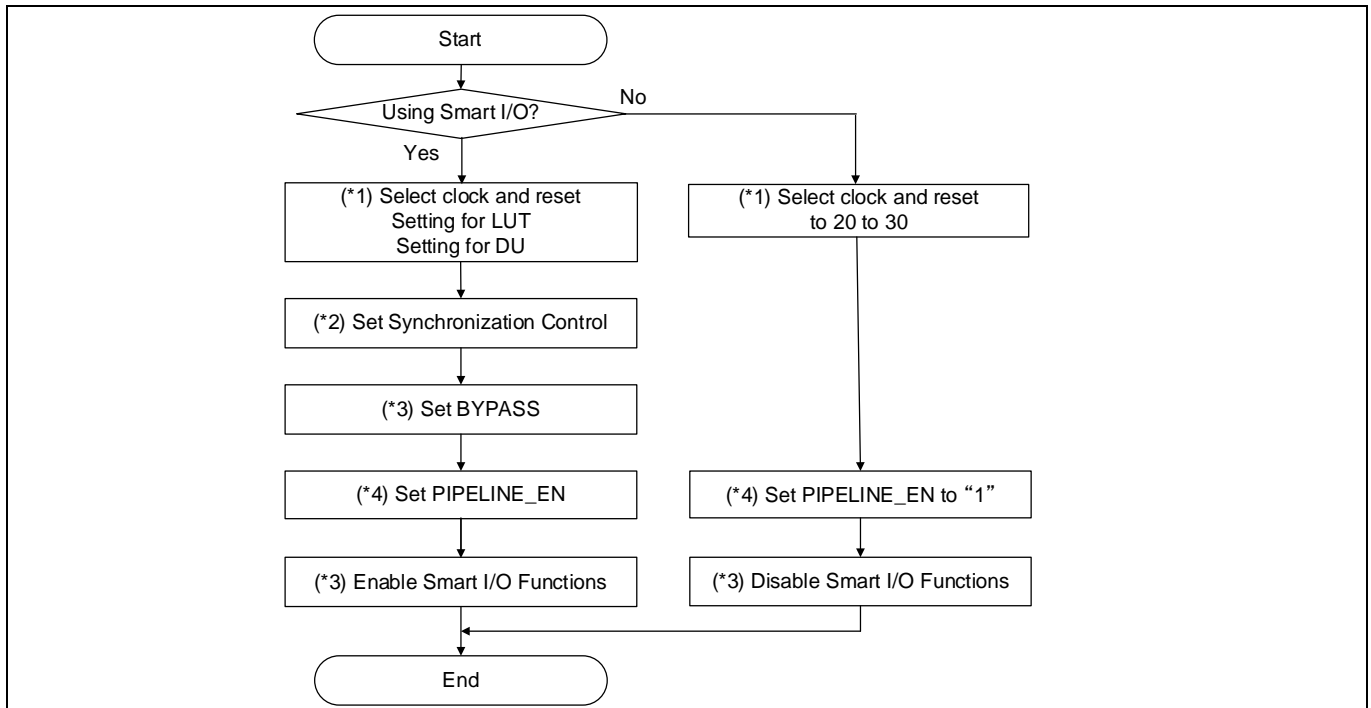

**Figure 10 Smart I/O configuration flow**

When configuring Smart I/O, first initialize each component such as clock and reset, synchronizer, LUT [x], and DU. Before enabling Smart I/O (`SMARTIO_PRTx_CTL.ENABLE` set to “1”: Enabled), all components and routing should be configured.

If Smart I/O is not used, clock selection in clock and reset component should be set to a value between 20 to 30, and `PIPELINE_EN` should be set to “1”, to ensure low power consumption.

Note:

- (\*1) See [2 Structure of Smart I/O](#) for ports, source and clock setting, see [2.3 3-inputs lookup tables \(LUT \[x\]\)](#) for LUT [x] setting, and see [2.4 Data unit \(DU\)](#) for DU setting.
- (\*2) See [Table 3](#) for Synchronization setting.
- (\*3) See [Table 1](#) for bypass and Smart I/O enable setting.
- (\*4) See [Table 7](#) for `PIPELINE_EN` setting.

## Example configuration

### 4 Example configuration

This section describes how to use Smart I/O using the Peripheral Driver Library (PDL). See [Other references](#) for the PDL.

The Smart I/O example basically has a configuration part. The configuration part mainly configures the parameter values for the desired operation. The PDL driver configures each register based on the parameter values in the configuration part. You can configure the configuration part according to your system.


Smart I/O can be useful for an application that involves simple logic operations for input/output signal, or the internal routing between the internal HSIOM port and the I/O port. No CPU is required for these operations. This section explains how to use Smart I/O according to the use case.

#### 4.1 Use case to change routing from I/O pins to HSIOM by inverting polarity

This section explains an example of routing and simple logic operations by using Smart I/O.

In this use case, routing is changed to connect the input from pin 7 of Port 13 (io\_data\_in [7]) to pin 1 of HSIOM (smartio\_data [1]). In addition, the polarity of io\_data\_in [7] is inverted, and the inverted io\_data\_in [7] signal is output to smartio\_data [1]. See the Package pin list and alternate functions of [Device datasheet](#) for I/O port which can use Smart I/O.

**Figure 11** shows the connection from the I/O port to HSIOM with signal inverting. LUT [1] and LUT [7] are used for this use case.

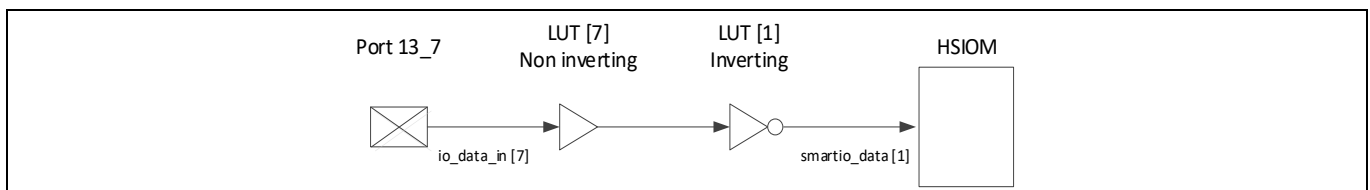

**Figure 11** Signal inverting image

Example configuration

Figure 12 shows the signal path of this example.

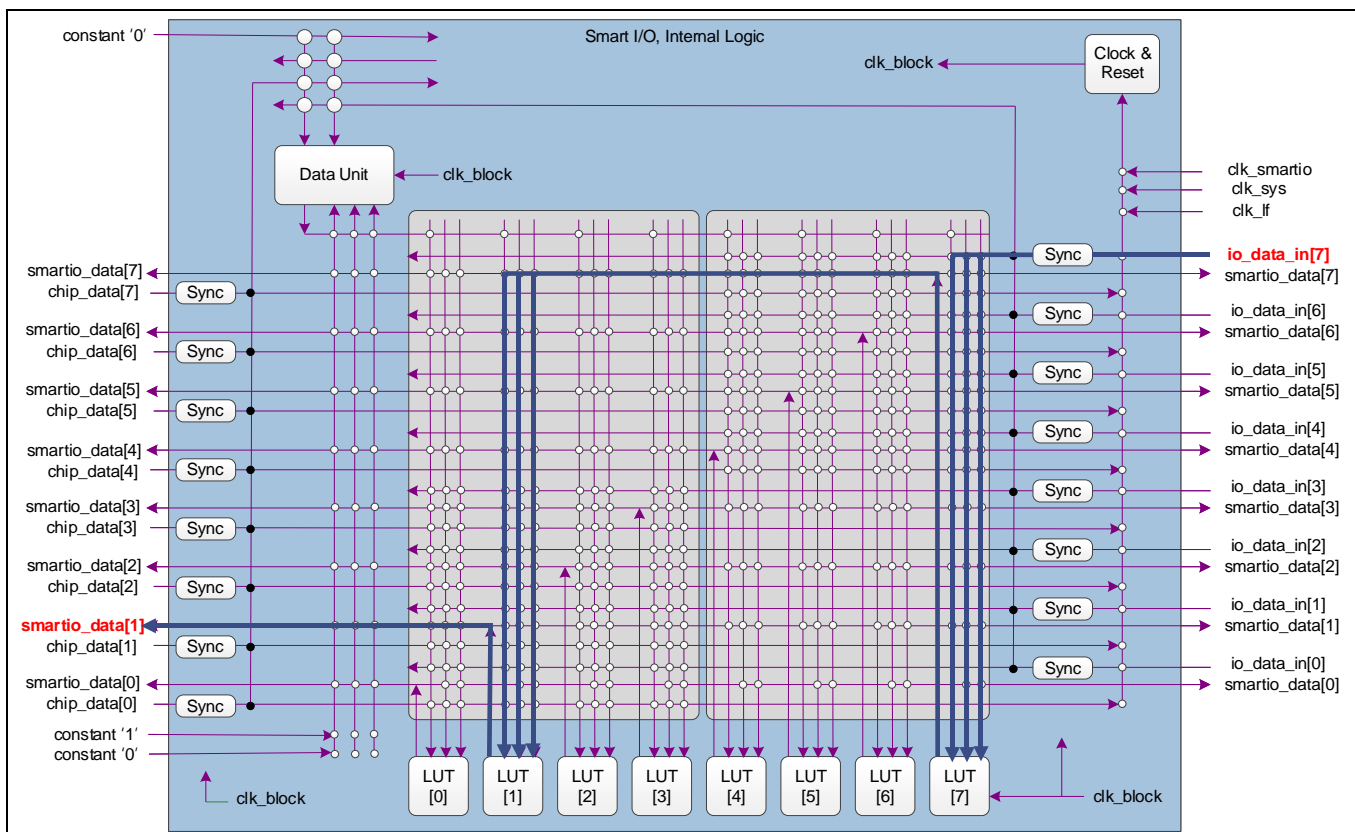


Figure 12 Example of the overview of routing

Note: LUT [1] and LUT [7] are used. LUT [7:4] that can use io\_data [7] as input cannot be routed to smartio\_data [1] directly. Therefore, the output of LUT [7] must go through LUT [1] which can be routed to smartio\_data [1]. In this use case, LUT [1] inverts the input signal from LUT [7] and outputs it to smartio\_data [1].

Table 13 shows the truth table of LUT [7] and Table 14 shows the truth table of LUT [1]. The blue highlights in the tables indicate an invalid combination pattern.

Table 13 Lookup table LUT [7]

Tr2_in	Tr1_in	Tr0_in	Tr_out
0	0	0	0
0	0	1	0
0	1	0	0
0	1	1	0
1	0	0	0
1	0	1	0
1	1	0	0
1	1	1	1

Example configuration

Table 14      Lookup Table LUT [1]

Tr2_in	Tt1_in	Tr0_in	Tr_out
0	0	0	1
0	0	1	1
0	1	0	1
0	1	1	1
1	0	0	1
1	0	1	1
1	1	0	1
1	1	1	0

The three inputs of LUT [1] are input same signal, Similarly, LUT [7] are input same signal. Therefore, the input pattern of LTUs is [Tr2\_in, Tr1\_in, Tr0\_in] = [0, 0, 0] or [1, 1, 1].

LUT [7] does not change polarity. That is, Tr\_out is “1”, when [Tr2\_in, Tr1\_in, Tr0\_in] = [1, 1, 1], and otherwise, Tr\_out = “0”.

LUT [1] reverses polarity. That is, Tr\_out is “0”, when [Tr2\_in, Tr1\_in, Tr0\_in] = [1, 1, 1], and otherwise, Tr\_out = “1”.

Figure 13 shows the setting procedure for Smart I/O.

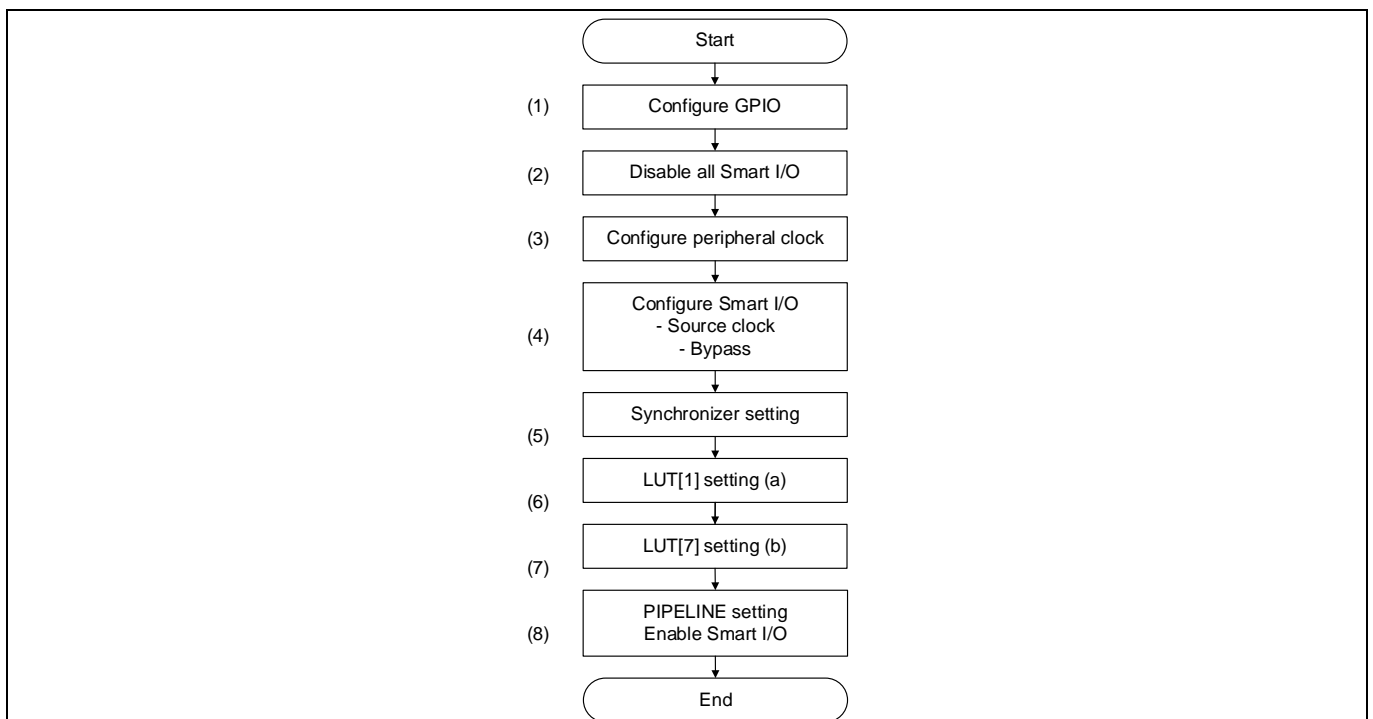


Figure 13      Setting procedure for Smart I/O

Note:            (a) See the Table 14 for setting pattern.

                    (b) See the Table 13 for setting pattern.

## Example configuration

### 4.1.1 Configuration and example code

**Table 15** lists the parameters and **Table 16** lists the functions of the configuration part for Smart I/O.

**Table 15 List of Smart I/O configuration parameters**

Parameters	Description	Value
SMART_IO_CLK_ACTIVE	Defines Smart I/O clock source	1ul (Select Active clock source)
CY_SMARTIO_CLK_INV	Defines Smart I/O clock	PCLK_SMARTIO13_CLOCK
SMART_IO_PORT	Defines Smart IO port	SMARTIO_PRT13 (It is assigned to Smart I/O Port13)
SMARTIO_BYPASS_CH_MASK	Defines Bypass channel mask io_data_in [7] to smartio_data [7]: No bypass io_data_in [6] to smartio_data [6]: Bypass io_data_in [5] to smartio_data [5]: Bypass io_data_in [4] to smartio_data [4]: Bypass io_data_in [3] to smartio_data [3]: Bypass io_data_in [2] to smartio_data [2]: Bypass io_data_in [1] to smartio_data [1]: No bypass io_data_in [0] to smartio_data [0]: Bypass	0x7Dul (See <b>Table 1</b> ) No use Smart IO for io_data_in [6] to io_data_in [2] and io_data_in [0]
SMARTIO_IOSYNC_CH_MASK	Defines IO sync channel mask	0x00ul (See <b>Table 3</b> )
LUT_IP_BUTTON_PORT	Defines input port for LUT[7] input	P13_7_PORT (It is assigned to GPIO Port 13)
LUT_IP_BUTTON_PIN	Defines input port pin for LUT[7] input	P13_7_PIN (It is assigned to GPIO Port 7 pin)
LUT_IP_BUTTON_PIN_MUX	Configures input port pin function	P13_7_GPIO (It is assigned to GPIO)
CY_SMARTIO_LUTTR_IO	Selects LUT[7] input	CY_SMARTIO_LUTTR_IO7
LUT_INV_OUT_PORT	Defines output port for LUT[7] input	P13_1_PORT (It is assigned to GPIO Port 13)
LUT_INV_OUT_PIN	Defines output port pin for LUT[7] input	P13_1_PIN (It is assigned to GPIO Port 1 pin)
LUT_INV_OUT_PIN_MUX	Configures output port pin function	P13_1_GPIO (It is assigned to GPIO)
LUTx_OUT_MAP	LUT[7] output pattern	0x80ul (See <b>Table 13.</b> )
LUTx_INV_OUT_MAP	LUT[1] output pattern	0x7Ful (See <b>Table 14.</b> )
LUTx_LOGIC_OPCODE	Select LUT Operation Mode	CY_SMARTIO_LUTOPC_COMB

## Example configuration

Parameters	Description	Value
		(It is assigned to Combinatorial)
CY_SYSCLK_DIV_16_BIT	Selects Divider Type to 16-bit divider	1ul
CY_SMARTIO_CLK_DIVACT	Selects the source clock to clk_smartio/rst_sys_act_n. See <a href="#">Table 2</a> .	16ul
CY_SMARTIO_CLK_GATED	Selects the source clock to Clock source is a constant '0'. See <a href="#">Table 2</a> .	20ul
CY_SMARTIO_CLK_ASYNC	Selects the source clock to asynchronous mode/"1". See <a href="#">Table 2</a> .	31ul
CY_SMARTIO_LUTTR_LUT7_OUT	Selects LUT[1] input	7ul (It is assigned to LUT[7] output. See <a href="#">Table 6</a> .)
CY_SMARTIO_LUTTR_IO7	Selects LUT[7] input	15ul (It is assigned to io_data_in [7] output. See <a href="#">Table 6</a> .)
smart_io_cfg.clkSrc	Source clock setting	CY_SMARTIO_CLK_DIVACT
smart_io_cfg.bypassMask	Configures bypass setting	SMARTIO_BYPASS_CH_MASK
smart_io_cfg.ioSyncEn	Configures Synchronizer setting	SMARTIO_IOSYNC_CH_MASK
lutCfgLut1.opcode	Configures LUT[1] Operation Mode setting	LUTx_LOGIC_OPCODE
lutCfgLut1.lutMap	Configures LUT[1] output pattern setting	LUTx_INV_OUT_MAP
lutCfgLut1.tr0	Configures LUT[1] tr0 input	CY_SMARTIO_LUTTR_LUT7_OUT
lutCfgLut1.tr1	Configures LUT[1] tr1 input	CY_SMARTIO_LUTTR_LUT7_OUT
lutCfgLut1.tr2	Configures LUT[1] tr2 input	CY_SMARTIO_LUTTR_LUT7_OUT
lutCfgLut7.opcode	Configures LUT[7] Operation Mode setting	LUTx_LOGIC_OPCODE
lutCfgLut7.lutMap	Configures LUT[7] output pattern setting	CY_SMARTIO_LUTTR_IO
lutCfgLut7.tr0	Configures LUT[7] tr0 input	CY_SMARTIO_LUTTR_IO
lutCfgLut7.tr1	Configures LUT[7] tr1 input	CY_SMARTIO_LUTTR_IO
lutCfgLut7.tr2	Configures LUT[7] tr2 input	CY_SMARTIO_LUTTR_IO

## Example configuration

**Table 16** List of Smart I/O configuration Functions

Functions	Description	Remarks
Init_IO_Pin()	Configures GPIO Port pin	-
Cy_SmartIO_Deinit()	Resets the Smart I/O to default values	Resets the Smart I/O registers; SMARTIO_PRTx_CTL, SMARTIO_PRTx_SYNC_CTL, SMARTIO_PRTx_LUT_SELY, SMARTIO_PRTx_LUT_CTLy, SMARTIO_PRTx_DU_SEL, SMARTIO_PRTx_DU_CTL and SMARTIO_PRTx_DATA
Init_SmartIO()	Configures and enables Smart I/O, Call for Init_SmartIO_Cfg() and Cy_SmartIO_Enable()	-
Init_SmartIO_Cfg()	Configures Smart I/O setting structure, Calls for Cy_SmartIO_Init()	-
Cy_SmartIO_Enable()	Enable Smart I/O	Write to PIPELINE_EN and ENABLED bit
Cy_SmartIO_Init()	Configure Smart I/O register	Write to the related registers for Source clock, Bypass, Synchronizer, LUT, and DU.

**Code Listing 1** demonstrates an example program to change routing from I/O Pins to HSIOM by Inverting Polarity. See the [Architecture TRM](#) and [Application Note](#) for GPIO and clock configuration.

**Code Listing 1** Example to change routing from I/O pins to HSIOM by inverting polarity

```

/* Smart IO clock source selection */
#define SMART_IO_CLK_ACTIVE 1ul

/* Smart IO port selections macro */
#define SMART_IO_PORT SMARTIO_PRT13

#define CY_SMARTIO_CLK_INV PCLK_SMARTIO13_CLOCK

/* Bypass channel mask */
#define SMARTIO_BYPASS_CH_MASK 0x7Du1

/* IO sync channel mask */
#define SMARTIO_IOSYNC_CH_MASK 0x00u1

/* Lut input button pin configuration */
#define LUT_IP_BUTTON_PORT P13_7_PORT /* GPIO_PRT13 */
#define LUT_IP_BUTTON_PIN P13_7_PIN /* 7 */
#define LUT_IP_BUTTON_PIN_MUX P13_7_GPIO

#define CY_SMARTIO_LUTTR_IO CY_SMARTIO_LUTTR_IO7 /**< I/O signal 7 (for LUT 4,5,6,7) */

/* LUT output pin configuration */
#define LUT_INV_OUT_PORT P13_1_PORT
#define LUT_INV_OUT_PIN P13_1_PIN
#define LUT_INV_OUT_PIN_MUX P13_1_GPIO

/* LUT output map */
#define LUTx_OUT_MAP 0x80u1
#define LUTx_INV_OUT_MAP 0x7Fu1

/* LUT logic circuit type macro */
#define LUTx_LOGIC_OPCODE CY_SMARTIO_LUTOPC_COMB
    
```



## Example configuration

**Code Listing 1** Example to change routing from I/O pins to HSIOM by inverting polarity

```

/* Button input configuration */
cy_stc_gpio_pin_config_t button_cfg =
{
    .outVal      = 0ul,
    .driveMode   = CY_GPIO_DM_HIGHZ,
    .hsiom       = LUT_IP_BUTTON_PIN_MUX,
    .intEdge     = 0ul,
    .intMask     = 0ul,
    .vtrip       = 0ul,
    .slewRate    = 0ul,
    .driveSel    = 0ul,
};

cy_stc_gpio_pin_config_t inv_out_cfg =
{
    .outVal      = 0ul,
    .driveMode   = CY_GPIO_DM_STRONG_IN_OFF,
    .hsiom       = LUT_INV_OUT_PIN_MUX,
    .intEdge     = 0ul,
    .intMask     = 0ul,
    .vtrip       = 0ul,
    .slewRate    = 0ul,
    .driveSel    = 0ul,
};

int main(void)
{
    :
    Init_IO_Pin();

    /* Deinit before Init */
    Cy_SmartIO_Deinit(SMART_IO_PORT);

    /* SmartIO peripheral clock divider setting */
    {
        Cy_SysClk_PeriphAssignDivider(CY_SMARTIO_CLK_INV, CY_SYSCLK_DIV_16_BIT, 0ul);
        uint32_t sourceFreq = Cy_SysClk_ClkPeriGetFrequency();
        uint32_t targetFreq = 12000000ul;
        uint32_t divNum = (sourceFreq / targetFreq);

        Cy_SysClk_PeriphDisableDivider(CY_SMARTIO_CLK_INV, CY_SYSCLK_DIV_16_BIT, 0ul);
        Cy_SysClk_PeriphSetDivider(CY_SMARTIO_CLK_INV, CY_SYSCLK_DIV_16_BIT, 0ul, (divNum - 1ul));
        Cy_SysClk_PeriphEnableDivider(CY_SMARTIO_CLK_INV, CY_SYSCLK_DIV_16_BIT, 0ul);
    }

    /* Initialization call for the Smart IO */
    Init_SmartIO();

    for(;;);
}

```

Configure Port for input (Port13.7pin)

Configure Port for output (Port13.1pin)

(1) Configure GPIO pin. See [Code Listing 2](#).

Disable all Smart I/O.

(3) Configure peripheral Clock

Initialize Smart I/O. See [Code Listing 3](#).

**Code Listing 2** Init\_IO\_Pin() function

```

void Init_IO_Pin(void)
{
    Cy_GPIO_Pin_Init(LUT_IP_BUTTON_PORT, LUT_IP_BUTTON_PIN, &button_cfg);
    Cy_GPIO_Pin_Init(LUT_INV_OUT_PORT, LUT_INV_OUT_PIN, &inv_out_cfg);
}

```

Configure Port13 7pin.

Configure Port13 1pin.

## Example configuration

### Code Listing 3 Init\_SmartIO() function

```
void Init_SmartIO(void)
{
    cy_en_smartio_status_t retStatus = (cy_en_smartio_status_t)0xFF;

    retStatus = Init_SmartIO_Cfg();
    if(retStatus == CY_SMARTIO_SUCCESS)
    {
        /* After all the configuration, enable SMART IO */
        Cy_SmartIO_Enable(SMART_IO_PORT);
    }
}
```

Configure Smart I/O. See [Code Listing 4](#).

Enable Smart I/O.

### Code Listing 4 Init\_SmartIO\_Cfg() function

```
cy_en_smartio_status_t Init_SmartIO_Cfg(void)
{
    cy_stc_smartio_lutcfg_t lutCfgLut1;
    cy_stc_smartio_lutcfg_t lutCfgLut7;

    cy_stc_smartio_config_t smart_io_cfg;
    cy_en_smartio_status_t retStatus = (cy_en_smartio_status_t)0xFF;

    /* initialize the Smart IO structure */
    memset(&lutCfgLut1, 0, sizeof(cy_stc_smartio_lutcfg_t));
    memset(&lutCfgLut7, 0, sizeof(cy_stc_smartio_lutcfg_t));
    memset(&smart_io_cfg, 0, sizeof(cy_stc_smartio_config_t));

#ifdef SMART_IO_CLK_ACTIVE
    /* Active clock source is selected */
    smart_io_cfg.clkSrc = (cy_en_smartio_clksrc_t)CY_SMARTIO_CLK_DIVACT;
#else
    /* Asynchronous clock source is selected */
    smart_io_cfg.clkSrc = (cy_en_smartio_clksrc_t)CY_SMARTIO_CLK_ASYNC;
#endif /* SMART_IO_CLK_ACTIVE */

    /* Bypass channel mask for input and output pin */
    smart_io_cfg.bypassMask = SMARTIO_BYPASS_CH_MASK;

    /* IO channel sync mask for selected pin */
    smart_io_cfg.ioSyncEn = SMARTIO_IOSYNC_CH_MASK;

    /* LUT[1] setting */
    /*******/
    /* Lut configuration for output, check description above */
    lutCfgLut1.opcode = LUTx_LOGIC_OPCODE;
    lutCfgLut1.lutMap = LUTx_INV_OUT_MAP;

    /* Lut configuration for input */
    lutCfgLut1.tr0 = (cy_en_smartio_luttr_t)CY_SMARTIO_LUTTR_LUT7_OUT;
    lutCfgLut1.tr1 = (cy_en_smartio_luttr_t)CY_SMARTIO_LUTTR_LUT7_OUT;
    lutCfgLut1.tr2 = (cy_en_smartio_luttr_t)CY_SMARTIO_LUTTR_LUT7_OUT;
    smart_io_cfg.lutCfgl = &lutCfgLut1;

    /* LUT[7] setting */
    /*******/
    /* Lut configuration for output, check description above */
    lutCfgLut7.opcode = LUTx_LOGIC_OPCODE;
    lutCfgLut7.lutMap = LUTx_OUT_MAP;

    /* Lut configuration for input (button) */
    lutCfgLut7.tr0 = (cy_en_smartio_luttr_t)CY_SMARTIO_LUTTR_IO;
    lutCfgLut7.tr1 = (cy_en_smartio_luttr_t)CY_SMARTIO_LUTTR_IO;
    lutCfgLut7.tr2 = (cy_en_smartio_luttr_t)CY_SMARTIO_LUTTR_IO;
    smart_io_cfg.lutCfgl7 = &lutCfgLut7;

    /* Initialization of Smart IO structure */
    retStatus = Cy_SmartIO_Init(SMART_IO_PORT, &smart_io_cfg);
    return retStatus;
}
```

Clear configuration structure.

Configure Smart I/O clock source

Configure BYPASS setting

Configure Synchronizer setting

Configure LUT [1]

Configure LUT [7]

Configure Smart I/O.

Example configuration

4.2 Use case to reset detection/stability circuitry

This section explains how to implement a reset detection/stability circuitry on the Smart I/O. Figure 14 shows the operation of reset detection/stability.

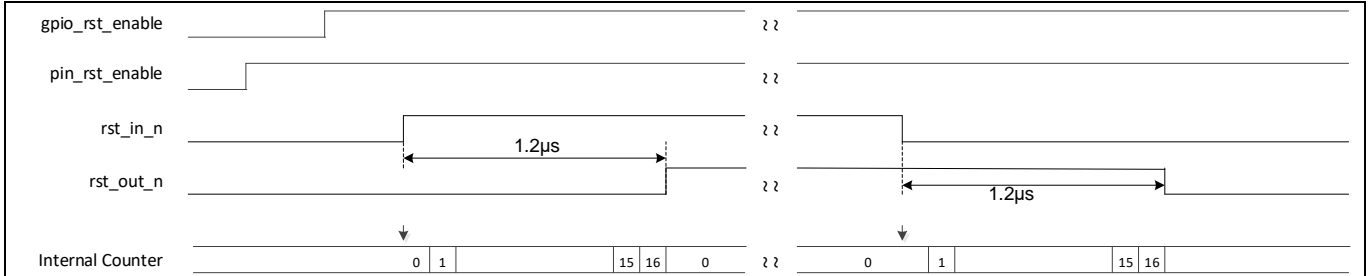


Figure 14 Operation of reset detection/stability circuitry

In this use case, the circuitry has two enable signals; pin\_rst\_enable and gpio\_rst\_enable. The pin\_rst\_enable is an enable signal from external circuitry and the gpio\_rst\_enable is an enable control signal by software. When both signals are enabled, the circuitry is active.

The rst\_in\_n is an external reset input with active high, and rst\_out\_n is a reset output with active high. The circuitry monitors rst\_in\_n. When rst\_in\_n is activated for a specific number of continuous cycles, the rst\_out\_n is output. A reset will be activated or released, when the operation clock selected by CLOCK\_SRC [12:8] is input continuously for 16 cycles. The source clock 50 MHz is divided by 6 to 13 MHz. Then, count 76 ns multiplied by 16 cycles, the time of reset activation or release is approximately 1.2 µs.

The following I/O port and HSIOM signals are used:

- io\_data\_in [6] = pin\_rst\_enable; (from I/O port)
- io\_data\_in [7] = rst\_in\_n; (from I/O port)
- smartio\_data [5] = rst\_out\_n; (to I/O port)
- chip\_data [4] = gpio\_rst\_enable; (from HSIOM)

Figure 15 shows the connection and functional logic of each LUT [3:0] and DU in this circuitry.

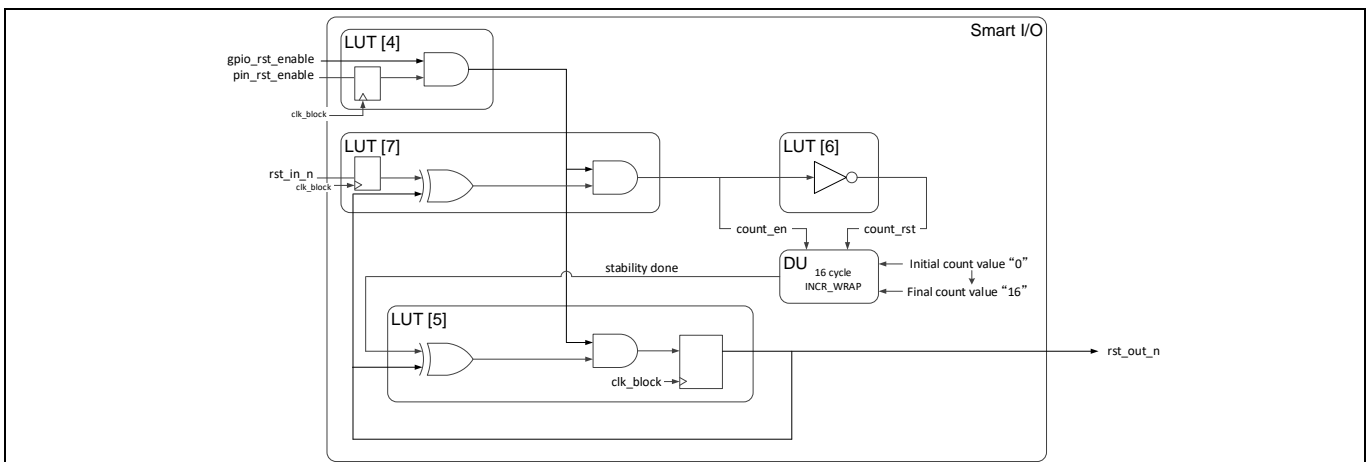


Figure 15 Logical example of a reset detection/stability circuitry

In this use case, four LUTs and one DU are used.

## Example configuration

LUT [4] is used to generate the activation signal of this circuitry from two enable signals (pin\_rst\_enable and gpio\_rst\_en). LUT [6] and LUT [7] are used to monitor the rst\_in\_n state and to start the counter of the DU. LUT [5] detects the stabilization wait completion and outputs rst\_out\_n.

DU is used to generate reset stability wait time, and the Tr\_out of LUT [5] is output synchronously by gated output mode.

Figure 16 shows the signal path of this use case.

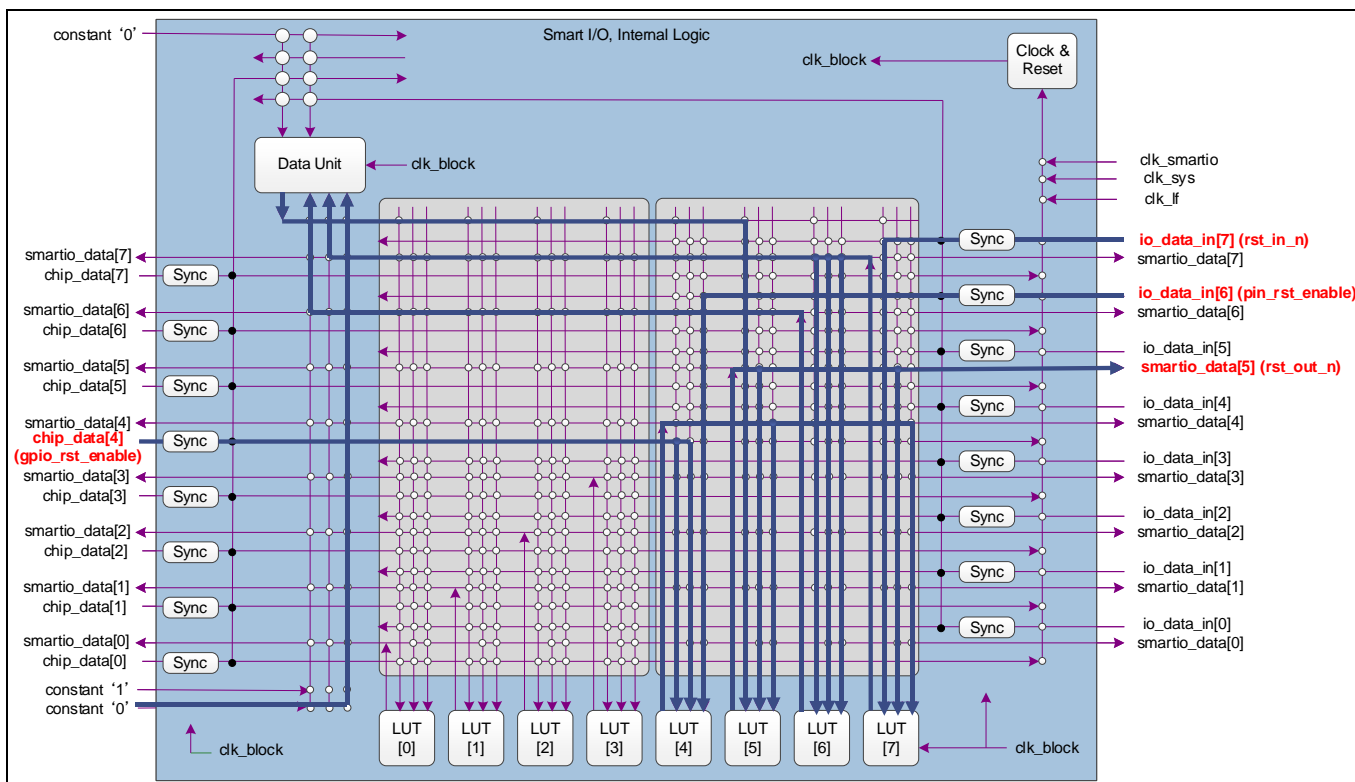


Figure 16 Signal path of reset detection/stability circuitry

In this use case, io\_data\_in [7:6], chip\_data [4], and smartio\_data [5] are used as input or output signals. Therefore, it can be configured with four LUTs (LUT [7:4]). If smartio\_data [3] is used for rst\_out\_n, it is necessary to go through LUT [3]. That is, five LUT [x] are required for this case.

Table 17, Table 18, Table 19, and Table 20 show the truth table of each LUT. The blue highlights in the tables indicate an invalid combination pattern.

Table 17 Lookup table LUT [6]

Tr2_in	Tr1_in	Tr0_in	Tr_out
0	0	0	1
0	0	1	1
0	1	0	1
0	1	1	1
1	0	0	1
1	0	1	1
1	1	0	1
1	1	1	0

Example configuration

**Table 18**      **Lookup table LUT [7]**

Tr2_in	Tr1_in	Tr0_in	Tr_out
0	0	0	0
0	0	1	0
0	1	0	0
0	1	1	1
1	0	0	0
1	0	1	1
1	1	0	0
1	1	1	0

**Table 19**      **Lookup table LUT [5]**

Tr2_in	Tr1_in	Tr0_in	Tr_out
0	0	0	0
0	0	1	0
0	1	0	0
0	1	1	0
1	0	0	0
1	0	1	1
1	1	0	1
1	1	1	0

**Table 20**      **Lookup table LUT [4]**

Tr2_in	Tr1_in	Tr0_in	Tr_out
0	0	0	0
0	0	1	0
0	1	0	0
0	1	1	0
1	0	0	0
1	0	1	0
1	1	0	0
1	1	1	1

LUT [6] is an inverter circuit with one input and one output, and each input of Tr0\_in, Tr1\_in, and Tr2\_in is the same signal. Therefore, valid combination pattern of [Tr0\_in, Tr1\_in, Tr2\_in, Tr\_out] is [0, 0, 0, 1] or [1, 1, 1, 0]. If an invalid pattern occurs, the counter circuit is reset and rst\_out\_n keeps the current value.

LUT [7] has three different inputs. If the enable signal (Tr0\_in) from LUT [4] is valid (=“1”) and the rst\_in\_n state (Tr2\_in) is different from the rst\_out\_n state (Tr1\_in) from LUT [5], “1” is output.

## Example configuration

LUT [5] generates rst\_out\_n signal. When the enable signal (Tr2\_in) from LUT [4] is valid (=“1”) and the stability done signal (Tr0\_in) from DU is detected (stabilization wait time has passed), the current rst\_out\_n signal (Tr1\_in, Tr\_out) of LUT [5] is reversed.

LUT [4] generates the enable signal for this circuitry. It has two inputs; pin\_rst\_enable and gpio\_rst\_enable. The pin\_rst\_enable is input to Tr2\_in, and the gpio\_rst\_enable is input to Tr0\_in and Tr1\_in. Therefore, different value combinations of Tr0\_in and Tr1\_in are invalid patterns. If an invalid pattern occurs, the circuitry is disabled (Tr\_out = “0”).

DU operates in the INCR\_WRAP mode. This mode increments data by 1 from an initial value (DATA 0) until it reaches a final value (DATA 1). When the count value matches the final value, it wraps around to DATA 0. If rst is “1”, the counter value is set to the initial value.

In this mode, DU has two control signal inputs; count\_en and count\_rst. The count\_en is the input to Tr1\_in, and the count\_rst is input to Tr0\_in. DU has two counter control registers (DATA 0 and DATA 1) and one output signal (Tr\_out). DATA0 register is the initial value of the counter, and DATA1 register is the final counter value.

**Table 21** shows DU configuration and input/output operation.


**Table 21 DU operation**

Tr0_in (rst)	Tr1_in (en)	Operation	DATA 0 (Initial value)	DATA 1 (Final value)	Tr_out
1	0	INCR_WRAP: Increments data by 1 from an initial value (DATA 0) until it reaches a final value (DATA 1). When count value matches the final value, it wraps around to DATA 0.	0	16	0 (It is the reset state)
0	1				A single clock pulse is output when the count value is equal to the final value.

Tr0\_in operates as “rst” and Tr1\_in operates as “en”. Tr0\_in is connected to the output of LUT [6] and Tr1\_in is connected to the input of LUT [6]. When "1" is input to en, the DU starts a counter. Then, outputs the single pulse, when the counter value reaches the final value.

## Example configuration

Figure 17 shows the setting procedure for Smart I/O.

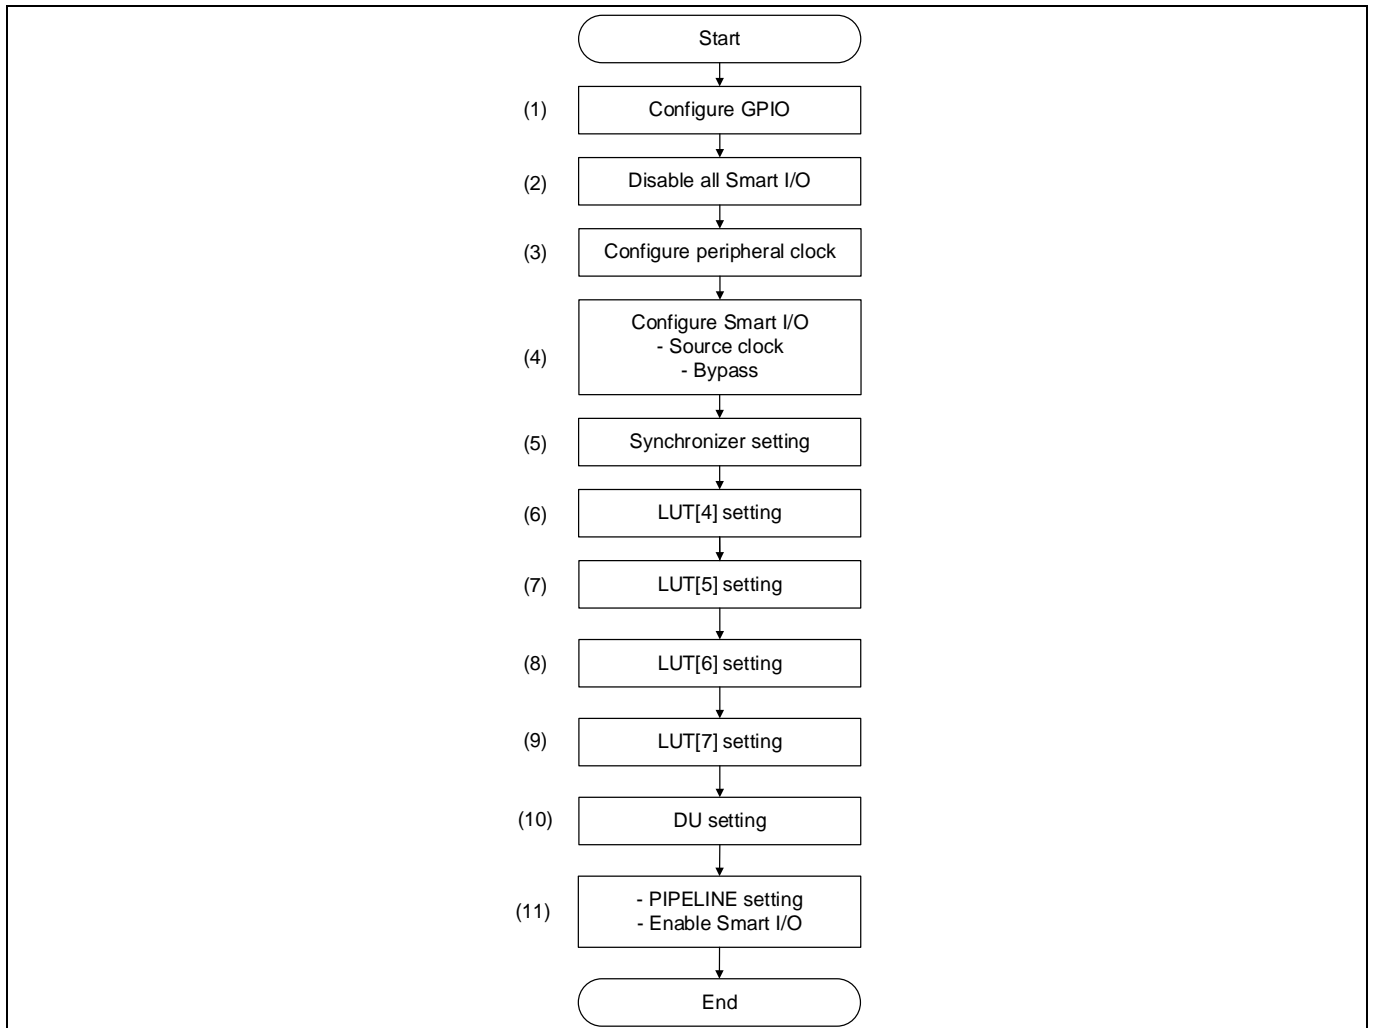

**Figure 17** Setting procedure for Smart I/O

Note: (1) See the [Application Note for the GPIO configuration](#).

(6) See the [Table 20](#) for setting pattern.

(7) See the [Table 19](#) for setting pattern.

(8) See the [Table 17](#) for setting pattern.

(9) See the [Table 18](#) for setting pattern.

## Example configuration

### 4.2.1 Configuration and example code

**Table 22** lists the parameters and **Table 23** lists the functions of the configuration part for Smart I/O.

**Table 22 List of Smart I/O configuration parameters**

Parameters	Description	Value
SMART_IO_CLK_ACTIVE	Defines Smart I/O clock source	1ul (Select Active clock source)
CY_SMARTIO_CLK_INV	Defines Smart I/O clock	PCLK_SMARTIO13_CLOCK
SMART_IO_PORT	Defines Smart IO port	SMARTIO_PRT13 (It is assigned to Smart I/O Port13)
SMARTIO_BYPASS_CH_MASK	Defines Bypass channel mask io_data_in [7] to smartio_data [7]: No bypass io_data_in [6] to smartio_data [6]: No bypass io_data_in [5] to smartio_data [5]: No bypass io_data_in [4] to smartio_data [4]: No bypass io_data_in [3] to smartio_data [3]: Bypass io_data_in [2] to smartio_data [2]: Bypass io_data_in [1] to smartio_data [1]: Bypass io_data_in [0] to smartio_data [0]: Bypass	0x0Ful (See <b>Table 1</b> ) No use Smart IO for io_data_in [3] to io_data_in [0]
SMARTIO_IOSYNC_CH_MASK	Defines IO sync channel mask	0x00ul (See <b>Table 3</b> )
GPIO_RST_EN_PORT	Defines input port for LUT[4] input	GPIO_PRT13 (It is assigned to GPIO Port13)
GPIO_RST_EN_PIN	Defines input port pin for LUT[4] input	4ul (It is assigned to GPIO Port 4pin)
GPIO_RST_EN_PIN_MUX	Configures input port pin function	P13_4_GPIO (It is assigned to GPIO)
PIN_RST_EN_PORT	Defines input port for LUT[6] input	GPIO_PRT13 (It is assigned to GPIO Port13)
PIN_RST_EN_PIN	Defines input port pin for LUT[6] input	6ul (It is assigned to GPIO Port 6 pin)
PIN_RST_EN_PIN_MUX	Configures input port pin function	P13_6_GPIO (It is assigned to GPIO)
RST_IN_PORT	Defines input port for LUT[7] input	GPIO_PRT13 (It is assigned to GPIO Port 13)
RST_IN_PIN	Defines input port pin for LUT[7] input	7ul (It is assigned to GPIO Port 6 pin)
RST_IN_PIN_MUX	Configures input port pin function	P13_7_GPIO (It is assigned to GPIO)
RST_OUT_PORT	Defines input port for LUT[5] output	GPIO_PRT13 (It is assigned to GPIO Port 13)
RST_OUT_PIN	Defines input port pin for LUT[5] output	5ul (It is assigned to GPIO Port 6 pin)
RST_OUT_PIN_MUX	Configures input port pin function	P13_5_GPIO (It is assigned to GPIO)



## Example configuration

Parameters	Description	Value
LUT4_OUT_MAP	LUT[4] output pattern	0x80ul (See <a href="#">Table 20</a> )
LUT5_OUT_MAP	LUT[5] output pattern	0x60ul (See <a href="#">Table 19</a> )
LUT6_OUT_MAP	LUT[6] output pattern	0x7Ful (See <a href="#">Table 17</a> )
LUT7_OUT_MAP	LUT[7] output pattern	0x28ul (See <a href="#">Table 18</a> )
LUTx_LOGIC_OPCODE_COMB	Selects LUT Operation Mode	CY_SMARTIO_LUTOPC_COMB (It is assigned to Combinatorial)
LUTx_LOGIC_OPCODE_GO	Selects LUT Operation Mode	CY_SMARTIO_LUTOPC_GATED_OUT
LUTx_LOGIC_OPCODE_GI2	Selects LUT Operation Mode	CY_SMARTIO_LUTOPC_GATED_TR2
CY_SYSClk_DIV_16_BIT	Selects Divider Type to 16-bit divider	1ul
CY_SMARTIO_CLK_DIVACT	Selects the source clock to clk_smartio/rst_sys_act_n. See <a href="#">Table 2</a> .	16ul
CY_SMARTIO_CLK_GATED	Selects the source clock to Clock source is a constant '0'. See <a href="#">Table 2</a> .	20ul
CY_SMARTIO_CLK_ASYNC	Selects the source clock to asynchronous mode/'1'. See <a href="#">Table 2</a> .	31ul
CY_SMARTIO_LUTTR_CHIP4	LUT[4] Tr0/Tr1 input	4ul (It is assigned to LUT[4]. See <a href="#">Table 6</a> )
CY_SMARTIO_LUTTR_IO6	LUT[4] Tr2 input	14ul (It is assigned to LUT[4]. See <a href="#">Table 6</a> )
CY_SMARTIO_LUTTR_DU_OUT	LUT[5] Tr0 input	0ul (It is assigned to LUT[5]. See <a href="#">Table 6</a> )
CY_SMARTIO_LUTTR_LUT5_OUT	LUT[5] Tr1 input/LUT[7] Tr1 input	5ul (It is assigned to LUT[5]. See <a href="#">Table 6</a> )
CY_SMARTIO_LUTTR_LUT4_OUT	LUT[5] Tr2 input/ LUT[7] Tr2 input	4ul (It is assigned to LUT[5]. See <a href="#">Table 6</a> )
CY_SMARTIO_LUTTR_LUT7_OUT	LUT[6] Tr0/Tr1/Tr2 input	7ul (It is assigned to LUT[6]. See <a href="#">Table 6</a> )
CY_SMARTIO_LUTTR_IO7	LUT[7] Tr0 input	15ul (It is assigned to LUT[7]. See <a href="#">Table 6</a> )
CY_SMARTIO_DUTR_LUT6_OUT	DU Tr0 input trigger source	9ul (It is assigned to LUT6 output. See <a href="#">Table 9</a> )
CY_SMARTIO_DUTR_LUT7_OUT	DU Tr1 input trigger source	10ul (It is assigned to LUT7 output. See <a href="#">Table 9</a> )
CY_SMARTIO_DUTR_ZERO	DU Tr2 input trigger source	0ul (It is assigned to Constant 0. See <a href="#">Table 9</a> )
CY_SMARTIO_DUDATA_ZERO	DU data0 input DATA source	0ul (It is assigned to Constant 0. See <a href="#">Table 10</a> )

**Example configuration**

Parameters	Description	Value
CY_SMARTIO_DUDATA_DATA REG	DU data1 input DATA source	3ul (It is assigned to SMARTIO.DATA register. See <a href="#">Table 10</a> )
CY_SMARTIO_DUOPC_INCR_ WRAP	DU opcode	3ul (It is assigned to Increment and wrap-around (Count up and wrap). See <a href="#">Table 11</a> )
CY_SMARTIO_DUSIZE_8	DU operation bit size	7ul (It is assigned to 8-bits size/width operand. See <a href="#">Table 10</a> )
smart_io_cfg.clkSrc	Source clock setting	CY_SMARTIO_CLK_DIVACT
smart_io_cfg.bypassMas k	Configures bypass setting	SMARTIO_BYPASS_CH_ MASK
smart_io_cfg.ioSyncEn	Configures Synchronizer setting	SMARTIO_IOSYNC_CH_MASK
lutCfgLut4.opcode	Configures LUT[4] Operation Mode setting	LUTx_LOGIC_OPCODE_GI2
lutCfgLut4.lutMap	Configures LUT[4] output pattern setting	LUT4_OUT_MAP
lutCfgLut4.tr0	Configures LUT[4] tr0 input	CY_SMARTIO_LUTTR_CHIP4
lutCfgLut4.tr1	Configures LUT[4] tr1 input	CY_SMARTIO_LUTTR_CHIP4
lutCfgLut4.tr2	Configures LUT[4] tr2 input	CY_SMARTIO_LUTTR_IO6
lutCfgLut5.opcode	Configures LUT[5] Operation Mode setting	LUTx_LOGIC_OPCODE_GO
lutCfgLut5.lutMap	Configures LUT[5] output pattern setting	LUT5_OUT_MAP
lutCfgLut5.tr0	Configures LUT[5] tr0 input	CY_SMARTIO_LUTTR_DU_ OUT
lutCfgLut5.tr1	Configures LUT[5] tr1 input	CY_SMARTIO_LUTTR_LUT5_ OUT
lutCfgLut5.tr2	Configures LUT[5] tr2 input	CY_SMARTIO_LUTTR_LUT4_ OUT
lutCfgLut6.opcode	Configures LUT[6] Operation Mode setting	LUTx_LOGIC_OPCODE_ COMB
lutCfgLut6.lutMap	Configures LUT[6] output pattern setting	LUT6_OUT_MAP
lutCfgLut6.tr0	Configures LUT[6] tr0 input	CY_SMARTIO_LUTTR_LUT7_ OUT
lutCfgLut6.tr1	Configures LUT[6] tr1 input	CY_SMARTIO_LUTTR_LUT7_ OUT
lutCfgLut6.tr2	Configures LUT[6] tr2 input	CY_SMARTIO_LUTTR_LUT7_ OUT
lutCfgLut7.opcode	Configures LUT[7] Operation Mode setting	LUTx_LOGIC_OPCODE_GI2
lutCfgLut7.lutMap	Configures LUT[7] output pattern setting	LUT7_OUT_MAP
lutCfgLut7.tr0	Configures LUT[7] tr0 input	CY_SMARTIO_LUTTR_LUT4_ OUT
lutCfgLut7.tr1	Configures LUT[7] tr1 input	CY_SMARTIO_LUTTR_LUT5_ OUT
lutCfgLut7.tr2	Configures LUT[7] tr2 input	CY_SMARTIO_LUTTR_IO7

## Example configuration

Parameters	Description	Value
lutCfgDu.tr0	Configures DU input trigger 0 source selection - LUT[6] output	CY_SMARTIO_DUTR_LUT6_OUT
lutCfgDu.tr1	Configures DU input trigger 1 source selection - LUT[7] output	CY_SMARTIO_DUTR_LUT7_OUT
lutCfgDu.tr2	Configures DU input trigger 2 source selection - Constant 0	CY_SMARTIO_DUTR_ZERO
lutCfgDu.data0	DU input DATA0 source selection - Fixed 0	CY_SMARTIO_DUDATA_ZERO
lutCfgDu.data1	DU input DATA1 source selection - SMARTIO_PRTx_DATA.DATA [7:0]	CY_SMARTIO_DUDATA_DATAREG
lutCfgDu.opcode	DU op-code	CY_SMARTIO_DUOPC_INCR_WRAP
lutCfgDu.size	DU width size is 8	CY_SMARTIO_DUSIZE_8
lutCfgDu.dataReg	DU DATA register value = 16	10ul

**Table 23 List of Smart I/O configuration functions**

Functions	Description	Remarks
Init_IO_Pin()	Configures GPIO Port pin	-
Cy_SmartIO_Deinit()	Resets the Smart I/O to default values	Resets the Smart I/O registers; SMARTIO_PRTx_CTL, SMARTIO_PRTx_SYNC_CTL, SMARTIO_PRTx_LUT_SELy, SMARTIO_PRTx_LUT_CTLy, SMARTIO_PRTx_DU_SEL, SMARTIO_PRTx_DU_CTL and SMARTIO_PRTx_DATA
Init_SmartIO()	Configures and enables Smart I/O, Calls for Init_SmartIO_Cfg() and Cy_SmartIO_Enable()	-
Init_SmartIO_Cfg()	Configures Smart I/O setting structure, Calls for Cy_SmartIO_Init()	-
Cy_SmartIO_Enable()	Enable Smart I/O	Write to PIPELINE_EN and ENABLED bit
Cy_SmartIO_Init()	Configures Smart I/O register	Write to the related registers for Source clock, Bypass, Synchronizer, LUT, and DU.

## Example configuration

**Code Listing 5** demonstrates an example program to reset detection/stability circuitry. See the [Architecture TRM](#) and [Application Note](#) for GPIO and clock configuration.

**Code Listing 5 Example to reset detection/stability circuitry**

```

/* Smart IO clock source selection */
#define SMART_IO_CLK_ACTIVE          1ul

/* Smart IO port selections macro */
#define SMART_IO_PORT                SMARTIO_PRT13

#define CY_SMARTIO_CLK_INV           PCLK_SMARTIO13_CLOCK

/* Bypass channel mask */
#define SMARTIO_BYPASS_CH_MASK      0x0Ful /* 00001111: 0000 means [7:4] are not bypassed i.e. programmable
SMARTIO is exposed */

/* IO sync channel mask */
#define SMARTIO_IOSYNC_CH_MASK      0x00ul

/* Lut pin configuration */
#define GPIO_RST_EN_PORT             GPIO_PRT13
#define GPIO_RST_EN_PIN              4ul
#define GPIO_RST_EN_PIN_MUX         P13_4_GPIO /* Check signal at BB JP6.7 */

#define PIN_RST_EN_PORT              GPIO_PRT13
#define PIN_RST_EN_PIN               6ul
#define PIN_RST_EN_PIN_MUX         P13_6_GPIO /* Check signal at BB JP11.14 */

#define RST_IN_PORT                  GPIO_PRT13
#define RST_IN_PIN                   7ul
#define RST_IN_PIN_MUX              P13_7_GPIO /* Check signal at BB JP11.13 */

#define RST_OUT_PORT                 GPIO_PRT13
#define RST_OUT_PIN                  5ul
#define RST_OUT_PIN_MUX             P13_5_GPIO /* Check signal at BB JP6.6 */

/* LUT output map */
#define LUT4_OUT_MAP                 0x80ul
#define LUT5_OUT_MAP                 0x28ul
#define LUT6_OUT_MAP                 0x7Ful
#define LUT7_OUT_MAP                 0x28ul

/* LUT logic circuit type macro */
#define LUTx_LOGIC_OPCODE_COMB      CY_SMARTIO_LUTOPC_COMB
#define LUTx_LOGIC_OPCODE_GO        CY_SMARTIO_LUTOPC_GATED_OUT
#define LUTx_LOGIC_OPCODE_GI2       CY_SMARTIO_LUTOPC_GATED_TR2

/* Port pin configuration */
/***** */
cy_stc_gpio_pin_config_t gpio_rst_cfg =
{
    .outVal      = 0ul,
    .driveMode   = CY_GPIO_DM_STRONG_IN_OFF, /* SmartIO from CPU */
    .hsiom       = GPIO_RST_EN_PIN_MUX,     /* P13_4_GPIO */
    .intEdge     = 0ul,
    .intMask     = 0ul,
    .vtrip       = 0ul,
    .slewRate    = 0ul,
    .driveSel    = 0ul,
};

cy_stc_gpio_pin_config_t pin_rst_cfg =
{
    .outVal      = 0ul,
    .driveMode   = CY_GPIO_DM_HIGHZ,       /* CPU from SmartIO */
    .hsiom       = PIN_RST_EN_PIN_MUX,     /* P13_6_GPIO */
    .intEdge     = 0ul,
    .intMask     = 0ul,
    .vtrip       = 0ul,
    .slewRate    = 0ul,
    .driveSel    = 0ul,
};

cy_stc_gpio_pin_config_t rst_in_cfg =
{
    .outVal      = 0ul,
    .driveMode   = CY_GPIO_DM_HIGHZ,       /* CPU from SmartIO */
    .hsiom       = RST_IN_PIN_MUX,         /* P13_7_GPIO */
    .intEdge     = 0ul,
    .intMask     = 0ul,
    .vtrip       = 0ul,
    .slewRate    = 0ul,
    .driveSel    = 0ul,
};

```

## Example configuration

**Code Listing 5 Example to reset detection/stability circuitry**

```

cy_stc_gpio_pin_config_t rst_out_cfg =
{
    .outVal      = 0ul,
    .driveMode   = CY_GPIO_DM_STRONG_IN_OFF, /* CPU from SmartIO */
    .hsiom       = RST_OUT_PIN_MUX,         /* P13_5_GPIO */
    .intEdge     = 0ul,
    .intMask     = 0ul,
    .vtrip       = 0ul,
    .slewRate    = 0ul,
    .driveSel    = 0ul,
};

int main(void)
{
    :
    Init_IO_Pin();

    /* Deinit before Init */
    Cy_SmartIO_Deinit(SMART_IO_PORT);

    /* SmartIO peripheral clock divider setting */
    {
        Cy_SysClk_PeriphAssignDivider(CY_SMARTIO_CLK_INV, CY_SYSCLK_DIV_16_BIT, 0ul);
        uint32_t sourceFreq = Cy_SysClk_ClkPeriGetFrequency();
        uint32_t targetFreq = 12000000ul;
        uint32_t divNum = (sourceFreq / targetFreq);

        Cy_SysClk_PeriphPolkDisableDivider(CY_SMARTIO_CLK_INV, CY_SYSCLK_DIV_16_BIT, 0ul);
        Cy_SysClk_PeriphPolkSetDivider(CY_SMARTIO_CLK_INV, CY_SYSCLK_DIV_16_BIT, 0ul, (divNum - 1ul));
        Cy_SysClk_PeriphPolkEnableDivider(CY_SMARTIO_CLK_INV, CY_SYSCLK_DIV_16_BIT, 0ul);
    }

    Init_SmartIO();

    Cy_GPIO_Clr(GPIO_PRT13, 4ul);

    while(1)
    {
    }
}

```

Configure Port for output (Port13 5pin)

(1) Configure GPIO pin. See [Code Listing 6](#).

Disable all Smart I/O.

(3) Configure peripheral Clock

Initialize Smart I/O. See [Code Listing 7](#).

**Code Listing 6 Init\_IO\_Pin() function**

```

void Init_IO_Pin(void)
{
    /* Please check ReadMe.txt for proper connection of Input and Output */
    Cy_GPIO_Pin_Init(GPIO_RST_EN_PORT, GPIO_RST_EN_PIN, &gpio_rst_cfg);
    Cy_GPIO_Pin_Init(PIN_RST_EN_PORT, PIN_RST_EN_PIN, &pin_rst_cfg);
    Cy_GPIO_Pin_Init(RST_IN_PORT, RST_IN_PIN, &rst_in_cfg);
    Cy_GPIO_Pin_Init(RST_OUT_PORT, RST_OUT_PIN, &rst_out_cfg);
}

```

Configure Port13 4pin.

Configure Port13 5pin.

Configure Port13 6pin.

Configure Port13 7pin.

**Code Listing 7 Init\_SmartIO() function**

```

void Init_SmartIO(void)
{
    cy_en_smartio_status_t retStatus = (cy_en_smartio_status_t)0xFF;

    retStatus = Init_SmartIO_Cfg();
    if(retStatus == CY_SMARTIO_SUCCESS)
    {
        /* After all the configuration, enable SMART IO */
        Cy_SmartIO_Enable(SMART_IO_PORT);
    }
}

```

Configure Smart I/O. See [Code Listing 8](#).

Enable Smart I/O.

**Code Listing 8 Init\_SmartIO\_Cfg() function**

```

cy_en_smartio_status_t Init_SmartIO_Cfg(void)
{
    cy_stc_smartio_ducfg_t lutCfgDu;
    cy_stc_smartio_lutcfg_t lutCfgLut4;
    cy_stc_smartio_lutcfg_t lutCfgLut5;
    cy_stc_smartio_lutcfg_t lutCfgLut6;
    cy_stc_smartio_lutcfg_t lutCfgLut7;

    cy_stc_smartio_config_t smart_io_cfg;
    cy_en_smartio_status_t retStatus = (cy_en_smartio_status_t)0xFF;
}

```

Example configuration

Code Listing 5 Example to reset detection/stability circuitry

```

/* initialize the Smart IO structure */
memset(&lutCfgDu, 0ul, sizeof(cy_stc_smartio_ducfg_t));
memset(&lutCfgLut4, 0ul, sizeof(cy_stc_smartio_lutcfg_t));
memset(&lutCfgLut5, 0ul, sizeof(cy_stc_smartio_lutcfg_t));
memset(&lutCfgLut6, 0ul, sizeof(cy_stc_smartio_lutcfg_t));
memset(&lutCfgLut7, 0ul, sizeof(cy_stc_smartio_lutcfg_t));
memset(&smart_io_cfg, 0ul, sizeof(cy_stc_smartio_config_t));

#ifdef SMART_IO_CLK_ACTIVE
/* Active clock source is selected */
smart_io_cfg.clkSrc = (cy_en_smartio_clksrc_t)CY_SMARTIO_CLK_DIVACT;
#else
/* Asynchronous clock source is selected */
smart_io_cfg.clkSrc = (cy_en_smartio_clksrc_t)CY_SMARTIO_CLK_ASYNC;
#endif /* SMART_IO_CLK_ACTIVE */

/* Bypass channel mask for input and output pin */
smart_io_cfg.bypassMask = SMARTIO_BYPASS_CH_MASK;

/* IO channel sync mask for selected pin */
smart_io_cfg.ioSyncEn = SMARTIO_IOSYNC_CH_MASK;

/***** LUT[4] setting *****/
lutCfgLut4.opcode = LUTx_LOGIC_OPCODE_GI2;
lutCfgLut4.lutMap = LUT4_OUT_MAP;

/* Lut configuration for input */
lutCfgLut4.tr0 = (cy_en_smartio_luttr_t)CY_SMARTIO_LUTTR_CHIP4;
lutCfgLut4.tr1 = (cy_en_smartio_luttr_t)CY_SMARTIO_LUTTR_CHIP4;
lutCfgLut4.tr2 = (cy_en_smartio_luttr_t)CY_SMARTIO_LUTTR_IO6;
smart_io_cfg.lutCfg4 = &lutCfgLut4;

/***** LUT[5] setting *****/
/* Lut configuration for output, check description above */
lutCfgLut5.opcode = LUTx_LOGIC_OPCODE_GO;
lutCfgLut5.lutMap = LUT5_OUT_MAP;

/* Lut configuration for input (button) */
lutCfgLut5.tr0 = (cy_en_smartio_luttr_t)CY_SMARTIO_LUTTR_DU_OUT;
lutCfgLut5.tr1 = (cy_en_smartio_luttr_t)CY_SMARTIO_LUTTR_LUT5_OUT;
lutCfgLut5.tr2 = (cy_en_smartio_luttr_t)CY_SMARTIO_LUTTR_LUT4_OUT;
smart_io_cfg.lutCfg5 = &lutCfgLut5;

/***** LUT[6] setting *****/
lutCfgLut6.opcode = LUTx_LOGIC_OPCODE_COMB;
lutCfgLut6.lutMap = LUT6_OUT_MAP;

/* Lut configuration for input */
lutCfgLut6.tr0 = (cy_en_smartio_luttr_t)CY_SMARTIO_LUTTR_LUT7_OUT;
lutCfgLut6.tr1 = (cy_en_smartio_luttr_t)CY_SMARTIO_LUTTR_LUT7_OUT;
lutCfgLut6.tr2 = (cy_en_smartio_luttr_t)CY_SMARTIO_LUTTR_LUT7_OUT;
smart_io_cfg.lutCfg6 = &lutCfgLut6;

/***** LUT[7] setting *****/
lutCfgLut7.opcode = LUTx_LOGIC_OPCODE_GI2;
lutCfgLut7.lutMap = LUT7_OUT_MAP;

/* Lut configuration for input */
lutCfgLut7.tr0 = (cy_en_smartio_luttr_t)CY_SMARTIO_LUTTR_LUT4_OUT;
lutCfgLut7.tr1 = (cy_en_smartio_luttr_t)CY_SMARTIO_LUTTR_LUT5_OUT;
lutCfgLut7.tr2 = (cy_en_smartio_luttr_t)CY_SMARTIO_LUTTR_IO7;
smart_io_cfg.lutCfg7 = &lutCfgLut7;

/***** DU setting *****/
lutCfgDu.tr0 = CY_SMARTIO_DUTR_LUT6_OUT; /*< DU input trigger 0 source selection - LUT[3]6 output*/
lutCfgDu.tr1 = CY_SMARTIO_DUTR_LUT7_OUT; /*< DU input trigger 1 source selection - LUT[3]7 output*/
lutCfgDu.tr2 = CY_SMARTIO_DUTR_ZERO; /*< DU input trigger 2 source selection - Constant 0*/
lutCfgDu.data0 = CY_SMARTIO_DUDATA_ZERO; /*< DU input DATA0 source selection - Fixed 0*/
lutCfgDu.data1 = CY_SMARTIO_DUDATA_DATAREG; /*< DU input DATA1 source selection - SMARTIO_PRTx_DATA.DATA [7:0]*/
lutCfgDu.opcode = CY_SMARTIO_DUOPC_INCR_WRAP; /*< DU op-code */
lutCfgDu.size = CY_SMARTIO_DUSIZE_8; /*< DU width size is 8 */
lutCfgDu.dataReg = 0x10ul; /*< DU DATA register value = 16 */
smart_io_cfg.ducfg = &lutCfgDu;

/* Initialization of Smart IO structure */
retStatus = Cy_SmartIO_Init(SMART_IO_PORT, &smart_io_cfg);
return retStatus;
}
    
```

Clear configuration structure.

Configure Smart I/O clock source

Configure BYPASS setting

Configure Synchronizer setting

Configure LUT [4]

Configure LUT [5]

Configure LUT [6]

Configure LUT [7]

Configure DU

Configure Smart I/O.

## Glossary

## 5 Glossary

**Table 24** Glossary

Terms	Description
chip_data	Input signals from HSIOM
Clk_sys/CLK_HF	This is derived from the system clock using a peripheral clock divider. See the Clocking System chapter of the <a href="#">Architecture TRM</a> for details.
DeepSleep	Power mode that only low-frequency peripherals are available. See the DeepSleep Mode section in the Device Power Modes chapter of the <a href="#">Architecture TRM</a> for details.
DU	Data Unit. DU performs simple increment, decrement, increment/decrement, shift, and AND/OR operations based on opcode configuration in register. See the Smart I/O - Data Unit section in the I/O System chapter of the <a href="#">Architecture TRM</a> for details.
GPIO	General-purpose input/output
HSIOM	High Speed I/O Matrix. See the High-Speed I/O Matrix section in the I/O System chapter of the <a href="#">Architecture TRM</a> for details.
io_data_in	Input signals from I/O port
I/O Port	I/O Port provides the interface between the CPU core and peripheral components to the outside world. See the I/O System chapter of the <a href="#">Architecture TRM</a> for details.
LUT [x]	3-input Lookup Tables. LUT [x] block takes three input signals and generates an output based on the configuration set in register. See the Smart I/O - LUT section in the I/O System chapter of the <a href="#">Architecture TRM</a> for details.
smartio_data	Output signals from Smart I/O

---

## Related documents

### 6 Related documents

The following are the XMC7000 family series datasheets and technical reference manuals. Contact [Technical support](#) to obtain these documents.

- Device datasheet
  - XMC7200 Datasheet 32-Bit Arm® Cortex®-M7 Microcontroller XMC7000 Family
  - XMC7100 Datasheet 32-Bit Arm® Cortex®-M7 Microcontroller XMC7000 Family
- Architecture Technical Reference Manual
  - XMC7000 MCU Family Architecture Technical Reference Manual (TRM)
  - XMC7200 Registers Technical Reference Manual (TRM)
  - XMC7100 Registers Technical Reference Manual (TRM)
- Application Note
  - AN234118 - GPIO Usage Setup in XMC7000 Family
  - AN234253 – Clock Configuration Setup in XMC7000 Family



---

### Other references

## 7 Other references

The Infineon PDL simplifies software development for the XMC7000 family of devices. The PDL integrates device header files, startup code, and peripheral drivers into a single package. The drivers abstract the hardware functions into a set of easy-to-use APIs. Contact [Technical support](#) to obtain the PDL.

---

## Revision history

### Revision history

Document version	Date of release	Description of changes
**	2021-12-02	Initial release

#### Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

**Edition 2021-12-02**

**Published by**

**Infineon Technologies AG**

**81726 Munich, Germany**

**© 2021 Infineon Technologies AG.**

**All Rights Reserved.**

**Do you have a question about this document?**

**Go to [www.cypress.com/support](http://www.cypress.com/support)**

**Document reference**

**002-34023 Rev. \*\***

#### IMPORTANT NOTICE

The information contained in this application note is given as a hint for the implementation of the product only and shall in no event be regarded as a description or warranty of a certain functionality, condition or quality of the product. Before implementation of the product, the recipient of this application note must verify any function and other technical information given herein in the real application. Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind (including without limitation warranties of non-infringement of intellectual property rights of any third party) with respect to any and all information given in this application note.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office ([www.infineon.com](http://www.infineon.com)).

#### WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.