

AN311

FM25V01 Replaces Two FM25CL64s

Author: Harsha Medu

Associated Project: No

Associated Part Family: FM25V01, FM25CL64

Software Version: None

Related Application Notes: None

AN311 discusses the key differences which need to be considered when migrating from FM25CL64 to FM25V01.

Description

The FM25V01, a 128-Kbit SPI F-RAM, is a potential replacement for two FM25CL64 (64-Kbit) devices; FM25CL64 is now obsolete. For most designs, the FM25V01 device can be considered a superset of the FM25CL64. The two devices are identical in terms of pinout, package dimensions, and read/write functionality. This application note discusses the key differences between the two devices, apart from density, which need to be considered when migrating from FM25CL64 to FM25V01.

Backward Compatible

From a software point of view, the two devices are compatible. Aside from the additional address bit to access twice the memory, the two devices are read / write compatible. Both devices use the same two-byte address. Remember that the 128-Kbit device address wraps at 0x3FFF while the 64-Kbit wraps at 0x1FFF. The block protect boundaries are spaced at twice the address, compared to the 64-Kbit device. For systems that use a single FM25CL64 device, the transition to the FM25V01 could be as straightforward as changing your firmware to hold the address bit A13 LOW during SRAM read/writes. For systems that use two FM25CL64s, firmware needs to be modified to use the address bit A13 to access the full 128-Kbit memory.

From a hardware point of view, the key difference between the two devices is the higher standby current. Additionally FM25V01 operates down to 2.0 V, extends the speed up to 40 MHz and adds Device ID, Sleep Mode features. It also adds power-up, power-down ramp rate and first access time (after power-up) specifications. A memory write operation is given in [Figure 1](#) for FM25V01. Note the addition of address bit A13 in the serial address stream. This is the MSB bit for the 128-Kbit devices. A compatibility chart for the two devices is given in [Table 1](#). A detailed comparison is shown in [Table 2](#).

Table 1. Compatibility Chart

FM25CL64 Feature or Spec	Is FM25V01 compatible?
Package	Yes
Pinout	Yes
Temperature Range	Yes
Operating Voltage	Yes
Operating Current	Yes
Standby Current	No
Read / Write Function	Yes
Timing / Frequency	Yes
Data Retention	Refer to Table 2
Endurance	Yes

Figure 1. FM25V01 Write Cycle (WREN not shown)

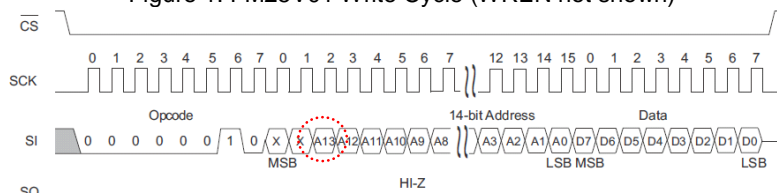


Table 2. Detailed Comparison

	FM25CL64	FM25V01	Comments
Package Types	-G, -DG	-G	Same “green” SOIC package. FM25V01 is not offered in “green” TDFN package.
Package Outlines	SOIC-8, TDFN-8	SOIC-8	Same outline and board footprint for SOIC. FM25V01 is not offered in “green” TDFN package.
Pinout	-	-	Same
Temperature Range	–40 °C to +85 °C	–40 °C to +85 °C	Same
Operating Voltage Range	2.7 V to 3.65 V	2.0 V to 3.6 V	FM25V01 allows operation down to 2.0 V
Active Supply Current	350 μ A @ 1 MHz 7 mA @ 20 MHz	220 μ A @ 1 MHz 2.5 mA @ 40 MHz	FM25V01 offers lower active current
Standby Current	1 μ A	150 μ A	FM25V01 has higher standby current
Sleep Mode Current	-	8 μ A	FM25V01 offers a sleep mode which can be used to reduce the standby/idle current. During wake-up from sleep mode, the device needs a recovery time of 400 μ s.
Read / Write Function	-	-	Same 2-byte addressing, same op-codes
Clock Frequency	20 MHz	40 MHz	FM25V01 supports higher speed
Data Retention	45 years (+85 °C)	10 years (+85 °C) 38 years (+75 °C)	
Endurance	Unlimited	1E+14	FM25V01's endurance is large enough to be considered as unlimited for all practical applications. For a 64-byte loop, at 40 MHz, the FM25V01's endurance is 43 years.
V _{DD} Power-Up Ramp Rate (t _{VR})	-	50 μ s / V	Power-up ramp rate should be slower than 50 μ s / V for FM25V01
V _{DD} Power-Down Ramp Rate (t _{VF})	-	100 μ s / V	Power-down ramp rate should be slower than 100 μ s / V for FM25V01
Power-Up to First Access (t _{PU})	-	250 μ s	After power-up, the first access of FM25V01 should be after 250 μ s

Critical Considerations

All the parameter differences in [Table 2](#) should be considered during the migration to FM25V01. The critical differences are discussed in this section. System designers are also recommended to review the detailed datasheets when migrating to the new part.

Read / Write Function

The FM25V01 device has an extra address bit, A13, to support the additional 64-Kbit memory when compared to the FM25CL64. Setting A13 to a 0 level will address the 64-Kbits of your current FM25CL64 application. Setting A13 to a 1 level will address the additional 64-Kbits of the FM25V01. Note that roll over will not happen at 0x1FFF in FM25V01; instead it will roll over at 0x3FFF.

Standby Current / Sleep Mode Current

The FM25V01 has higher standby current of 150 μ A compared to 1 μ A of FM25CL64. But FM25V01 offers an additional sleep mode feature which can be used to reduce the standby/idle current. The sleep mode current is 8 μ A. Note that during wake-up from sleep mode, the device needs a recovery time of 400 μ s.

V_{DD} Ramp Rate

V_{DD} power-up and power-down ramp rate specifications are added in FM25V01 device. Ensure that the power-up ramp rate is slower than 50 $\mu\text{s} / \text{V}$ and power-down ramp rate is slower than 100 $\mu\text{s} / \text{V}$ in your system.

Power-Up to First Access

Power-up to first access specification is added in FM25V01 device. Ensure that the FM25V01 device is accessed only after 250 μs from power-up.

Conclusion

AN311 discusses the differences between FM25V01 and FM25CL64 which need to be considered during migration.

Document History

Document Title: FM25V01 Replaces Two FM25CL64s - AN311

Document Number: 001-86834

Revision	ECN	Orig. of Change	Submission Date	Description of Change
**	3944550	GVCH	03/26/2013	New Spec.
*A	4281267	MEDU	03/07/2014	Updated to Cypress Template. Added Compatibility Table and Detailed Comparison Table.

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

Products

Automotive	cypress.com/go/automotive
Clocks & Buffers	cypress.com/go/clocks
Interface	cypress.com/go/interface
Lighting & Power Control	cypress.com/go/powerpsoc cypress.com/go/plc
Memory	cypress.com/go/memory
PSoC	cypress.com/go/psoc
Touch Sensing	cypress.com/go/touch
USB Controllers	cypress.com/go/usb
Wireless/RF	cypress.com/go/wireless

PSoC® Solutions

psoc.cypress.com/solutions

[PSoC 1](#) | [PSoC 3](#) | [PSoC 4](#) | [PSoC 5LP](#)

Cypress Developer Community

[Community](#) | [Forums](#) | [Blogs](#) | [Video](#) | [Training](#)

Technical Support

cypress.com/go/support

PSoC is a registered trademark of Cypress Semiconductor Corp. All other trademarks or registered trademarks referenced herein are the property of their respective owners.



Cypress Semiconductor
198 Champion Court
San Jose, CA 95134-1709

Phone : 408-943-2600
Fax : 408-943-4730
Website : www.cypress.com

© Cypress Semiconductor Corporation, 2013-2014. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress product. Nor does it convey or imply any license under patent or other rights. Cypress products are not warranted nor intended to be used for medical, life support, life saving, critical control or safety applications, unless pursuant to an express written agreement with Cypress. Furthermore, Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

This Source Code (software and/or firmware) is owned by Cypress Semiconductor Corporation (Cypress) and is protected by and subject to worldwide patent protection (United States and foreign), United States copyright laws and international treaty provisions. Cypress hereby grants to licensee a personal, non-exclusive, non-transferable license to copy, use, modify, create derivative works of, and compile the Cypress Source Code and derivative works for the sole purpose of creating custom software and or firmware in support of licensee product to be used only in conjunction with a Cypress integrated circuit as specified in the applicable agreement. Any reproduction, modification, translation, compilation, or representation of this Source Code except as specified above is prohibited without the express written permission of Cypress.

Disclaimer: CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Cypress reserves the right to make changes without further notice to the materials described herein. Cypress does not assume any liability arising out of the application or use of any product or circuit described herein. Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress' product in a life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Use may be limited by and subject to the applicable Cypress software license agreement.