



# PSoC<sup>®</sup> CY8C24x93 Family

## Technical Reference Manual (TRM)

**Document No. 001-87135 Rev. \*B**

**May 26, 2015**

Cypress Semiconductor  
198 Champion Court  
San Jose, CA 95134-1709  
Phone (USA): 800.858.1810  
Phone (Intl.): 408.943.2600

## Copyrights

© Cypress Semiconductor Corporation, 2013-2015. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress product. Nor does it convey or imply any license under patent or other rights. Cypress products are not warranted nor intended to be used for medical, life support, life saving, critical control or safety applications, unless pursuant to an express written agreement with Cypress. Furthermore, Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

PSoC® and CapSense® are registered trademarks and PSoC Designer™, and Programmable System-on-Chip™ are trademarks of Cypress Semiconductor Corporation (Cypress), along with Cypress® and Cypress Semiconductor™. All other trademarks or registered trademarks referenced herein are the property of their respective owners.

Purchase of I<sup>2</sup>C components from Cypress or one of its sublicensed Associated Companies conveys a license under the Philips I<sup>2</sup>C Patent Rights to use these components in an I<sup>2</sup>C system, provided that the system conforms to the I<sup>2</sup>C Standard Specification as defined by Philips.

Any Source Code (software and/or firmware) is owned by Cypress Semiconductor Corporation (Cypress) and is protected by and subject to worldwide patent protection (United States and foreign), United States copyright laws and international treaty provisions. Cypress hereby grants to licensee a personal, non-exclusive, non-transferable license to copy, use, modify, create derivative works of, and compile the Cypress Source Code and derivative works for the sole purpose of creating custom software and or firmware in support of licensee product to be used only in conjunction with a Cypress integrated circuit as specified in the applicable agreement. Any reproduction, modification, translation, compilation, or representation of this Source Code except as specified above is prohibited without the express written permission of Cypress.

Disclaimer: CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Cypress reserves the right to make changes without further notice to the materials described herein. Cypress does not assume any liability arising out of the application or use of any product or circuit described herein. Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress' product in a life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Use may be limited by and subject to the applicable Cypress software license agreement.

## Flash Code Protection

Note the following details of the flash code protection features on Cypress devices.

Cypress products meet the specifications contained in their particular Cypress Datasheets. Cypress believes that its family of products is one of the most secure families of its kind on the market today, regardless of how they are used. There may be methods, unknown to Cypress, that can breach the code protection features. Any of these methods, to our knowledge, would be dishonest and possibly illegal. Neither Cypress nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Cypress is willing to work with the customer who is concerned about the integrity of their code. Code protection is constantly evolving. We at Cypress are committed to continuously improving the code protection features of our products.

# Contents Overview



|  |            |
|--|------------|
| <b>Section A: Overview</b>                   | <b>13</b>  |
| 1. Pin Information .....                     | 21         |
| <b>Section B: PSoC Core</b>                  | <b>27</b>  |
| 2. CPU Core (M8C) .....                      | 31         |
| 3. Supervisory ROM (SROM) .....              | 37         |
| 4. RAM Paging.....                           | 43         |
| 5. Interrupt Controller .....                | 49         |
| 6. General-Purpose I/O (GPIO) .....          | 57         |
| 7. System Performance Controller (SPC) ..... | 65         |
| 8. Internal Main Oscillator (IMO) .....      | 67         |
| 9. Internal Low-speed Oscillator (ILO) ..... | 71         |
| 10. External Crystal Oscillator (ECO) .....  | 73         |
| 11. Sleep and Watchdog .....                 | 77         |
| <b>Section C: Analog System</b>              | <b>87</b>  |
| 12. IDAC .....                               | 89         |
| 13. I/O Analog Multiplexer .....             | 91         |
| 14. Comparators .....                        | 93         |
| <b>Section D: System Resources</b>           | <b>97</b>  |
| 15. Digital Clocks .....                     | 103        |
| 16. I <sup>2</sup> C Slave .....             | 111        |
| 17. System Resets .....                      | 127        |
| 18. POR and LVD .....                        | 135        |
| 19. SPI .....                                | 137        |
| 20. Programmable Timer .....                 | 151        |
| 21. Full-Speed USB (CY8C24193/493) .....     | 155        |
| <b>Section E: Registers</b>                  | <b>173</b> |
| 22. Register Reference .....                 | 177        |
| <b>Section F: Glossary</b>                   | <b>269</b> |
| <b>Section G: Index</b>                      | <b>285</b> |



# Contents



|   |           |
|---|-----------|
| <b>Section A: Overview</b>                        | <b>13</b> |
| <b>1. Pin Information</b>                         | <b>21</b> |
| 1.1 Pinouts.....                                  | 21        |
| 1.1.1 16-pin QFN (13 GPIOs) [1] .....             | 21        |
| 1.1.2 32-pin QFN (28 GPIOs) [5] .....             | 22        |
| 1.1.3 32-pin QFN (28 GPIOs) [9] .....             | 23        |
| 1.1.4 48-pin QFN (34 GPIOs) [13] .....            | 24        |
| 1.1.5 48-pin QFN (36 GPIOs (With USB)) [18] ..... | 25        |
| 1.1.6 48-pin QFN (OCD) (36 GPIOs) [22] .....      | 26        |
| <b>Section B: PSoC Core</b>                       | <b>27</b> |
| <b>2. CPU Core (M8C)</b>                          | <b>31</b> |
| 2.1 Overview .....                                | 31        |
| 2.2 Internal Registers .....                      | 31        |
| 2.3 Address Spaces .....                          | 31        |
| 2.4 Instruction Set Summary .....                 | 32        |
| 2.5 Instruction Formats .....                     | 34        |
| 2.5.1 One-Byte Instructions .....                 | 34        |
| 2.5.2 Two-Byte Instructions .....                 | 34        |
| 2.5.3 Three-Byte Instructions .....               | 35        |
| 2.6 Register Definitions .....                    | 36        |
| 2.6.1 CPU_F Register .....                        | 36        |
| 2.6.2 Related Registers .....                     | 36        |
| <b>3. Supervisory ROM (SROM)</b>                  | <b>37</b> |
| 3.1 Architectural Description .....               | 37        |
| 3.1.1 Additional SROM Feature .....               | 38        |
| 3.1.2 SROM Function Descriptions .....            | 38        |
| 3.1.2.1 SWBootReset Function .....                | 38        |
| 3.1.2.2 ReadBlock Function .....                  | 39        |
| 3.1.2.3 WriteBlock Function .....                 | 39        |
| 3.1.2.4 EraseBlock Function .....                 | 40        |
| 3.1.2.5 ProtectBlock Function .....               | 40        |
| 3.1.2.6 TableRead Function .....                  | 40        |
| 3.1.2.7 EraseAll Function .....                   | 40        |
| 3.1.2.8 Checksum Function .....                   | 41        |
| 3.1.2.9 Calibrate0 Function .....                 | 41        |
| 3.1.2.10 Calibrate1 Function .....                | 41        |
| 3.1.2.11 WriteAndVerify Function .....            | 41        |
| 3.1.2.12 HWBootReset Function .....               | 42        |
| 3.2 Register Definitions .....                    | 42        |

|   |           |
|---|-----------|
| <b>4. RAM Paging</b>                          | <b>43</b> |
| 4.1 Architectural Description.....            | 43        |
| 4.1.1 Basic Paging.....                       | 43        |
| 4.1.2 Stack Operations .....                  | 43        |
| 4.1.3 Interrupts .....                        | 44        |
| 4.1.4 MVI Instructions.....                   | 44        |
| 4.1.5 Current Page Pointer.....               | 44        |
| 4.1.6 Index Memory Page Pointer .....         | 45        |
| 4.2 Register Definitions .....                | 46        |
| 4.2.1 TMP_DRx Registers .....                 | 46        |
| 4.2.2 CUR_PP Register .....                   | 46        |
| 4.2.3 STK_PP Register .....                   | 47        |
| 4.2.4 IDX_PP Register .....                   | 47        |
| 4.2.5 MVR_PP Register .....                   | 47        |
| 4.2.6 MVW_PP Register .....                   | 48        |
| 4.2.7 Related Registers.....                  | 48        |
| <b>5. Interrupt Controller</b>                | <b>49</b> |
| 5.1 Architectural Description.....            | 49        |
| 5.1.1 Posted versus Pending Interrupts .....  | 50        |
| 5.2 Application Overview .....                | 50        |
| 5.3 Register Definitions .....                | 51        |
| 5.3.1 INT_CLR0 Register .....                 | 51        |
| 5.3.2 INT_CLR1 Register .....                 | 52        |
| 5.3.3 INT_CLR2 Register .....                 | 53        |
| 5.3.4 INT_MSK0 Register.....                  | 54        |
| 5.3.5 INT_MSK1 Register.....                  | 54        |
| 5.3.6 INT_MSK2 Register.....                  | 55        |
| 5.3.7 INT_SW_EN Register .....                | 55        |
| 5.3.8 INT_VC Register .....                   | 56        |
| 5.3.9 Related Registers .....                 | 56        |
| <b>6. General-Purpose I/O (GPIO)</b>          | <b>57</b> |
| 6.1 Architectural Description.....            | 57        |
| 6.1.1 General Description.....                | 58        |
| 6.1.2 Digital I/O.....                        | 58        |
| 6.1.3 Analog and Digital Inputs.....          | 58        |
| 6.1.4 Port 1 Distinctions.....                | 58        |
| 6.1.5 Port 0 Distinctions.....                | 59        |
| 6.1.6 GPIO Block Interrupts.....              | 59        |
| 6.1.6.1 Interrupt Modes .....                 | 59        |
| 6.1.7 Data Bypass .....                       | 60        |
| 6.2 Register Definitions .....                | 61        |
| 6.2.1 PRTxDR Registers .....                  | 61        |
| 6.2.2 PRTxIE Registers .....                  | 61        |
| 6.2.3 PRTxDMx Registers .....                 | 62        |
| 6.2.4 IO_CFG1 Register.....                   | 63        |
| 6.2.5 IO_CFG2 Register.....                   | 63        |
| <b>7. System Performance Controller (SPC)</b> | <b>65</b> |
| 7.1 Architectural Description.....            | 65        |
| 7.2 Application Overview .....                | 65        |
| 7.2.1 Use of the Application Interface.....   | 65        |

|                   |  |           |
|-------------------|--|-----------|
| 7.2.2             | Status Codes .....                               | 66        |
| 7.2.3             | ADC User Module Usage .....                      | 66        |
| <b>8.</b>         | <b>Internal Main Oscillator (IMO)</b> .....      | <b>67</b> |
| 8.1               | Architectural Description .....                  | 67        |
| 8.2               | Application Overview .....                       | 67        |
| 8.2.1             | Trimming the IMO .....                           | 67        |
| 8.2.2             | Engaging Slow IMO .....                          | 67        |
| 8.3               | Register Definitions.....                        | 68        |
| 8.3.1             | IMO_TR Register .....                            | 68        |
| 8.3.2             | IMO_TR1 Register .....                           | 68        |
| 8.3.3             | CPU_SCR1 Register .....                          | 69        |
| 8.3.4             | OSC_CR2 Register .....                           | 69        |
| 8.3.5             | Related Registers .....                          | 69        |
| <b>9.</b>         | <b>Internal Low-speed Oscillator (ILO)</b> ..... | <b>71</b> |
| 9.1               | Architectural Description .....                  | 71        |
| 9.2               | Register Definitions.....                        | 72        |
| 9.2.1             | ILO_TR Register .....                            | 72        |
| <b>10.</b>        | <b>External Crystal Oscillator (ECO)</b> .....   | <b>73</b> |
| 10.1              | Architectural Description .....                  | 73        |
| 10.2              | Application Overview .....                       | 74        |
| 10.3              | Register Definitions.....                        | 75        |
| 10.3.1            | ECO_ENBUS Register .....                         | 75        |
| 10.3.2            | ECO_TRIM Register .....                          | 75        |
| 10.3.3            | ECO_CFG Register .....                           | 75        |
| 10.3.4            | Related Registers .....                          | 76        |
| 10.4              | Usage Modes and Guidelines.....                  | 76        |
| <b>11.</b>        | <b>Sleep and Watchdog</b> .....                  | <b>77</b> |
| 11.1              | Architectural Description .....                  | 77        |
| 11.1.1            | Sleep Control Implementation Logic .....         | 78        |
| 11.1.1.1          | Wakeup Logic.....                                | 78        |
| 11.1.2            | Sleep Timer.....                                 | 80        |
| 11.2              | Application Overview .....                       | 80        |
| 11.3              | Register Definitions.....                        | 81        |
| 11.3.1            | RES_WDT Register .....                           | 81        |
| 11.3.2            | SLP_CFG Register .....                           | 81        |
| 11.3.3            | SLP_CFG2 Register .....                          | 82        |
| 11.3.4            | SLP_CFG3 Register .....                          | 82        |
| 11.3.5            | Related Registers .....                          | 82        |
| 11.4              | Timing Diagrams.....                             | 83        |
| 11.4.1            | Sleep Sequence .....                             | 83        |
| 11.4.2            | Wakeup Sequence.....                             | 84        |
| 11.4.3            | Bandgap Refresh.....                             | 84        |
| 11.4.4            | Watchdog Timer.....                              | 85        |
| <b>Section C:</b> | <b>Analog System</b> .....                       | <b>87</b> |
| <b>12.</b>        | <b>IDAC</b> .....                                | <b>89</b> |
| 12.1              | Architectural Description .....                  | 89        |
| 12.1.1            | IDAC .....                                       | 89        |

|                   |  |            |
|-------------------|--|------------|
| 12.2              | Register Definitions .....                 | 90         |
| 12.2.1            | CS_CR2 Register .....                      | 90         |
| 12.2.2            | CS_CR3 Register .....                      | 90         |
| 12.2.3            | IDAC_D Register .....                      | 90         |
| <b>13.</b>        | <b>I/O Analog Multiplexer</b> .....        | <b>91</b>  |
| 13.1              | Architectural Description.....             | 91         |
| 13.2              | Register Definitions .....                 | 92         |
| 13.2.1            | MUX_CRx Registers .....                    | 92         |
| <b>14.</b>        | <b>Comparators</b> .....                   | <b>93</b>  |
| 14.1              | Architectural Description .....            | 93         |
| 14.2              | Register Definitions .....                 | 95         |
| 14.2.1            | CMP_RDC Register .....                     | 95         |
| 14.2.2            | CMP_MUX Register .....                     | 95         |
| 14.2.3            | CMP_CR0 Register .....                     | 96         |
| 14.2.4            | CMP_CR1 Register .....                     | 96         |
| 14.2.5            | CMP_LUT Register .....                     | 96         |
| <b>Section D:</b> | <b>System Resources</b> .....              | <b>97</b>  |
| <b>15.</b>        | <b>Digital Clocks</b> .....                | <b>103</b> |
| 15.1              | Architectural Description.....             | 103        |
| 15.1.1            | Internal Main Oscillator.....              | 103        |
| 15.1.2            | Internal Low-speed Oscillator .....        | 103        |
| 15.1.3            | External Clock .....                       | 104        |
| 15.1.3.1          | Switch Operation .....                     | 104        |
| 15.2              | Register Definitions .....                 | 106        |
| 15.2.1            | USB_MISC_CR Register .....                 | 106        |
| 15.2.2            | OUT_P0 Register .....                      | 106        |
| 15.2.3            | OUT_P1 Register .....                      | 107        |
| 15.2.4            | OSC_CR0 Register .....                     | 108        |
| 15.2.5            | OSC_CR2 Register .....                     | 109        |
| <b>16.</b>        | <b>I<sup>2</sup>C Slave</b> .....          | <b>111</b> |
| 16.1              | Architectural Description.....             | 111        |
| 16.1.1            | Basic I <sup>2</sup> C Data Transfer ..... | 112        |
| 16.2              | Application Overview .....                 | 113        |
| 16.2.1            | Slave Operation.....                       | 113        |
| 16.3              | Register Definitions .....                 | 114        |
| 16.3.1            | I2C_XCFG Register .....                    | 114        |
| 16.3.2            | I2C_XSTAT Register .....                   | 115        |
| 16.3.3            | I2C_ADDR Register .....                    | 115        |
| 16.3.4            | I2C_ADDR Register .....                    | 116        |
| 16.3.5            | I2C_BP_EZ_CFG Register .....               | 116        |
| 16.3.6            | I2C_CP Register .....                      | 117        |
| 16.3.7            | CPU_BP Register .....                      | 117        |
| 16.3.8            | CPU_CP Register .....                      | 117        |
| 16.3.9            | I2C_BUF Register .....                     | 118        |
| 16.3.10           | I2C_CFG Register .....                     | 119        |
| 16.3.11           | I2C_SCR Register .....                     | 121        |
| 16.3.12           | I2C_DR Register .....                      | 122        |
| 16.4              | Timing Diagrams .....                      | 123        |



|            |  |            |
|------------|--|------------|
| 16.4.1     | Clock Generation .....                       | 123        |
| 16.4.2     | Basic I/O Timing .....                       | 123        |
| 16.4.3     | Status Timing .....                          | 124        |
| 16.4.4     | Slave Stall Timing .....                     | 125        |
| <b>17.</b> | <b>System Resets</b>                         | <b>127</b> |
| 17.1       | Architectural Description .....              | 127        |
| 17.2       | Pin Behavior During Reset .....              | 127        |
| 17.2.1     | GPIO Behavior on Power Up .....              | 127        |
| 17.2.2     | Powerup External Reset Behavior .....        | 128        |
| 17.2.3     | GPIO Behavior on External Reset .....        | 128        |
| 17.3       | Register Definitions .....                   | 129        |
| 17.3.1     | CPU_SCR1 Register .....                      | 129        |
| 17.3.2     | CPU_SCR0 Register .....                      | 130        |
| 17.4       | Timing Diagrams .....                        | 131        |
| 17.4.1     | Power-On-Reset .....                         | 131        |
| 17.4.2     | External Reset .....                         | 131        |
| 17.4.3     | Watchdog Timer Reset .....                   | 131        |
| 17.4.4     | Reset Details .....                          | 133        |
| 17.5       | Power Modes .....                            | 133        |
| <b>18.</b> | <b>POR and LVD</b>                           | <b>135</b> |
| 18.1       | Architectural Description .....              | 135        |
| 18.2       | Register Definitions .....                   | 136        |
| 18.2.1     | VLT_CR Register .....                        | 136        |
| 18.2.2     | VLT_CMP Register .....                       | 136        |
| <b>19.</b> | <b>SPI</b>                                   | <b>137</b> |
| 19.1       | Architectural Description .....              | 137        |
| 19.1.1     | SPI Protocol Function .....                  | 137        |
| 19.1.1.1   | SPI Protocol Signal Definitions .....        | 138        |
| 19.1.2     | SPI Master Function .....                    | 138        |
| 19.1.2.1   | Usability Exceptions .....                   | 138        |
| 19.1.2.2   | Block Interrupt .....                        | 138        |
| 19.1.3     | SPI Slave Function .....                     | 138        |
| 19.1.3.1   | Usability Exceptions .....                   | 138        |
| 19.1.3.2   | Block Interrupt .....                        | 139        |
| 19.1.4     | Input Synchronization .....                  | 139        |
| 19.2       | Register Definitions .....                   | 139        |
| 19.2.1     | SPI_TXR Register .....                       | 139        |
| 19.2.2     | SPI_RXR Register .....                       | 140        |
| 19.2.2.1   | SPI Master Data Register Definitions .....   | 140        |
| 19.2.2.2   | SPI Slave Data Register Definitions .....    | 140        |
| 19.2.3     | SPI_CR Register .....                        | 141        |
| 19.2.3.1   | SPI Control Register Definitions .....       | 141        |
| 19.2.4     | SPI_CFG Register .....                       | 142        |
| 19.2.4.1   | SPI Configuration Register Definitions ..... | 142        |
| 19.2.5     | Related Registers .....                      | 142        |
| 19.3       | Timing Diagrams .....                        | 143        |
| 19.3.1     | SPI Mode Timing .....                        | 143        |
| 19.3.2     | SPIM Timing .....                            | 144        |
| 19.3.3     | SPIS Timing .....                            | 148        |

|  |            |
|--|------------|
| <b>20. Programmable Timer</b>                                    | <b>151</b> |
| 20.1 Architectural Description.....                              | 151        |
| 20.1.1 Operation.....  | 151        |
| 20.2 Register Definitions .....                                  | 153        |
| 20.2.1 PT0_CFG Register.....                                     | 153        |
| 20.2.2 PT1_CFG Register.....                                     | 153        |
| 20.2.3 PT2_CFG Register.....                                     | 154        |
| 20.2.4 PTx_DATA0 Register.....                                   | 154        |
| 20.2.5 PTx_DATA1 Register.....                                   | 154        |
| <b>21. Full-Speed USB (CY8C24193/493)</b>                        | <b>155</b> |
| 21.1 Architectural Description.....                              | 155        |
| 21.2 Application Description .....                               | 155        |
| 21.2.1 USB SIE .....   | 155        |
| 21.2.2 USB SRAM.....   | 156        |
| 21.2.2.1 PSoC Memory Arbiter .....                               | 156        |
| 21.2.3 Oscillator Lock .....                                     | 158        |
| 21.2.4 Transceiver .....   | 158        |
| 21.2.5 USB Suspend.....  | 159        |
| 21.2.5.1 Using Standby I2C-USB Sleep Mode for USB Suspend.....   | 159        |
| 21.2.5.2 Using Standby or Deep Sleep Modes for USB Suspend ..... | 159        |
| 21.2.5.3 Wakeup from Suspend.....                                | 159        |
| 21.2.6 Regulator.....  | 159        |
| 21.3 Register Definitions .....                                  | 161        |
| 21.3.1 USB_SOF0 Register .....                                   | 161        |
| 21.3.2 USB_CR0 Register.....                                     | 161        |
| 21.3.3 USBIO_CR0 Register.....                                   | 162        |
| 21.3.4 USBIO_CR1 Register.....                                   | 162        |
| 21.3.5 EP0_CR Register .....                                     | 163        |
| 21.3.6 EP0_CNT Register .....                                    | 164        |
| 21.3.7 EP0_DRx Register .....                                    | 164        |
| 21.3.8 EPx_CNT1 Register .....                                   | 165        |
| 21.3.9 EPx_CNT0 Register .....                                   | 166        |
| 21.3.10 EPx_CR0 Register .....                                   | 167        |
| 21.3.11 PMAx_WA Register .....                                   | 168        |
| 21.3.12 PMAx_DR Register .....                                   | 169        |
| 21.3.13 PMAx_RA Register.....                                    | 170        |
| 21.3.14 USB_CR1 Register.....                                    | 171        |
| 21.3.15 USB_MISC_CR Register .....                               | 171        |
| 21.3.16 IMO_TR1 Register.....                                    | 172        |
| <b>Section E: Registers</b>                                      | <b>173</b> |
| <b>22. Register Reference</b>                                    | <b>177</b> |
| 22.1 Maneuvering Around the Registers .....                      | 177        |
| 22.2 Register Conventions .....                                  | 177        |
| 22.3 Bank 0 Registers .....                                      | 178        |
| 22.3.1 PRTxDR .....  | 178        |
| 22.3.2 PRTxIE .....  | 179        |
| 22.3.3 SPI_TXR .....   | 180        |
| 22.3.4 SPI_RXR .....   | 181        |
| 22.3.5 SPI_CR .....  | 182        |
| 22.3.6 USB_SOF0 .....  | 183        |

|         |                        |     |
|---------|------------------------|-----|
| 22.3.7  | USB_SOF1 .....         | 184 |
| 22.3.8  | USB_CR0 .....          | 185 |
| 22.3.9  | USBIO_CR0 .....        | 186 |
| 22.3.10 | USBIO_CR1 .....        | 187 |
| 22.3.11 | EP0_CR .....           | 188 |
| 22.3.12 | EP0_CNT .....          | 189 |
| 22.3.13 | EP0_DRx .....          | 190 |
| 22.3.14 | EPx_CNT0 .....         | 191 |
| 22.3.15 | EPx_CNT1 .....         | 192 |
| 22.3.16 | PMAx_DR .....          | 193 |
| 22.3.17 | CMP_RDC .....          | 194 |
| 22.3.18 | CMP_MUX .....          | 195 |
| 22.3.19 | CMP_CR0 .....          | 196 |
| 22.3.20 | CMP_CR1 .....          | 197 |
| 22.3.21 | CMP_LUT .....          | 199 |
| 22.3.22 | CS_CR2 .....           | 200 |
| 22.3.23 | CS_CR3 .....           | 201 |
| 22.3.24 | PT0_CFG .....          | 202 |
| 22.3.25 | PTx_DATA1 .....        | 203 |
| 22.3.26 | PTx_DATA0 .....        | 204 |
| 22.3.27 | PT1_CFG .....          | 205 |
| 22.3.28 | PT2_CFG .....          | 206 |
| 22.3.29 | I2C_XCFG .....         | 207 |
| 22.3.30 | I2C_ADDR .....         | 209 |
| 22.3.31 | I2C_XSTAT .....        | 210 |
| 22.3.32 | I2C_BP_EZ_CFG .....    | 211 |
| 22.3.33 | I2C_CP .....           | 212 |
| 22.3.34 | CPU_BP .....           | 213 |
| 22.3.35 | CPU_CP .....           | 214 |
| 22.3.36 | I2C_BUF .....          | 215 |
| 22.3.37 | CUR_PP .....           | 216 |
| 22.3.38 | STK_PP .....           | 217 |
| 22.3.39 | IDX_PP .....           | 218 |
| 22.3.40 | MVR_PP .....           | 219 |
| 22.3.41 | MVW_PP .....           | 220 |
| 22.3.42 | I2C_CFG .....          | 221 |
| 22.3.43 | I2C_SCR .....          | 222 |
| 22.3.44 | I2C_DR .....           | 223 |
| 22.3.45 | INT_CLR0 .....         | 224 |
| 22.3.46 | INT_CLR1 .....         | 226 |
| 22.3.47 | INT_CLR2 .....         | 228 |
| 22.3.48 | INT_MSK2 .....         | 230 |
| 22.3.49 | INT_MSK1 .....         | 231 |
| 22.3.50 | INT_MSK0 .....         | 232 |
| 22.3.51 | INT_SW_EN .....        | 233 |
| 22.3.52 | INT_VC .....           | 234 |
| 22.3.53 | RES_WDT .....          | 235 |
| 22.3.54 | CPU_F .....            | 236 |
| 22.3.55 | IDAC_D .....           | 238 |
| 22.3.56 | CPU_SCR1 .....         | 239 |
| 22.3.57 | CPU_SCR0 .....         | 240 |
| 22.4    | Bank 1 Registers ..... | 241 |
| 22.4.1  | PRTxDM0 .....          | 241 |

|         |                   |     |
|---------|-------------------|-----|
| 22.4.2  | PRTxDM1 .....     | 242 |
| 22.4.3  | SPI_CFG .....     | 243 |
| 22.4.4  | USB_CR1 .....     | 244 |
| 22.4.5  | PMAx_WA .....     | 245 |
| 22.4.6  | PMAx_RA .....     | 246 |
| 22.4.7  | EPx_CR0 .....     | 247 |
| 22.4.8  | TMP_DRx .....     | 248 |
| 22.4.9  | USB_MISC_CR ..... | 249 |
| 22.4.10 | OUT_P0 .....      | 250 |
| 22.4.11 | ECO_ENBUS .....   | 251 |
| 22.4.12 | ECO_TRIM .....    | 252 |
| 22.4.13 | MUX_CRx .....     | 253 |
| 22.4.14 | IO_CFG1 .....     | 254 |
| 22.4.15 | OUT_P1 .....      | 255 |
| 22.4.16 | IO_CFG2 .....     | 257 |
| 22.4.17 | OSC_CR0 .....     | 258 |
| 22.4.18 | ECO_CFG .....     | 259 |
| 22.4.19 | OSC_CR2 .....     | 260 |
| 22.4.20 | VLT_CR .....      | 261 |
| 22.4.21 | VLT_CMP .....     | 262 |
| 22.4.22 | IMO_TR .....      | 263 |
| 22.4.23 | ILO_TR .....      | 264 |
| 22.4.24 | SLP_CFG .....     | 265 |
| 22.4.25 | SLP_CFG2 .....    | 266 |
| 22.4.26 | SLP_CFG3 .....    | 267 |
| 22.4.27 | IMO_TR1 .....     | 268 |

|                            |            |
|----------------------------|------------|
| <b>Section F: Glossary</b> | <b>269</b> |
|----------------------------|------------|

|                         |            |
|-------------------------|------------|
| <b>Section G: Index</b> | <b>285</b> |
|-------------------------|------------|

# Section A: Overview



The PSoC<sup>®</sup> family consists of many Programmable System-on-Chip with On-Chip Controller devices. The CY24x93 PSoC devices have programmable analog and digital resources in addition to a fast CPU, flash program memory, and SRAM data memory.

For the most up-to-date ordering, pinout, packaging, or electrical specification information, refer to the PSoC device's datasheet. For the most current technical reference manual information and newest product documentation, go to the Cypress web site at <http://www.cypress.com/go/RLTRM>.

---

## Document Organization

This manual is organized into sections and chapters, according to PSoC functionality. Each section contains a top-level architectural diagram and a register summary (if applicable). Most chapters within the sections have an introduction, an architectural/application description, register definitions, and timing diagrams. The sections are as follows:

- **Overview** – Presents the top-level architecture, helpful information to get started, and document history and conventions. The PSoC device **pinouts** are detailed in [Pin Information, on page 21](#).
- **PSoC Core** – Describes the heart of the PSoC device in various chapters, beginning with an architectural overview and a summary list of registers pertaining to the PSoC core.
- **Analog System** – Describes the configurable PSoC Analog system in various chapters, beginning with an architectural overview and a summary list of registers pertaining to the Analog system.
- **System Resources** – Presents additional PSoC system resources, beginning with an overview and a summary list of registers pertaining to system resources.
- **Registers** – Lists all PSoC device registers in register mapping tables, and presents bit-level detail of each register in its own Register Reference chapter. Where applicable, detailed register descriptions are also located in each chapter.
- **Glossary** – Defines the specialized terminology used in this manual. Glossary terms are presented in ***bold, italic font*** throughout this manual.
- **Index** – Lists the location of key topics and elements that constitute and empower the PSoC devices.

## Top-Level Architecture

The PSoC block diagram on the next page illustrates the top-level architecture of the CY24x93 devices. Each major grouping in the diagram is covered in this manual in its own section: PSoC Core, Analog System, and System Resources. Banding these three main areas together is the communication network of the system **bus**.

### PSoC Core

The PSoC Core is a powerful engine that supports a rich instruction set. It includes the **SRAM** for data storage, an **interrupt** controller for easy program execution to new addresses, sleep and watchdog timers, a regulated 3.0-V output option for Port 1 I/Os, and multiple **clock** sources that include the IMO (internal main oscillator) and ILO (internal low-speed oscillator) for precision, programmable clocking.

The CPU core, called the M8C, is a powerful processor with speeds up to 24 MHz. The M8C is a four MIPS 8-**bit** Harvard architecture microprocessor. Within the CPU core are the **SRAM** and **Flash** memory components that provide flexible programming.

PSoC GPIOs provide connection to the CPU and Analog resources of the device. Each pin's drive mode is selectable from four options, allowing great flexibility in external interfacing. Every pin also has the capability to generate a system interrupt on low level and change from last read.

### Analog System


The analog system is composed of comparators, reference drivers, I/O multiplexers IDAC and an ADC. Various reference selections are provided.

### System Resources

The System Resources provide additional PSoC capability. These system resources include:

- Digital clocks to increase the flexibility of the PSoC programmable system-on-chip.
- I2C functionality with "no bus stalling."
- Various system resets supported by the M8C.
- Power-on-reset (POR) circuit protection.
- SPI master and slave functionality.
- A programmable timer to provide periodic interrupts.
- Clock boost network providing a stronger signal to switches.
- Full-speed USB interface for USB 2.0 communication with 512 bytes of dedicated buffer memory and an internal 3-V regulator.

PSoC Core Top-Level Block Diagram

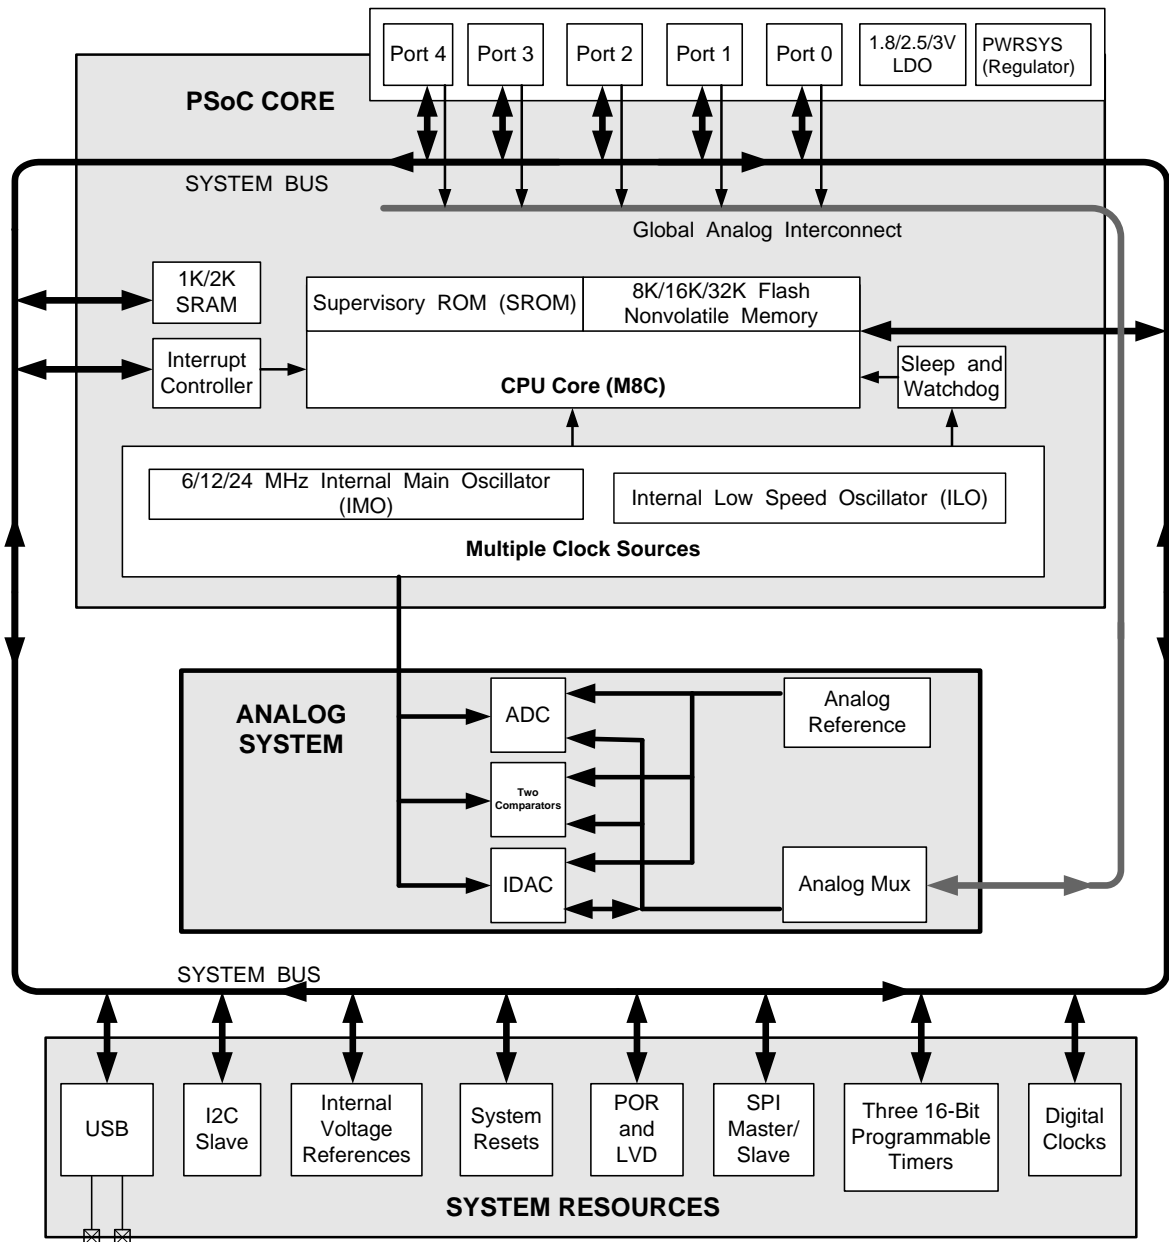

## Getting Started

The quickest path to understanding PSoC is by reading the PSoC device's datasheet and using *PSoC Designer™ Integrated Development Environment (IDE)*. This manual is useful for understanding the details of the PSoC integrated circuit.

**Important Note** For the most up-to-date Ordering, Packaging, or Electrical Specification information, refer to the individual PSoC device's datasheet or go to <http://www.cypress.com>.

## Support

Free support for PSoC products is available online at <http://www.cypress.com>. Resources include Training Seminars, Discussion Forums, Application Notes, TightLink Technical Support Email/Knowledge Base, and Application Support Technicians.

Technical Support can be reached at <http://www.cypress.com/support>.

## Product Upgrades

Cypress provides scheduled upgrades and version enhancements for PSoC Designer free of charge. You can order the upgrades from your distributor on CD-ROM or download them directly from <http://www.cypress.com> under Software. Also provided are critical updates to system documentation under <http://www.cypress.com> >> Documentation.

## Development Kits

Development Kits are available from the following distributors: Digi-Key, Avnet, Arrow, and Future. The Cypress Online Store contains development kits, **C** compilers, and all accessories for PSoC development. Go to the Cypress Online Store at <http://www.cypress.com> under Order >> PSoC Kits.



## Document History

This section serves as a chronicle of the *PSoC® CY8C24X93 Family Technical Reference Manual*.

### Technical Reference Manual History

| Version/<br>Release Date | Originator | Description of Change   |
|--------------------------|------------|---|
| ** May 2013              | AMKA       | First release of the CY8C24x93 Technical Reference Manual.  |
| *A May 2013              | AMKA       | Updated link in second paragraph in <a href="#">Section A: Overview on page 13</a> .  |
| *B May 2015              | ASRI/RJVB  | <p>Changed IMODIS bits to RSVD.</p> <p>Updated number of blocks for CY8C24093/193 and CY8C24293/393/593 in <a href="#">Table 3-6 on page 39</a> to 64 and 128 respectively.</p> <p>Updated <a href="#">Checksum Function on page 41</a>.</p> <p>Removed reference to IMO disabling in <a href="#">Architectural Description on page 67</a>.</p> <p>Added a note on glitch protection in <a href="#">External Clock on page 104</a>.</p> |

## Documentation Conventions

There are only four distinguishing font types used in this manual, besides those found in the headings.

- The first is the use of *italics* when referencing a document title or file name.
- The second is the use of ***bold italics*** when referencing a term described in the Glossary of this manual.
- The third is the use of Times New Roman font, distinguishing equation examples.
- The fourth is the use of `Courier New` font, distinguishing code examples.

## Register Conventions

The following table lists the register conventions that are specific to this manual. A more detailed set of register conventions is located in the [Register Reference chapter on page 177](#).

### Register Conventions

| Convention                   | Example | Description  |
|------------------------------|---------|--|
| 'x' in a register name       | PRTxIE  | Multiple instances/address ranges of the same register |
| R                            | R : 00  | Read register or bit(s)                                |
| W                            | W : 00  | Write register or bit(s)                               |
| O                            | RO : 00 | Only a read/write register or bit(s).                  |
| L                            | RL : 00 | Logical register or bit(s)                             |
| C                            | RC : 00 | Clearable register or bit(s)                           |
| 00                           | RW : 00 | Reset value is 0x00 or 00h                             |
| XX                           | RW : XX | Register is not reset                                  |
| 0,                           | 0,04h   | Register is in bank 0                                  |
| 1,                           | 1,23h   | Register is in bank 1                                  |
| x,                           | x,F7h   | Register exists in register bank 0 and register bank 1 |
| Empty, grayed-out table cell |         | Reserved bit or group of bits, unless otherwise stated |

## Numeric Naming

Hexadecimal numbers are represented with all letters in uppercase with an appended lowercase 'h' (for example, '14h' or '3Ah') and ***hexadecimal*** numbers may also be represented by a '0x' prefix, the ***C*** coding convention. Binary numbers have an appended lowercase 'b' (for example, '01010100b' or '01000011b'). Numbers not indicated by an 'h' or 'b' are ***decimal***.

## Units of Measure

This table lists the units of measure used in this manual.

### Units of Measure

| Symbol | Unit of Measure               |
|--------|-------------------------------|
| °C     | degrees Celsius               |
| dB     | decibels                      |
| fF     | femtofarads                   |
| Hz     | hertz                         |
| k      | kilo, 1000                    |
| K      | 2 <sup>10</sup> , 1024        |
| KB     | 1024 bytes                    |
| Kbit   | 1024 bits                     |
| kHz    | kilohertz (32.000)            |
| kΩ     | kilohms                       |
| MHz    | megahertz                     |
| MΩ     | megaohms                      |
| μA     | microamperes                  |
| μF     | microfarads                   |
| μs     | microseconds                  |
| μV     | microvolts                    |
| μVrms  | microvolts root-mean-square   |
| mA     | milliamperes                  |
| ms     | milliseconds                  |
| mV     | millivolts                    |
| nA     | nanoamperes                   |
| ns     | nanoseconds                   |
| nV     | nanovolts                     |
| Ω      | ohms                          |
| pF     | picofarads                    |
| pp     | peak-to-peak                  |
| ppm    | parts per million             |
| sps    | samples per second            |
| σ      | sigma: one standard deviation |
| V      | volts                         |

## Acronyms

This table lists the acronyms that are used in this manual.

### Acronyms

| Acronym | Description                        |
|---------|------------------------------------|
| ABUS    | analog output bus                  |
| AC      | alternating current                |
| ADC     | analog-to-digital converter        |
| API     | Application Programming Interface  |
| BC      | broadcast clock                    |
| BR      | bit rate                           |
| BRA     | bus request acknowledge            |
| BRQ     | bus request                        |
| CBUS    | comparator bus                     |
| CI      | carry in                           |
| CMP     | compare                            |
| CO      | carry out                          |
| CPU     | central processing unit            |
| CRC     | cyclic redundancy check            |
| CT      | continuous time                    |
| DAC     | digital-to-analog converter        |
| DC      | direct current                     |
| DI      | digital or data input              |
| DMA     | direct memory access               |
| DO      | digital or data output             |
| ECO     | external crystal oscillator        |
| FB      | feedback                           |
| GIE     | global interrupt enable            |
| GPIO    | general-purpose I/O                |
| ICE     | in-circuit emulator                |
| IDE     | integrated development environment |
| ILO     | internal low-speed oscillator      |
| IMO     | internal main oscillator           |
| I/O     | input/output                       |
| IOR     | I/O read                           |
| IOW     | I/O write                          |
| IPOR    | imprecise power-on-reset           |
| IRQ     | interrupt request                  |
| ISR     | interrupt service routine          |
| ISSP    | in system serial programming       |
| IVR     | interrupt vector read              |
| LFSR    | linear feedback shift register     |
| LRb     | last received bit                  |
| LRB     | last received byte                 |
| LSb     | least significant bit              |
| LSB     | least significant byte             |
| LUT     | look-up table                      |
| MISO    | master-in-slave-out                |
| MOSI    | master-out-slave-in                |
| MSb     | most significant bit               |
| MSB     | most significant byte              |
| PC      | program counter                    |

### Acronyms<continue> (continued)

| Acronym | Description                           |
|---------|---------------------------------------|
| PCH     | program counter high                  |
| PCL     | program counter low                   |
| PD      | power down                            |
| PMA     | PSoC® memory arbiter                  |
| POR     | power-on-reset                        |
| PPOR    | precision power-on-reset              |
| PRS     | pseudo random sequence                |
| PSoC®   | Programmable System-on-Chip           |
| PSSDC   | power system sleep duty cycle         |
| PWM     | pulse width modulator                 |
| RAM     | random access memory                  |
| RETI    | return from interrupt                 |
| RO      | relaxation oscillator                 |
| ROM     | read-only memory                      |
| RW      | read/write                            |
| SAR     | successive approximation register     |
| SC      | switched capacitor                    |
| SIE     | serial interface engine               |
| SE0     | single-ended zero                     |
| SOF     | start of frame                        |
| SP      | stack pointer                         |
| SPI     | serial peripheral interconnect        |
| SPIM    | serial peripheral interconnect master |
| SPIS    | serial peripheral interconnect slave  |
| SRAM    | static random access memory           |
| SROM    | supervisory read-only memory          |
| SSADC   | single slope ADC                      |
| SSC     | supervisory system call               |
| TC      | terminal count                        |
| USB     | universal serial bus                  |
| WDT     | watchdog timer                        |
| WDR     | watchdog reset                        |
| XRES    | external reset                        |



# 1. Pin Information



This chapter lists, describes, and illustrates all pins and pinout configurations for the PSoC devices. For up-to-date ordering, pinout, and packaging information, refer to the individual PSoC device's datasheet or go to <http://www.cypress.com>.

## 1.1 Pinouts

### 1.1.1 16-pin QFN (13 GPIOs) <sup>[1]</sup>

**Table 1. Pin Definitions – CY8C24093 <sup>[2]</sup>**


| Pin No. | Type    |        | Name            | Description   |
|---------|---------|--------|-----------------|---|
|         | Digital | Analog |                 |   |
| 1       | I/O     | I      | P2[5]           | Crystal output (XOut)   |
| 2       | I/O     | I      | P2[3]           | Crystal input (XIn)   |
| 3       | IOHR    | I      | P1[7]           | I <sup>2</sup> C SCL, SPI SS  |
| 4       | IOHR    | I      | P1[5]           | I <sup>2</sup> C SDA, SPI MISO  |
| 5       | IOHR    | I      | P1[3]           | SPI CLK   |
| 6       | IOHR    | I      | P1[1]           | ISSP CLK <sup>[3]</sup> , I <sup>2</sup> C SCL, SPI MOSI                |
| 7       | Power   |        | V <sub>SS</sub> | Ground connection   |
| 8       | IOHR    | I      | P1[0]           | ISSP DATA <sup>[3]</sup> , I <sup>2</sup> C SDA, SPI CLK <sup>[4]</sup> |
| 9       | IOHR    | I      | P1[2]           |   |
| 10      | IOHR    | I      | P1[4]           | Optional external clock (EXTCLK)  |
| 11      | Input   |        | XRES            | Active high external reset with internal pull-down                      |
| 12      | IOH     | I      | P0[4]           |   |
| 13      | Power   |        | V <sub>DD</sub> | Supply voltage  |
| 14      | IOH     | I      | P0[7]           |   |
| 15      | IOH     | I      | P0[3]           |   |
| 16      | IOH     | I      | P0[1]           |   |

**LEGEND** A = Analog, I = Input, O = Output, OH = 5 mA High Output Drive, R = Regulated Output.

#### Notes

1. No center pad.
2. 13 GPIOs.
3. On power-up, the SDA(P1[0]) drives a strong high for 256 sleep clock cycles and drives resistive low for the next 256 sleep clock cycles. The SCL(P1[1]) line drives resistive low for 512 sleep clock cycles and both the pins transition to high impedance state. On reset, after XRES de-asserts, the SDA and the SCL lines drive resistive low for 8 sleep clock cycles and transition to high impedance state. Hence, during power-up or reset event, P1[1] and P1[0] may disturb the I<sup>2</sup>C bus. Use alternate pins if you encounter issues.
4. Alternate SPI clock.

**Figure 1. CY8C24093 Device**

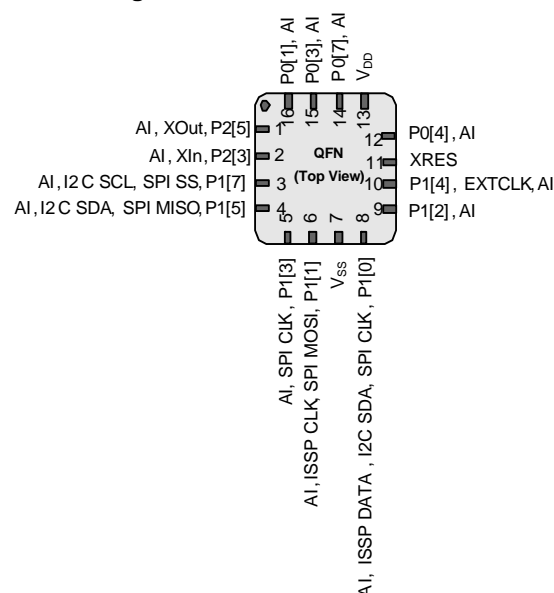

## 1.1.2 32-pin QFN (28 GPIOs) <sup>[5]</sup>


**Table 2. Pin Definitions – CY8C24193 <sup>[6]</sup>**

| Pin No. | Type    |        | Name            | Description   |
|---------|---------|--------|-----------------|---|
|         | Digital | Analog |                 |   |
| 1       | IOH     | I      | P0[1]           |   |
| 2       | I/O     | I      | P2[7]           |   |
| 3       | I/O     | I      | P2[5]           | Crystal output (XOut)   |
| 4       | I/O     | I      | P2[3]           | Crystal input (XIn)   |
| 5       | I/O     | I      | P2[1]           |   |
| 6       | I/O     | I      | P3[3]           |   |
| 7       | I/O     | I      | P3[1]           |   |
| 8       | IOHR    | I      | P1[7]           | I <sup>2</sup> C SCL, SPI SS  |
| 9       | IOHR    | I      | P1[5]           | I <sup>2</sup> C SDA, SPI MISO  |
| 10      | IOHR    | I      | P1[3]           | SPI CLK.  |
| 11      | IOHR    | I      | P1[1]           | ISSP CLK <sup>[7]</sup> , I <sup>2</sup> C SCL, SPI MOSI.               |
| 12      | Power   |        | V <sub>SS</sub> | Ground connection.  |
| 13      | IOHR    | I      | P1[0]           | ISSP DATA <sup>[7]</sup> , I <sup>2</sup> C SDA, SPI CLK <sup>[8]</sup> |
| 14      | IOHR    | I      | P1[2]           |   |
| 15      | IOHR    | I      | P1[4]           | Optional external clock input (EXTCLK)                                  |
| 16      | IOHR    | I      | P1[6]           |   |
| 17      | Input   |        | XRES            | Active high external reset with internal pull-down                      |
| 18      | I/O     | I      | P3[0]           |   |
| 19      | I/O     | I      | P3[2]           |   |
| 20      | I/O     | I      | P2[0]           |   |
| 21      | I/O     | I      | P2[2]           |   |
| 22      | I/O     | I      | P2[4]           |   |
| 23      | I/O     | I      | P2[6]           |   |
| 24      | IOH     | I      | P0[0]           |   |
| 25      | IOH     | I      | P0[2]           |   |
| 26      | IOH     | I      | P0[4]           |   |
| 27      | IOH     | I      | P0[6]           |   |
| 28      | Power   |        | V <sub>DD</sub> | Supply voltage  |
| 29      | IOH     | I      | P0[7]           |   |
| 30      | IOH     | I      | P0[5]           |   |
| 31      | IOH     | I      | P0[3]           |   |
| 32      | Power   |        | V <sub>SS</sub> | Ground connection   |
| CP      | Power   |        | V <sub>SS</sub> | Center pad must be connected to ground                                  |

**LEGEND** A = Analog, I = Input, O = Output, OH = 5 mA High Output Drive, R = Regulated Output.

### Notes

- 28 GPIOs.
- The center pad (CP) on the QFN package must be connected to ground (V<sub>SS</sub>) for best mechanical, thermal, and electrical performance. If not connected to ground, it must be electrically floated and not connected to any other signal.
- On power-up, the SDA(P1[0]) drives a strong high for 256 sleep clock cycles and drives resistive low for the next 256 sleep clock cycles. The SCL(P1[1]) line drives resistive low for 512 sleep clock cycles and both the pins transition to high impedance state. On reset, after XRES de-asserts, the SDA and the SCL lines drive resistive low for 8 sleep clock cycles and transition to high impedance state. Hence, during power-up or reset event, P1[1] and P1[0] may disturb the I2C bus. Use alternate pins if you encounter issues.
- Alternate SPI clock.

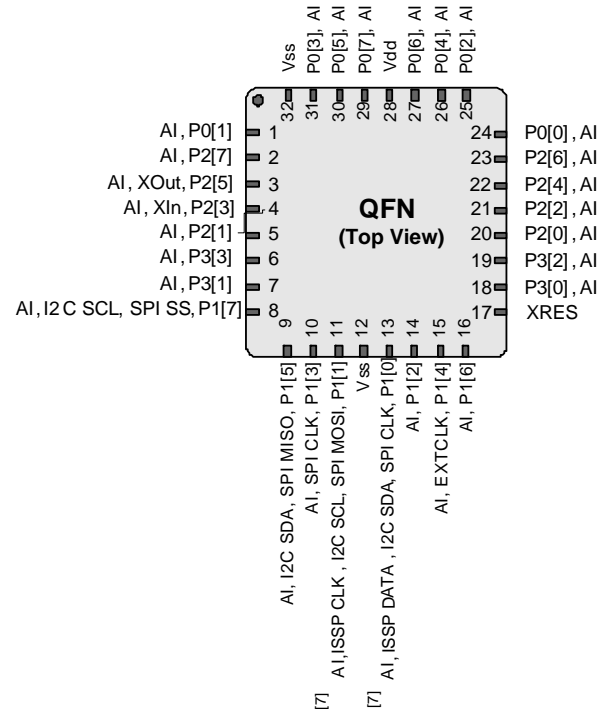**Figure 2. CY8C24193**


### 1.1.3 32-pin QFN (28 GPIOs) <sup>[9]</sup>


**Table 3. Pin Definitions – CY8C24293 <sup>[10]</sup>**

| Pin No. | Digital | Analog | Name            | Description   |
|---------|---------|--------|-----------------|---|
| 1       | IOH     | I      | P0[1]           |   |
| 2       | I/O     | I      | P2[5]           | Crystal output (XOut)   |
| 3       | I/O     | I      | P2[3]           | Crystal input (XIn)   |
| 4       | I/O     | I      | P2[1]           |   |
| 5       | I/O     | I      | P4[3]           |   |
| 6       | I/O     | I      | P3[3]           |   |
| 7       | I/O     | I      | P3[1]           |   |
| 8       | IOHR    | I      | P1[7]           | I <sup>2</sup> C SCL, SPI SS  |
| 9       | IOHR    | I      | P1[5]           | I <sup>2</sup> C SDA, SPI MISO  |
| 10      | IOHR    | I      | P1[3]           | SPI CLK.  |
| 11      | IOHR    | I      | P1[1]           | ISSP CLK <sup>[11]</sup> , I <sup>2</sup> C SCL, SPI MOSI.                |
| 12      | Power   |        | V <sub>SS</sub> | Ground connection   |
| 13      | IOHR    | I      | P1[0]           | ISSP DATA <sup>[11]</sup> , I <sup>2</sup> C SDA, SPI CLK <sup>[12]</sup> |
| 14      | IOHR    | I      | P1[2]           |   |
| 15      | IOHR    | I      | P1[4]           | Optional external clock input (EXTCLK)                                    |
| 16      | IOHR    | I      | P1[6]           |   |
| 17      | Input   |        | XRES            | Active high external reset with internal pull-down                        |
| 18      | I/O     | I      | P3[0]           |   |
| 19      | I/O     | I      | P3[2]           |   |
| 20      | I/O     | I      | P4[0]           |   |
| 21      | I/O     | I      | P4[2]           |   |
| 22      | I/O     | I      | P2[0]           |   |
| 23      | I/O     | I      | P2[2]           |   |
| 24      | I/O     | I      | P2[4]           |   |
| 25      | IOH     | I      | P0[0]           |   |
| 26      | IOH     | I      | P0[2]           |   |
| 27      | IOH     | I      | P0[4]           |   |
| 28      | IOH     | I      | P0[6]           |   |
| 29      | Power   |        | V <sub>DD</sub> |   |
| 30      | IOH     | I      | P0[7]           |   |
| 31      | IOH     | I      | P0[3]           |   |
| 32      | Power   |        | V <sub>SS</sub> | Ground connection   |
| CP      | Power   |        | V <sub>SS</sub> | Center pad must be connected to ground                                    |

**LEGEND** A = Analog, I = Input, O = Output, OH = 5 mA High Output Drive, R = Regulated Output.

#### Notes

- 28 GPIOs.
- The center pad (CP) on the QFN package must be connected to ground (V<sub>SS</sub>) for best mechanical, thermal, and electrical performance. If not connected to ground, it must be electrically floated and not connected to any other signal.
- On power-up, the SDA(P1[0]) drives a strong high for 256 sleep clock cycles and drives resistive low for the next 256 sleep clock cycles. The SCL(P1[1]) line drives resistive low for 512 sleep clock cycles and both the pins transition to high impedance state. On reset, after XRES de-asserts, the SDA and the SCL lines drive resistive low for 8 sleep clock cycles and transition to high impedance state. Hence, during power-up or reset event, P1[1] and P1[0] may disturb the I2C bus. Use alternate pins if you encounter issues.
- Alternate SPI clock.

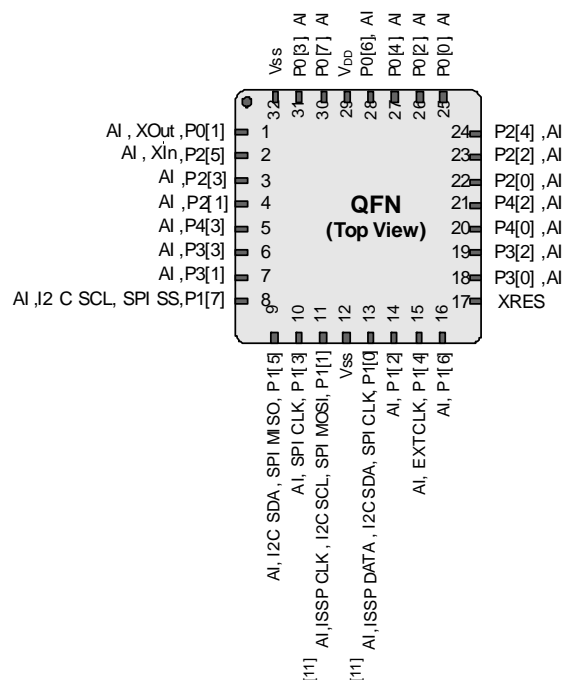
**Figure 3. CY8C24293 Device**


### 1.1.4 48-pin QFN (34 GPIOs) <sup>[13]</sup>

**Table 4. Pin Definitions – CY8C24393, CY8C24693** <sup>[14, 15]</sup>

| Pin No. | Digital | Analog | Name            | Description   |
|---------|---------|--------|-----------------|---|
| 1       |         |        | NC              | No connection   |
| 2       | I/O     | I      | P2[7]           |   |
| 3       | I/O     | I      | P2[5]           | Crystal output (XOut)   |
| 4       | I/O     | I      | P2[3]           | Crystal input (XIn)   |
| 5       | I/O     | I      | P2[1]           |   |
| 6       | I/O     | I      | P4[3]           |   |
| 7       | I/O     | I      | P4[1]           |   |
| 8       | I/O     | I      | P3[7]           |   |
| 9       | I/O     | I      | P3[5]           |   |
| 10      | I/O     | I      | P3[3]           |   |
| 11      | I/O     | I      | P3[1]           |   |
| 12      | IOHR    | I      | P1[7]           | I <sup>2</sup> C SCL, SPI SS  |
| 13      | IOHR    | I      | P1[5]           | I <sup>2</sup> C SDA, SPI MISO  |
| 14      |         |        | NC              | No connection   |
| 15      |         |        | NC              | No connection   |
| 16      | IOHR    | I      | P1[3]           | SPI CLK   |
| 17      | IOHR    | I      | P1[1]           | ISSP CLK <sup>[16]</sup> , I <sup>2</sup> C SCL, SPI MOSI                 |
| 18      | Power   |        | V <sub>SS</sub> | Ground connection   |
| 19      |         |        | NC              | No connection   |
| 20      |         |        | NC              | No connection   |
| 21      | Power   |        | V <sub>DD</sub> | Supply voltage  |
| 22      | IOHR    | I      | P1[0]           | ISSP DATA <sup>[16]</sup> , I <sup>2</sup> C SDA, SPI CLK <sup>[17]</sup> |
| 23      | IOHR    | I      | P1[2]           |   |
| 24      | IOHR    | I      | P1[4]           | Optional external clock input (EXTCLK)                                    |
| 25      | IOHR    | I      | P1[6]           |   |
| 26      | Input   |        | XRES            | Active high external reset with internal pull-down                        |
| 27      | I/O     | I      | P3[0]           |   |
| 28      | I/O     | I      | P3[2]           |   |
| 29      | I/O     | I      | P3[4]           |   |
| 30      | I/O     | I      | P3[6]           |   |
| 31      | I/O     | I      | P4[0]           |   |
| 32      | I/O     | I      | P4[2]           |   |
| 33      | I/O     | I      | P2[0]           |   |
| 34      | I/O     | I      | P2[2]           |   |
| 35      | I/O     | I      | P2[4]           |   |
| 36      |         |        | NC              | No connection   |
| 37      | IOH     | I      | P0[0]           |   |
| 38      | IOH     | I      | P0[2]           |   |
| 39      | IOH     | I      | P0[4]           |   |
| 40      | IOH     | I      | P0[6]           |   |
| 41      | Power   |        | V <sub>DD</sub> | Supply voltage  |
| 42      |         |        | NC              | No connection   |
| 43      |         |        | NC              | No connection   |
| 44      | IOH     | I      | P0[7]           |   |
| 45      |         |        | NC              | No connection   |
| 46      | IOH     | I      | P0[3]           |   |
| 47      | Power   |        | V <sub>SS</sub> | Ground connection   |
| 48      | IOH     | I      | P0[1]           |   |
| CP      | Power   |        | V <sub>SS</sub> | Center pad must be connected to ground                                    |

**LEGENDA** = Analog, I = Input, O = Output, NC = No Connection H = 5 mA High Output Drive, R = Regulated Output.

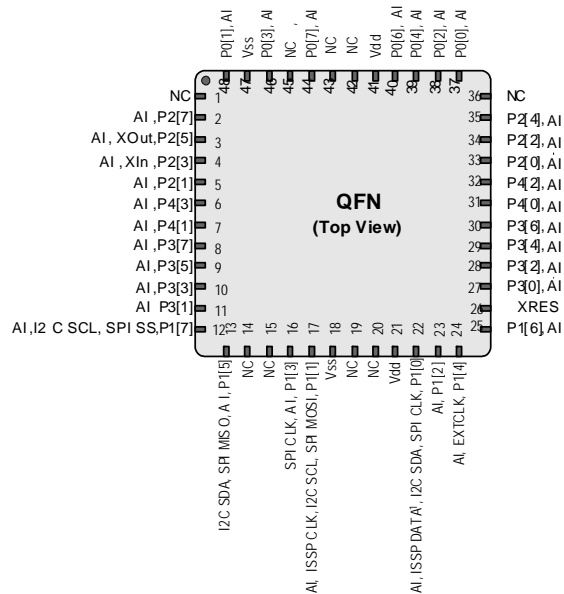**Figure 4. CY8C24393, CY8C24693 Device**


#### Notes

- 38 GPIOs.
- This part is available in limited quantities for In-Circuit Debugging during prototype development. It is not available in production volumes.
- The center pad (CP) on the QFN package must be connected to ground (V<sub>SS</sub>) for best mechanical, thermal, and electrical performance. If not connected to ground, it must be electrically floated and not connected to any other signal.
- On Power-up, the SDA(P1[0]) drives a strong high for 256 sleep clock cycles and drives resistive low for the next 256 sleep clock cycles. The SCL(P1[1]) line drives resistive low for 512 sleep clock cycles and both the pins transition to High impedance state. On reset, after XRES de- asserts, the SDA and the SCL lines drive resistive low for 8 sleep clock cycles and transition to high impedance state. In both cases, a pull-up resistance on these lines combines with the pull-down resistance (5.6K ohm) and form a potential divider. Hence, during power-up or reset event, P1[1] and P1[0] may disturb the I2C bus. Use alternate pins if you encounter issues.
- Alternate SPI clock.







## Section B: PSoC Core




The PSoC Core section discusses the core components of a PSoC device with a base part number of CY8C24x93 and the registers associated with those components. The core section covers the heart of the PSoC device, which includes the M8C **microcontroller**, SRAM, interrupt controller, GPIO, and **SRAM** paging; multiple clock sources such as IMO and ILO; and sleep and watchdog functionality. This section includes the following chapters:

- [CPU Core \(M8C\) on page 31.](#)
- [Supervisory ROM \(SRAM\) on page 37.](#)
- [RAM Paging on page 43.](#)
- [Interrupt Controller on page 49.](#)
- [General-Purpose I/O \(GPIO\) on page 57.](#)
- [Internal Main Oscillator \(IMO\) on page 67.](#)
- [Internal Low-speed Oscillator \(ILO\) on page 71.](#)
- [External Crystal Oscillator \(ECO\), on page 73](#)
- [Sleep and Watchdog on page 77.](#)

### Top-Level Core Architecture

This figure displays the top-level architecture of the PSoC core. Each component of the figure is discussed at length in this section.

PSoC Core Block Diagram

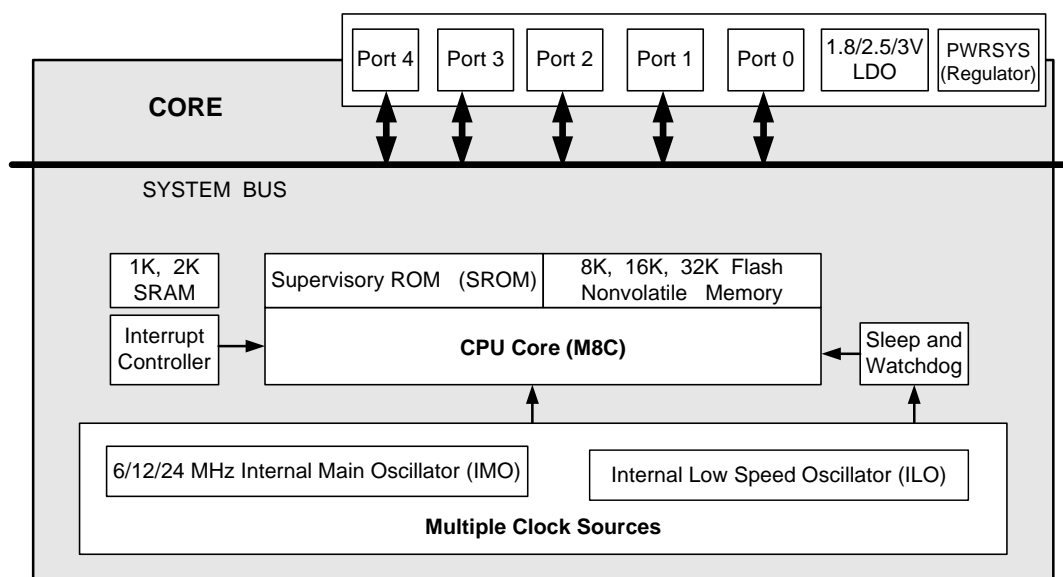

## Core Register Summary

This table lists all the PSoC registers for the CPU core in **address** order within their system resource configuration. The grayed out bits are reserved bits. If you write these bits, always write them with a value of '0'. For the core registers, the first 'x' in some **register** addresses represents either bank 0 or bank 1. These registers are listed throughout this manual in bank 0, even though they are also available in bank 1.

Summary Table of the Core Registers

| Address  | Name      | Bit 7                  | Bit 6     | Bit 5      | Bit 4     | Bit 3     | Bit 2          | Bit 1     | Bit 0     | Access  |
|--|-----------|------------------------|-----------|------------|-----------|-----------|----------------|-----------|-----------|---------|
| M8C REGISTER (page 31)                         |           |                        |           |            |           |           |                |           |           |         |
| x,F7h  | CPU_F     | PgMode[1:0]            |           | XIO_1      | XIO       |           | Carry          | Zero      | GIE       | RL : 02 |
| RAM PAGING (SRAM) REGISTERS (page 43)          |           |                        |           |            |           |           |                |           |           |         |
| x,6Ch  | TMP_DR0   | Data[7:0]              |           |            |           |           |                |           |           | RW : 00 |
| x,6Dh  | TMP_DR1   | Data[7:0]              |           |            |           |           |                |           |           | RW : 00 |
| x,6Eh  | TMP_DR2   | Data[7:0]              |           |            |           |           |                |           |           | RW : 00 |
| x,6Fh  | TMP_DR3   | Data[7:0]              |           |            |           |           |                |           |           | RW : 00 |
| 0,D0h  | CUR_PP    |                        |           |            |           |           | Page Bits[2:0] |           |           | RW : 0  |
| 0,D1h  | STK_PP    |                        |           |            |           |           | Page Bits[2:0] |           |           | RW : 0  |
| 0,D3h  | IDX_PP    |                        |           |            |           |           | Page Bits[2:0] |           |           | RW : 0  |
| 0,D4h  | MVR_PP    |                        |           |            |           |           | Page Bits[2:0] |           |           | RW : 0  |
| 0,D5h  | MVW_PP    |                        |           |            |           |           | Page Bits[2:0] |           |           | RW : 0  |
| INTERRUPT CONTROLLER REGISTERS (page 49)       |           |                        |           |            |           |           |                |           |           |         |
| 0,DAh  | INT_CLR0  | I2C                    | Sleep     | SPI        | GPIO      | Timer0    |                | Analog    | V Monitor | RW : 00 |
| 0,DBh  | INT_CLR1  | Endpoint3              | Endpoint2 | Endpoint1  | Endpoint0 | USB SOF   | USB Bus Rst    | Timer2    | Timer1    | RW : 00 |
| 0,DCh  | INT_CLR2  |                        |           | USB_WAKE   | Endpoint8 | Endpoint7 | Endpoint6      | Endpoint5 | Endpoint4 | RW : 00 |
| 0,DEh  | INT_MSK2  |                        |           | USB Wakeup | Endpoint8 | Endpoint7 | Endpoint6      | Endpoint5 | Endpoint4 | RW : 00 |
| 0,DFh  | INT_MSK1  | Endpoint3              | Endpoint2 | Endpoint1  | Endpoint0 | USB SOF   | USB Bus Reset  | Timer2    | Timer1    | RW : 00 |
| 0,E0h  | INT_MSK0  | I2C                    | Sleep     | SPI        | GPIO      | Timer0    |                | Analog    | V Monitor | RW : 00 |
| 0,E1h  | INT_SW_EN |                        |           |            |           |           |                |           | ENSWINT   | RW : 0  |
| 0,E2h  | INT_VC    | Pending Interrupt[7:0] |           |            |           |           |                |           |           | RC : 00 |
| GENERAL-PURPOSE I/O (GPIO) REGISTERS (page 61) |           |                        |           |            |           |           |                |           |           |         |
| 0,00h  | PRT0DR    | Data[7:0]              |           |            |           |           |                |           |           | RW : 00 |
| 0,01h  | PRT0IE    | Interrupt Enables[7:0] |           |            |           |           |                |           |           | RW : 00 |
| 0,04h  | PRT1DR    | Data[7:0]              |           |            |           |           |                |           |           | RW : 00 |
| 0,05h  | PRT1IE    | Interrupt Enables[7:0] |           |            |           |           |                |           |           | RW : 00 |
| 0,08h  | PRT2DR    | Data[7:0]              |           |            |           |           |                |           |           | RW : 00 |
| 0,09h  | PRT2IE    | Interrupt Enables[7:0] |           |            |           |           |                |           |           | RW : 00 |
| 0,0Ch  | PRT3DR    | Data[7:0]              |           |            |           |           |                |           |           | RW : 00 |
| 0,0Dh  | PRT3IE    | Interrupt Enables[7:0] |           |            |           |           |                |           |           | RW : 00 |
| 1,00h  | PRT0DM0   | Drive Mode 0[7:0]      |           |            |           |           |                |           |           | RW : 00 |
| 1,01h  | PRT0DM1   | Drive Mode 1[7:0]      |           |            |           |           |                |           |           | RW : FF |
| 1,04h  | PRT1DM0   | Drive Mode 0[7:0]      |           |            |           |           |                |           |           | RW : 00 |
| 1,05h  | PRT1DM1   | Drive Mode 1[7:0]      |           |            |           |           |                |           |           | RW : FF |
| 1,08h  | PRT2DM0   | Drive Mode 0[7:0]      |           |            |           |           |                |           |           | RW : 00 |
| 1,09h  | PRT2DM1   | Drive Mode 1[7:0]      |           |            |           |           |                |           |           | RW : FF |
| 1,0Ch  | PRT3DM0   | Drive Mode 0[7:0]      |           |            |           |           |                |           |           | RW : 00 |
| 1,0Dh  | PRT3DM1   | Drive Mode 1[7:0]      |           |            |           |           |                |           |           | RW : FF |
| 0,10h  | PRTxDR    | Data[7:0]              |           |            |           |           |                |           |           | RW : 00 |
| 0,11h  | PRTxIE    | Interrupt Enables[7:0] |           |            |           |           |                |           |           | RW : 00 |
| 1,10h  | PRTxDM0   | Drive Mode 0[7:0]      |           |            |           |           |                |           |           | RW : 00 |
| 1,11h  | PRTxDM1   | Drive Mode 0[7:0]      |           |            |           |           |                |           |           | RW : 00 |

Summary Table of the Core Registers<continue> (continued)

| Address   | Name      | Bit 7   | Bit 6      | Bit 5      | Bit 4       | Bit 3          | Bit 2         | Bit 1           | Bit 0   | Access    |
|---|-----------|---------|------------|------------|-------------|----------------|---------------|-----------------|---------|-----------|
| 1,DCh   | IO_CFG1   | StrongP |            | Range[1:0] |             | P1_LOW_THRS    | SPICLK_ON_P10 | REG_EN          | IOINT   | RW : 00   |
| <b>INTERNAL MAIN OSCILLATOR (IMO) REGISTER</b> (page 68)      |           |         |            |            |             |                |               |                 |         |           |
| 1,E8h   | IMO_TR    |         |            |            |             |                |               |                 |         | W: 00     |
| 1,FAh   | IMO_TR1   |         |            |            |             |                |               | Fine Trim[2:0]  |         | RW : 00   |
| x,FEh   | CPU_SCR1  | IRESS   |            |            | SLIM[1:0]   |                |               |                 | IRAMDIS | # : 00    |
| 1,E2h   | OSC_CR2   |         |            |            | CLK48MEN    |                | EXTCLKEN      | RSVD            |         | RW : 00   |
| <b>INTERNAL LOW-SPEED OSCILLATOR (ILO) REGISTER</b> (page 72) |           |         |            |            |             |                |               |                 |         |           |
| 1,E9h   | ILO_TR    |         | PD_MODE    | ILOFREQ    | SATBIASB    | Freq Trim[3:0] |               | DAA[5:0]        |         | RW : 18   |
| <b>EXTERNAL CRYSTAL OSCILLATOR (ECO) REGISTERS</b> (page 73)  |           |         |            |            |             |                |               |                 |         |           |
| 1,D2h   | ECO_ENBUS |         |            |            |             |                |               | ECO_ENBUS[2:0]  |         | RW : 07   |
| 1,D3h   | ECO_TRIM  |         |            |            |             | ECO_XGM[2:0]   |               | FLSH            |         | RW : 00   |
| 1,E1h   | ECO_CFG   |         |            |            |             |                | ECO_LPM       |                 | BINC    |           |
| SLEEP AND WATCH-DOG REG-ISTERS (page 81)                      |           |         |            |            |             |                |               | BDAC[3:0]       |         |           |
|   |           |         |            |            |             |                |               |                 |         |           |
| 0,E3h   | RES_WDT   |         |            |            |             |                |               | WDSL_Clear[7:0] |         | W : 00    |
| 1,EBh   | SLP_CFG   |         | PSSDC[1:0] |            |             |                |               |                 |         | RW : 0    |
| 1,ECh   | SLP_CFG2  |         |            |            |             | ALT_Buzz [1:0] |               |                 | LSO_OFF | RW : 00   |
| 1,EDh   | SLP_CFG3  |         | DBL_TAPS   |            | T2TAP [1:0] | T1TAP [1:0]    |               |                 |         | RW : 0x7F |

#### Legend

- L The and f, expr; or f, expr; and xor f, expr instructions can be used to modify this register.
- x An "x" before the comma in the address field indicates that this register can be accessed or written to no matter what bank is used.
- C Clearable register or bit(s).
- R Read register or bit(s).
- W Write register or bit(s).



## 2. CPU Core (M8C)



This chapter explains the CPU Core, called the M8C, and its associated register. It covers the internal M8C registers, address spaces, **instruction** set and formats. For additional information concerning the M8C instruction set, refer to the *PSoC Designer Assembly Language User Guide* available at <http://www.cypress.com>. For a quick reference of all PSoC registers in address order, refer to the [Register Reference chapter on page 177](#).

### 2.1 Overview

The **M8C** is a four MIPS 8-bit Harvard architecture microprocessor. Selectable processor clock speeds up to 24 MHz enable you to tune the M8C to a particular application's performance and power requirements. The M8C supports a rich instruction set that allows for efficient low-level language support.

### 2.2 Internal Registers

The M8C has five internal registers that are used in program execution. Here is a list of these registers.

- Accumulator (A)
- Index (X)
- Program Counter (PC)
- Stack Pointer (SP)
- Flags (F)

All the internal M8C registers are 8 bits in width, except for the PC, which is 16 bits wide. Upon **reset**, A, X, PC, and SP are reset to 00h. The Flag register (F) is reset to 02h, indicating that the Z **flag** is **set**.

With each **stack** operation, the SP is automatically incremented or decremented so that it always points to the next stack **byte** in RAM. If the last byte in the stack is at address FFh, the **stack pointer** wraps to RAM address 00h. It is the **firmware** developer's responsibility to ensure that the stack does not overlap with user-defined variables in RAM.

With the exception of the F register, the M8C internal registers are not accessible via an explicit register address. The internal M8C registers are accessed using these instructions:

- MOV A, expr
- MOV X, expr
- SWAP A, SP
- OR F, expr
- JMP LABEL

The F register is read by using address F7h in either register bank.

### 2.3 Address Spaces

The M8C has three address spaces: **ROM**, **RAM**, and registers. The ROM address space includes the Supervisory ROM (SROM) and the flash. The ROM address space is accessed through its own address and **data bus**.

The ROM address space is composed of the SROM and the on-chip flash program store. Flash is organized into 128-byte blocks. Program store page boundaries are not an issue because the M8C automatically increments the 16-bit PC on every instruction. This makes the block boundaries invisible to user code. Instructions occurring on a 128-byte flash page boundary (with the exception of **JMP** instructions) incur an extra M8C clock cycle, because the upper byte of the PC is incremented.

The register address space is used to configure the PSoC microcontroller's programmable blocks. It consists of two banks of 256 bytes each. To switch between banks, the XIO bit in the Flag register is set or cleared (set for Bank1, cleared for Bank0). The common convention is to leave the bank set to Bank0 (XIO cleared), switch to Bank1 as needed (set XIO), then switch back to Bank0.

## 2.4 Instruction Set Summary

The instruction set is summarized in both [Table 2-1](#) and [Table 2-2](#) (in numeric and *mnemonic* order, respectively), and serves as a quick reference. If more information is needed, the Instruction Set Summary tables are described in detail in the *PSoC Designer Assembly Language User Guide* (visit <http://www.cypress.com>).

Table 2-1. Instruction Set Summary Sorted Numerically by Opcode

| Opcode Hex | Cycles | Bytes | Instruction Format | Flags | Opcode Hex | Cycles | Bytes | Instruction Format    | Flags                        | Opcode Hex | Cycles | Bytes | Instruction Format    | Flags |
|------------|--------|-------|--------------------|-------|------------|--------|-------|-----------------------|------------------------------|------------|--------|-------|-----------------------|-------|
| 00         | 15     | 1     | SSC                |       | 2D         | 8      | 2     | OR [X+expr], A        | Z                            | 5A         | 5      | 2     | MOV [expr], X         |       |
| 01         | 4      | 2     | ADD A, expr        | C, Z  | 2E         | 9      | 3     | OR [expr], expr       | Z                            | 5B         | 4      | 1     | MOV A, X              | Z     |
| 02         | 6      | 2     | ADD A, [expr]      | C, Z  | 2F         | 10     | 3     | OR [X+expr], expr     | Z                            | 5C         | 4      | 1     | MOV X, A              |       |
| 03         | 7      | 2     | ADD A, [X+expr]    | C, Z  | 30         | 9      | 1     | HALT                  |                              | 5D         | 6      | 2     | MOV A, reg[expr]      | Z     |
| 04         | 7      | 2     | ADD [expr], A      | C, Z  | 31         | 4      | 2     | XOR A, expr           | Z                            | 5E         | 7      | 2     | MOV A, reg[X+expr]    | Z     |
| 05         | 8      | 2     | ADD [X+expr], A    | C, Z  | 32         | 6      | 2     | XOR A, [expr]         | Z                            | 5F         | 10     | 3     | MOV [expr], [expr]    |       |
| 06         | 9      | 3     | ADD [expr], expr   | C, Z  | 33         | 7      | 2     | XOR A, [X+expr]       | Z                            | 60         | 5      | 2     | MOV reg[expr], A      |       |
| 07         | 10     | 3     | ADD [X+expr], expr | C, Z  | 34         | 7      | 2     | XOR [expr], A         | Z                            | 61         | 6      | 2     | MOV reg[X+expr], A    |       |
| 08         | 4      | 1     | PUSH A             |       | 35         | 8      | 2     | XOR [X+expr], A       | Z                            | 62         | 8      | 3     | MOV reg[expr], expr   |       |
| 09         | 4      | 2     | ADC A, expr        | C, Z  | 36         | 9      | 3     | XOR [expr], expr      | Z                            | 63         | 9      | 3     | MOV reg[X+expr], expr |       |
| 0A         | 6      | 2     | ADC A, [expr]      | C, Z  | 37         | 10     | 3     | XOR [X+expr], expr    | Z                            | 64         | 4      | 1     | ASL A                 | C, Z  |
| 0B         | 7      | 2     | ADC A, [X+expr]    | C, Z  | 38         | 5      | 2     | ADD SP, expr          |                              | 65         | 7      | 2     | ASL [expr]            | C, Z  |
| 0C         | 7      | 2     | ADC [expr], A      | C, Z  | 39         | 5      | 2     | CMP A, expr           | if (A=B) Z=1<br>if (A<B) C=1 | 66         | 8      | 2     | ASL [X+expr]          | C, Z  |
| 0D         | 8      | 2     | ADC [X+expr], A    | C, Z  | 3A         | 7      | 2     | CMP A, [expr]         |                              | 67         | 4      | 1     | ASR A                 | C, Z  |
| 0E         | 9      | 3     | ADC [expr], expr   | C, Z  | 3B         | 8      | 2     | CMP A, [X+expr]       |                              | 68         | 7      | 2     | ASR [expr]            | C, Z  |
| 0F         | 10     | 3     | ADC [X+expr], expr | C, Z  | 3C         | 8      | 3     | CMP [expr], expr      |                              | 69         | 8      | 2     | ASR [X+expr]          | C, Z  |
| 10         | 4      | 1     | PUSH X             |       | 3D         | 9      | 3     | CMP [X+expr], expr    |                              | 6A         | 4      | 1     | RLC A                 | C, Z  |
| 11         | 4      | 2     | SUB A, expr        | C, Z  | 3E         | 10     | 2     | MVI A, [ [expr]++ ]   | Z                            | 6B         | 7      | 2     | RLC [expr]            | C, Z  |
| 12         | 6      | 2     | SUB A, [expr]      | C, Z  | 3F         | 10     | 2     | MVI [ [expr]++ ], A   |                              | 6C         | 8      | 2     | RLC [X+expr]          | C, Z  |
| 13         | 7      | 2     | SUB A, [X+expr]    | C, Z  | 40         | 4      | 1     | NOP                   |                              | 6D         | 4      | 1     | RRC A                 | C, Z  |
| 14         | 7      | 2     | SUB [expr], A      | C, Z  | 41         | 9      | 3     | AND reg[expr], expr   | Z                            | 6E         | 7      | 2     | RRC [expr]            | C, Z  |
| 15         | 8      | 2     | SUB [X+expr], A    | C, Z  | 42         | 10     | 3     | AND reg[X+expr], expr | Z                            | 6F         | 8      | 2     | RRC [X+expr]          | C, Z  |
| 16         | 9      | 3     | SUB [expr], expr   | C, Z  | 43         | 9      | 3     | OR reg[expr], expr    | Z                            | 70         | 4      | 2     | AND F, expr           | C, Z  |
| 17         | 10     | 3     | SUB [X+expr], expr | C, Z  | 44         | 10     | 3     | OR reg[X+expr], expr  | Z                            | 71         | 4      | 2     | OR F, expr            | C, Z  |
| 18         | 5      | 1     | POP A              | Z     | 45         | 9      | 3     | XOR reg[expr], expr   | Z                            | 72         | 4      | 2     | XOR F, expr           | C, Z  |
| 19         | 4      | 2     | SBB A, expr        | C, Z  | 46         | 10     | 3     | XOR reg[X+expr], expr | Z                            | 73         | 4      | 1     | CPL A                 | Z     |
| 1A         | 6      | 2     | SBB A, [expr]      | C, Z  | 47         | 8      | 3     | TST [expr], expr      | Z                            | 74         | 4      | 1     | INC A                 | C, Z  |
| 1B         | 7      | 2     | SBB A, [X+expr]    | C, Z  | 48         | 9      | 3     | TST [X+expr], expr    | Z                            | 75         | 4      | 1     | INC X                 | C, Z  |
| 1C         | 7      | 2     | SBB [expr], A      | C, Z  | 49         | 9      | 3     | TST reg[expr], expr   | Z                            | 76         | 7      | 2     | INC [expr]            | C, Z  |
| 1D         | 8      | 2     | SBB [X+expr], A    | C, Z  | 4A         | 10     | 3     | TST reg[X+expr], expr | Z                            | 77         | 8      | 2     | INC [X+expr]          | C, Z  |
| 1E         | 9      | 3     | SBB [expr], expr   | C, Z  | 4B         | 5      | 1     | SWAP A, X             | Z                            | 78         | 4      | 1     | DEC A                 | C, Z  |
| 1F         | 10     | 3     | SBB [X+expr], expr | C, Z  | 4C         | 7      | 2     | SWAP A, [expr]        | Z                            | 79         | 4      | 1     | DEC X                 | C, Z  |
| 20         | 5      | 1     | POP X              |       | 4D         | 7      | 2     | SWAP X, [expr]        |                              | 7A         | 7      | 2     | DEC [expr]            | C, Z  |
| 21         | 4      | 2     | AND A, expr        | Z     | 4E         | 5      | 1     | SWAP A, SP            | Z                            | 7B         | 8      | 2     | DEC [X+expr]          | C, Z  |
| 22         | 6      | 2     | AND A, [expr]      | Z     | 4F         | 4      | 1     | MOV X, SP             |                              | 7C         | 13     | 3     | LCALL                 |       |
| 23         | 7      | 2     | AND A, [X+expr]    | Z     | 50         | 4      | 2     | MOV A, expr           | Z                            | 7D         | 7      | 3     | LJMP                  |       |
| 24         | 7      | 2     | AND [expr], A      | Z     | 51         | 5      | 2     | MOV A, [expr]         | Z                            | 7E         | 10     | 1     | RETI                  | C, Z  |
| 25         | 8      | 2     | AND [X+expr], A    | Z     | 52         | 6      | 2     | MOV A, [X+expr]       | Z                            | 7F         | 8      | 1     | RET                   |       |
| 26         | 9      | 3     | AND [expr], expr   | Z     | 53         | 5      | 2     | MOV [expr], A         |                              | 8x         | 5      | 2     | JMP                   |       |
| 27         | 10     | 3     | AND [X+expr], expr | Z     | 54         | 6      | 2     | MOV [X+expr], A       |                              | 9x         | 11     | 2     | CALL                  |       |
| 28         | 11     | 1     | ROMX               | Z     | 55         | 8      | 3     | MOV [expr], expr      |                              | Ax         | 5      | 2     | JZ                    |       |
| 29         | 4      | 2     | OR A, expr         | Z     | 56         | 9      | 3     | MOV [X+expr], expr    |                              | Bx         | 5      | 2     | JNZ                   |       |
| 2A         | 6      | 2     | OR A, [expr]       | Z     | 57         | 4      | 2     | MOV X, expr           |                              | Cx         | 5      | 2     | JC                    |       |
| 2B         | 7      | 2     | OR A, [X+expr]     | Z     | 58         | 6      | 2     | MOV X, [expr]         |                              | Dx         | 5      | 2     | JNC                   |       |
| 2C         | 7      | 2     | OR [expr], A       | Z     | 59         | 7      | 2     | MOV X, [X+expr]       |                              | Ex         | 7      | 2     | JACC                  |       |
|            |        |       |                    |       |            |        |       |                       |                              | Fx         | 13     | 2     | INDEX                 | Z     |

**Note 1** Interrupt acknowledge to Interrupt Vector table = 13 cycles.

**Note 2** The number of cycles required by an instruction is increased by one for instructions that span 128 byte page boundaries in the flash memory space.



Table 2-2. Instruction Set Summary Sorted Alphabetically by Mnemonic

| Opcode Hex | Cycles | Bytes | Instruction Format    | Flags                        | Opcode Hex | Cycles | Bytes | Instruction Format    | Flags | Opcode Hex | Cycles | Bytes | Instruction Format    | Flags |
|------------|--------|-------|-----------------------|------------------------------|------------|--------|-------|-----------------------|-------|------------|--------|-------|-----------------------|-------|
| 09         | 4      | 2     | ADC A, expr           | C, Z                         | 76         | 7      | 2     | INC [expr]            | C, Z  | 20         | 5      | 1     | POP X                 |       |
| 0A         | 6      | 2     | ADC A, [expr]         | C, Z                         | 77         | 8      | 2     | INC [X+expr]          | C, Z  | 18         | 5      | 1     | POP A                 | Z     |
| 0B         | 7      | 2     | ADC A, [X+expr]       | C, Z                         | Fx         | 13     | 2     | INDEX                 | Z     | 10         | 4      | 1     | PUSH X                |       |
| 0C         | 7      | 2     | ADC [expr], A         | C, Z                         | Ex         | 7      | 2     | JACC                  |       | 08         | 4      | 1     | PUSH A                |       |
| 0D         | 8      | 2     | ADC [X+expr], A       | C, Z                         | Cx         | 5      | 2     | JC                    |       | 7E         | 10     | 1     | RETI                  | C, Z  |
| 0E         | 9      | 3     | ADC [expr], expr      | C, Z                         | 8x         | 5      | 2     | JMP                   |       | 7F         | 8      | 1     | RET                   |       |
| 0F         | 10     | 3     | ADC [X+expr], expr    | C, Z                         | Dx         | 5      | 2     | JNC                   |       | 6A         | 4      | 1     | RLC A                 | C, Z  |
| 01         | 4      | 2     | ADD A, expr           | C, Z                         | Bx         | 5      | 2     | JNZ                   |       | 6B         | 7      | 2     | RLC [expr]            | C, Z  |
| 02         | 6      | 2     | ADD A, [expr]         | C, Z                         | Ax         | 5      | 2     | JZ                    |       | 6C         | 8      | 2     | RLC [X+expr]          | C, Z  |
| 03         | 7      | 2     | ADD A, [X+expr]       | C, Z                         | 7C         | 13     | 3     | LCALL                 |       | 28         | 11     | 1     | ROMX                  | Z     |
| 04         | 7      | 2     | ADD [expr], A         | C, Z                         | 7D         | 7      | 3     | LJMP                  |       | 6D         | 4      | 1     | RRC A                 | C, Z  |
| 05         | 8      | 2     | ADD [X+expr], A       | C, Z                         | 4F         | 4      | 1     | MOV X, SP             |       | 6E         | 7      | 2     | RRC [expr]            | C, Z  |
| 06         | 9      | 3     | ADD [expr], expr      | C, Z                         | 50         | 4      | 2     | MOV A, expr           | Z     | 6F         | 8      | 2     | RRC [X+expr]          | C, Z  |
| 07         | 10     | 3     | ADD [X+expr], expr    | C, Z                         | 51         | 5      | 2     | MOV A, [expr]         | Z     | 19         | 4      | 2     | SBB A, expr           | C, Z  |
| 38         | 5      | 2     | ADD SP, expr          |                              | 52         | 6      | 2     | MOV A, [X+expr]       | Z     | 1A         | 6      | 2     | SBB A, [expr]         | C, Z  |
| 21         | 4      | 2     | AND A, expr           | Z                            | 53         | 5      | 2     | MOV [expr], A         |       | 1B         | 7      | 2     | SBB A, [X+expr]       | C, Z  |
| 22         | 6      | 2     | AND A, [expr]         | Z                            | 54         | 6      | 2     | MOV [X+expr], A       |       | 1C         | 7      | 2     | SBB [expr], A         | C, Z  |
| 23         | 7      | 2     | AND A, [X+expr]       | Z                            | 55         | 8      | 3     | MOV [expr], expr      |       | 1D         | 8      | 2     | SBB [X+expr], A       | C, Z  |
| 24         | 7      | 2     | AND [expr], A         | Z                            | 56         | 9      | 3     | MOV [X+expr], expr    |       | 1E         | 9      | 3     | SBB [expr], expr      | C, Z  |
| 25         | 8      | 2     | AND [X+expr], A       | Z                            | 57         | 4      | 2     | MOV X, expr           |       | 1F         | 10     | 3     | SBB [X+expr], expr    | C, Z  |
| 26         | 9      | 3     | AND [expr], expr      | Z                            | 58         | 6      | 2     | MOV X, [expr]         |       | 00         | 15     | 1     | SSC                   |       |
| 27         | 10     | 3     | AND [X+expr], expr    | Z                            | 59         | 7      | 2     | MOV X, [X+expr]       |       | 11         | 4      | 2     | SUB A, expr           | C, Z  |
| 70         | 4      | 2     | AND F, expr           | C, Z                         | 5A         | 5      | 2     | MOV [expr], X         |       | 12         | 6      | 2     | SUB A, [expr]         | C, Z  |
| 41         | 9      | 3     | AND reg[expr], expr   | Z                            | 5B         | 4      | 1     | MOV A, X              | Z     | 13         | 7      | 2     | SUB A, [X+expr]       | C, Z  |
| 42         | 10     | 3     | AND reg[X+expr], expr | Z                            | 5C         | 4      | 1     | MOV X, A              |       | 14         | 7      | 2     | SUB [expr], A         | C, Z  |
| 64         | 4      | 1     | ASL A                 | C, Z                         | 5D         | 6      | 2     | MOV A, reg[expr]      | Z     | 15         | 8      | 2     | SUB [X+expr], A       | C, Z  |
| 65         | 7      | 2     | ASL [expr]            | C, Z                         | 5E         | 7      | 2     | MOV A, reg[X+expr]    | Z     | 16         | 9      | 3     | SUB [expr], expr      | C, Z  |
| 66         | 8      | 2     | ASL [X+expr]          | C, Z                         | 5F         | 10     | 3     | MOV [expr], [expr]    |       | 17         | 10     | 3     | SUB [X+expr], expr    | C, Z  |
| 67         | 4      | 1     | ASR A                 | C, Z                         | 60         | 5      | 2     | MOV reg[expr], A      |       | 4B         | 5      | 1     | SWAP A, X             | Z     |
| 68         | 7      | 2     | ASR [expr]            | C, Z                         | 61         | 6      | 2     | MOV reg[X+expr], A    |       | 4C         | 7      | 2     | SWAP A, [expr]        | Z     |
| 69         | 8      | 2     | ASR [X+expr]          | C, Z                         | 62         | 8      | 3     | MOV reg[expr], expr   |       | 4D         | 7      | 2     | SWAP X, [expr]        |       |
| 9x         | 11     | 2     | CALL                  |                              | 63         | 9      | 3     | MOV reg[X+expr], expr |       | 4E         | 5      | 1     | SWAP A, SP            | Z     |
| 39         | 5      | 2     | CMP A, expr           | if (A=B) Z=1<br>if (A<B) C=1 | 3E         | 10     | 2     | MVI A, [ [expr]++ ]   | Z     | 47         | 8      | 3     | TST [expr], expr      | Z     |
| 3A         | 7      | 2     | CMP A, [expr]         |                              | 3F         | 10     | 2     | MVI [ [expr]++ ], A   |       | 48         | 9      | 3     | TST [X+expr], expr    | Z     |
| 3B         | 8      | 2     | CMP A, [X+expr]       |                              | 40         | 4      | 1     | NOP                   |       | 49         | 9      | 3     | TST reg[expr], expr   | Z     |
| 3C         | 8      | 3     | CMP [expr], expr      |                              | 29         | 4      | 2     | OR A, expr            | Z     | 4A         | 10     | 3     | TST reg[X+expr], expr | Z     |
| 3D         | 9      | 3     | CMP [X+expr], expr    |                              | 2A         | 6      | 2     | OR A, [expr]          | Z     | 72         | 4      | 2     | XOR F, expr           | C, Z  |
| 73         | 4      | 1     | CPL A                 | Z                            | 2B         | 7      | 2     | OR A, [X+expr]        | Z     | 31         | 4      | 2     | XOR A, expr           | Z     |
| 78         | 4      | 1     | DEC A                 | C, Z                         | 2C         | 7      | 2     | OR [expr], A          | Z     | 32         | 6      | 2     | XOR A, [expr]         | Z     |
| 79         | 4      | 1     | DEC X                 | C, Z                         | 2D         | 8      | 2     | OR [X+expr], A        | Z     | 33         | 7      | 2     | XOR A, [X+expr]       | Z     |
| 7A         | 7      | 2     | DEC [expr]            | C, Z                         | 2E         | 9      | 3     | OR [expr], expr       | Z     | 34         | 7      | 2     | XOR [expr], A         | Z     |
| 7B         | 8      | 2     | DEC [X+expr]          | C, Z                         | 2F         | 10     | 3     | OR [X+expr], expr     | Z     | 35         | 8      | 2     | XOR [X+expr], A       | Z     |
| 30         | 9      | 1     | HALT                  |                              | 43         | 9      | 3     | OR reg[expr], expr    | Z     | 36         | 9      | 3     | XOR [expr], expr      | Z     |
| 74         | 4      | 1     | INC A                 | C, Z                         | 44         | 10     | 3     | OR reg[X+expr], expr  | Z     | 37         | 10     | 3     | XOR [X+expr], expr    | Z     |
| 75         | 4      | 1     | INC X                 | C, Z                         | 71         | 4      | 2     | OR F, expr            | C, Z  | 45         | 9      | 3     | XOR reg[expr], expr   | Z     |
|            |        |       |                       |                              |            |        |       |                       |       | 46         | 10     | 3     | XOR reg[X+expr], expr | Z     |

**Note 1** Interrupt acknowledge to Interrupt Vector table = 13 cycles.

**Note 2** The number of cycles required by an instruction is increased by one for instructions that span 128 byte page boundaries in the flash memory space.

## 2.5 Instruction Formats

The M8C has a total of seven instruction formats that use instruction lengths of one, two, and three bytes. All instruction bytes are taken from the program memory (flash), using an address and data bus that are independent from the address and data buses used for register and RAM access.

While examples of instructions are given in this section, refer to the *PSoC Designer Assembly Language User Guide* for detailed information on individual instructions.

### 2.5.1 One-Byte Instructions

Many instructions, such as some of the MOV instructions, have single-byte forms because they do not use an address or data as an operand. As shown in [Table 2-3](#), one-byte instructions use an 8-bit opcode. The set of one-byte instructions are divided into four categories, according to where their results are stored.

Table 2-3. One-Byte Instruction Format

| Byte 0       |
|--------------|
| 8-Bit Opcode |

The first category of one-byte instructions are those that do not update any register or RAM. Only the one-byte NOP and SSC instructions fit this category. While the **program counter** is incremented as these instructions execute, they do not cause any other internal M8C registers to update, nor do these instructions directly affect the register space or the RAM address space. The SSC instruction causes SROM code to run, which modifies RAM and the M8C internal registers.

The second category contains the two PUSH instructions. The PUSH instructions are unique because they are the only one-byte instructions that modify a RAM address. These instructions automatically increment the SP.

The third category contains the HALT instruction. The HALT instruction is unique because it is the only one-byte instruction that modifies a user register. The HALT instruction modifies user register space address FFh (CPU\_SCR0 register).

The final category for one-byte instructions are those that update the internal M8C registers. This category holds the largest number of instructions: ASL, ASR, CPL, DEC, INC, MOV, POP, RET, RETI, RLC, ROMX, RRC, SWAP. These instructions cause the A, X, and SP registers or SRAM to update.

### 2.5.2 Two-Byte Instructions

The majority of M8C instructions are two bytes in length. While these instructions are divided into categories identical to the one-byte instructions, this does not provide a useful distinction between the three two-byte instruction formats that the M8C uses.

Table 2-4. Two-Byte Instruction Formats

| Byte 0       | Byte 1                  |
|--------------|-------------------------|
| 4-Bit Opcode | 12-Bit Relative Address |
| 8-Bit Opcode | 8-Bit Data              |
| 8-Bit Opcode | 8-Bit Address           |

The first two-byte instruction format, shown in the first row of [Table 2-4](#), is used by short jumps and calls: CALL, JMP, JACC, INDEX, JC, JNC, JNZ, JZ. This instruction format uses only four bits for the instruction opcode, leaving 12 bits to store the relative destination address in a two's-complement form. These instructions can change program execution to an address relative to the current address by -2048 or +2047.

The second two-byte instruction format, shown in the second row of [Table 2-4](#), is used by instructions that employ the Source Immediate addressing **mode** (see the *PSoC Designer Assembly Language User Guide*). The destination for these instructions is an internal M8C register, while the source is a constant value. An example of this type of instruction is ADD A, 7.

The third two-byte instruction format, shown in the third row of [Table 2-4](#), is used by a wide range of instructions and addressing modes. The following is a list of the addressing modes that use this third two-byte instruction format:

- Source Direct (ADD A, [7])
- Source Indexed (ADD A, [X+7])
- Destination Direct (ADD [7], A)
- Destination Indexed (ADD [X+7], A)
- Source Indirect Post Increment (MVI A, [7])
- Destination Indirect Post Increment (MVI [7], A)

For more information on addressing modes see the *PSoC Designer Assembly Language User Guide*.

### 2.5.3 Three-Byte Instructions

The three-byte instruction formats are the second most prevalent instruction formats. These instructions need three bytes because they either move data between two addresses in the user accessible address space (registers and RAM) or they hold 16-bit absolute addresses as the destination of a long jump or long call.

Table 2-5. Three-Byte Instruction Formats

| Byte 0       | Byte 1                    | Byte 2        |
|--------------|---------------------------|---------------|
| 8-Bit Opcode | 16-Bit Address (MSB, LSB) |               |
| 8-Bit Opcode | 8-Bit Address             | 8-Bit Data    |
| 8-Bit Opcode | 8-Bit Address             | 8-Bit Address |

The first instruction format, shown in the first row of Table 2-5, is used by the `LJMP` and `LCALL` instructions. These instructions change program execution unconditionally to an absolute address. The instructions use an 8-bit opcode, leaving room for a 16-bit destination address.

The second three-byte instruction format, shown in the second row of Table 2-5, is used by the following two addressing modes:

- Destination Direct Source Immediate (`ADD [7], 5`)
- Destination Indexed Source Immediate (`ADD [X+7], 5`)

The third three-byte instruction format, shown in the third row of Table 2-5, is for the Destination Direct Source Direct addressing mode, which is used by only one instruction. This instruction format uses an 8-bit opcode followed by two 8-bit addresses. The first address is the destination address in RAM, while the second address is the source address in RAM. The following is an example of this instruction:

```
MOV [7], [5]
```

## 2.6 Register Definitions

The following register is associated with the CPU Core (M8C). The register description has an associated register table showing the bit structure. The bits that are grayed out in the table are reserved bits and are not detailed in the register description that follows. Always write reserved bits with a value of '0'.

### 2.6.1 CPU\_F Register

| Address | Name  | Bit 7       | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|-------|-------------|-------|-------|-------|-------|-------|-------|-------|---------|
| x,F7h   | CPU_F | PgMode[1:0] |       |       | XIO   |       | Carry | Zero  | GIE   | RL : 02 |

#### Legend

L The AND F, expr; OR F, expr; and XOR F, expr flag instructions can be used to modify this register.

x An "x" before the comma in the address field indicates that this register can be read or written to no matter what bank is used.

The M8C Flag Register (CPU\_F) provides read access to the M8C flags.

**Bits 7 and 6: PgMode[1:0].** PgMode determines how the CUR\_PP, STK\_PP, and IDX\_PP registers are used in forming effective RAM addresses for Direct Address mode and Indexed Address mode operands. PgMode also determines whether the stack page is determined by the STK\_PP or IDX\_PP register. (See the [Register Definitions on page 46](#) in the RAM Paging chapter.)

**Bit 4: XIO.** The I/O bank select bit, also known as the register bank select bit, is used to select the register bank that is active for a register read or write. This bit allows the PSoC device to have 512 8-bit registers and is thought of as the ninth address bit for registers. The address space accessed when the XIO bit is set to '0' is called **user space**, while address space accessed when the XIO bit is set to '1' is called **configuration space**.

**Bit 2: Carry.** The Carry flag bit is set or cleared in response to the result of several instructions. It is also manipulated by

the flag logic opcodes (for example, OR F, 4). See the *PSoC Designer Assembly Language User Guide* for more details.

**Bit 1: Zero.** The Zero flag bit is set or cleared in response to the result of several instructions. It is also manipulated by the flag logic opcodes (for example, OR F, 2). See the *PSoC Designer Assembly Language User Guide* for more details.

**Bit 0: GIE.** The state of the Global Interrupt Enable bit determines whether interrupts (by way of the interrupt request (IRQ)) are recognized by the M8C. This bit is set or cleared using the flag logic instructions (for example, OR F, 1). GIE is also automatically cleared when an interrupt is processed, after the flag byte is stored on the stack, preventing nested interrupts. If wanted, set the bit in an **interrupt service routine (ISR)**. For GIE=1, the M8C samples the IRQ input for each instruction. For GIE=0, the M8C ignores the IRQ.

For additional information, refer to the [CPU\\_F register on page 236](#).

### 2.6.2 Related Registers

The following registers are related to the M8C block:

- [CPU\\_SCR1 register on page 239](#).
- [CPU\\_SCR0 register on page 240](#).

## 3. Supervisory ROM (SROM)



This chapter discusses the Supervisory ROM (SROM) functions. For a quick reference of all PSoC registers in address order, refer to the [Register Reference chapter on page 177](#).

### 3.1 Architectural Description

The SROM holds code that boots a PSoC device, calibrates circuitry, and performs flash operations. The functions provided by the SROM are called from code stored in the flash or by device programmers.

The SROM is used to boot the part and provide interface functions to the flash blocks. [Table 3-1](#) lists the SROM functions. The SROM functions are accessed by executing the Supervisory System Call instruction (SSC), which has an opcode of 00h. Before executing the SSC, the M8C's accumulator needs to load with the wanted SROM function code from [Table 3-1](#).

Attempting to access undefined functions (Reserved functions) causes a HALT. The SROM functions execute code with calls; therefore, the functions require stack space. With the exception of Reset, all of the SROM functions have a parameter block in SRAM that you must configure before executing the SSC.

[Table 3-2](#) lists all possible parameter block variables. The meaning of each parameter, with regards to a specific SROM function, is described later in this chapter. Because the SSC instruction clears the CPU\_F PgMode bits, all parameter block variable addresses are in SRAM Page 0. The CPU\_F value is automatically restored at the end of the SROM function.

The MVR\_PP and MVW\_PP pointers are not disabled by clearing the CPU\_F PgMode bits. Therefore, the POINTER parameter is interpreted as an address in the page indicated by the MVI page pointers, when the supervisory operation is called. This allows the data buffer used in the supervisory operation to be located in any SRAM page. (See the [RAM Paging chapter on page 43](#) for more details regarding the MVR\_PP and MVW\_PP pointers.)

Table 3-1. List of SROM Functions

| Function Code | Function Name  | Required Stack Space | Page |
|---------------|----------------|----------------------|------|
| 00h           | SWBootReset    | 0                    | 38   |
| 01h           | ReadBlock      | 7                    | 39   |
| 02h           | WriteBlock     | 7                    | 39   |
| 03h           | EraseBlock     | 5                    | 40   |
| 06h           | TableRead      | 3                    | 40   |
| 07h           | Checksum       | 4                    | 41   |
| 08h           | Calibrate0     | 4                    | 41   |
| 09h           | Calibrate1     | 3                    | 41   |
| 0Ah           | WriteAndVerify | 7                    | 42   |
| 0Fh           | HWBootReset    | 3                    | 42   |

**Note** ProtectBlock and EraseAll (described on [page 40](#)) SROM functions are not listed in this table because they are dependent on external programming.

Table 3-2. SROM Function Variables

| Variable Name    | SRAM Address |
|------------------|--------------|
| KEY1/RETURN CODE | 0,F8h        |
| KEY2             | 0,F9h        |
| BLOCKID          | 0,FAh        |
| POINTER          | 0,FBh        |
| CLOCK            | 0,FCh        |
| Reserved         | 0,FDh        |
| DELAY            | 0,FEh        |
| Reserved         | 0,FFh        |

**Note** CLOCK and DELAY are ignored and are reserved for future use.

Two important variables that are used for all functions are KEY1 and KEY2. These variables are used to help discriminate between valid SSCs and inadvertent SSCs. KEY1 must always have a value of 3Ah, while KEY2 must have the same value as the stack pointer when the SROM function begins execution. This is the SP (Stack Pointer) value when the SSC opcode is executed, plus three. For all SROM functions except SWBootReset, if either of the keys do not match the expected values, the M8C halts. The SWBootReset function does not check the key values. It only checks to see if the accumulator's value is 00h.

The following code example puts the correct value in KEY1 and KEY2. The code is preceded by a HALT, to force the

program to jump directly into the setup code and not accidentally run into it.

```

1.      halt
2.      SSCOP: mov [KEY1], 3ah
3.      mov X, SP
4.      mov A, X
5.      add A, 3
6.      mov [KEY2], A

```

### 3.1.1 Additional SROM Feature

**Return Codes:** These aid in the determination of success or failure of a particular function. The return code is stored in KEY1's position in the parameter block. The Checksum and TableRead functions do not have return codes because KEY1's position in the parameter block is used to return other data.

Table 3-3. SROM Return Code Meanings

| Return Code Value | Description   |
|-------------------|---|
| 00h               | Success.  |
| 01h               | Function not allowed because of block level protection. |
| 02h               | Software reset without hardware reset.                  |
| 03h               | Fatal error, SROM halted.                               |
| 04h               | Write and Verify error.                                 |
| 06h               | Failure of Smartwrite parameters CheckSum               |

**Note** Read, write, and erase operations may fail if the target block is read or write protected. Block protection levels are set during device programming and cannot be modified from code in the PSoC device.

### 3.1.2 SROM Function Descriptions

#### 3.1.2.1 SWBootReset Function

The SROM function SWBootReset is responsible for transitioning the device from a reset state to running user code. See [Chapter "System Resets" on page 127](#) for more information on what events causes the SWBootReset function to execute.

The SWBootReset function executes whenever the SROM is entered with an M8C accumulator value of 00h; the SRAM parameter block is not used as an input to the function. This happens, by design, after a hardware reset because the M8C's accumulator is reset to 00h or when user code executes the SSC instruction with an accumulator value of 00h.

If the checksum of the calibration data is valid, the SWBootReset function ends by setting the internal M8C registers (CPU\_SP, CPU\_PC, CPU\_X, CPU\_F, CPU\_A) to 00h, writing 00h to most SRAM addresses in SRAM Page 0, and then begins to execute user code at address 0000h. See [Table 3-5](#) and the following paragraphs for more information on which SRAM addresses are modified. If the checksum is not valid, an internal reset is executed and the boot process

starts over. If this condition occurs, the internal reset status bit (IRESS) is set in the CPU\_SCR1 register.

In devices with more than 256 bytes of SRAM, no SRAM is modified by the SWBootReset function in SRAM pages numbered higher than '0'.

[Table 3-5](#) documents the value of all the SRAM addresses in Page 0 after a successful SWBootReset. A value of "xx" indicates that the SRAM address is not modified by the SWBootReset function. A hex value indicates that the address always has the indicated value after a successful SWBootReset. A "??" indicates that the value, after a SWBootReset, is determined by the value of the IRAMDIS bit in the CPU\_SCR1 register. If IRAMDIS is not set, these addresses are initialized to 00h. If IRAMDIS is set, these addresses are not modified by a SWBootReset after a watchdog reset.

The IRAMDIS bit allows the preservation of variables even if a watchdog reset (WDR) occurs. The IRAMDIS bit is reset by all system resets except watchdog reset. Therefore, this bit is only useful for watchdog resets and not general resets.



Table 3-5. SRAM Map Post SWBootReset (00h)

| Address | 0    | 1    | 2    | 3    | 4    | 5    | 6    | 7    |
|---------|------|------|------|------|------|------|------|------|
|         | 8    | 9    | A    | B    | C    | D    | E    | F    |
| 0x0_    | 0x00 | 0x00 | 0x00 | ??   | ??   | ??   | ??   | ??   |
|         | ??   | ??   | ??   | ??   | ??   | ??   | ??   | ??   |
| 0x1_    | ??   | ??   | ??   | ??   | ??   | ??   | ??   | ??   |
|         | ??   | ??   | ??   | ??   | ??   | ??   | ??   | ??   |
| 0x2_    | ??   | ??   | ??   | ??   | ??   | ??   | ??   | ??   |
|         | ??   | ??   | ??   | ??   | ??   | ??   | ??   | ??   |
| 0x3_    | ??   | ??   | ??   | ??   | ??   | ??   | ??   | ??   |
|         | ??   | ??   | ??   | ??   | ??   | ??   | ??   | ??   |
| 0x4_    | ??   | ??   | ??   | ??   | ??   | ??   | ??   | ??   |
|         | ??   | ??   | ??   | ??   | ??   | ??   | ??   | ??   |
| 0x5_    | ??   | ??   | ??   | ??   | ??   | ??   | ??   | ??   |
|         | ??   | ??   | ??   | ??   | ??   | ??   | ??   | ??   |
| 0x6_    | ??   | ??   | ??   | ??   | ??   | ??   | ??   | ??   |
|         | ??   | ??   | ??   | ??   | ??   | ??   | ??   | ??   |
| 0x7_    | ??   | ??   | ??   | ??   | ??   | ??   | ??   | ??   |
|         | ??   | ??   | ??   | ??   | ??   | ??   | ??   | ??   |
| 0x8_    | ??   | ??   | ??   | ??   | ??   | ??   | ??   | ??   |
|         | ??   | ??   | ??   | ??   | ??   | ??   | ??   | ??   |
| 0x9_    | ??   | ??   | ??   | ??   | ??   | ??   | ??   | ??   |
|         | ??   | ??   | ??   | ??   | ??   | ??   | ??   | ??   |
| 0xA_    | ??   | ??   | ??   | ??   | ??   | ??   | ??   | ??   |
|         | ??   | ??   | ??   | ??   | ??   | ??   | ??   | ??   |
| 0xB_    | ??   | ??   | ??   | ??   | ??   | ??   | ??   | ??   |
|         | ??   | ??   | ??   | ??   | ??   | ??   | ??   | ??   |
| 0xC_    | ??   | ??   | ??   | ??   | ??   | ??   | ??   | ??   |
|         | ??   | ??   | ??   | ??   | ??   | ??   | ??   | ??   |
| 0xD_    | 0x00 | 0x00 | 0x00 | 0x00 | 0x00 | 0x00 | 0x00 | 0x00 |
|         | 0x00 | 0x00 | 0x00 | 0x00 | 0x00 | 0x00 | 0x00 | 0x00 |
| 0xE_    | 0x00 | 0x00 | 0x00 | 0x00 | 0x00 | 0x00 | 0x00 | 0x00 |
|         | 0x00 | 0x00 | 0x00 | 0x00 | 0x00 | 0x00 | 0x00 | 0x00 |
| 0xF_    | 0x00 | 0x00 | 0x00 | 0x00 | 0x00 | 0x00 | ??   | ??   |
|         | 0x00 | 0x02 | 0x00 | 0x00 | 0xn  | xx   | 0x00 | 0x00 |
|         | 0x06 |      |      |      |      |      |      |      |

Address F8h is the return code byte for all SROM functions (except Checksum and TableRead); for this function, the only acceptable values are 00h, 02h, and 06h (only for INT\_CLR2 CY8C24x93 Revision AA). Address FCh is the fail count variable. After POR, WDR, or XRES, the variable is initialized to 00h by the SROM. Each time the Checksum fails, the fail count is incremented. Therefore, if it takes two passes through SWBootReset to get a good Checksum, the fail count is 01h.

### 3.1.2.2 ReadBlock Function

The ReadBlock function is used to read 128 contiguous bytes from flash: a block. The PSoC device has 32 KB of

flash and has two hundred fifty-six 128-byte blocks. Valid block IDs are 00h to FFh.

Table 3-6. Flash Memory Organization

| PSoC Device       | Amount of Flash | Amount of SRAM | Number of Blocks per Bank | Number of Banks |
|-------------------|-----------------|----------------|---------------------------|-----------------|
| CY8C24093/193     | 8 KB            | 1K Bytes       | 64                        | 1               |
| CY8C24293/393/593 | 16 KB           | 2K Bytes       | 128                       | 1               |
| CY8C24493/693     | 32 KB           | 2K Bytes       | 256                       | 1               |

The first thing the ReadBlock function does is check the protection bits to determine if the wanted BLOCKID is readable. If read protection is turned on, the ReadBlock function exits setting the accumulator and KEY2 back to 00h. KEY1 has a value of 01h indicating a read failure.

If read protection is not enabled, the function reads 128 bytes from the flash using a ROMX instruction and stores the results in SRAM using an MVI instruction. The 128 bytes are stored in SRAM, beginning at the address indicated by the value of the POINTER parameter. When the ReadBlock completes successfully, the accumulator, KEY1, and KEY2 has a value of 00h.

**Note** An MVI [expr], A stores the flash block contents in SRAM meaning that you can use the MVW\_PP register to indicate which SRAM pages receive the data.

Table 3-7. ReadBlock Parameters (01h)

| Name    | Address | Type     | Description                                  |
|---------|---------|----------|--|
| MVW_PP  | 0,D5h   | Register | MVI write page pointer register.             |
| KEY1    | 0,F8h   | RAM      | 3Ah.   |
| KEY2    | 0,F9h   | RAM      | Stack Pointer value+3, when SSC is executed. |
| BLOCKID | 0,FAh   | RAM      | Flash block number.                          |
| POINTER | 0,FBh   | RAM      | Addresses in SRAM to store returned data.    |

### 3.1.2.3 WriteBlock Function

The WriteBlock function stores data in the flash. No verification of the data is performed, but execution time is about 1 ms less than the WriteAndVerify function. The WriteAndVerify function is the recommended method for altering the data in one flash block (see "WriteAndVerify Function" on page 42). Data moves 128 bytes at a time from SRAM to flash. This is a two-step process, the first step is to load the page latch with 128 bytes of data and it is followed by the programming of the corresponding block of flash. No erase is needed before WriteBlock.

If write protection is turned on, then the WriteBlock function exits, setting the accumulator and KEY2 back to 00h. KEY1 has a value of 01h, indicating a write failure. Write protection is set when the PSoC device is programmed externally and cannot be changed through the SSC function.

The BLOCKID of the flash block, where the data is stored, must be determined and stored at SRAM address FAh. Valid block IDs are 00h to FFh.

An `MVI A, [expr]` instruction is used to move data from SRAM into flash. Therefore, use the `MVI` read pointer (`MVR_PP` register) to specify which SRAM page from which data is pulled. Using the `MVI` read pointer and the parameter blocks `POINTER` value allows the SROM WriteBlock function to move data from any SRAM page into any flash block.

The SRAM address, the first of the 128 bytes to store in flash, is indicated using the `POINTER` variable in the parameter block (SRAM address FBh).

Table 3-8. WriteBlock Parameters (02h)

| Name    | Address | Type     | Description   |
|---------|---------|----------|---|
| MVR_PP  | 0,D4h   | Register | <code>MVI</code> read page pointer register.  |
| KEY1    | 0,F8h   | RAM      | 3Ah.  |
| KEY2    | 0,F9h   | RAM      | Stack Pointer value+3, when SSC is executed.  |
| BLOCKID | 0,FAh   | RAM      | Flash block number.   |
| POINTER | 0,FBh   | RAM      | First of 128 addresses in SRAM, where the data to be stored in flash, is located before calling WriteBlock. |

### 3.1.2.4 EraseBlock Function

The EraseBlock function is not recommended for use. The functionality is redundant with the WriteBlock and WriteAndVerify functions. The only practical use is for clearing all data in a 128 byte block of contiguous bytes in flash to 00h. If used, it should not be called repeatedly on the same block. It may be used between WriteAndVerify or WriteBlock operations.

If write protection is turned on, then the EraseBlock function exits, setting the accumulator and KEY2 back to 00h. KEY1 has a value of 01h, indicating a write failure.

To set up the parameter block for the EraseBlock function, store the correct key values in KEY1 and KEY2. The block number to erase must be stored in the BLOCKID variable.

Table 3-9. EraseBlock Parameters (03h)

| Name    | Address | Type | Description                                  |
|---------|---------|------|--|
| KEY1    | 0,F8h   | RAM  | 3Ah.   |
| KEY2    | 0,F9h   | RAM  | Stack Pointer value+3, when SSC is executed. |
| BLOCKID | 0,FAh   | RAM  | Flash block number.                          |

### 3.1.2.5 ProtectBlock Function

The PSoC devices offer flash protection on a block-by-block basis. Table 3-10 lists the protection modes available. In the table, ER and EW indicate the ability to perform external reads and writes (that is, by an external programmer). For internal writes, IW is used. Internal reading is always permitted by way of the `ROMX` instruction. An SR indicates the ability to read by way of the SROM ReadBlock function.

In this table, note that all protection is removed by EraseAll.

Table 3-10. Protect Block Modes

| Mode | Settings    | Description            | In PSoC Designer    |
|------|-------------|------------------------|---------------------|
| 00b  | SR ER EW IW | Unprotected            | U = Unprotected     |
| 01b  | SR ER EW IW | Read protect           | F = Factory upgrade |
| 10b  | SR ER EW IW | Disable external write | R = Field upgrade   |
| 11b  | SR ER EW IW | Disable internal write | W = Full protection |

Table 3-11. Protection Level Bit Packing

| 7         | 6 | 5         | 4 | 3         | 2 | 1       | 0 |
|-----------|---|-----------|---|-----------|---|---------|---|
| Block n+3 |   | Block n+2 |   | Block n+1 |   | Block n |   |

### 3.1.2.6 TableRead Function

The TableRead function gives the user access to part-specific data stored in the flash during manufacturing. The flash for these tables is separate from the program flash and is not directly accessible. It also returns a revision ID for the die (do not confuse this with the silicon ID stored in the Table 0 row in Table 3-14).

A summary of the information stored in the tables for the flash is contained in Table 3-14. There are four 8-byte tables in the CY8C24x93 devices.

Table 3-12. TableRead Parameters (06h)

| Name    | Address | Type | Description                                  |
|---------|---------|------|--|
| KEY1    | 0,F8h   | RAM  | 3Ah.   |
| KEY2    | 0,F9h   | RAM  | Stack Pointer value+3, when SSC is executed. |
| BLOCKID | 0,FAh   | RAM  | Table number to read.                        |

### 3.1.2.7 EraseAll Function

The EraseAll function performs a series of steps that destroys the user data in the flash banks and resets the protection block in each flash bank to all zeros (the unprotected state). This function is only executed by an external programmer. If EraseAll is executed from code, the M8C HALTs without touching the flash or protections. See Table 3-13. The three other hidden blocks above the protection block, in each flash bank, are not affected by the EraseAll.

Table 3-13. EraseAll Parameters (05h)

| Name | Address | Type | Description                                  |
|------|---------|------|--|
| KEY1 | 0,F8h   | RAM  | 3Ah.   |
| KEY2 | 0,F9h   | RAM  | Stack Pointer value+3, when SSC is executed. |



Table 3-14. Flash Tables with Assigned Values

| Table   | Byte 0   | Byte 1          | Byte 2          | Byte 3                           | Byte 4   | Byte 5 | Byte 6 | Byte 7 |
|---------|--|-----------------|-----------------|----------------------------------|----------|--------|--------|--------|
| Table 0 | Silicon ID High Byte<br>Expected Numbers =<br># Bits Used to Encode =<br>Max Values (including 0) =<br>Bits Targeted = |                 | Reserved        |                                  |          |        |        |        |
| Table 1 | IMO 6 MHz trim   | IMO 12 MHz trim | IMO 24 MHz trim | IMO 24 MHz USB trim (high power) | Reserved |        |        |        |
| Table 2 | Reserved   |                 |                 |                                  |          |        |        |        |
| Table 3 | Reserved   |                 |                 |                                  |          |        |        |        |

### 3.1.2.8 Checksum Function

The Checksum function calculates a 16-bit checksum over a user specifiable number of blocks, within a single flash bank starting at block zero. The BLOCKID parameter is used to pass in the number of blocks to checksum. A BLOCKID value of '1' calculates the checksum of only block 0, a BLOCKID of '2' calculates the checksum of block 0 and block 1, and so on. A BLOCKID value of '0' calculates the checksum of the entire flash bank. Note that if the BLOCKID is greater than or equal to the number of blocks that the device has, the function calculates checksum for entire flash. For example, in an 8KB flash memory device (CY8C24093/193), if the BLOCKID is equal to or greater than 64, the function calculates checksum for entire 8KB flash.

The 16-bit checksum is returned in KEY1 and KEY2. The parameter KEY1 holds the lower 8 bits of the checksum and the parameter KEY2 holds the upper 8 bits of the checksum.

Table 3-15. Checksum Parameters (07h)

| Name    | Address | Type | Description  |
|---------|---------|------|--|
| KEY1    | 0,F8h   | RAM  | 3Ah.   |
| KEY2    | 0,F9h   | RAM  | Stack Pointer value+3, when SSC is executed.                 |
| BLOCKID | 0,FAh   | RAM  | Number of flash blocks from which to calculate the checksum. |

### 3.1.2.9 Calibrate0 Function

This function may be executed at any time to set all calibration values. However, it is unnecessary to call this function; it is simply documented for completeness. The calibration values are accessed using the TableRead function, which is described in the section [TableRead Function, on page 40](#).

Table 3-16. Calibrate0 Parameters (08h)

| Name | Address | Type | Description                                  |
|------|---------|------|--|
| KEY1 | 0,F8h   | RAM  | 3Ah.   |
| KEY2 | 0,F9h   | RAM  | Stack Pointer value+3, when SSC is executed. |

### 3.1.2.10 Calibrate1 Function

While the Calibrate1 function is a completely separate function from Calibrate0, they perform the same task, which is to transfer the calibration values stored in a special area of flash to their appropriate registers. What is unique about Calibrate1 is that it calculates a checksum of the calibration data and, if that checksum is determined as invalid, Calibrate1 causes a **hardware reset** by generating an internal reset. If this occurs, it is indicated by setting the Internal Reset Status bit (IRESS) in the CPU\_SCR1 register.

The Calibrate1 function uses SRAM to calculate a checksum of the calibration data. The POINTER value is used to indicate the address of a 38-byte buffer used by this function. When the function completes, the 38 bytes are set to 00h.

An MVI A, [expr] and an MVI [expr], A instruction are used to move data between SRAM and flash. Therefore, the MVI write pointer (MVW\_PP) and the MVI read pointer (MVR\_PP) must be specified to the same SRAM page to control the page of RAM used for the operations.

Calibrate1 was created as a sub-function of SWBootReset and the Calibrate1 function code was added to provide direct access. For more information on how Calibrate1 works, see [SWBootReset Function on page 38](#).

This function may be executed at any time to reset all calibration values. However, it is unnecessary to call this function; it is simply documented for completeness. The calibration values are accessed using the TableRead function, which is described in the section [TableRead Function on page 40](#).

Table 3-17. Calibrate1 Parameters (09h)

| Name    | Address | Type     | Description                                       |
|---------|---------|----------|---|
| KEY1    | 0,F8h   | RAM      | 3Ah.  |
| KEY2    | 0,F9h   | RAM      | Stack Pointer value+3, when SSC is executed.      |
| POINTER | 0,FBh   | RAM      | First of 30 SRAM addresses used by this function. |
| MVR_PP  | 0,D4h   | Register | MVI write page pointer.                           |
| MVW_PP  | 0,D5h   | Register | MVI read page pointer.                            |

### 3.1.2.11 WriteAndVerify Function

WriteAndVerify is the recommend function for modifying one block of data in flash. The WriteAndVerify function works exactly the same as the WriteBlock function except that the flash data is verified after the Write. The execution time is about 1 ms longer than WriteBlock (but still within the Twrite spec). The function performs a three-step process. In the first step, 128 bytes of data are moved from SRAM to the flash. In the second step, flash is programmed with the data. In the final step, the flash data is compared against the input data values, thus verifying that the write was successful. The write and verify is one SROM operation; therefore, the SROM is not exited until the verify is completed.

The parameters for this block are identical to the WriteBlock (see [WriteBlock Function on page 39](#)). If the verify operation fails, the 04h error code is returned at SRAM address F8h

Table 3-18. WriteAndVerify Parameters (0Ah)

| Name    | Address | Type | Description   |
|---------|---------|------|---|
| KEY1    | 0,F8h   | RAM  | 3Ah.  |
| KEY2    | 0,F9h   | RAM  | Stack Pointer value+3, when SSC is executed.  |
| BLOCKID | 0,FAh   | RAM  | Flash block number.   |
| POINTER | 0,FBh   | RAM  | First of 128 addresses in SRAM, where the data to be stored in flash, is located before calling WriteBlock. |

### 3.1.2.12 HWBootReset Function

The HWBootReset function is used to force a hardware reset. A hardware reset causes all registers to go back to their POR state. Then, the SROM SWBootReset function executes, followed by flash code execution beginning at address 0x0000.

The HWBootReset function only requires that the CPU\_A, KEY1, and KEY2 be set up correctly. As with all other SROM functions, if the setup is incorrect, the SROM executes a HALT. Then, either a POR, XRES, or WDR is needed to clear the HALT. See [Chapter "System Resets" on page 127](#) for more information.

Table 3-19. HWBootReset Parameters (0Fh)

| Name | Address | Type | Description                                  |
|------|---------|------|--|
| KEY1 | 0,F8h   | RAM  | 3Ah.   |
| KEY2 | 0,F9h   | RAM  | Stack Pointer value+3, when SSC is executed. |

## 3.2 Register Definitions

This chapter has no register detail information because there are no registers directly assigned to the Supervisory ROM.

## 4. RAM Paging



This chapter explains the PSoC device's use of RAM Paging and its associated registers. For a complete table of the RAM paging registers, refer to the [Summary Table of the Core Registers on page 28](#). For a quick reference of all PSoC registers in address order, refer to the [Register Reference chapter on page 177](#).

### 4.1 Architectural Description

The M8C is an 8-bit CPU with an 8-bit memory address bus. The memory address bus allows the M8C to access up to 256 bytes of SRAM, to increase the amount of available SRAM and preserve the M8C *assembly* language. The PSoC device has 1K and 2K bytes of SRAM with eight pages of memory architecture.

To take full advantage of the paged memory architecture of the PSoC device, you use several registers and manage two CPU\_F register bits. However, the power-on-reset (POR) value for all of the paging registers and CPU\_F bits is zero. This places the PSoC device in a mode identical to devices with only 256 bytes of SRAM. There is no need to understand all of the paging registers to take advantage of the additional SRAM available in some devices. To use the additional SRAM pages, modify the memory paging logic reset state.

The memory paging architecture consists of five areas:

- Stack Operations
- Interrupts
- MVI Instructions
- Current Page Pointer
- Indexed Memory Page Pointer


The first three of these areas do not depend upon the CPU\_F register's PgMode bits and are covered in the subsections after Basic Paging. The function of the last two depend upon the CPU\_F PgMode bits and are covered last.

#### 4.1.1 Basic Paging

To increase the amount of SRAM, the M8C accesses memory page bits. The memory page bits are located in the CUR\_PP register and allow selection of one of eight SRAM pages. In addition to setting the page bits, Page mode is enabled by setting the CPU\_F[7] bit. If Page mode is not enabled, the page bits are ignored and all non-stack memory access is directed to Page 0.

After Page mode is enabled and the page bits are set, all instructions that operate on memory access the SRAM page indicated by the page bits. The exceptions to this are the instructions that operate on the stack and the MVI instructions: PUSH, POP, LCALL, RETI, RET, CALL, and MVI. See the description of [Stack Operations](#) and [MVI Instructions](#) for a more detailed discussion.

Figure 4-1. Data Memory Organization

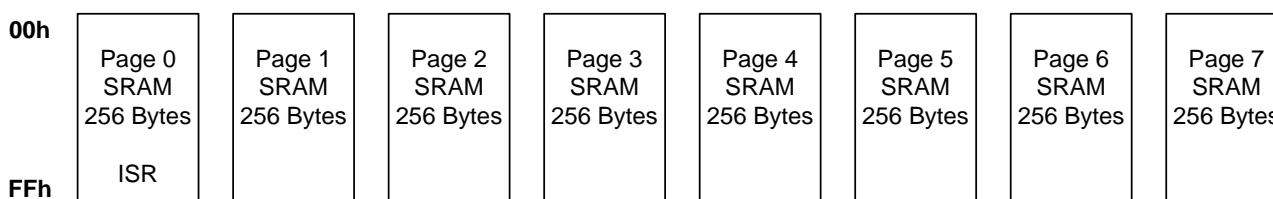

#### 4.1.2 Stack Operations

As mentioned previously, the paging architecture's reset state puts the PSoC in a mode identical to that of a 256-byte device. Therefore, upon reset, all memory accesses are to Page 0. The SRAM page that stack operations use is deter-

mined by the value of the three least significant bits (LSb) of the Stack Page Pointer register (STK\_PP). Stack operations have no dependency on the PgMode bits in the CPU\_F register. Stack operations are those that use the Stack Pointer (SP) to calculate their affected address. Refer to the *PSoC*

*Designer Assembly Language User Guide* for more information on all M8C instructions.

Stack memory accesses are a special case. If they were not, the stack could fragment across several pages. To prevent the stack from fragmenting, all instructions that operate on the stack automatically use the page indicated by the STK\_PP register. Therefore, if the program encounters a CALL, the PSoC device automatically pushes the program counter onto the stack page indicated by STK\_PP. After the program counter is pushed, the SRAM paging mode automatically switches back to the precall mode. All other stack operations, such as RET and POP, follow the same rule as CALL. The stack is confined to a single SRAM page and the Stack Pointer wraps from 00h to FFh and FFh to 00h. The user code must ensure that the stack is not damaged because of stack wrapping.

Because the value of the STK\_PP register can change at any time, it is theoretically possible to manage the stack in such a way as to allow it to grow beyond one SRAM page or manage multiple stacks. However, the only supported use of the STK\_PP register is when its value is set before the first stack operation and not changed again.

### 4.1.3 Interrupts

Interrupts, in a multipage SRAM PSoC device, operate the same as interrupts in a 256-byte device. However, because the CPU\_F register is automatically set to 00h on an interrupt and because of the nonlinear nature of interrupts in a system, other parts of the memory paging architecture can be affected.

Interrupts are an abrupt change in program flow. If no special action is taken on interrupts by the PSoC device, the **interrupt service routine (ISR)** could be thrown into any SRAM page. To prevent this problem, the special addressing modes for all memory accesses, except for stack and MVI, are disabled when an ISR is entered. The special addressing modes are disabled when the CPU\_F register is cleared. At the end of the ISR, the previous SRAM addressing mode is restored when the CPU\_F register value is restored by the RETI instruction.

All interrupt service **routine** code starts execution in SRAM Page 0. If the ISR must change to another SRAM page, do this by changing the values of the CPU\_F[7:6] bits to enable the special SRAM addressing modes. However, any change made to the CUR\_PP, IDX\_PP, or STK\_PP registers persists after the ISR returns. Therefore, have the ISR save the current value of any paging register it modifies and restore its value before the ISR returns.

### 4.1.4 MVI Instructions

MVI instructions use data page pointers of their own (MVR\_PP and MVW\_PP). This allows a data buffer to be located away from other program variables, but accessible without changing the Current Page Pointer (CUR\_PP).

An MVI instruction performs three memory operations. Both forms of the MVI instruction access an address in SRAM that holds the data pointer (a memory read 1st access), incrementing that value and then storing it back in SRAM (a memory write 2nd access). This pointer value must reside in the current page, just as all other nonstack and nonindexed operations on memory. However, the third memory operation uses the MVx\_PP register. This third memory access is either a read or a write, depending upon which MVI instruction is used. The MVR\_PP pointer is used for the MVI instruction that moves data into the accumulator. The MVW\_PP pointer is used for the MVI instruction that moves data from the accumulator into SRAM. The MVI pointers are always enabled, regardless of the state of the Flag register page bits (CPU\_F register).

### 4.1.5 Current Page Pointer

The Current Page Pointer determines which SRAM page is used for all memory accesses. Normal memory accesses are those not covered by other pointers including all nonstack, non-MVI, and nonindexed memory access instructions. The normal memory access instructions have the SRAM page they operate on determined by the value of the CUR\_PP register. By default, the CUR\_PP register has no effect on the SRAM page that is used for normal memory access, because all normal memory access is forced to SRAM Page 0.

The upper bit of the PgMode bits in the CPU\_F register determine if the CUR\_PP register affects normal memory access. When the upper bit of the PgMode bits is set to '0', all normal memory access is forced to SRAM Page 0. This mode is automatically enabled when an Interrupt Service Routine (ISR) is entered. This is because, before the ISR is entered, the M8C pushes the current value of the CPU\_F register onto the stack and then clears the CPU\_F register. Therefore, by default, any normal memory access in an ISR is guaranteed to occur in SRAM Page 0.

When the RETI instruction is executed to end the ISR, the previous value of the CPU\_F register is restored, returning to the previous page mode. This is the default ISR behavior and it is possible to change the PgMode bits in the CPU\_F register while in an ISR. If the PgMode bits are changed while in an ISR, the pre-ISR value is still restored by the RETI; but if the CUR\_PP register is changed in the ISR, the ISR is also required to restore the value before executing the RETI instruction.

When the upper bit of the PgMode bits is set to '1', all normal memory access is forced to the SRAM page indicated by the CUR\_PP register value. [Table 4-1](#) summarizes the PgMode bit values and the corresponding Memory Paging mode.

## 4.1.6 Index Memory Page Pointer

The Source Indexed and Destination Indexed addressing modes to SRAM are treated as a unique addressing mode in a PSoC device with more than one page of SRAM. An example of an indexed addressing mode is the `MOV A, [X+expr]` instruction. Register access has indexed addressing as well; however, those instructions are not affected by the SRAM paging architecture.

**Important Note** If you are not using assembly to program a PSoC device, be aware that the **compiler** writer may restrict the use of some memory paging modes. Review the conventions in your compiler's user guide for more information on restrictions or conventions associated with memory paging modes.

Indexed SRAM accesses operate in one of three modes:

- Index memory access modes are forced to SRAM Page 0.
- Index memory access modes are directed to the SRAM page indicated by the value in the STK\_PP register.
- Index memory access is forced to the SRAM page indicated by the value in the IDX\_PP register.

The mode is determined by the value of the PgMode bits in the CPU\_F register. However, the final SRAM page that is used also requires setting either the Stack Page Pointer (STK\_PP) register or the Index Page Pointer (IDX\_PP) register. [Table 4-1](#) shows the three indexed memory access modes. The third column of the table is provided for reference only.

Table 4-1. CPU\_F PgMode Bit Modes

| CPU_F PgMode Bits | Current SRAM Page | Indexed SRAM Page | Typical Use                 |
|-------------------|-------------------|-------------------|-----------------------------|
| 00b               | 0                 | 0                 | ISR*                        |
| 01b               | 0                 | STK_PP            | ISR with variables on stack |
| 10b               | CUR_PP            | IDX_PP            |                             |
| 11b               | CUR_PP            | STK_PP            |                             |

\* Mode used by SROM functions initiated by the SSC instruction.

After reset, the PgMode bits are set to 00b. In this mode, index memory accesses are forced to SRAM Page 0, just as they are in a PSoC device with only 256 bytes of SRAM. This mode is also automatically enabled when an interrupt occurs in a PSoC device and is considered the default ISR mode. This is because before the ISR is entered, the M8C pushes the current value of the CPU\_F register onto the stack and then clears the CPU\_F register. Thus, by default, any indexed memory access in an ISR is guaranteed to occur in SRAM Page 0. When the RETI instruction executes to end the ISR, the previous value of the CPU\_F register is restored as is the previous page mode. Note that this ISR behavior is the default and that the PgMode bits in the CPU\_F register may be changed while in an ISR. If the PgMode bits are changed while in an ISR, the pre-ISR value is still restored by the RETI; but if the STK\_PP or IDX\_PP registers are changed in the ISR, the ISR is also required to restore the values before executing the RETI instruction.

The most likely PgMode bit change, while in an ISR, is from the default value of 00b to 01b. In the 01b mode, indexed memory access is directed to the SRAM page indicated by the value of the STK\_PP register. By using the PgMode, modification of the STK\_PP register value is unnecessary. The STK\_PP register determines on which SRAM page the stack is located. The 01b paging mode is intended to provide easy access to the stack, while in an ISR, by setting the CPU\_X register (just X in instruction format) equal to value of SP using `MOV X, SP` instruction.

The two previous paragraphs covered two of the three indexed memory access modes: STK\_PP and forced to SRAM Page 0. Note, as shown in [Table 4-1](#), that the STK\_PP mode for indexed memory access is available under two PgMode settings. The 01b mode is intended for ISR use and the 11b mode is intended for non-ISR use. The third indexed memory access mode requires the PgMode bits to be set to 10b. In this mode, indexed memory access is forced to the SRAM page indicated by the value of the IDX\_PP register.

## 4.2 Register Definitions

The following registers are associated with RAM Paging and are listed in address order. The register descriptions have an associated register table showing the bit structure for that register. The bits in the tables that are grayed out are reserved bits and are not detailed in the register descriptions that follow. Always write reserved bits with a value of '0'. For a complete table of RAM Paging registers, refer to the [Summary Table of the Core Registers on page 28](#).

### 4.2.1 TMP\_DRx Registers

| Address | Name                    | Bit 7     | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|-------------------------|-----------|-------|-------|-------|-------|-------|-------|-------|---------|
| x,6xh   | <a href="#">TMP_DRx</a> | Data[7:0] |       |       |       |       |       |       |       | RW : 00 |

#### Legend

x An 'x' before the comma in the address field indicates that this register can be read or written to no matter what bank is used. An "x" after the comma in the address field indicates that there are multiple instances of the register.

The Temporary Data Registers (TMP\_DR0, TMP\_DR1, TMP\_DR2, and TMP\_DR3) enhance the performance in multiple SRAM page PSoC devices.

These registers have no predefined function (for example, the compiler and hardware do not use these registers) and exist for the user to define.

**Bits 7 to 0: Data[7:0].** Due to the paged SRAM architecture of PSoC devices with more than 256 bytes of SRAM, a

value in SRAM is not always accessible without first changing the current page. The TMP\_DRx registers are readable and writable registers that are provided to improve the performance of multiple SRAM page PSoC devices, by supplying some register space for data that is always accessible.

For an expanded listing of the TMP\_DRx registers, refer to the [Summary Table of the Core Registers on page 28](#). For additional information, refer to the [TMP\\_DRx register on page 248](#).

### 4.2.2 CUR\_PP Register

| Address | Name                   | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2          | Bit 1 | Bit 0 | Access  |
|---------|------------------------|-------|-------|-------|-------|-------|----------------|-------|-------|---------|
| 0,D0h   | <a href="#">CUR_PP</a> |       |       |       |       |       | Page Bits[2:0] |       |       | RW : 00 |

The Current Page Pointer Register (CUR\_PP) sets the effective SRAM page for normal memory accesses in a multi-SRAM page PSoC device.

**Bits 2 to 0: Page Bits[2:0].** These bits affect the SRAM page that is accessed by an instruction when the CPU\_F[7:6] bits have a value of either 10b or 11b. Source Indexed, Destination Indexed addressing modes, and stack instructions, are never affected by the value of the CUR\_PP register. See the STK\_PP and IDX\_PP registers for more information.

The Source Indirect Post Increment and Destination Indirect Post Increment addressing modes, better known as MVI, are only partially affected by the value of the CUR\_PP register. For MVI instructions, the pointer address is in the SRAM page indicated by CUR\_PP, but the address pointed to may be in another SRAM page.

See the MVR\_PP and MVW\_PP register descriptions for more information.

For additional information, refer to the [CUR\\_PP register on page 216](#).



### 4.2.3 STK\_PP Register

| Address | Name                   | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2          | Bit 1 | Bit 0 | Access |
|---------|------------------------|-------|-------|-------|-------|-------|----------------|-------|-------|--------|
| 0,D1h   | <a href="#">STK_PP</a> |       |       |       |       |       | Page Bits[2:0] |       |       | RW : 0 |

The Stack Page Pointer Register (STK\_PP) is used to set the effective SRAM page for stack memory accesses in a multi-SRAM page PSoC device.

**Bits 2 to 0: Page Bits[2:0].** These bits have the potential to affect two types of memory access.

The purpose of this register is to determine on which SRAM page to store the stack. In the reset state, this register's value is 00h and the stack is in SRAM Page 0. However, if the STK\_PP register value is changed, the next stack operation occurs on the SRAM page indicated by the new STK\_PP value. Therefore, set the value of this register early in the program and never change it. If the program changes

the STK\_PP value after the stack grows, the program must ensure that the STK\_PP value is restored when needed.

**Note** The impact of the STK\_PP register on the stack is independent of the SRAM Paging bits in the CPU\_F register.

The second type of memory accesses that the STK\_PP register affects are indexed memory accesses when the CPU\_F[7:6] bits are set to 11b. In this mode, Source Indexed and Destination Indexed memory accesses are directed to the stack SRAM page, rather than the SRAM page indicated by the IDX\_PP register or SRAM Page 0.

For additional information, refer to the [STK\\_PP register on page 217](#).

### 4.2.4 IDX\_PP Register

| Address | Name                   | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2          | Bit 1 | Bit 0 | Access |
|---------|------------------------|-------|-------|-------|-------|-------|----------------|-------|-------|--------|
| 0,D3h   | <a href="#">IDX_PP</a> |       |       |       |       |       | Page Bits[2:0] |       |       | RW : 0 |

The Index Page Pointer Register (IDX\_PP) sets the effective SRAM page for indexed memory accesses in a multi-SRAM page PSoC device.

**Bits 2 to 0: Page Bits[2:0].** These bits allow instructions, which use the Source Indexed and Destination Indexed address modes, to operate on an SRAM page that is not equal to the current SRAM page. However, the effect this

register has on indexed addressing modes is only enabled when the CPU\_F[7:6] is set to 10b.

When CPU\_F[7:6] is set to 10b and an indexed memory access is made, the access is directed to the SRAM page indicated by the value of the IDX\_PP register.

See the STK\_PP register description for more information on other indexed memory access modes. For additional

### 4.2.5 MVR\_PP Register

| Address | Name                   | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2          | Bit 1 | Bit 0 | Access |
|---------|------------------------|-------|-------|-------|-------|-------|----------------|-------|-------|--------|
| 0,D4h   | <a href="#">MVR_PP</a> |       |       |       |       |       | Page Bits[2:0] |       |       | RW : 0 |

The MVI Read Page Pointer Register (MVR\_PP) sets the effective SRAM page for MVI read memory accesses in a multi-SRAM page PSoC device.

**Bits 2 to 0: Page Bits[2:0].** These bits are only used by the MVI A, [expr] instruction, not to be confused with the MVI [expr], A instruction covered by the MVW\_PP register. This instruction is considered a read because data is transferred from SRAM to the microprocessor's A register (CPU\_A).

When an MVI A, [expr] instruction is executed in a device with more than one page of SRAM, the SRAM address that is read by the instruction is determined by the value of the least significant bits in this register. However, the pointer for the MVI A, [expr] instruction is always located in the current SRAM page. See the *PSoC Designer Assembly Language User Guide* for more information on the MVI A, [expr] instruction.

The function of this register and the MVI instructions are independent of the SRAM Paging bits in the CPU\_F register. For additional information, refer to the [MVR\\_PP register on page 219](#).

## 4.2.6 MVW\_PP Register

| Address | Name                   | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2          | Bit 1 | Bit 0 | Access |
|---------|------------------------|-------|-------|-------|-------|-------|----------------|-------|-------|--------|
| 0,D5h   | <a href="#">MVW_PP</a> |       |       |       |       |       | Page Bits[2:0] |       |       | RW : 0 |

The MVI Write Page Pointer Register (MVW\_PP) sets the effective SRAM page for MVI write memory accesses in a multi-SRAM page PSoC device.

**Bits 2 to 0: Page Bits[2:0].** These bits are only used by the MVI [expr], A instruction, not to be confused with the MVI A, [expr] instruction covered by the MVR\_PP register. This instruction is considered a write because data is transferred from the microprocessor's A register (CPU\_A) to SRAM.

When an MVI [expr], A instruction is executed in a device with more than one page of SRAM, the SRAM

address that is written by the instruction is determined by the value of the least significant bits in this register. However, the pointer for the MVI [expr], A instruction is always located in the current SRAM page. See the *PSoC Designer Assembly Language User Guide* for more information on the MVI [expr], A instruction.

The function of this register and the MVI instructions are independent of the SRAM Paging bits in the CPU\_F register. For additional information, refer to the [MVW\\_PP register on page 220](#).

## 4.2.7 Related Registers

- [CPU\\_F Register on page 36](#).



# 5. Interrupt Controller




This chapter presents the Interrupt Controller and its associated registers. The interrupt controller provides a mechanism for a hardware resource in PSoC devices to change program execution to a new address without regard to the current task being performed by the code being executed. For a quick reference of all PSoC registers in address order, refer to the [Register Reference chapter on page 177](#).

## 5.1 Architectural Description

Figure 5-1 shows a block diagram of the Interrupt Controller, illustrating the concepts of **posted interrupts** and **pending interrupts**.

Figure 5-1. Interrupt Controller Block Diagram

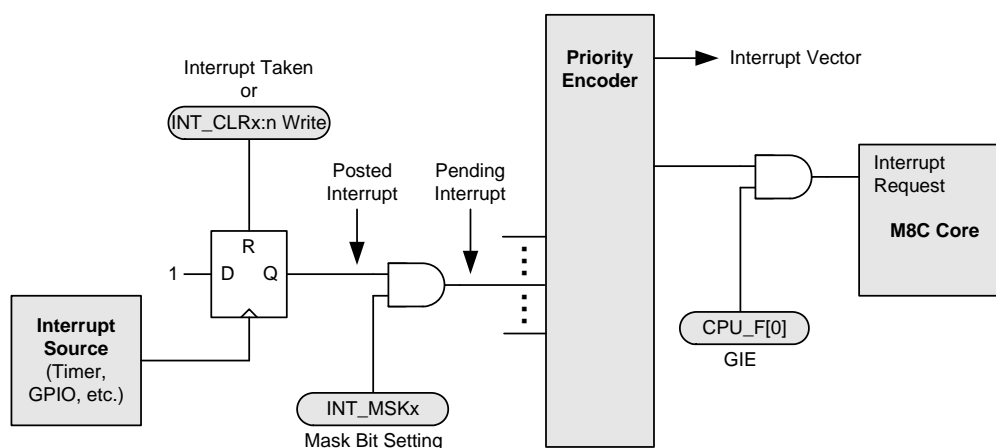

This is the sequence of events that occur during interrupt processing.

1. An interrupt becomes active, either because (a) the interrupt condition occurs (for example, a timer expires), (b) a previously posted interrupt is enabled through an update of an interrupt **mask** register, or (c) an interrupt is pending and GIE is set from '0' to '1' in the CPU Flag register.
2. The current executing instruction finishes.
3. The internal interrupt service routine (ISR) executes, taking 13 cycles. During this time, the following actions occur:
  - ❑ The PCH, PCL, and Flag register (CPU\_F) are pushed onto the stack (in that order).
  - ❑ The CPU\_F register clears. Because this clears the GIE bit to '0', additional interrupts are temporarily disabled.
4. Program execution vectors to the interrupt table. Typically an **LJMP** instruction in the interrupt table sends execution to the user's interrupt service routine for this interrupt. (See [Instruction Set Summary on page 32](#).)
5. The ISR executes. Interrupts are disabled because GIE = 0. In the ISR, interrupts can be re-enabled if necessary by setting GIE = 1 (take care to avoid stack overflow in this case).
6. The ISR ends with an **RETI** instruction. This pops the Flag register, PCL, and PCH from the stack, restoring those registers. The restored Flag register re-enables interrupts because GIE = 1 again.

7. Execution resumes at the next instruction, after the instruction that occurred before the interrupt. However, if there are more pending interrupts, the subsequent interrupts are processed before the next normal program instruction.

**Interrupt Latency.** The time between the assertion of an enabled interrupt and the start of its ISR is calculated using this equation:

#### Equation 1

$$\begin{aligned} \text{Latency} = & \\ & \text{Time for current instruction to finish} + \\ & \text{Time for M8C to change program counter to interrupt address} + \\ & \text{Time for LJMP instruction in interrupt table to execute.} \end{aligned}$$

For example, if the 5-cycle JMP instruction is executing when an interrupt becomes active, the total number of CPU clock cycles before the ISR begins is:

#### Equation 2

$$\begin{aligned} & (1 \text{ to } 5 \text{ cycles for JMP to finish}) + \\ & (13 \text{ cycles for interrupt routine}) + \\ & (7 \text{ cycles for LJMP}) = 21 \text{ to } 25 \text{ cycles.} \end{aligned}$$

In this example, at 24 MHz, 25 clock cycles take 1.042  $\mu$ s.

**Interrupt Priority.** Interrupt priorities come into consideration when more than one interrupt is pending during the same instruction cycle. In this case, the Priority Encoder (see Figure 5-1) generates an interrupt vector for the highest priority pending interrupt.

### 5.1.1 Posted versus Pending Interrupts

An interrupt is posted when its interrupt conditions occur. This results in the flip-flop in Figure 5-1 clocking in a 1. The interrupt remains posted until the interrupt is taken or until it is cleared by writing to the appropriate INT\_CLR<sub>x</sub> register.

A posted interrupt is not pending unless it is enabled by setting its interrupt mask bit (in the appropriate INT\_MSK<sub>x</sub> register). All pending interrupts are processed by the Priority Encoder to determine the highest priority interrupt taken by the M8C if the Global Interrupt Enable bit is set in the CPU\_F register.

Disabling an interrupt by clearing its interrupt mask bit (in the INT\_MSK<sub>x</sub> register) does not clear a posted interrupt, nor does it prevent an interrupt from posting. It simply prevents a posted interrupt from becoming pending.

It is especially important to understand the functionality of clearing posted interrupts, if the configuration of the PSoC device is changed by the application.

For example, if a block has a posted interrupt when it is enabled and then disabled, the posted interrupt remains.

Therefore, it is good practice to use the INT\_CLR register to clear posted interrupts before enabling or re-enabling a block.

## 5.2 Application Overview

The interrupt controller and its associated registers allow the user's code to respond to an interrupt from almost every functional block in PSoC devices. Interrupts for all the digital blocks and each of the analog columns are available, as well as interrupts for supply voltage, sleep, variable clocks, and a general GPIO (pin) interrupt.

The registers associated with the interrupt controller allow the disabling of interrupts either globally or individually. The registers also provide a mechanism by which a user can **clear** all pending and posted interrupts or clear individual posted or pending interrupts. A **software** mechanism is provided to set individual interrupts. Setting an interrupt by way of software is very useful during code development, when one may not have the complete hardware system necessary to generate a real interrupt.

The following table lists the interrupts and priorities that are available in the PSoC devices.

Table 5-1. Device Interrupts

| Interrupt Priority                                 | Interrupt Address | Interrupt Name         |
|--|-------------------|------------------------|
| 0 (Highest)  | 0000h             | Reset                  |
| 1  | 0004h             | Supply voltage monitor |
| 2  | 0008h             | Analog                 |
| 3  | 0010h             | Timer0                 |
| 4  | 0014h             | GPIO                   |
| 5  | 0018h             | SPI                    |
| 6  | 001Ch             | I2C                    |
| 7  | 0020h             | Sleep Timer            |
| 8  | 0024h             | Timer1                 |
| 9  | 0028h             | Timer2                 |
| 10 (Lowest for CY8C20x66, CY8C20x46/96, CY8C20x36) | 005Ch             | ADC                    |

## 5.3 Register Definitions

The following registers are associated with the Interrupt Controller and are listed in address order. The register descriptions have an associated register table showing the bit structure for that register. The bits in the tables that are grayed out are reserved bits and are not detailed in the register descriptions that follow. Always write reserved bits with a value of '0'. For a complete table of Interrupt Controller registers, refer to the [Summary Table of the Core Registers on page 28](#).

### 5.3.1 INT\_CLR0 Register

| Address | Name                     | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3  | Bit 2 | Bit 1  | Bit 0     | Access  |
|---------|--------------------------|-------|-------|-------|-------|--------|-------|--------|-----------|---------|
| 0,DAh   | <a href="#">INT_CLR0</a> | I2C   | Sleep | SPI   | GPIO  | Timer0 |       | Analog | V Monitor | RW : 00 |

The Interrupt Clear Register 0 (INT\_CLR0) enables the individual interrupt sources' ability to clear posted interrupts.

The INT\_CLR0 register is similar to the INT\_MSK0 register in that it holds a bit for each interrupt source. Functionally the INT\_CLR0 register is similar to the INT\_VC register, although its operation is completely independent. When the INT\_CLR0 register is read, any bits that are set indicate an interrupt was posted for that hardware resource. Reading this register gives the user the ability to determine all posted interrupts.

The Enable Software Interrupt (ENSWINT) bit in the INT\_SW\_EN register determines how an individual bit value, written to an INT\_CLR0 register, is interpreted. When ENSWINT is cleared (the default state), writing 1's to the INT\_CLR0 register has no effect. However, writing 0's to the INT\_CLR0 register, when ENSWINT is cleared, causes the corresponding interrupt to clear. If the ENSWINT bit is set, any 0's written to the INT\_CLR0 register are ignored. However, 1's written to the INT\_CLR0 register, while ENSWINT is set, cause an interrupt to post for the corresponding interrupt.

Software interrupts aid in debugging interrupt service routines by eliminating the need to create system level interac-

tions that are sometimes necessary to create a hardware-only interrupt.

**Bit 7: I2C.** This bit allows posted I2C interrupts to be read, cleared, or set.

**Bit 6: Sleep.** This bit allows posted sleep interrupts to be read, cleared, or set.

**Bit 5: SPI.** This bit allows posted SPI interrupts to be read, cleared, or set.

**Bit 4: GPIO.** This bit allows posted GPIO interrupts to be read, cleared, or set.

**Bit 3: Timer0.** This bit allows posted timer interrupts to be read, cleared, or set.

**Bit 1: Analog.** This bit allows posted analog interrupts to be read, cleared, or set.

**Bit 0: V Monitor.** This bit allows posted voltage monitor interrupts to be read, cleared, or set.

For additional information, refer to the [INT\\_CLR0 register on page 224](#).

### 5.3.2 INT\_CLR1 Register

| Address | Name     | Bit 7     | Bit 6     | Bit 5     | Bit 4     | Bit 3   | Bit 2       | Bit 1  | Bit 0  | Access  |
|---------|----------|-----------|-----------|-----------|-----------|---------|-------------|--------|--------|---------|
| 0,DBh   | INT_CLR1 | Endpoint3 | Endpoint2 | Endpoint1 | Endpoint0 | USB SOF | USB Bus Rst | Timer2 | Timer1 | RW : 00 |

This register enables the individual interrupt sources' ability to clear posted interrupts.

When bits in this register are read, a '1' is returned for every bit position that has a corresponding posted interrupt. When bits in this register are written with a '0' and ENSWINT is not set, posted interrupts are cleared at the corresponding bit positions. If there is no posted interrupt, there is no effect. When bits in this register are written with a '1' and ENSWINT is set, an interrupt is posted in the interrupt controller.

**Bit 7: Endpoint3.** Read '0', no posted interrupt for USB Endpoint3. Read '1', posted interrupt present for USB Endpoint3.

Write 0 AND ENSWINT = 0. Clear posted interrupt if it exists.

Write 1 AND ENSWINT = 0. No effect.

Write 0 AND ENSWINT = 1. No effect.

Write 1 AND ENSWINT = 1. Post an interrupt for USB Endpoint3.

**Bit 6: Endpoint2.** Read '0', no posted interrupt for USB Endpoint2. Read '1', posted interrupt present for USB Endpoint2.

Write 0 AND ENSWINT = 0. Clear posted interrupt if it exists.

Write 1 AND ENSWINT = 0. No effect.

Write 0 AND ENSWINT = 1. No effect.

Write 1 AND ENSWINT = 1. Post an interrupt for USB Endpoint2.

**Bit 5: Endpoint1.** Read '0', no posted interrupt for USB Endpoint1. Read '1', posted interrupt present for USB Endpoint1.

Write 0 AND ENSWINT = 0. Clear posted interrupt if it exists.

Write 1 AND ENSWINT = 0. No effect.

Write 0 AND ENSWINT = 1. No effect.

Write 1 AND ENSWINT = 1. Post an interrupt for USB Endpoint1.

**Bit 4: Endpoint0.** Read '0', no posted interrupt for USB Endpoint0. Read '1', posted interrupt present for USB Endpoint0.

Write 0 AND ENSWINT = 0. Clear posted interrupt if it exists.

Write 1 AND ENSWINT = 0. No effect.

Write 0 AND ENSWINT = 1. No effect.

Write 1 AND ENSWINT = 1. Post an interrupt for USB Endpoint0.

**Bit 3: USB SOF.** Read '0', no posted interrupt for USB Start of Frame (SOF). Read '1', posted interrupt present for USB Start of Frame (SOF).

Write 0 AND ENSWINT = 0. Clear posted interrupt if it exists.

Write 1 AND ENSWINT = 0. No effect.

Write 0 AND ENSWINT = 1. No effect.

Write 1 AND ENSWINT = 1. Post an interrupt for USB Start of Frame (SOF).

**Bit 2: USB Bus Rst.** Read '0', no posted interrupt for USB Bus Reset. Read '1', posted interrupt present for USB Bus Reset.

Write 0 AND ENSWINT = 0. Clear posted interrupt if it exists.

Write 1 AND ENSWINT = 0. No effect.

Write 0 AND ENSWINT = 1. No effect.

Write 1 AND ENSWINT = 1. Post an interrupt for USB Bus Reset.

**Bit 1: Timer2.** Read '0', no posted interrupt for Timer2. Read '1', posted interrupt present for Timer2.

Write 0 AND ENSWINT = 0. Clear posted interrupt if it exists.

Write 1 AND ENSWINT = 0. No effect.

Write 0 AND ENSWINT = 1. No effect.

Write 1 AND ENSWINT = 1. Post an interrupt for Timer2.

**Bit 0: Timer1.** Read '0', no posted interrupt for Timer1. Read '1', posted interrupt present for Timer1.

Write 0 AND ENSWINT = 0. Clear posted interrupt if it exists.

Write 1 AND ENSWINT = 0. No effect.

Write 0 AND ENSWINT = 1. No effect.

Write 1 AND ENSWINT = 1. Post an interrupt for Timer1.

For additional information, refer to the [INT\\_CLR1 register on page 226](#).

### 5.3.3 INT\_CLR2 Register

| Address | Name     | Bit 7 | Bit 6 | Bit 5    | Bit 4     | Bit 3     | Bit 2     | Bit 1     | Bit 0     | Access  |
|---------|----------|-------|-------|----------|-----------|-----------|-----------|-----------|-----------|---------|
| 0,DCh   | INT_CLR2 |       |       | USB_WAKE | Endpoint8 | Endpoint7 | Endpoint6 | Endpoint5 | Endpoint4 | RW : 00 |

This register enables the individual interrupt sources' ability to clear posted interrupts.

When bits in this register are read, a '1' is returned for every bit position that has a corresponding posted interrupt. When bits in this register are written with a '0' and ENSWINT is not set, posted interrupts are cleared at the corresponding bit positions. If there was not a posted interrupt, there is no effect. When bits in this register are written with a '1' and ENSWINT is set, an interrupt is posted in the interrupt controller.

**Bit 5: USB\_WAKE.** Read '0', no posted interrupt for USB wakeup. Read '1', posted interrupt present for USB wakeup. Write 0 AND ENSWINT = 0. Clear posted interrupt if it exists.

Write 1 AND ENSWINT = 0. No effect.

Write 0 AND ENSWINT = 1. No effect.

Write 1 AND ENSWINT = 1. Post an interrupt for USB wakeup.

**Bit 4: Endpoint8.** Read '0', no posted interrupt for USB Endpoint8. Read '1', posted interrupt present for USB Endpoint8.

Write 0 AND ENSWINT = 0. Clear posted interrupt if it exists.

Write 1 AND ENSWINT = 0. No effect.

Write 0 AND ENSWINT = 1. No effect.

Write 1 AND ENSWINT = 1. Post an interrupt for USB Endpoint8.

**Bit 3: Endpoint7.** Read '0', no posted interrupt for USB Endpoint7. Read '1', posted interrupt present for USB Endpoint7.

Write 0 AND ENSWINT = 0. Clear posted interrupt if it exists.

Write 1 AND ENSWINT = 0. No effect.

Write 0 AND ENSWINT = 1. No effect.

Write 1 AND ENSWINT = 1. Post an interrupt for USB Endpoint7.

**Bit 2: Endpoint6.** Read '0', no posted interrupt for USB Endpoint6. Read '1', posted interrupt present for USB Endpoint6.

Write 0 AND ENSWINT = 0. Clear posted interrupt if it exists.

Write 1 AND ENSWINT = 0. No effect.

Write 0 AND ENSWINT = 1. No effect.

Write 1 AND ENSWINT = 1. Post an interrupt for USB Endpoint6.

**Bit 1: Endpoint5.** Read '0', no posted interrupt for USB Endpoint5. Read '1', posted interrupt present for USB Endpoint5.

Write 0 AND ENSWINT = 0. Clear posted interrupt if it exists.

Write 1 AND ENSWINT = 0. No effect.

Write 0 AND ENSWINT = 1. No effect.

Write 1 AND ENSWINT = 1. Post an interrupt for USB Endpoint5.

**Bit 0: Endpoint4.** Read '0', no posted interrupt for USB Endpoint4. Read '1', posted interrupt present for USB Endpoint4.

Write 0 AND ENSWINT = 0. Clear posted interrupt if it exists.

Write 1 AND ENSWINT = 0. No effect.

Write 0 AND ENSWINT = 1. No effect.

Write 1 AND ENSWINT = 1. Post an interrupt for USB Endpoint4.

For additional information, refer to the [INT\\_CLR2 register on page 228](#).

### 5.3.4 INT\_MSK0 Register

| Address | Name                     | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3  | Bit 2 | Bit 1  | Bit 0     | Access  |
|---------|--------------------------|-------|-------|-------|-------|--------|-------|--------|-----------|---------|
| 0,E0h   | <a href="#">INT_MSK0</a> | I2C   | Sleep | SPI   | GPIO  | Timer0 |       | Analog | V Monitor | RW : 00 |

The Interrupt Mask Register (INT\_MSK0) enables the individual interrupt sources' ability to create pending interrupts.

If cleared, each bit in an INT\_MSK0 register prevents a posted interrupt from becoming a pending interrupt (input to the Priority Encoder). However, an interrupt can still post even if its mask bit is zero. All INT\_MSK0 bits are independent of all other INT\_MSK0 bits.

If an INT\_MSK0 bit is set, the interrupt source associated with that mask bit may generate an interrupt that becomes a pending interrupt. For example, if INT\_MSK0[4] is set and at least one GPIO pin is configured to generate an interrupt, the interrupt controller allows a GPIO interrupt request to post and become a pending interrupt to which the M8C responds. If a higher priority interrupt is generated before the M8C responds to the GPIO interrupt, the higher priority interrupt is responded to before the GPIO interrupt.

Each interrupt source may require configuration at a block level. Refer to the corresponding chapter for each interrupt for any additional configuration information.

**Bit 7: I2C.** This bit allows I2C interrupts to be enabled or masked.

**Bit 6: Sleep.** This bit allows sleep interrupts to be enabled or masked.

**Bit 5: SPI.** This bit allows SPI interrupts to be enabled or masked.

**Bit 4: GPIO.** This bit allows GPIO interrupts to be enabled or masked.

**Bit 3: Timer0.** This bit allows Timer0 interrupts to be enabled or masked.

**Bit 1: Analog.** This bit allows analog interrupts to be enabled or masked.

**Bit 0: V Monitor.** This bit allows voltage monitor interrupts to be enabled or masked.

For additional information, refer to the [INT\\_MSK0 register on page 232](#).

### 5.3.5 INT\_MSK1 Register

| Address | Name                     | Bit 7     | Bit 6     | Bit 5     | Bit 4     | Bit 3   | Bit 2         | Bit 1  | Bit 0  | Access  |
|---------|--------------------------|-----------|-----------|-----------|-----------|---------|---------------|--------|--------|---------|
| 0,DFh   | <a href="#">INT_MSK1</a> | Endpoint3 | Endpoint2 | Endpoint1 | Endpoint0 | USB SOF | USB Bus Reset | Timer2 | Timer1 | RW : 00 |

This register enables the individual sources' ability to create pending interrupts.

When an interrupt is masked off, the mask bit is '0'. The interrupt continues to post in the interrupt controller. Clearing the mask bit only prevents a posted interrupt from becoming a pending interrupt.

**Bit 7: Endpoint3.** '0' is mask USB Endpoint3 interrupt. '1' is unmask USB Endpoint3 interrupt.

**Bit 6: Endpoint2.** '0' is mask USB Endpoint2 interrupt. '1' is unmask USB Endpoint2 interrupt.

**Bit 5: Endpoint1.** '0' is mask USB Endpoint1 interrupt. '1' is unmask USB Endpoint1 interrupt.

**Bit 4: Endpoint0.** '0' is mask USB Endpoint0 interrupt. '1' is unmask USB Endpoint0 interrupt.

**Bit 3: USB SOF.** '0' is mask USB SOF interrupt. '1' is unmask USB SOF interrupt.

**Bit 2: USB Bus Reset (K).** '0' is mask USB Bus Reset interrupt. '1' is unmask USB Bus Reset interrupt.

**Bit 1: Timer2.** '0' is mask Timer2 interrupt. '1' is unmask Timer2 interrupt.

**Bit 0: Timer1.** '0' is mask Timer1 interrupt. '1' is unmask Timer1 interrupt.

For additional information, refer to the [INT\\_MSK1 register on page 231](#).

### 5.3.6 INT\_MSK2 Register

| Address | Name                     | Bit 7 | Bit 6 | Bit 5      | Bit 4     | Bit 3     | Bit 2     | Bit 1     | Bit 0     | Access  |
|---------|--------------------------|-------|-------|------------|-----------|-----------|-----------|-----------|-----------|---------|
| 0,DEh   | <a href="#">INT_MSK2</a> |       |       | USB Wakeup | Endpoint8 | Endpoint7 | Endpoint6 | Endpoint5 | Endpoint4 | RW : 00 |

This register is used to enable the individual sources' ability to create pending interrupts.

When an interrupt is masked off, the mask bit is '0'. The interrupt still posts in the interrupt controller. Therefore, clearing the mask bit only prevents a posted interrupt from becoming a pending interrupt.

**Bit 5: USB Wakeup.** '0' is mask USB Wakeup interrupt. '1' is unmask USB Wakeup interrupt.

**Bit 4: Endpoint8.** '0' is mask USB Endpoint8 interrupt. '1' is unmask USB Endpoint8 interrupt.

**Bit 3: Endpoint7.** '0' is mask USB Endpoint7 interrupt. '1' is unmask USB Endpoint7 interrupt.

**Bit 2: Endpoint6.** '0' is mask USB Endpoint6 interrupt. '1' is unmask USB Endpoint6 interrupt.

**Bit 1: Endpoint5.** '0' is mask USB Endpoint5 interrupt. '1' is unmask USB Endpoint5 interrupt.

**Bit 0: Endpoint4.** '0' is mask USB Endpoint4 interrupt. '1' is unmask USB Endpoint4 interrupt.

For additional information, refer to the [INT\\_MSK2 register on page 230](#).

### 5.3.7 INT\_SW\_EN Register

| Address | Name                      | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0   | Access |
|---------|---------------------------|-------|-------|-------|-------|-------|-------|-------|---------|--------|
| 0,E1h   | <a href="#">INT_SW_EN</a> |       |       |       |       |       |       |       | ENSWINT | RW : 0 |

The Interrupt Software Enable Register (INT\_SW\_EN) is used to enable software interrupts.

**Bit 0: ENSWINT.** This bit is a special non-mask bit that controls the behavior of the INT\_CLR0 register. See the INT\_CLR0 register in this section for more information.

For more details, see [INT\\_SW\\_EN register on page 233](#).



### 5.3.8 INT\_VC Register

| Address | Name                   | Bit 7                  | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|------------------------|------------------------|-------|-------|-------|-------|-------|-------|-------|---------|
| 0,E2h   | <a href="#">INT_VC</a> | Pending Interrupt[7:0] |       |       |       |       |       |       |       | RC : 00 |

#### Legend

Clearable register or bits.

The Interrupt Vector Clear Register (INT\_VC) returns the next pending interrupt and clears all pending interrupts when written.

**Bits 7 to 0: Pending Interrupt[7:0].** When the register is read, the **least significant byte (LSB)** of the highest priority pending interrupt is returned. For example, if the GPIO and I2C interrupts were pending and the INT\_VC register was read, the value 14h is read. However, if no interrupts were pending, the value 00h is returned. This is the reset vector in the interrupt table; however, reading 00h from the INT\_VC register is not considered an indication that a system reset is pending. Rather, reading 00h from the INT\_VC register simply indicates that there are no pending interrupts. The highest priority interrupt, indicated by the value returned by a read of the INT\_VC register, is removed from the list of pending interrupts when the M8C services an interrupt.

Reading the INT\_VC register has limited usefulness. If interrupts are enabled, a read to the INT\_VC register is not able to determine that an interrupt was pending before the interrupt was actually taken. However, while in an interrupt service routine, a user may wish to read the INT\_VC register to see the next interrupt. When the INT\_VC register is written with any value, all pending and posted interrupts are cleared by asserting the clear line for each interrupt.

For additional information, refer to the [INT\\_VC register on page 234](#).

### 5.3.9 Related Registers

- [CPU\\_F on page 236](#).



## 6. General-Purpose I/O (GPIO)




This chapter discusses the general-purpose I/O (GPIO) and its associated registers, which is the circuit responsible for interfacing to the I/O pins of a PSoC device. The GPIO blocks provide the interface between the M8C core and the outside world. They offer a large number of configurations to support several types of input/output (IO) operations for both digital and analog systems. For a complete table of the GPIO registers, refer to [PSoC Core on page 27](#). For a quick reference of all PSoC registers in address order, refer to the [Register Reference chapter on page 177](#).

### 6.1 Architectural Description

The GPIO in the CY8C24x93 devices are all uniform, except that Port 0 and Port 1 GPIO have stronger high drive. In addition to higher drive strength, Port 1 GPIO have an option for regulated output level. These distinctions are discussed in more detail in [Port 1 Distinctions on page 58](#) and [Port 0 Distinctions on page 59](#).

Figure 6-1. GPIO Block Diagram

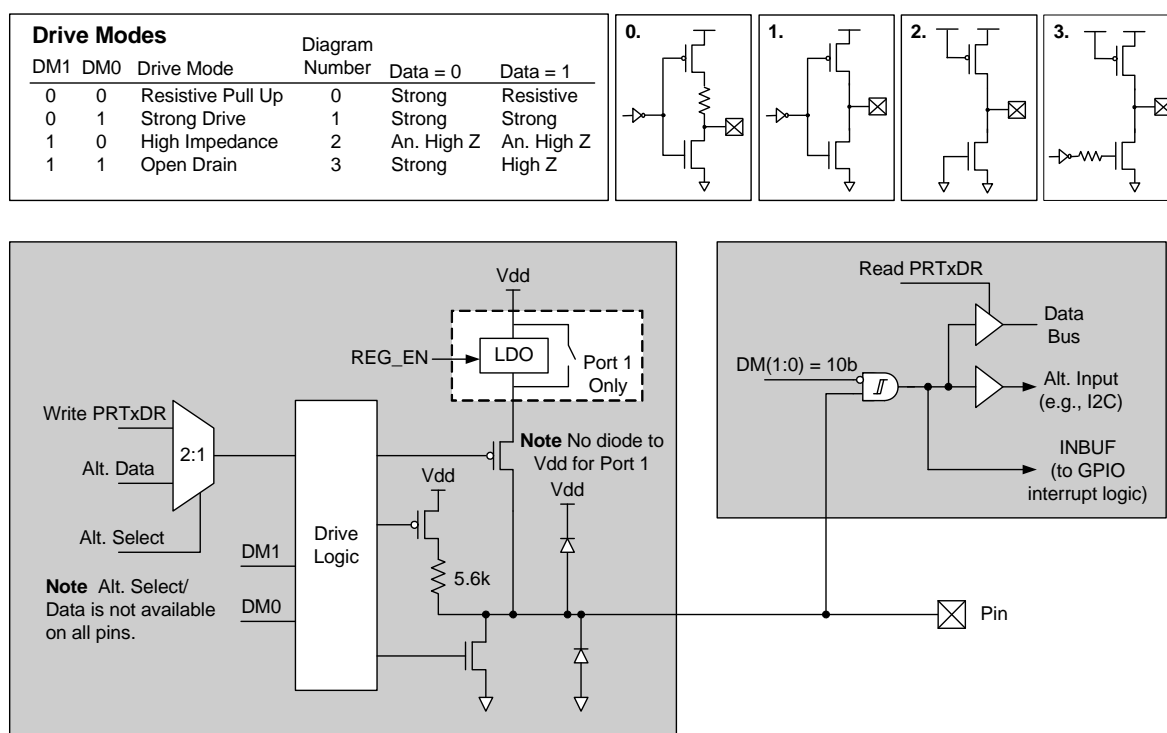

## 6.1.1 General Description

The GPIO contains input buffers, output drivers, and configuration logic for connecting the PSoC device to the outside world.

I/O ports are arranged with (up to) 8 bits per port. Each full port contains eight identical GPIO blocks. Each GPIO block is used for the following types of I/O:

- Digital I/O (digital input and output controlled by software)
- Analog I/O

Each I/O pin also has several drive modes, and interrupt capabilities. All GPIO pins provide both digital I/O and analog input capability.

All I/O contain the capability to connect to an internal analog bus. This is described in detail in the [I/O Analog Multiplexer chapter on page 91](#).

Certain pins contain an option to bypass the normal data path and output from an internal source. An example is I2C outputs. These are described in [Data Bypass on page 60](#).

## 6.1.2 Digital I/O

One of the basic operations of the GPIO ports is to allow the M8C to send information out of the PSoC device and get information into the M8C from outside the device. This is accomplished using the port data register (PRTxDR). Writes from the M8C to the PRTxDR register store the data state, one bit per GPIO. In the standard non-bypass mode, the pin drivers drive the pin in response to this data bit, with a drive strength determined by the Drive mode setting (see [Figure 6-1](#)). The actual voltage on the pin depends upon the Drive mode and the external load.

The M8C reads the value of a port by reading the PRTxDR register address. When the M8C reads the PRTxDR register address, the current value of the pin voltage is translated into a logic value and returned to the M8C. Note that the pin voltage can represent a different logic value than the last value written to the PRTxDR register. This is an important distinction to remember in situations such as the use of a read modify write to a PRTxDR register. Examples of read modify write instructions include AND, OR, and XOR.

The following is an example of how a read modify write, to a PRTxDR register, can have an unexpected and even indeterminate result in certain systems. Consider a scenario where all bits of Port 1 on the PSoC device are in the strong 0 resistive 1 Drive mode; so that in some cases, the system the PSoC is in may pull down one of the bits by an external driver.

```
mov    reg[PRT1DR], 0xFF
and    reg[PRT1DR], 0x7F
```

In the first line of this code, writing a FFh to the port causes the PSoC to drive all pins high through a resistor. This does

not affect any bits that are strongly driven low by the system the PSoC is in. However, in the second line of code, it cannot guarantee that only bit 7 is the one set to a strong 0 (zero). Because the AND instruction first reads the port, any bits that are currently driven low externally are read as a 0. These zeros are then written back to the port. When this happens, the pin goes into a strong 0 state; therefore, if the external low drive condition ends in the system, the PSoC keeps the pin value at a logic 0.

## 6.1.3 Analog and Digital Inputs

Analog signals pass into the PSoC device core from device pins through a resistive path. For analog signals, the GPIO block is typically configured into a High-impedance Analog Drive mode (High-Z). The mode turns off the Schmitt trigger on the input path, which may reduce power consumption and decrease internal switching noise when using a particular I/O as an analog input.

All modes, except High-impedance Analog, allow digital inputs. The most useful digital input modes are Resistive Pull Up (DM1, DM0 = 00b with Data = 1) or a fully high-impedance input using open drain (DM1, DM0 = 11b with Data = 1).

## 6.1.4 Port 1 Distinctions

Port 1 has two differences from the other GPIO ports. It has stronger high drive (as does Port 0) and it has an option for regulating all outputs to a 3 V/2.5 V/1.8 V level when in strong drive mode. Refer to the device datasheet for the different current sourcing specifications of Port 1.

By setting the REG\_EN bit in the IO\_CFG1 register, Port 1 can be configured to drive strong high to a regulated 3 V/2.5 V/1.8 V level. If REG\_EN is set low, Port 1 pins drive to Vdd in strong drive mode.

In Resistive High Drive mode ([DM1, DM0] = 00), the pins pull up to the **chip** Vdd level regardless of the regulator setting for this port. Only Strong Drive mode allows for the outputs to be driven to the regulated level. When the REG\_EN bit is set high, pins configured for strong drive to regulated level, while those in resistive pull-up mode drive to Vdd.

In their default state, all Port 1 I/O prevent DC current from flowing into the pin when the pin voltage is above the chip Vdd. This feature resolves the problem where the PSoC holds down the system I2C bus or provides a current leakage path from a powered peripheral during PSoC power down or reset.

The open drain driver is capable of sinking 24 mA current (required for sinking LEDs used for backlighting) and maintaining a logic low state.

Regulated output level can be selected by bits 4 and 5 in the IO\_CFG1 register. For 3-V output level, the chip Vdd should be greater than 3.1 V. For 2.5-V output, the chip Vdd should

be greater than 2.7 V, and for 1.8-V output level, chip V<sub>dd</sub> should be greater than 2.5 V.

### 6.1.5 Port 0 Distinctions

Port 0 has a stronger high drive. However, unlike Port 1, it does not have an option to regulate the outputs when in strong drive mode. Refer to the device datasheet for the different current sourcing specifications of Port 0.

### 6.1.6 GPIO Block Interrupts

You can individually configure each GPIO pin for interrupt capability. Pins are configured by pin interrupt enables and also by a chip wide selection for interrupt state with this global selection. Pins can be set to interrupt when the pin is low or when it changes from the last time it was read. The block provides an open drain interrupt output (INTO) that is connected to other GPIO blocks in a wire-OR fashion.

All pin interrupts that are wire-ORed together are tied to the same system GPIO interrupt. Therefore, if interrupts are enabled on multiple pins, the user's interrupt service routine must provide a mechanism to determine which pin was the source of the interrupt.

Using a GPIO interrupt requires these steps:

1. Set the Interrupt mode (IOINT bit in the IO\_CFG1 register).
2. Enable the bit interrupt in the GPIO block.
3. Set the mask bit for the (global) GPIO interrupt.
4. Assert the overall Global Interrupt Enable.

The first step sets a common interrupt mode for all pins.

The second step is set at the GPIO pin level (that is, at each port pin), by way of the PRTxIE registers.

The last two steps are common to all interrupts and described in the [Interrupt Controller chapter on page 49](#).

At the GPIO block level, asserting the INTO line depends only on the bit interrupt enable and the state of the pin relative to the chosen Interrupt mode. At the PSoC device level, due to their wire-OR nature, the GPIO interrupts are neither true edge sensitive interrupts nor true level sensitive interrupts. They are considered edge-sensitive for asserting, but level sensitive for release of the wire-OR interrupt line.

If no GPIO interrupts are asserting, a GPIO interrupt occurs whenever a GPIO pin interrupt enable is set and the GPIO pin transitions (if not already transitioned) appropriately high or low to match the interrupt mode configuration. After this happens, the INTO line pulls low to assert the GPIO interrupt. This assumes the other system level enables are on, such as setting the global GPIO interrupt enable and the Global Interrupt Enable. Setting the pin interrupt enable may immediately assert INTO, if the Interrupt mode conditions are already being met at the pin.


After INTO pulls low, it continues to hold INTO low until one of these conditions change:

- The pin interrupt enable is cleared.
- The voltage at pin transitions to the opposite state.
- In interrupt-on-change mode, the GPIO data register is read thus setting the local interrupt level to the opposite state.
- The Interrupt mode is changed so that the current pin state does not create an interrupt.

After one of these conditions is met, the INTO releases. At this point, another GPIO pin (or this pin again) can assert its INTO pin, pulling the common line low to assert a new interrupt.

Note the following behavior from this level release feature. If one pin is asserting INTO and then a second pin asserts its INTO, when the first pin releases its INTO, the second pin is already driving INTO and thus no change is seen (that is, no new interrupt is asserted on the GPIO interrupt). Take care, using polling or the states of the GPIO pin and Global Interrupt Enables, to catch all interrupts among a set of wire-OR GPIO blocks.

Figure 6-2. GPIO Interrupt Logic Diagram

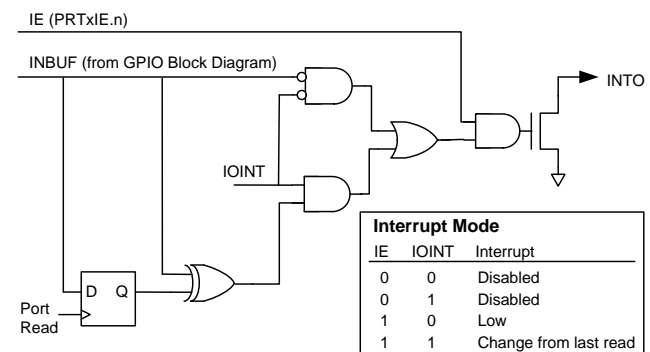

#### 6.1.6.1 Interrupt Modes

GPIO interrupts use the IOINT bit from the IO\_CFG1 register. The setting of IOINT determines the interrupt mode for all GPIO.

Interrupt mode IOINT=0 means that the block asserts the GPIO interrupt line (INTO) when the pin voltage is low, if the block's bit interrupt enable line is set (high).

Interrupt mode IOINT=1 means that the block asserts the interrupt line (INTO) when the pin voltage is the opposite of the last state read from the pin, if the block's bit interrupt enable line is set high. This mode switches between low mode and high mode, depending upon the last value read from the port during reads of the data register (PRTxDR). If the last value read from the GPIO was 0, the GPIO pin is in


Interrupt High mode. If the last value read from the GPIO was '1', the GPIO is in Interrupt Low mode.

Table 6-1. GPIO Interrupt Modes

| IE | IOINT | Description                                  |
|----|-------|--|
| 0  | 0     | Bit interrupt disabled, INTO deasserted      |
| 0  | 1     | Bit interrupt disabled, INTO d-asserted      |
| 1  | 0     | Assert INTO when PIN = low                   |
| 1  | 1     | Assert INTO when PIN = change from last read |

Figure 6-3 assumes that the GIE is set, GPIO interrupt mask is set, and that the IOINT bit was set to high. The Change Interrupt mode relies on the value of an internal read register to determine if the pin state changed. Therefore, the port that contains the GPIO in question must be read during every interrupt service routine. If the port is not read, the Interrupt mode acts as if it is in high mode when the latch value is '0' and low mode when the latch value is '1'.

Figure 6-3. GPIO Interrupt Mode IOINT = 1

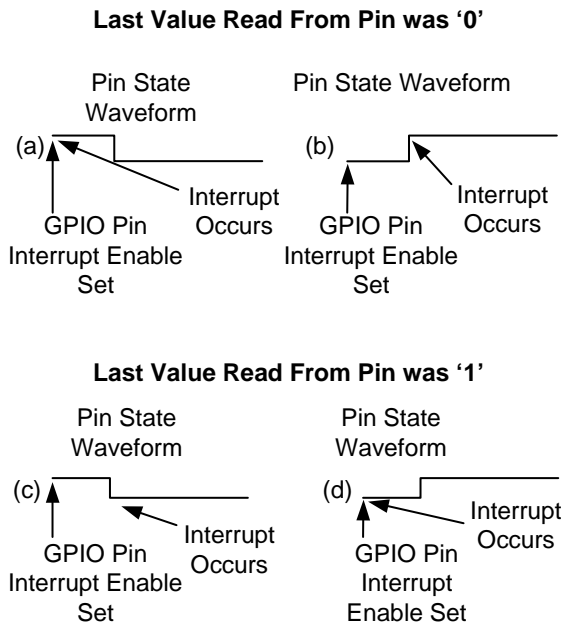

### 6.1.7 Data Bypass

GPIO pins are configured to either output data through CPU writes to the PRTxDR registers or to bypass the port's data register and output data from internal functions instead. The bypass path is shown in Figure 6-1 by the Alt Data input, which is selected by the Alt Select input. These data bypass options are selected in one of two ways.

- For internal functions such as I2C and SPI, the hardware automatically selects the bypass mode for the required pins when the function is enabled. In addition, some bypass outputs are selected by the user through the OUT\_P1 register. For these, the pin is configured for data bypass when the register bit is set high, which allows an internal signal to be driven to the pin.
- For all bypass modes, the wanted drive mode of the pin must be configured separately for each pin, with the PRTxDM1 and PRTxDM0 registers.

## 6.2 Register Definitions

The following registers are associated with the general-purpose I/O (GPIO) and are listed in address order. The register descriptions have an associated register table showing the bit structure for that register. The bits in the tables that are grayed out are reserved bits and are not detailed in the register descriptions that follow. Always write reserved bits with a value of 0. For a complete table of general-purpose I/O registers, refer to the [Core Register Summary on page 28](#).

For a selected GPIO block, the individual registers are addressed in the [Core Register Summary on page 28](#). In the register names, the 'x' is the port number, configured at the PSoC device level (x = 0 to 4 typically). All register values are readable, except for the PRTxDR register; reads of this register return the pin state instead of the register bit state.

### 6.2.1 PRTxDR Registers

| Address | Name   | Bit 7     | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|--------|-----------|-------|-------|-------|-------|-------|-------|-------|---------|
| 0,xxh   | PRTxDR | Data[7:0] |       |       |       |       |       |       |       | RW : 00 |

#### Legend

xx An "x" after the comma in the address field indicates that there are multiple instances of the register. For an expanded address listing of these registers, refer to the [Core Register Summary on page 28](#).

The Port Data Register (PRTxDR) allows for write or read access of the current logical equivalent of the voltage on the pin.

**Bits 7 to 0: Data[7:0].** Writing the PRTxDR register bits set the output drive state for the pin to high (for Data = 1) or low (Data = 0), unless a bypass mode is selected (see [Data Bypass on page 60](#)).

Reading the PRTxDR register returns the actual pin state, as seen by the input buffer. This may not be the same as the expected output state, if the load pulls the pin more strongly than the pin's configured output drive. See [Digital I/O on page 58](#) for a detailed discussion of digital I/O.

For additional information, refer to the [PRTxDR register on page 178](#).

### 6.2.2 PRTxIE Registers

| Address | Name   | Bit 7                 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|--------|-----------------------|-------|-------|-------|-------|-------|-------|-------|---------|
| 0,xxh   | PRTxIE | InterruptEnables[7:0] |       |       |       |       |       |       |       | RW : 00 |

#### Legend

xx An "x" after the comma in the address field indicates that there are multiple instances of the register. For an expanded address listing of these registers, refer to the [Core Register Summary on page 28](#).

The Port Interrupt Enables (PRTxIE) registers enable or disable interrupts from individual GPIO pins.

**Bits 7 to 0: InterruptEnables[7:0].** These bits enable the corresponding port pin interrupt. Only four LSB pins are used because this port has four pins.

'0' is port pin interrupt disabled for the corresponding pin.

'1' is port pin interrupt enabled for the corresponding pin. Interrupt mode is determined by the IOINT bit in the [IO\\_CFG1](#) register.

For additional information, refer to the [PRTxDR register on page 178](#).

### 6.2.3 PRTxDMx Registers

| Address | Name    | Bit 7             | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|---------|-------------------|-------|-------|-------|-------|-------|-------|-------|---------|
| 1,xxh   | PRTxDM0 | Drive Mode 0[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,xxh   | PRTxDM1 | Drive Mode 1[7:0] |       |       |       |       |       |       |       | RW : FF |

#### Legend

xx An "x" after the comma in the address field indicates that there are multiple instances of the register. For an expanded address listing of these registers, refer to the [Core Register Summary on page 28](#).

The Port Drive Mode Bit Registers (PRTxDM0 and PRTxDM1) specify the Drive mode for GPIO pins.

**Bits 7 to 0: Drive Mode x[7:0].** In the PRTxDMx registers there are four possible drive modes for each port pin. Two mode bits are required to select one of these modes, and these two bits are spread into two different registers (PRTxDM0 and PRTxDM1). The bit position of the affected port pin (for example, Pin[2] in Port 0) is the same as the bit position of each of the two drive mode register bits that control the Drive mode for that pin (for example, bit[2] in PRT0DM0 and bit[2] in PRT0DM1). The two bits from the two registers are treated as a group. These are referred to as DM1 and DM0, or together as DM[1:0]. Drive modes are shown in [Table 6-3](#).

For analog I/O, set the drive mode to the High-Z analog mode, 10b. The 10b mode disables the block's digital input buffer so no crowbar current flows, even when the analog input is not close to either power rail. If the 10b drive mode is used, the pin is always read as a zero by the CPU and the pin cannot generate a useful interrupt. (It is not strictly required that you select High-Z mode for analog operation.)

When digital inputs are needed on the same pin as analog inputs, use the 11b Drive mode with the corresponding data bit (in the PRTxDR register) set high.

| Drive Modes |     | Pin State                                     | Description   |
|-------------|-----|---|---|
| DM1         | DM0 |   |   |
| 0           | 0   | Resistive pull-up                             | Resistive high, strong low  |
| 0           | 1   | Strong drive                                  | Strong high, strong low   |
| 1           | 0   | High-impedance, analog ( <b>reset state</b> ) | High-Z high and low, digital input disabled (for zero power) ( <b>reset state</b> ) |
| 1           | 1   | Open drain low                                | High-Z high (digital input enabled), strong low.                                    |

The GPIO provides a default drive mode of high-impedance, analog (High-Z). This is achieved by forcing the reset state of all PRTxDM1 registers to FFh.

For additional information, refer to [PRTxDM0 register on page 241](#) and [PRTxDM1 register on page 242](#).

## 6.2.4 IO\_CFG1 Register

| Address | Name                    | Bit 7   | Bit 6 | Bit 5      | Bit 4 | Bit 3       | Bit 2         | Bit 1  | Bit 0 | Access  |
|---------|-------------------------|---------|-------|------------|-------|-------------|---------------|--------|-------|---------|
| 1,DCh   | <a href="#">IO_CFG1</a> | StrongP |       | Range[1:0] |       | P1_LOW_THRS | SPICLK_ON_P10 | REG_EN | IOINT | RW : 00 |

The Input/Output Configuration Register 1 (IO\_CFG1) configures the Port 1 output regulator and set the Interrupt mode for all GPIO.

**Bit 7: StrongP.** Setting this bit increases the drive strength and edge ratio for high outputs.

**Bit 5 and 4: Range[1:0].** These bits select the regulator output level for Port 1. Available levels are 3.0 V, 1.8 V, and 2.5 V.

Selects the high output level for Port 1 outputs.

| Range[1:0] | Output Level |
|------------|--------------|
| 00         | 3.0 volts    |
| 01         | 3.0 volts    |
| 10         | 1.8 volts    |
| 11         | 2.5 volts    |

**Bit 3 P1\_LOW\_THRS.** This bit reduces the threshold voltage of the P1 port input buffers so that there are no compatibility issues when Port 1 is communicating at regulated voltage levels.

'0' is standard threshold of VIH, VIL. '1' is reduce threshold of VIH, VIL.

**Bit 2: SPICLK\_ON\_P10.** When this bit is set to '1', the SPI clock is mapped to Port 1 pin 0. Otherwise, it is mapped to Port 1 pin 3.

**Bit 1: REG\_EN.** The Register Enable bit (REG\_EN) controls the regulator on Port 1 outputs.

**Bit 0: IO INT.** This bit sets the GPIO Interrupt mode for all pins in the CY8C24x93 PSoC devices. GPIO interrupts are controlled at each pin by the PRTxIE registers, and also by the global GPIO bit in the INT\_MSK0 register.

For additional information, refer to the [IO\\_CFG1 register on page 254](#).

## 6.2.5 IO\_CFG2 Register

| Address | Name                    | Bit 7 | Bit 6 | Bit 5          | Bit 4 | Bit 3 | Bit 2 | Bit 1          | Bit 0 | Access  |
|---------|-------------------------|-------|-------|----------------|-------|-------|-------|----------------|-------|---------|
| 1,DEh   | <a href="#">IO_CFG2</a> |       |       | REG_LEVEL[2:0] |       |       |       | REG_CLOCK[1:0] |       | RW : 00 |

The Input/Output Configuration Register 2 (IO\_CFG2) selects output regulated supply and clock rates.

**Bits 5 to 3: REG\_LEVEL[2:0].** These bits select output regulated supply.

| REG_LEVEL[2:0] | Approx. Regulated Supply (V) |     |     |
|----------------|------------------------------|-----|-----|
| 000            | 3                            | 2.5 | 1.8 |
| 001            | 3.1                          | 2.6 | 1.9 |
| 010            | 3.2                          | 2.7 | 2.0 |
| 011            | 3.3                          | 2.8 | 2.1 |
| 100            | 3.4                          | 2.9 | 2.2 |
| 101            | 3.5                          | 3.0 | 2.3 |
| 110            | 3.6                          | 3.1 | 2.4 |
| 111            | 3.7                          | 3.2 | 2.5 |

**Bits 1 to 0: REG\_CLOCK[1:0].** The Regulated I/O charge pump can operate with a maximum clock speed of 12 MHz. The REG\_CLOCK[1:0] bits select clocking options for the regulator. Setting REG\_CLOCK[1:0] to '10' should be used with 24-MHz SYSCLK and '01' should be used with 6-/12-MHz SYSCLK.

| REG_CLOCK[1:0] | SYSCLK Clock Rate |
|----------------|-------------------|
| 10             | 24 MHz            |
| 01             | 6/12 MHz          |

For additional information, refer to the [IO\\_CFG2 register on page 257](#).





# 7. System Performance Controller (SPC)



This chapter discusses the System Performance Controller (SPC) and its associated registers. For a complete table of the SPC registers, refer to the [Summary Table of the Core Registers on page 28](#). For a quick reference of all PSoC registers in address order, refer to the [Register Reference chapter on page 177](#).

## 7.1 Architectural Description


The System Performance Controller (SPC) abstracts the programming interface to all nonvolatile SONOS memories on chip: Flash Macros (FM), Embedded EEPROM (EE), and nonvolatile latches (NVL). The key to the SPC is its Smart Write algorithm that is used when writing to these memories. This programming method optimizes the SONOS performance over a limited range of process and temperature.

This chapter provides a limited overview of the SPC as well as device-specific interfaces and settings. The heart of the SPC is the microcontroller core, temperature sensor, and the SPC system bus. The system includes interfaces to device core blocks and to the application processor. The following sections provide register information and an overview of key system block functionality.

## 7.2 Application Overview

As shown in [Figure 7-1](#), the SPC contains one read/write data port and one read-only status port. Reads from the status port return terminal conditions. The application processor/controller presents the data port with a stream of bytes formatted to implement the desired commands.

Figure 7-1. SPC Application Interface

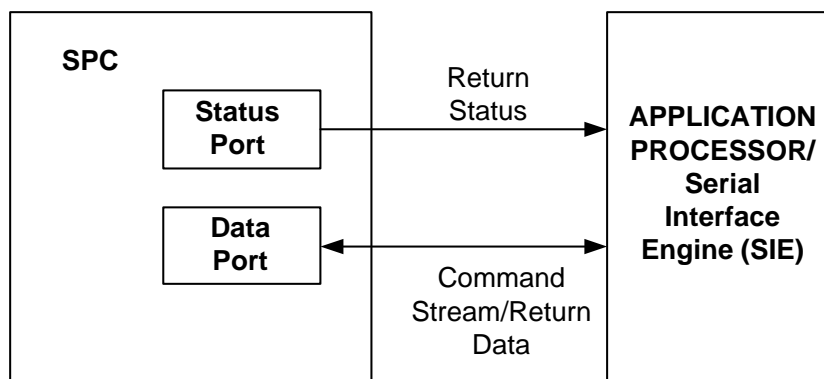

### 7.2.1 Use of the Application Interface

In a typical programming operation, a command byte is written. After the first byte of information is driven to the SPC (which is the instruction opcode), the SPC drives the 0th bit of status as '1' indicating that SPC is busy in processing the instruction. The next byte of information should be given to SPC only if the first bit of status is set to '1'. This bit is also set when the read data is ready on the rd\_data port of SPC.


This bit is monitored by the host processor/controller to give the next byte of data.

[Figure 7-2](#) shows a high-level example of how bytes are streamed into the command interface to implement two successive page writes. Each command consists of a command byte, followed by parameters that are associated with the selected command. For the example shown, a base address is given, followed by a stream of data bytes (auto address

increment). When the targeted page buffer is full, the programming operation is initiated, and the application proces-

sor/SIE must wait for the operation to finish before writing a new command.

Figure 7-2. Command/Parameter Format

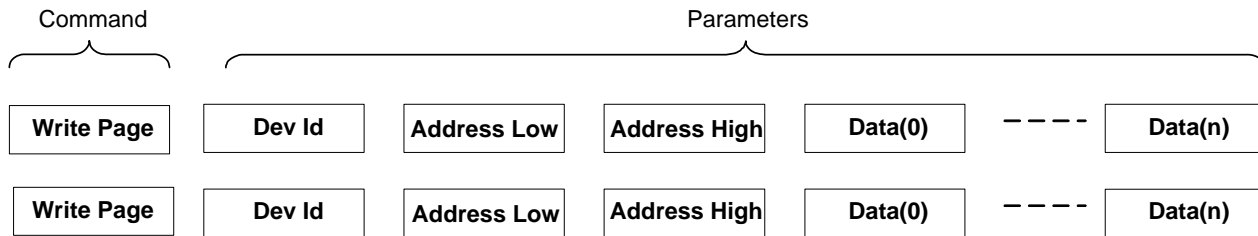

**Note** The address low and address high make a 16-bit address, with address high being the MSB of the address and address low being the LSB of the address. For instructions such as load multi byte, read multi byte, program protect, the address is auto incremented based on the address low, address high and N value.

### 7.2.2 Status Codes

The SPC returns a 6-bit status code (bits 7:2 in the status register) after an instruction is executed. The status code when not 0 indicates an error condition.

The error status code is only cleared after the next command instruction is written into the SPC.

### 7.2.3 ADC User Module Usage

The ADC module cannot be accessed directly through the registers in the firmware but must be accessed through the SPC registers and ADC user module.

Input to ADC module can be from an external pin, so make sure the respective analog mux is enabled to connect external input to ADC module.

To use the ADC user module:

1. Place the ADCINC user module in the device editor.
2. Configure Resolution and Clock divider as the application requires.
3. Enable global interrupts.
4. Set ADC Mode.
5. Start ADC.
6. Get sample.
7. Poll flag.
8. Reset flag.
9. Retrieve data.

## 8. Internal Main Oscillator (IMO)



This chapter presents the Internal Main Oscillator (IMO) and its associated registers. The IMO produces clock signals of 6, 12, and 24 MHz. For a complete table of the IMO registers, refer to the [Summary Table of the Core Registers on page 28](#). For a quick reference of all PSoC registers in address order, refer to the [Register Reference chapter on page 177](#).

### 8.1 Architectural Description

The Internal Main Oscillator (IMO) outputs a clock that is normally driven to the main system clock, SYSCLK. The IMO clock frequency can be configured as 6, 12, or 24 MHz.

The accuracy of the internal IMO clock is approximately  $\pm 5\%$  over temperature and voltage variation. No external components are required to achieve this level of accuracy. The IMO provides higher accuracies when enabled for locking to USB traffic during USB operation. See [Full-Speed USB \(CY8C24193/493\) chapter on page 155](#) for more information. The frequency doubler circuit, which produces SYSCLKX2, can be disabled to save power.

Registers for controlling these operations are found in the [Digital Clocks chapter on page 103](#).

Table 8-1. IMO Frequencies

| SLIMO | CY8C24x93 |
|-------|-----------|
| 00    | 12        |
| 01    | 6         |
| 10    | 24        |
| 11    | Reserved  |

### 8.2 Application Overview

Device power may be optimized by selecting among the 24, 12, or 6 MHz settings using the SLIMO bits in the CPU\_SCR1 register in conjunction with associated trim values in the IMO\_TR register. Both methods are described later in this document.

#### 8.2.1 Trimming the IMO

An 8-bit register (IMO\_TR) is used to trim the IMO. Bit 0 is the LSB and bit 7 is the MSB. The trim step size is approximately 60 kHz at the 24-MHz clock setting. A factory trim setting is loaded into the IMO\_TR register at boot time.

#### 8.2.2 Engaging Slow IMO

Writing to the SLIMO bits of the CPU\_SCR1 register enables the Slow IMO feature. SLIMO settings for 6 and 12 MHz are listed in [Table 8-1](#). When changing frequency ranges, the associated factory trim value must be loaded into the IMO\_TR register. The IMO immediately changes to the new frequency. Factory trim settings are stored in flash for the frequencies listed in [Table 8-1](#).

## 8.3 Register Definitions

The following registers are associated with the Internal Main Oscillator (IMO). The register descriptions have associated register tables showing the bit structure for that register. The bits in the tables that are grayed out are reserved bits and are not detailed in the register descriptions that follow. Always write reserved bits with a value of '0'. For a complete table showing all oscillator registers, refer to the [Summary Table of the Core Registers on page 28](#).

### 8.3.1 IMO\_TR Register

| Address | Name                   | Bit 7     | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|------------------------|-----------|-------|-------|-------|-------|-------|-------|-------|---------|
| 1,E8h   | <a href="#">IMO_TR</a> | Trim[7:0] |       |       |       |       |       |       |       | RW : 00 |

The Internal Main Oscillator Trim Register (IMO\_TR) manually centers the oscillator's output to a target frequency.

This register is loaded with a factory trim value at boot. When changing frequency ranges, the matching frequency trim value must be loaded into this register.

A TableRead command to the Supervisory ROM returns the trim values to the SRAM. [EraseAll Parameters \(05h\)](#), on [page 40](#) has information on the location of various trim settings stored in flash tables. Firmware needs to read the right trim value for desired frequency and update the IMO\_TR register. The IMO\_TR register must be changed at the lower frequency range setting.

For additional information, refer to the [IMO\\_TR register on page 263](#)

### 8.3.2 IMO\_TR1 Register

| Address | Name                    | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2          | Bit 1 | Bit 0 | Access |
|---------|-------------------------|-------|-------|-------|-------|-------|----------------|-------|-------|--------|
| 1,FAh   | <a href="#">IMO_TR1</a> |       |       |       |       |       | Fine Trim[2:0] |       |       | RW : 0 |

The Internal Main Oscillator Trim Register 1 (CY8C24x93 IMO\_TR1) adjusts the IMO frequency.

**Bits 2 to 0: Fine Trim[2:0].** These bits provide a fine tuning capability to the IMO trim. These three bits are the 3 LSB of the IMO trim with the IMO\_TR register supplying the 8 MSB. A larger value in this register will increase the speed

of the oscillator. The value in these bits varies the IMO frequency: approximately 7.5 kHz/step. When the EnableLock bit is set in the USB\_CR1 register, firmware writes to this register are disabled.

For additional information, refer to the [IMO\\_TR1 register on page 268](#).

### 8.3.3 CPU\_SCR1 Register

| Address | Name                     | Bit 7 | Bit 6 | Bit 5 | Bit 4      | Bit 3 | Bit 2 | Bit 1 | Bit 0   | Access |
|---------|--------------------------|-------|-------|-------|------------|-------|-------|-------|---------|--------|
| x,FEh   | <a href="#">CPU_SCR1</a> | IRESS |       |       | SLIMO[1:0] |       |       |       | IRAMDIS | # : 0  |

#### Legend

x An "x" before the comma in the address field indicates that this register can be read or written to no matter what bank is used.

# Access is bit specific. Refer to the [Register Reference chapter on page 177](#) for additional information.

The System Status and Control Register 1 (CPU\_SCR1) conveys the status and control of events related to internal resets and watchdog reset.

**Bit 7: IRESS.** The Internal Reset Status bit is a read-only bit that determines if the booting process occurred more than once.

When this bit is set, it indicates that the SROM SWBootReset code ran more than once. If this bit is not set, the SWBootReset ran only once. In either case, the SWBootReset code does not allow execution from code stored in flash until the M8C core is in a safe operating mode with respect to supply voltage and flash operation. There is no need for concern when this bit is set. It is provided for systems that may be sensitive to boot time, so that they can determine if the normal one pass boot time was exceeded. For more information on the SWBootReset code, see the [Supervisory ROM \(SROM\) chapter on page 37](#).

**Bit 4 to 3: SLIMO[1:0].** These bits set the IMO frequency range. See the following table for more information.

These changes allow optimization of speed and power. The IMO trim value must also be changed when SLIMO is changed (see [Engaging Slow IMO on page 67](#)). When not in external clocking mode, the IMO is the source for SYSCLK; therefore, when the speed of the IMO changes so does SYSCLK.

| SLIMO | CY8C20x66, CY8C20x46/96, CY8C20x36 |
|-------|------------------------------------|
| 00    | 12                                 |
| 01    | 6                                  |
| 10    | 24                                 |
| 11    | Reserved                           |

**Bit 0: IRAMDIS.** Initialize RAM Disable. This bit is a control bit that is readable and writeable. The **default value** for this bit is '0', which indicates that the maximum amount of SRAM must be initialized upon watchdog reset to a value of 00h. When the bit is '1', the minimum amount of SRAM is initialized after a watchdog reset.

For additional information, refer to the [CPU\\_SCR1 register on page 239](#).

### 8.3.4 OSC\_CR2 Register

| Address | Name                    | Bit 7 | Bit 6 | Bit 5 | Bit 4    | Bit 3 | Bit 2    | Bit 1 | Bit 0 | Access  |
|---------|-------------------------|-------|-------|-------|----------|-------|----------|-------|-------|---------|
| 1,E2h   | <a href="#">OSC_CR2</a> |       |       |       | CLK48MEN |       | EXTCLKEN | RSVD  |       | RW : 00 |

The Oscillator Control Register 2 (OSC\_CR2) configures various features of internal clock sources and clock nets.

**Bit 4: CLK48MEN.** This is the 48-MHz clock enable bit. '0' disables the bit and '1' enables the bit. This register setting applies only when the device is not in OCD mode. When in OCD mode, the 48-MHz clock is always active.

**Bit 2: EXTCLKEN.** When the EXTCLKEN bit is set, the external clock becomes the source for the internal clock tree, SYSCLK, which drives most device clocking functions. All external and internal signals, including the low-speed oscillator, are synchronized to this clock source. The external clock input is located on P1[4]. When using this input, the pin drive mode must be set to High-Z (not High-Z analog), such as drive mode 11b with PRT1DR bit 4 set high.

**Bit 1: RSVD.** This is a reserved bit. It should always be 0.

For additional information, refer to the [OSC\\_CR2 register on page 260](#).

### 8.3.5 Related Registers

- [OSC\\_CR2 Register on page 109](#).
- [CPU\\_SCR1 Register on page 129](#).



## 9. Internal Low-speed Oscillator (ILO)



This chapter briefly explains the Internal Low-speed Oscillator (ILO) and its associated register. The Internal Low-speed Oscillator produces a 32-kHz or 1-kHz clock. For a quick reference of all PSoC registers in address order, refer to the [Register Reference chapter on page 177](#).

### 9.1 Architectural Description

The Internal Low-speed Oscillator (ILO) is an oscillator with a nominal frequency of 32 kHz or 1 kHz. It is used to generate sleep wakeup interrupts and watchdog resets. This oscillator is also used as a clocking source for the digital blocks. This block operates with a small internal bias current and produces an output clock of either 1 kHz or 32 kHz, configurable by the user. The ILO is trimmed for 32 kHz in production devices. There is no trim for 1 kHz, hence, high variation is expected from nominal value.

The block operates by charging a capacitor with a current, to a reference level. When reached, the capacitor is discharged to ground. This process repeats to provide the oscillator (half) period.

---

## 9.2 Register Definitions

The following register is associated with the Internal Low-speed Oscillator (ILO). The register description has an associated register table showing the bit structure. The bits in the table that are grayed out are reserved bits and are not detailed in the register description that follows. Always write reserved bits with a value of '0'.

### 9.2.1 ILO\_TR Register

| Address | Name                   | Bit 7 | Bit 6   | Bit 5   | Bit 4 | Bit 3          | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|------------------------|-------|---------|---------|-------|----------------|-------|-------|-------|---------|
| 1,E9h   | <a href="#">ILO_TR</a> |       | PD_MODE | ILOFREQ |       | Freq Trim[3:0] |       |       |       | RW : 18 |

The Internal Low-speed Oscillator Trim Register (ILO\_TR) sets the adjustment for the internal low-speed oscillator.

**Bit 6: PD\_MODE.** This bit selects power down mode. Setting this bit high disables the oscillator and current bias when the ILO is powered down, which results in slower startup time. Setting this bit low keeps the small current bias running when the ILO is powered down, which results in faster startup time.

**Bit 5: ILOFREQ.** When this bit is set, the oscillator operates at a nominal frequency of 1 kHz, otherwise, it runs at the default 32 kHz.

**Bits 3 to 0: FREQ\_TRIM[3:0].** These bits trim the oscillator frequency. The device-specific value, placed in the trim bits of this register at boot time, is based on factory testing. ***Do not alter the values in the register.***

For additional information, refer to the [ILO\\_TR register](#) on page 264.



## 10. External Crystal Oscillator (ECO)



This chapter briefly explains the External Crystal Oscillator (ECO) and its associated registers. The 32.768-kHz external crystal oscillator circuit allows the user to replace the internal low-speed oscillator with a more precise time source. For a quick reference of all PSoC registers in address order, refer to the [Register Reference chapter on page 177](#).


### 10.1 Architectural Description

The External Crystal Oscillator (ECO) circuit requires only the following external components: an inexpensive watch crystal and two small value capacitors. The XTALIn (P2[3]) and XTALOut (P2[5]) pins connect to a 32.768-kHz watch crystal and the two external capacitors bypass these pins to ground. [Figure 10-1](#) shows the external connections needed to implement the ECO. See the [Application Overview on page 74](#) for information on enabling the ECO. Transitions between the internal and external oscillator domains may produce glitches on the clock bus.

During the process of activating the ECO, there must be a hold-off period before using it as the 32.768-kHz source. This hold-off period is partially implemented in hardware using the sleep timer. Firmware must set up a sleep period of one second (maximum ECO settling time), and then enable the ECO in the OSC\_CR0 register. At the one second timeout (the sleep interrupt), the switch is made by hardware to the ECO. If the ECO is subsequently deactivated, the ILO will again be activated and the switch is made back to the ILO immediately.

The ECO Exists bit (ECO EX, bit 0 of ECO\_CONFIG) is used to control whether the switch-over is allowed or locked. This is a write-once bit. It is written early in code execution after a power-on-reset (POR) or external reset (XRES) event. A '1' in this bit indicates to the hardware that a crystal exists in the system, and firmware is allowed to switch back and forth between ECO and ILO operation. If the bit is '0', switch-over to the ECO is locked out.


Figure 10-1. External Components for the ECO

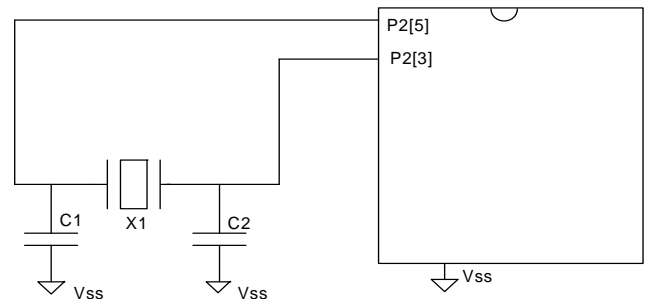

The ECO Exists Written bit (ECO EXW, bit 1 of ECO\_CONFIG) is read only and is set on the first write to this register. When this bit is '1', it indicates that the state of ECO EX is locked. This is illustrated in [Figure 10-2](#).

Figure 10-2. State Transition Between ECO and ILO

This transition is allowed only if the write once "ECO Exists" register bit is set.

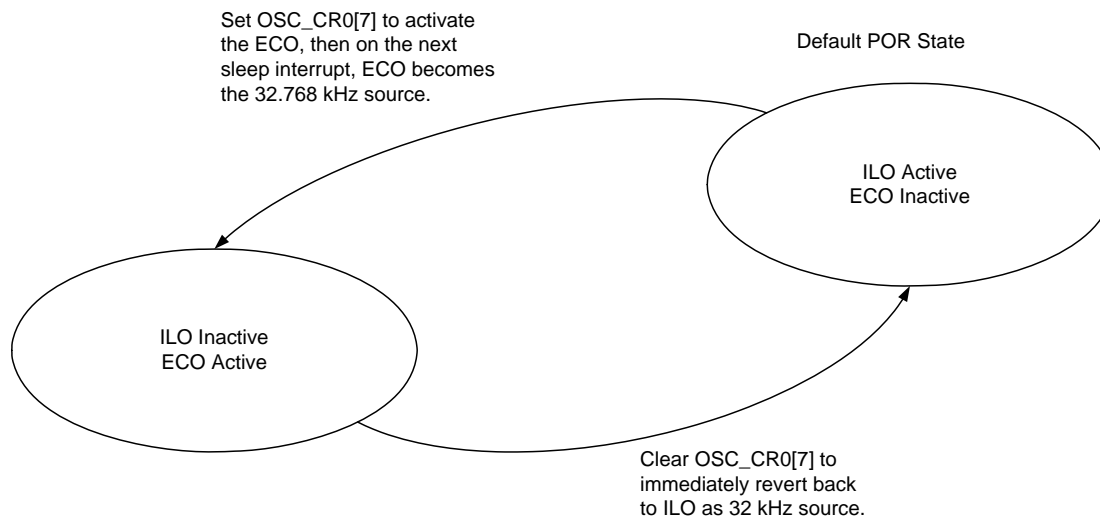

## 10.2 Application Overview

To use a 32.768-kHz external crystal, the GPIO pins that connect to the crystal must be set to the High-impedance drive mode. See the [General-Purpose I/O \(GPIO\) chapter on page 57](#) for information on GPIOs and their drive modes.

The firmware steps involved in switching between the ILO to the 32.768-kHz ECO are as follows.

- At reset, the device begins operation using the ILO.
1. Set the ECO EX bit to allow crystal operation.
2. Modify bits [2:0] in the External Crystal Oscillator ENBUS Register to be 011b.
3. Select a sleep interval of one second, using bits[4:3] in the Oscillator Control Register 0 (OSC\_CR0), as the oscillator stabilization interval.
4. Set bit [7] in the Oscillator Control Register 0 (OSC\_CR0) to '1' to enable the external crystal oscillator.
5. The ECO becomes the selected source at the end of the one-second interval on the edge created by the sleep interrupt logic. The one-second interval gives the oscillator time to stabilize before it becomes the active source. The sleep interrupt need not be enabled for the switch-over to occur. Reset the sleep timer (if this does not interfere with any ongoing realtime clock operation), to guarantee the interval length. Note that the ILO continues to run until the oscillator is automatically switched over by the sleep timer interrupt.

**Note** The ILO switches back instantaneously by writing the 32-kHz Select Control bit to '0'.

**Note** Transitions between oscillator domains may produce glitches on the 32-kHz clock bus. Functions that require accuracy on the 32-kHz clock should be enabled after the transition in oscillator domains.

## 10.3 Register Definitions

These registers are associated with the external crystal oscillator.

### 10.3.1 ECO\_ENBUS Register

| Address | Name                      | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2          | Bit 1 | Bit 0 | Access  |
|---------|---------------------------|-------|-------|-------|-------|-------|----------------|-------|-------|---------|
| 1,D2h   | <a href="#">ECO_ENBUS</a> |       |       |       |       |       | ECO_ENBUS[2:0] |       |       | RW : 07 |

The ECO\_ENBUS register is used to disable and enable the external crystal oscillator (ECO).

**Bits 2 to 0 ECO\_ENBUS[2:0].** 111b – Default. Disables the external crystal oscillator (ECO).

011b – Allows the ECO to be enabled by bits in the ECO\_CFG register.

Other values are reserved. See the [Application Overview on page 74](#) for the proper sequence for enabling the ECO.

For additional information, refer to the [ECO\\_ENBUS register on page 251](#).

### 10.3.2 ECO\_TRIM Register

| Address | Name                     | Bit 7 | Bit 6 | Bit 5 | Bit 4        | Bit 3 | Bit 2 | Bit 1       | Bit 0 | Access  |
|---------|--------------------------|-------|-------|-------|--------------|-------|-------|-------------|-------|---------|
| 1,D3h   | <a href="#">ECO_TRIM</a> |       |       |       | ECO_XGM[2:0] |       |       | ECO_LP[1:0] |       | RW : 11 |

The ECO TRIM Register (ECO\_TRIM) controls gain and power settings for the 32-kHz crystal oscillator.

These settings should not be changed from their default state. The default value is 14h.

**Bits 4 to 2: ECO\_XGM[2:0].** These bits set the amplifier gain. In high-power mode (ECO\_LPM=0), the step size of the current source is approximately 400 nA, and the highest source current is with the '000' setting. In low-power mode (ECO\_LPM=1), the overall power is approximately 5% lower with the '000' setting than with the '111' setting.

'000' is the highest gain setting, and has the lowest power in low-power mode (5% power reduction).

'111' is the lowest gain setting.

This value is factory trimmed; the typical value is '101'.

**Bits 1 to 0: ECO\_LP[1:0].** These bits set the gain mode.

'00' is the highest power setting.

'11' is the lowest power setting. (30% power reduction).

The default value is '00'.

For additional information, refer to the [ECO\\_TRIM register on page 252](#).

### 10.3.3 ECO\_CFG Register

| Address | Name                    | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2   | Bit 1   | Bit 0  | Access  |
|---------|-------------------------|-------|-------|-------|-------|-------|---------|---------|--------|---------|
| 1,E1h   | <a href="#">ECO_CFG</a> |       |       |       |       |       | ECO_LPM | ECO_EXW | ECO_EX | RW : 00 |

The ECO Configuration Register provides status and control for the ECO.

**Bit 2 ECO\_LPM.** This bit enables the ECO low-power mode when high. This is recommended for use only during sleep mode.

**Bit 1 ECO\_EXW.** The ECO Exists Written bit is used as a status bit to indicate that the ECO EX bit was previously writ-

ten to. It is read only. When this bit is a '1' indicates that the ECO\_CFG register was written to and is now locked.

**Bit 0 ECO\_EX.** The ECO Exists bit serves as a flag to the hardware, to indicate that an external crystal oscillator exists in the system. Just after boot, it may be written only once to a value of '1' (crystal exists) or '0' (crystal does not exist).

If the bit is '0', a switch-over to the ECO is locked out by hardware. If the bit is '1', hardware allows the firmware to

freely switch between the ECO and ILO. It should be written as early as possible after a POR or XRES event.

For additional information, refer to the [ECO\\_CFG register on page 259](#)

### 10.3.4 Related Registers

- [OSC\\_CR0 Register, on page 108.](#)
- [PRTxDR Registers register on page 61.](#)
- [PRTxIE Registers register on page 61.](#)

## 10.4 Usage Modes and Guidelines


This block operates at extremely low current levels, making it vulnerable to coupled noise. Take care to avoid coupling noise from neighboring signal pins. The block is designed to

accept a wide variety of 6- or 12-pF crystals. There are four distinct operating power modes:

- Power-down (PDM)
- Startup mode (SPM)
- High-power mode (HPM)
- Low-power mode (LPM)

There are specific sequences that are used to switch between each mode; typically a small delay is required after each instruction.

Figure 10-3. Power Mode State Machine

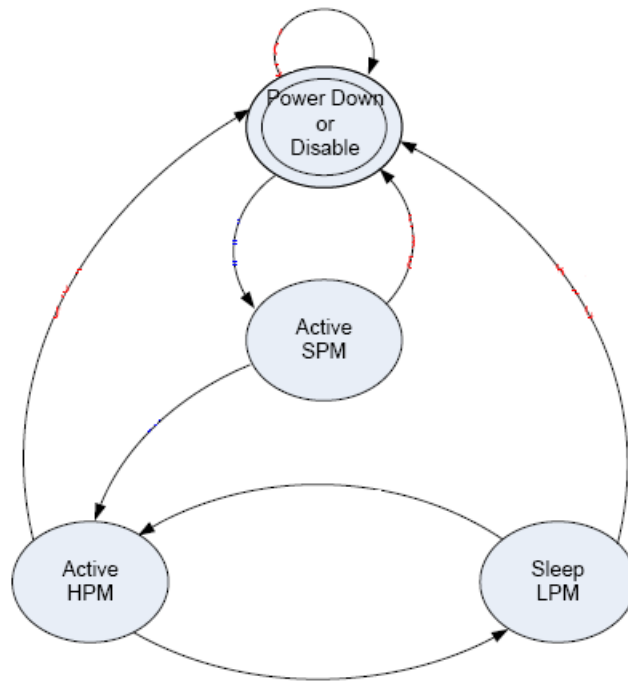

# 11. Sleep and Watchdog




This chapter discusses the Sleep and Watchdog operations and their associated registers. For a complete table of the Sleep and Watchdog registers, refer to the [Summary Table of the Core Registers on page 28](#). For a quick reference of all PSoC registers in address order, refer to the [Register Reference chapter on page 177](#).

## 11.1 Architectural Description

Device components that are involved in Sleep and Watchdog operation are the selected 32-kHz clock, the wakeup timer, the Sleep bit in the CPU\_SCR0 register, the sleep circuit (to sequence going into and coming out of sleep), the bandgap refresh circuit (to periodically refresh the reference voltage during sleep), and the **watchdog timer**.

Figure 11-1. Sleep Controller Architecture

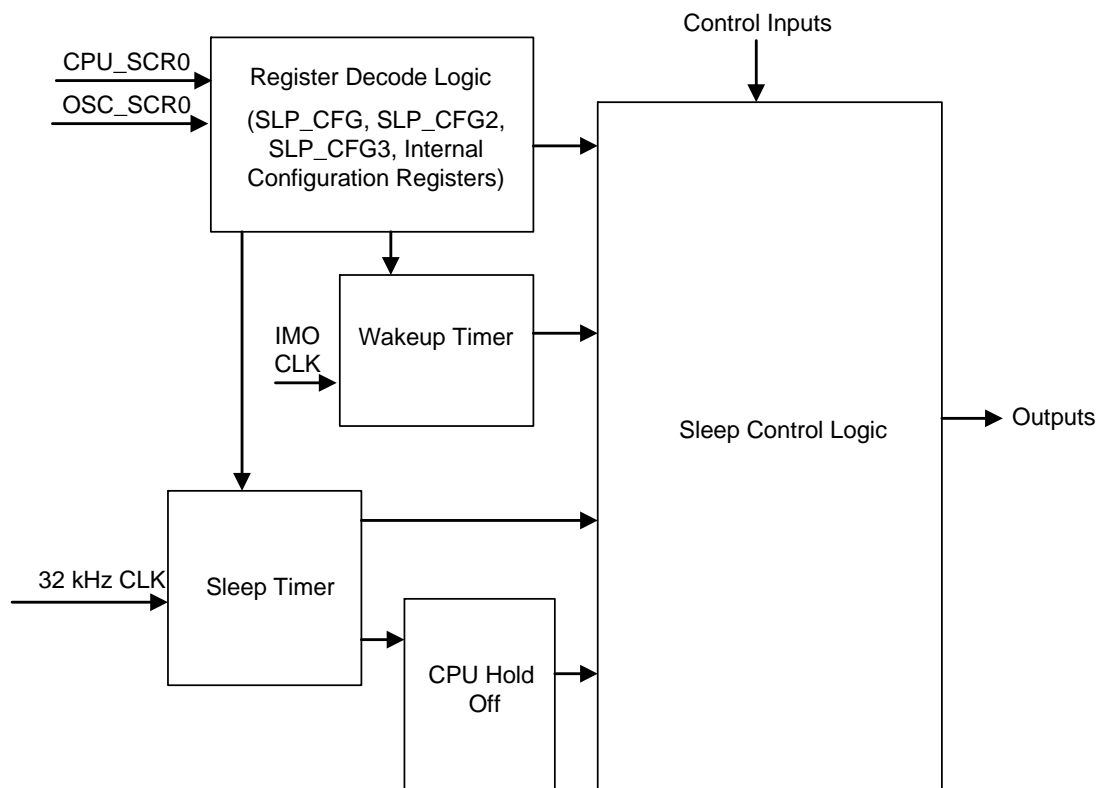

### 11.1.1 Sleep Control Implementation Logic

This section details the sleep mode logic implementation.

Conditions for entering the sleep modes:


- **Standby Mode:** Set the SLEEP bit in the CPU\_SCR0 register. This asserts the “sleep” signal for the sleep controller.
- **I2C\_USB Mode:** Set the I2C\_ON bit in the SLP\_CFG2 register and then set the SLEEP bit in the CPU\_SCR0 register. Another way to enter I2C\_USB sleep mode is to set the USB Enable bit in the USB\_CR0 register and then set the SLEEP bit in the CPU\_SCR0 register. This asserts the sleep signal for the sleep controller and also the I2CEnable signal to the power system.  
The I2C block works in I2C\_USB sleep mode only to wake up the system. That is, when the device is in sleep, I2C can detect a start condition and receive an address. If the address matches, I2C generates an interrupt and wakes the system (refer to [Power Modes on page 133](#)). If you put the device to sleep again while these transactions are occurring (i.e., when you are in the middle of I2C transactions), I2C does not work and will send NAKs. I2C can only detect a start condition and collect an 8-bit address then wake the system through an interrupt during I2C sleep mode. Therefore, it is recommended to check the bus status in the I2C\_XSTAT register before putting the device to sleep if there is any I2C data transfer. To ensure data retention in the 32-byte I2C buffer during sleep, the I2C\_ON bit in SLP\_CFG2 register should be set before entering sleep state.
- **Deep Sleep Mode:** Configure the I2C\_ON bit in the SLP\_CFG2 register to 0, then USB Enable bit in the USB\_CR0 register to '0' and the X32ON bit in OSC\_CR0 to '0'. Set the LSO\_OFF bit in the SLP\_CFG2 register and then set the “SLEEP” bit in the CPU\_SCR0 register. This enables the LSO\_OFF signal to power down the LSO. The system enters into deep sleep mode. One point to note here is to not set the X32ON bit to '1' without setting the ECO\_EX (ECO exists) bit in the ECO\_CFG (1,E1h) register to a '1'. If you do so, the deep sleep mode is not entered, but clk32K is also not running. This implies that the sleep timer interrupt or the programmable timer interrupt cannot occur.

#### 11.1.1.1 Wakeup Logic

- Waking up from standby mode is by an interrupt, which can be a sleep timer interrupt, a GPIO interrupt, a 16-bit programmable timer 0 interrupt, or a USB interrupt.
- For the device, the wakeup from I2C\_USB sleep mode can be by an I2C interrupt in addition to a sleep timer interrupt, a programmable timer 0 interrupt, a GPIO interrupt, or a USB interrupt.
- For the device, the wakeup from deep sleep mode can be by either a GPIO interrupt or a USB interrupt.
- In standby mode during buzz, if the external supply falls below the LVD limit, an LVD interrupt occurs and initiates the wakeup sequence.
- In standby mode, if watchdog reset occurs, it first initiates the wakeup sequence. After the wakeup is done, it resets the system.

As shown in Figure 11-2, when the SLEEP bit is deasserted, the wakeup is initiated. The sequence is shown in the following timing diagram. The taps used in this wakeup sequence are generated based upon user configuration settings in the SLP\_CFG3 register.

Figure 11-2. Wakeup Sequence for the Device<sup>1, 2, 3</sup>

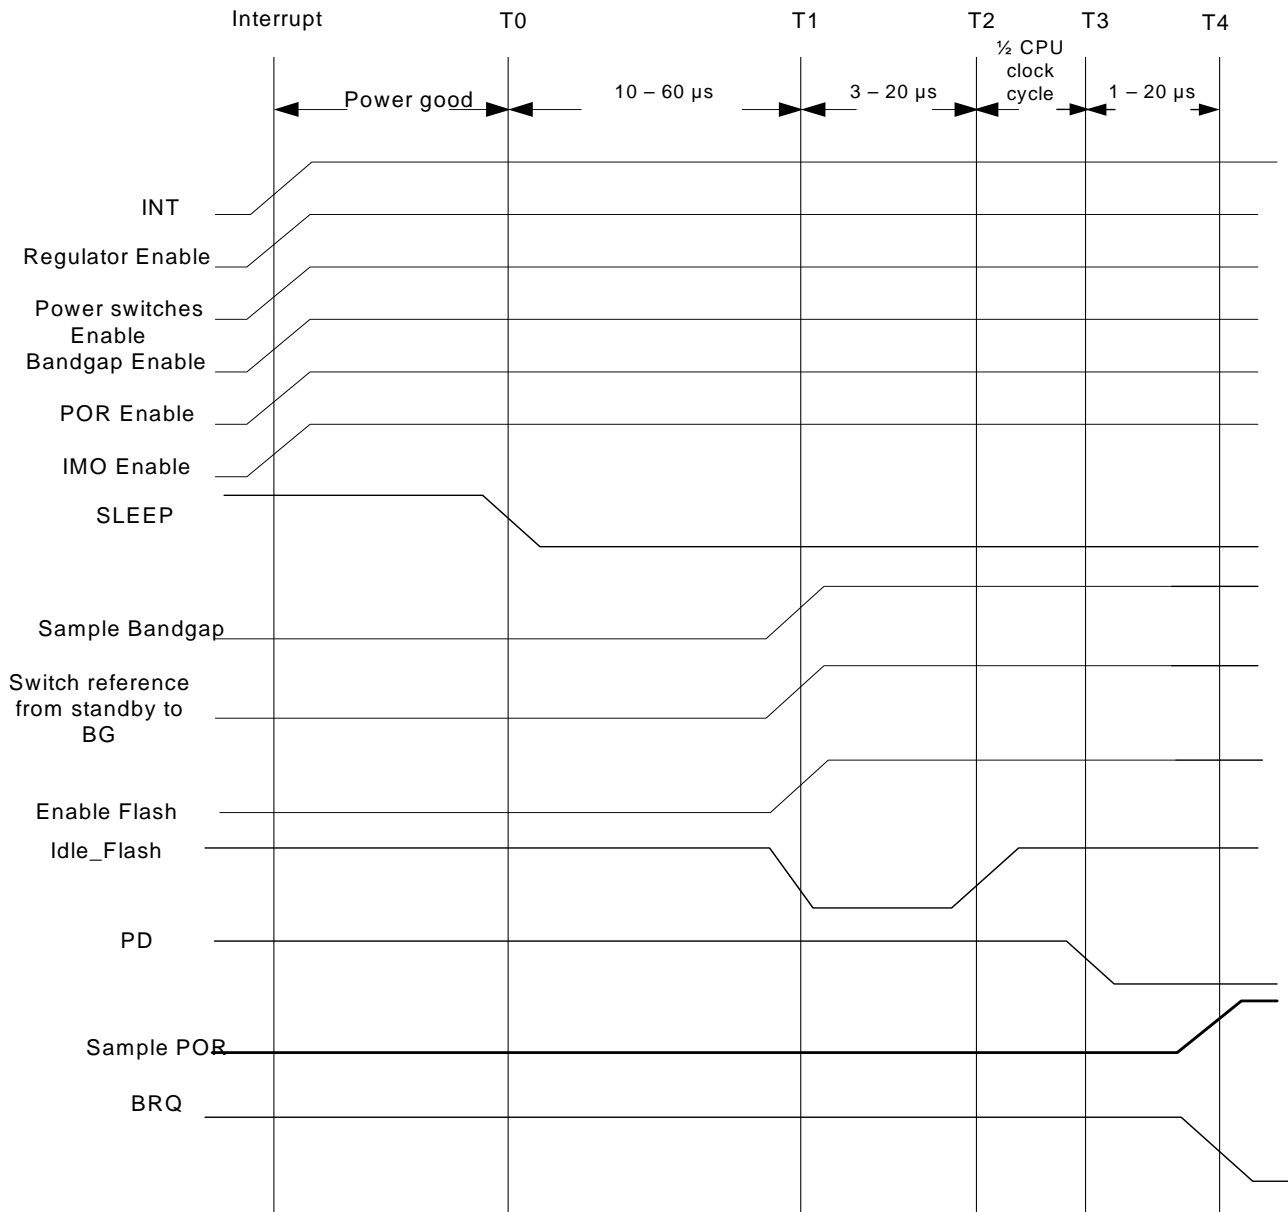

1. The duration of Power Good is 3 ILO Cycles.
2. The timing of T0 – T4 is based on the IMO frequency and the settings in the SLP\_CFG3 register. For additional information, refer to the [SLP\\_CFG3 Register on page 82](#).
3. The maximum worst-case duration of the wakeup sequence is 263 μs, based on the minimum specified ILO frequency of 19 kHz, the minimum specified IMO frequency, and the default settings of the SLP\_CFG3 register.

**Note** The T0, T1, and T2 mentioned in the SLP\_CFG3 register with respect to [Figure 11-2 on page 79](#) are defined as follows:

- T0: Time duration between T0 and T1 in the timing diagram.
- T1: Time duration between T1 and T2 in the timing diagram.
- T2: Time duration between T3 and T4 in the timing diagram.

### 11.1.2 Sleep Timer

The Sleep Timer is a 15-bit up counter clocked by the 32-kHz clock source. This timer is always enabled except in deep sleep mode. The exception to this is within an **ICE (in-circuit emulator)** in **debugger** mode and when the Stop bit in the CPU\_SCR0 is set; the sleep timer is disabled, so that the user does not get continual watchdog resets when a breakpoint is hit in the debugger environment.

If the associated sleep timer interrupt is enabled, a periodic interrupt to the CPU is generated based upon the sleep interval selected from the OSC\_CR0 register. The sleep timer functionality does not need to directly associate with the sleep state. It can be used as a general-purpose timer interrupt regardless of sleep state.

The reset state of the sleep timer is a count value of all zeros. There are two ways to reset the sleep timer. Any hardware reset, (that is, POR, XRES, or Watchdog Reset (WDR)) resets the sleep timer. There is also a method that allows the user to reset the sleep timer in firmware. A write of 38h to the RES\_WDT register clears the sleep timer.

**Note** Any write to the RES\_WDT register also clears the watchdog timer.

Clearing the sleep timer is done at anytime to synchronize the sleep timer operation to CPU processing. A good example of this is after POR. The CPU hold off, due to voltage ramp and others, may be significant. In addition, a significant amount of program initialization may be required. However, the sleep timer starts counting immediately after POR and is at an arbitrary count when user code begins execution. In this case, it is desirable to clear the sleep timer before enabling the sleep interrupt initially to ensure that the first sleep period is a full interval.

## 11.2 Application Overview

The following are notes regarding sleep related to firmware and application issues.

**Note 1** If an interrupt is pending, enabled, and scheduled to be taken at the instruction boundary after the write to the SLEEP bit, the system does not go to sleep. The instruction still executes, but it cannot set the SLEEP bit in the CPU\_SCR0 register. Instead, the interrupt is taken and the effect of the sleep instruction ignored.

**Note 2** There is no need to enable the Global Interrupt Enable (CPU\_F register) to wake the system out of sleep state. Individual interrupt enables, as set in the interrupt mask registers, are sufficient. If the Global Interrupt Enable is not set, the CPU does not service the ISR associated with that interrupt. However, the system wakes up and continues executing instructions from the point at which it went to sleep. In this case, the user must manually clear the pending interrupt or subsequently enable the Global Interrupt Enable bit and let the CPU take the ISR. If a pending interrupt is not cleared, it is continuously asserted. Although the SLEEP bit may be written and the sleep sequence executed as soon as the device enters sleep mode, the SLEEP bit is cleared by the pending interrupt and sleep mode is exited immediately.

**Note 3** Upon wakeup, the instruction immediately after the sleep instruction is executed before the interrupt service routine (if enabled). The instruction after the sleep instruction is prefetched before the system actually goes to sleep. Thus, when an interrupt occurs to wake the system up, the prefetched instruction executes and the interrupt service routine is executed. (If the Global Interrupt Enable is not set, instruction execution continues where it left off before sleep.)

**Note 4** If the Global Interrupt Enable bit is disabled, it is safely enabled just before the instruction that writes the SLEEP bit. It is usually undesirable to get an interrupt on the instruction boundary just before writing the SLEEP bit. This means that upon return from the interrupt, the sleep command is executed, possibly bypassing any firmware preparations that are necessary to go to sleep. To prevent this, disable interrupts before making preparations. After sleep preparations, enable global interrupts and write the SLEEP bit with the two consecutive instructions as follows.

```
and f,~01h // disable global interrupts
// (prepare for sleep, could
// be many instructions)
or f,01h // enable global interrupts
mov reg[ffh],08h // Set the sleep bit
```

Because of the timing of the Global Interrupt Enable instruction, it is not possible for an interrupt to occur immediately after that instruction. The earliest for the interrupt to occur is after the next instruction (write to the SLEEP bit) is executed. If an interrupt is pending, the sleep instruction is executed; but as described in Note 1, the sleep instruction is ignored. The first instruction executed after the ISR is the instruction after sleep.

**Note 5** When an interrupt occurs after the sleep bit is written and before "PD" (power down signal) is asserted, the interrupt is ignored. The time from the SLEEP bit being written to PD being asserted is 2.5 CPU cycles. Thus, if the interrupt occurs within this period, it is ignored. Refer to [Figure 11-3 on page 83](#) for sleep. The interrupts that occur after this period, that is, when the device is in sleep, are considered and the device wakes up.



## 11.3 Register Definitions

The following registers are associated with Sleep and Watchdog operations and are listed in address order. Each register description has an associated register table showing the bit structure for that register. The bits that are grayed out in the the following tables are reserved bits and are not detailed in the register descriptions. Always write reserved bits with a value of '0'. For a complete table of the Sleep and Watchdog registers, refer to the [Summary Table of the Core Registers on page 28](#).

### 11.3.1 RES\_WDT Register

| Address | Name                    | Bit 7           | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access |
|---------|-------------------------|-----------------|-------|-------|-------|-------|-------|-------|-------|--------|
| 0,E3h   | <a href="#">RES_WDT</a> | WDSL_Clear[7:0] |       |       |       |       |       |       |       | W : 00 |

The Reset Watchdog Timer Register (RES\_WDT) clears the watchdog timer (a write of any value) and clears both the watchdog timer and the sleep timer (a write of 38h).

**Bits 7 to 0: WDSL\_Clear[7:0].** The Watchdog Timer (WDT) write-only register is designed to timeout at three sleep timer rollover events. If only the WDT is cleared, the next Watchdog Reset (WDR) occurs anywhere from two to three times the current sleep interval setting. If the sleep timer is near the beginning of its count, the watchdog timeout is closer to three times.

However, if the sleep timer is very close to its **terminal count**, the watchdog timeout is closer to two times. To ensure a full three times timeout, clear both the WDT and the sleep timer. In applications that need a realtime clock and cannot reset the sleep timer when clearing the WDT, the duty cycle at which the WDT must be cleared is no greater than two times the sleep interval.

For additional information, refer to the [RES\\_WDT register on page 235](#).

### 11.3.2 SLP\_CFG Register

| Address | Name                    | Bit 7      | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access |
|---------|-------------------------|------------|-------|-------|-------|-------|-------|-------|-------|--------|
| 1,EBh   | <a href="#">SLP_CFG</a> | PSSDC[1:0] |       |       |       |       |       |       |       | RW : 0 |

The Sleep Configuration Register (SLP\_CFG) sets the sleep duty cycle.

The value placed in this register is based upon factory testing.

**Bits 7 and 6: PSSDC[1:0].** The Power System Sleep Duty Cycle bits set the sleep duty cycle.

For additional information, refer to the [SLP\\_CFG register on page 265](#).

### 11.3.3 SLP\_CFG2 Register

| Address | Name                     | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3          | Bit 2 | Bit 1  | Bit 0   | Access  |
|---------|--------------------------|-------|-------|-------|-------|----------------|-------|--------|---------|---------|
| 1, ECh  | <a href="#">SLP_CFG2</a> |       |       |       |       | ALT_Buzz [1:0] |       | I2C_ON | LSO_OFF | RW : 00 |

The Sleep Configuration Register (SLP\_CFG2) holds the configuration for I2C sleep, deep sleep, and buzz.

**Bits 3 and 2: ALT\_Buzz[1:0].** These bits control additional selections for POR/LVD buzz rates. These are lower rates than the compatibility mode to provide for lower average power.

'00' - Compatibility mode, buzz rate determined by PSSDC bits.

'01' - Duty cycle is 1/32768.

'10' - Duty cycle is 1/8192.

'11' - Reserved.

**Bit 1: I2C\_ON.** This bit enables the standby regulator in sleep at a level sufficient to supply the I2C circuitry. It is independent of the LSO\_OFF bit.

To ensure data retention in the 32-byte I2C buffer during sleep, the I2C\_ON bit should be set before entering sleep state.

**Bit 0: LSO\_OFF:** This bit disables the LSO oscillator when in sleep state. By default, the LSO oscillator runs in sleep. When this bit is '0', the standby regulator is active at a power level to supply the LSO and Sleep timer circuitry and the LSO is enabled. When this bit is '1', the LSO is disabled in sleep, which in turn, disables the Sleep Timer, Watchdog Timer, and POR/LVD buzzing activity in sleep. If I2C\_ON is not enabled and this bit is set, the device is in the lowest power deep sleep mode. Only a GPIO interrupt awakens the device from deep sleep mode.

For additional information, refer to the [SLP\\_CFG2 register on page 266](#).

### 11.3.4 SLP\_CFG3 Register

| Address | Name                     | Bit 7 | Bit 6    | Bit 5       | Bit 4 | Bit 3       | Bit 2 | Bit 1       | Bit 0 | Access    |
|---------|--------------------------|-------|----------|-------------|-------|-------------|-------|-------------|-------|-----------|
| 1, EDh  | <a href="#">SLP_CFG3</a> |       | DBL_TAPS | T2TAP [1:0] |       | T1TAP [1:0] |       | T0TAP [1:0] |       | RW : 0x7F |

The Sleep Configuration Register (SLP\_CFG3) holds the configuration of the wakeup sequence taps.

**It is strongly recommended to not alter this register setting.**

**Bit 6: DBL\_TAPS.** When this bit is set, all the tap values (T0, T1, and T2) are doubled for the wakeup sequence.

**Bits 5 and 4: T2TAP[1:0].** These bits control the duration of the T2-T4 sequence (see [Figure 11-2 on page 79](#)) by selecting a tap from the Wakeup Timer. Note The T2 delay is only valid for the wakeup sequence. It is not used for the buzz sequence.

'00' - 1  $\mu$ s  
'01' - 2  $\mu$ s  
'10' - 5  $\mu$ s  
'11' - 10  $\mu$ s

**Bits 3 and 2: T1TAP[1:0].** These bits control the duration of the T1-T2 sequence (see [Figure 11-2 on page 79](#)) by selecting a tap from the Wakeup Timer.

'00' - 3  $\mu$ s  
'01' - 4  $\mu$ s  
'10' - 5  $\mu$ s  
'11' - 10  $\mu$ s

**Bits 1 and 0: T0TAP[1:0].** These bits control the duration of the T0-T1 sequence (see [Figure 11-2 on page 79](#)) by selecting a tap from the Wakeup Timer.

'00' - 10  $\mu$ s  
'01' - 14  $\mu$ s  
'10' - 20  $\mu$ s  
'11' - 30  $\mu$ s

For additional information, refer to the [SLP\\_CFG3 register on page 267](#).

### 11.3.5 Related Registers

- [INT\\_MSK0 Register on page 54.](#)
- [OSC\\_CR0 Register on page 108.](#)
- [ILO\\_TR Register on page 72.](#)
- [CPU\\_SCR0 Register on page 130.](#)
- [CPU\\_SCR1 Register on page 129.](#)

## 11.4 Timing Diagrams

### 11.4.1 Sleep Sequence

The SLEEP bit in the CPU\_SCR0 register, is an input into the sleep logic circuit. This circuit is designed to sequence the device into and out of the hardware sleep state. [Figure 11-3](#) shows the hardware sequence to put the device to sleep, defined as follows.

1. Firmware sets the SLEEP bit in the CPU\_SCR0 register. The Bus Request (BRQ) signal to the CPU is immediately asserted: This is a request by the system to halt CPU operation at an instruction boundary.
2. The CPU issues a Bus Request Acknowledge (BRA) on the following **positive edge** of the CPU clock.
3. The sleep logic waits for the following **negative edge** of the CPU clock and then asserts a system wide Power Down (PD) signal. In [Figure 11-3](#), the CPU is halted and the system wide PD signal is asserted.

The system-wide PD signal controls three major circuit blocks: the flash memory module, the Internal Main Oscillator (6-/12-MHz oscillator), and the bandgap voltage reference. These circuits transition into a zero power state.


The only operational circuits on the PSoC device in standby sleep mode are the ILO, the bandgap refresh circuit, and the supply voltage monitor circuit. In standby sleep mode, the supply voltage monitor circuit is active only during the buzz interval. To properly detect and recover from a VDD brown

out condition, the configurable buzz rate must be frequent enough to capture the falling edge of VDD. If the falling edge of VDD is too sharp to be captured by the buzz rate, any of the following actions must be taken to ensure that the device properly responds to a brown out condition.

- Bring the device out of sleep before powering down. This can be accomplished in firmware, or by asserting XRES before powering down.
- Assure that VDD falls below 100 mV before powering back up.
- Set the No Buzz bit in the OSC\_CR0 register to keep the voltage monitoring circuit powered during sleep.
- Increase the buzz rate to assure that the falling edge of VDD will be captured. The rate is configured through the PSSDC bits in the SLP\_CFG register.

In deep sleep mode, the ILO, bandgap refresh circuit, and supply voltage monitor circuit are all powered down. However, additional low-power voltage monitoring circuitry gets enabled when entering deep sleep. This additional low-power voltage monitoring circuitry allows VDD brown out conditions to be detected for edge rates slower than 1V/ms.

Figure 11-3. Sleep Sequence

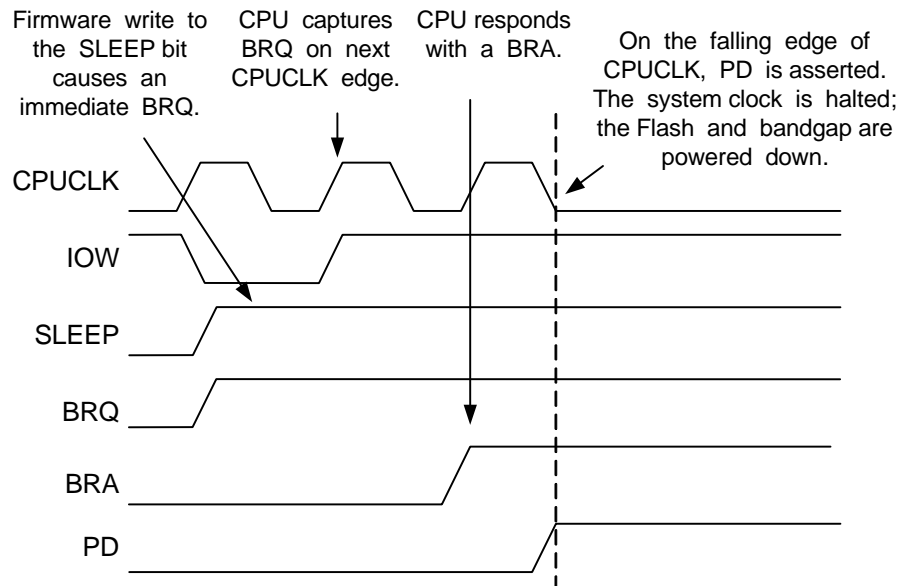

### 11.4.2 Wakeup Sequence

When asleep, the only event that wakes the system is an interrupt. The Global Interrupt Enable of the CPU Flag register does not need to be set. Any unmasked interrupt wakes the system up. It is optional for the CPU to actually take the interrupt after the wakeup sequence.

The wakeup sequence is synchronized to the taps from the wakeup timer (running on IMO clock). This allows the flash memory module enough time to power up before the CPU asserts the first read access. Another reason for the delay is to allow the IMO, bandgap, and LVD/POR circuits time to settle before actually being used in the system. As shown in [Figure 11-2](#), the wakeup sequence is as follows.

1. The wakeup interrupt occurs and the sequence is initiated at INT (shown in [Figure 11-2 on page 79](#)). The interrupt asynchronously enables the regulator, the bandgap circuit, LSO, POR, and the IMO. As the core power ramps, the IMO starts to oscillate and the remainder of the sequence is timed with configurable durations from the wakeup timer.
2. At T1, the bandgap is sampled and the flash is enabled.
3. At T2, the flash is put in power saving mode (idle).
4. At T3, the POR/LVD comparators are sampled and the CPU restarts.

There is no difference in wakeup from deep sleep or buzzed sleep because in all cases, to achieve the power specification, the regulator, references, and core blocks must be shut.

### 11.4.3 Bandgap Refresh

During normal operation the bandgap circuit provides a voltage reference (VRef) to the system for use in the analog blocks, flash, and **low-voltage detect (LVD)** circuitry. Normally, the bandgap output is connected directly to the VRef signal. However, during sleep, the **bandgap reference** generator block and LVD circuits are completely powered down. The bandgap and LVD blocks are periodically re-enabled during sleep to monitor for low-voltage conditions. This is accomplished by periodically turning on the bandgap.


The rate at which the refresh occurs is related to the 32-kHz clock and controlled by the Power System Sleep Duty Cycle. [Table 11-1](#) lists the available selections.

Table 11-1. Power System Sleep Duty Cycle Selections

| PSSDC         | Sleep Timer Counts | Period (Nominal) |
|---------------|--------------------|------------------|
| 00b (default) | 256                | 8 ms             |
| 01b           | 1024               | 31.2 ms          |
| 10b           | 64                 | 2 ms             |
| 11b           | 16                 | 500 $\mu$ s      |

**Note** Valid when ALT\_Buzz[1:0] of the SLP\_CFG2 register is 00b.

Figure 11-4. Buzz Sequence Timing

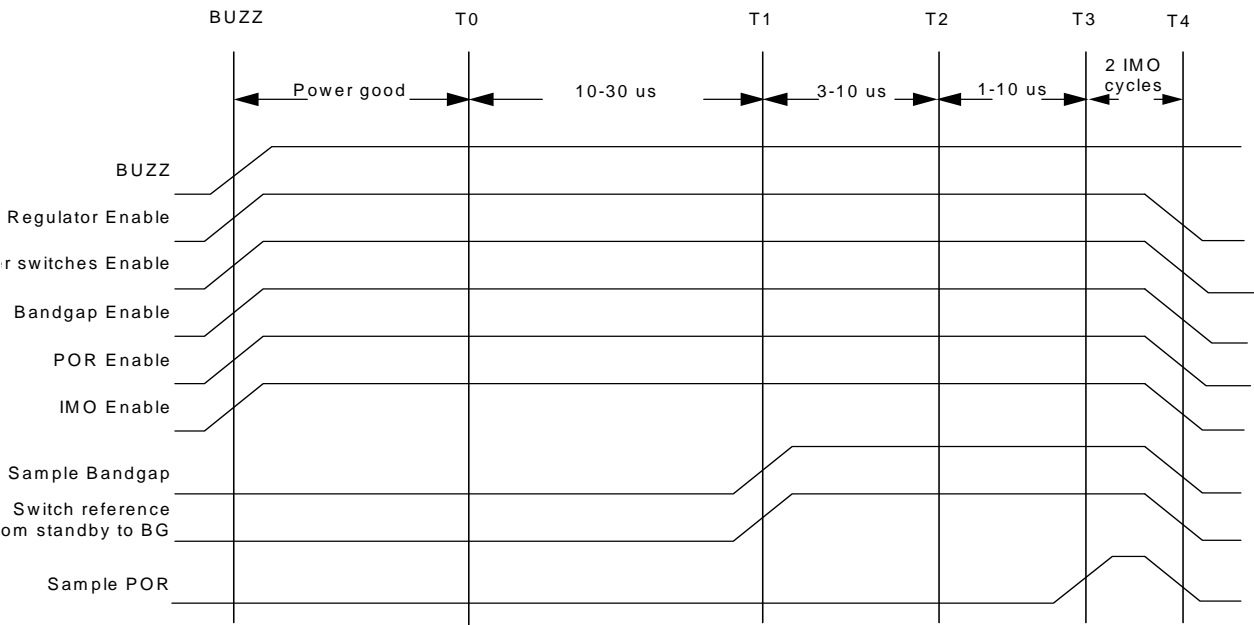

The buzz sequence after the Buzz signal comes. This is shown in [Figure 11-4, "Buzz Sequence Timing," on page 84](#).


## 11.4.4 Watchdog Timer

On device boot up, the Watchdog Timer (WDT) is initially disabled. The PORS bit in the System Control register controls the enabling of the WDT. Upon boot, the PORS bit is initially set to '1', indicating that either a POR or XRES event occurred. The WDT is enabled by clearing the PORS bit. After this bit is cleared and the WDT enabled, it cannot be disabled. (The PORS bit cannot be set to '1' in firmware; only cleared.)

The only way to disable the watchdog function after it is enabled is through a subsequent POR or XRES. Even though the WDT is disabled during the first time through initialization code after a POR or XRES, write all code as if it is enabled (that is, periodically review the WDT). This is because in the initialization code after a WDR event, the watchdog timer is enabled so all code must be aware of this.

The watchdog timer is three counts of the sleep timer interrupt output. The watchdog interval is three times the selected sleep timer interval. The available selections for the watchdog interval are shown in [Table 11-1](#). When the sleep timer interrupt is asserted, the watchdog timer increments. When the counter reaches three, a terminal count is asserted. This terminal count is registered by the 32-kHz clock. Therefore, the WDR (Watchdog Reset) signal goes high after the falling edge of the 32-kHz clock and held asserted for one cycle (30  $\mu$ s nominal). The **flip-flop** that registers the WDT terminal count is not reset by the WDR signal when it is asserted, but is reset by all other resets. This timing is shown in [Figure 11-5](#).

Figure 11-5. Watchdog Reset

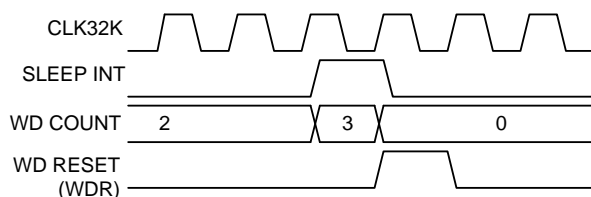

When enabled, periodically clear the WDT in firmware. Do this with a write to the RES\_WDT register. This write is data independent, so any write clears the watchdog timer. (Note that a write of 38h also clears the sleep timer.) If for any reason the firmware fails to clear the WDT within the selected interval, the circuit asserts WDR to the device. WDR is equivalent in effect to any other reset. All internal registers are set to their reset state. (See the table titled [Reset Functionality on page 133](#).) An important aspect to remember about WDT resets is that RAM initialization can be disabled (IRAMDIS is in the CPU\_SCR1 register). In this case, the SRAM contents are unaffected; so that when a WDR occurs, program variables are persistent through this reset.

In practical application, it is important to know that the watchdog timer interval can be anywhere between two and three times the sleep timer interval. The only way to guaran-

tee that the WDT interval is a full three times that of the sleep interval is to clear the sleep timer (write 38h) when clearing the WDT register. However, this is not possible in applications that use the sleep timer as a realtime clock. In the case where firmware clears the WDT register without clearing the sleep timer, this occurs at any point in a given sleep timer interval. If it occurs just before the terminal count of a sleep timer interval, the resulting WDT interval is just over two times that of the sleep timer interval.



## Section C: Analog System




The configurable Analog System section discusses the analog components of the PSoC device and the registers associated with those components. This section includes the following chapters:

- [I/O Analog Multiplexer on page 91.](#)
- [Comparators on page 93.](#)

### Top-Level Analog Architecture

The following figure displays the top-level architecture of the PSoC's Analog system. Each component of the figure is discussed at length in this section.

PSoC Analog System

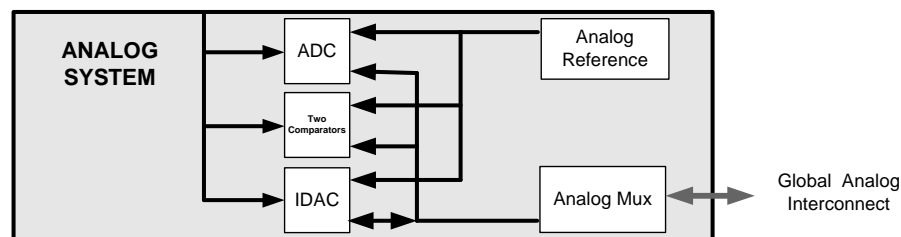

## Analog System Register Summary

The following table lists all the PSoC registers for the Analog system in address order within their system resource configuration. The bits that are grayed out are reserved bits. If these bits are written, always write them with a value of '0'.

Summary Table of the Analog Registers

| Address                                   | Name    | Bit 7        | Bit 6  | Bit 5     | Bit 4   | Bit 3                    | Bit 2 | Bit 1                    | Bit 0  | Access  |         |
|---|---------|--------------|--------|-----------|---------|--------------------------|-------|--------------------------|--------|---------|---------|
| ANALOG SYSTEM REGISTERS (page 90)         |         |              |        |           |         |                          |       |                          |        |         |         |
| 0,A2h                                     | CS_CR2  | IRANGE       |        | IDACDIR   | IDAC_EN |                          |       |                          |        | RW : 00 |         |
| 0,A3h                                     | CS_CR3  |              | REFMUX | REFMODE   | REF_EN  | LPFilt[1:0] <sup>a</sup> |       | LPF_EN[1:0] <sup>b</sup> |        | RW : 00 |         |
|   |         |              |        |           |         |                          |       |                          |        |         |         |
|   |         |              |        |           |         |                          |       |                          |        |         |         |
|   |         |              |        |           |         |                          |       |                          |        | RO : 00 |         |
|   |         |              |        |           |         |                          |       |                          |        |         |         |
|   |         |              |        |           |         |                          |       |                          |        |         |         |
|   |         |              |        |           |         |                          |       |                          |        |         |         |
| 0,FDh                                     | IDAC_D  | DACDATA[7:0] |        |           |         |                          |       |                          |        |         | RW : 00 |
| IO ANALOG MULTIPLEXER REGISTERS (page 92) |         |              |        |           |         |                          |       |                          |        |         |         |
| 1,D8h                                     | MUX_CR0 | ENABLE[7:0]  |        |           |         |                          |       |                          |        |         | RW : 00 |
| 1,D9h                                     | MUX_CR1 | ENABLE[7:0]  |        |           |         |                          |       |                          |        |         | RW : 00 |
| 1,DAh                                     | MUX_CR2 | ENABLE[7:0]  |        |           |         |                          |       |                          |        |         | RW : 00 |
| 1,DBh                                     | MUX_CR3 | ENABLE[7:0]  |        |           |         |                          |       |                          |        |         | RW : 00 |
| 1,DFh                                     | MUX_CR4 |              |        |           |         | ENABLE[3:0]              |       |                          |        | RW : 0  |         |
| COMPARATOR REGISTERS (page 95)            |         |              |        |           |         |                          |       |                          |        |         |         |
| 0,78h                                     | CMP_RDC |              |        | CMP1D     | CMP0D   |                          |       | CMP1L                    | CMP0L  | # : 0   |         |
| 0,79h                                     | CMP_MUX | INP1[1:0]    |        | INN1[1:0] |         | INP0[1:0]                |       | INN0[1:0]                |        | RW : 00 |         |
| 0,7Ah                                     | CMP_CR0 |              |        |           | CMP1EN  |                          |       |                          | CMP0EN | RW : 0  |         |
| 0,7Bh                                     | CMP_CR1 | CINT1        | CPIN1  | CRST1     | CDS1    | CINT0                    | CPIN0 | CRST0                    | CDS0   | RW : 00 |         |
| 0,7Ch                                     | CMP_LUT | LUT1[3:0]    |        |           |         | LUT0[3:0]                |       |                          |        | RW : 00 |         |

### Legend

# Access is bit specific. Refer to the [Register Reference chapter on page 177](#) for additional information.

R Read register or bit(s).

W Write register or bit(s).

a. These registers are available only for CY8C24193/493.

b. These registers are available only for CY8C24193/493.



# 12. IDAC



For a quick reference of all PSoC registers in address order, refer to the [Register Reference chapter on page 177](#).

## 12.1 Architectural Description


### 12.1.1 IDAC

The IDAC can provide current source up to 512  $\mu\text{A}$  to any GPIO pin. In the CY8C24x93 family of devices 4 ranges of current source can be implemented that can vary in 255 steps, and are connected to analog mux bus.

Table 12-1. IDAC Ranges

| Range | Full Scale Range in $\mu\text{A}$ |
|-------|-----------------------------------|
| 1x    | 64                                |
| 2x    | 128                               |
| 4x    | 256                               |
| 8x    | 512                               |

The GPIO pins can be connected to the Analog Mux Bus using the register MUX\_CRx where x equals the corresponding port number. The structure of the IDAC-Mux Bus-GPIO is as follows.

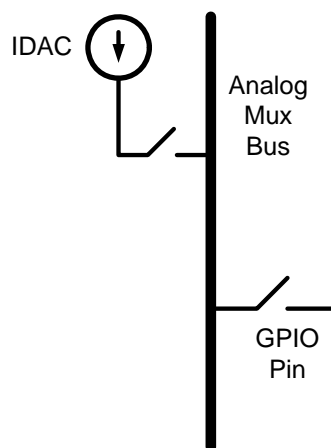

## 12.2 Register Definitions

The following registers are associated with the Analog Module and are listed in address order. The register descriptions have an associated register table showing the bit structure for that register. The bits in the tables that are grayed out are reserved bits and are not detailed in the register descriptions that follow. Always write reserved bits with a value of '0'. For a complete table of Analog Module registers, refer to the [Analog System Register Summary on page 88](#).

### 12.2.1 CS\_CR2 Register

| Address | Name                   | Bit 7  | Bit 6 | Bit 5   | Bit 4   | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access |
|---------|------------------------|--------|-------|---------|---------|-------|-------|-------|-------|--------|
| 0,A2h   | <a href="#">CS_CR2</a> | IRANGE |       | IDACDIR | IDAC_EN |       |       |       |       |        |

The Analog Control Register 2 (CS\_CR2) contains additional Analog system control options.

**Bits 7 and 6: IRANGE.** These bits scale the IDAC current output.

**Bit 5: IDACDIR.** This bit determines whether the IDAC sinks or sources current to the analog global bus when enabled.

**Bit 4: IDAC\_EN.** This bit enables manual connection of the IDAC to the analog global bus.

For additional information, refer to the [CS\\_CR2 register on page 200](#).

### 12.2.2 CS\_CR3 Register

| Address | Name                   | Bit 7 | Bit 6  | Bit 5   | Bit 4  | Bit 3       | Bit 2 | Bit 1       | Bit 0 | Access  |
|---------|------------------------|-------|--------|---------|--------|-------------|-------|-------------|-------|---------|
| 0,A3h   | <a href="#">CS_CR3</a> |       | REFMUX | REFMODE | REF_EN | LPFilt[1:0] |       | LPF_EN[1:0] |       | RW : 00 |

The Analog Control Register 3 (CS\_CR3) contains control bits primarily for the low pass filter and reference buffer.

**Bit 6: REFMUX.** This bit selects between VREF and REFHI for the reference buffer input.

**Bit 5: REFMODE.** This bit is used for manual connection of the reference buffer to the analog global bus.

**Bit 4: REF\_EN.** This bit enables the reference buffer to drive to the analog global bus.

**Bits 3 and 2: LPFilt[1:0]**<sup>1</sup>. These bits control the time constant of the low pass filter that connect to the analog bus.

**Bits 1<sup>2</sup> and 0: LPF\_EN[1:0].** These bits are used to connect a low pass filter into the input of either comparator channel.

For additional information, refer to the [CS\\_CR3 register on page 201](#).

- 
1. Bits 3 and 2 are available only for CY8C24193/493.  
2. Bit 1 is available only for CY8C24193/493.

### 12.2.3 IDAC\_D Register

| Address | Name                   | Bit 7         | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|------------------------|---------------|-------|-------|-------|-------|-------|-------|-------|---------|
| 0,FDh   | <a href="#">IDAC_D</a> | IDACDATA[7:0] |       |       |       |       |       |       |       | RW : 00 |

The Current DAC Data Register (IDAC\_D) specifies the 8-bit multiplying factor that determines the output DAC current.

**Bits 7 to 0: IDACDATA[7:0].** The 8-bit value in this register sets the current driven onto the analog global mux bus when the current DAC mode is enabled.

For additional information, refer to the [IDAC\\_D register on page 238](#).

# 13. I/O Analog Multiplexer



This chapter explains the device-wide I/O Analog Multiplexer for the CY8C24x93 PSoC devices and their associated registers. For a quick reference of all PSoC registers in address order, refer to the [Register Reference](#) chapter on page 177.

## 13.1 Architectural Description

The CY8C24x93 PSoC devices contain an enhanced analog multiplexer (mux) capability. This function allows many I/O pins to connect to a common internal analog global bus.

You can connect any number of pins simultaneously, and dedicated support circuitry allows selected pins to be alternately charged high or connected to the bus. The analog global bus can be connected as a comparator input. [Figure 13-1](#) shows a block diagram of the I/O analog mux system.

Figure 13-1. I/O Analog Mux System


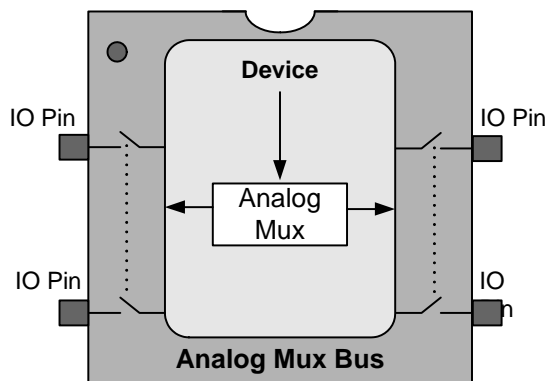


Figure 13-2. I/O Pin Configuration

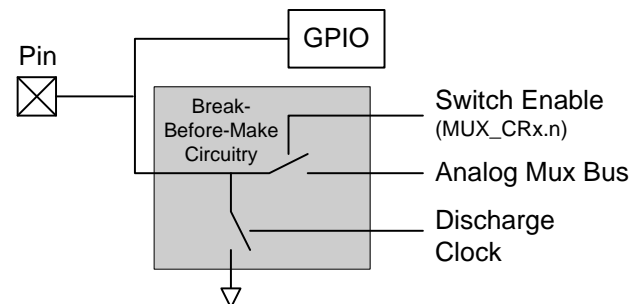

For each pin, the mux capability exists in parallel with the normal GPIO cell, shown in [Figure 13-2](#). Normally, the associated GPIO pin is put into a high-impedance state for these applications, although there are cases where the GPIO cell is configured by the user to briefly drive pin initialization states as described ahead.

Pins are individually connected to the internal bus by setting the corresponding bits in the MUX\_CRx registers. Any number of pins can be enabled at the same time. At reset, all of these mux connections are open (disconnected).

## 13.2 Register Definitions

The following registers are only associated with the Analog Bus Mux in the CY8C24x93 PSoC devices and are listed in address order. Each register description has an associated register table showing the bit structure for that register. Register bits that are grayed out throughout this document are reserved bits and are not detailed in the register descriptions that follow. Always write reserved bits with a value of '0'.

### 13.2.1 MUX\_CRx Registers

| Address | Name                    | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|-------------------------|-------|-------|-------|-------|-------|-------|-------|-------|---------|
| 1,D8h   | <a href="#">MUX_CR0</a> |       |       |       |       |       |       |       |       | RW : 00 |
| 1,D9h   | <a href="#">MUX_CR1</a> |       |       |       |       |       |       |       |       | RW : 00 |
| 1,DAh   | <a href="#">MUX_CR2</a> |       |       |       |       |       |       |       |       | RW : 00 |
| 1,DBh   | <a href="#">MUX_CR3</a> |       |       |       |       |       |       |       |       | RW : 00 |
| 1,DFh   | <a href="#">MUX_CR4</a> |       |       |       |       |       |       |       |       | RW : 0  |

The Analog Mux Port Bit Enable Registers (MUX\_CR0, MUX\_CR1, MUX\_CR2, MUX\_CR3, and MUX\_CR4) control the connection between the analog mux bus and the corresponding pin.

**Bits 7 to 0: ENABLE[7:0].** The bits in these registers enable connection of individual pins to the analog mux bus. Each I/O port has a corresponding MUX\_CRx register.

Setting a bit high connects the corresponding pin to the analog bus.

For additional information, refer to the [MUX\\_CRx register on page 253](#).

# 14. Comparators




This chapter explains the Comparators for the Cy8C24x93 PSoC devices and their associated registers. For a complete table of the comparator registers, refer to the [Analog System Register Summary on page 88](#). For a quick reference of all PSoC registers in address order, refer to the [Register Reference chapter on page 177](#).

## 14.1 Architectural Description

The CY8C24x93 PSoC devices contain two comparators designed to support general-purpose uses. [Figure 14-1](#) shows a block diagram of the comparator system.

Figure 14-1. Comparators Block Diagram

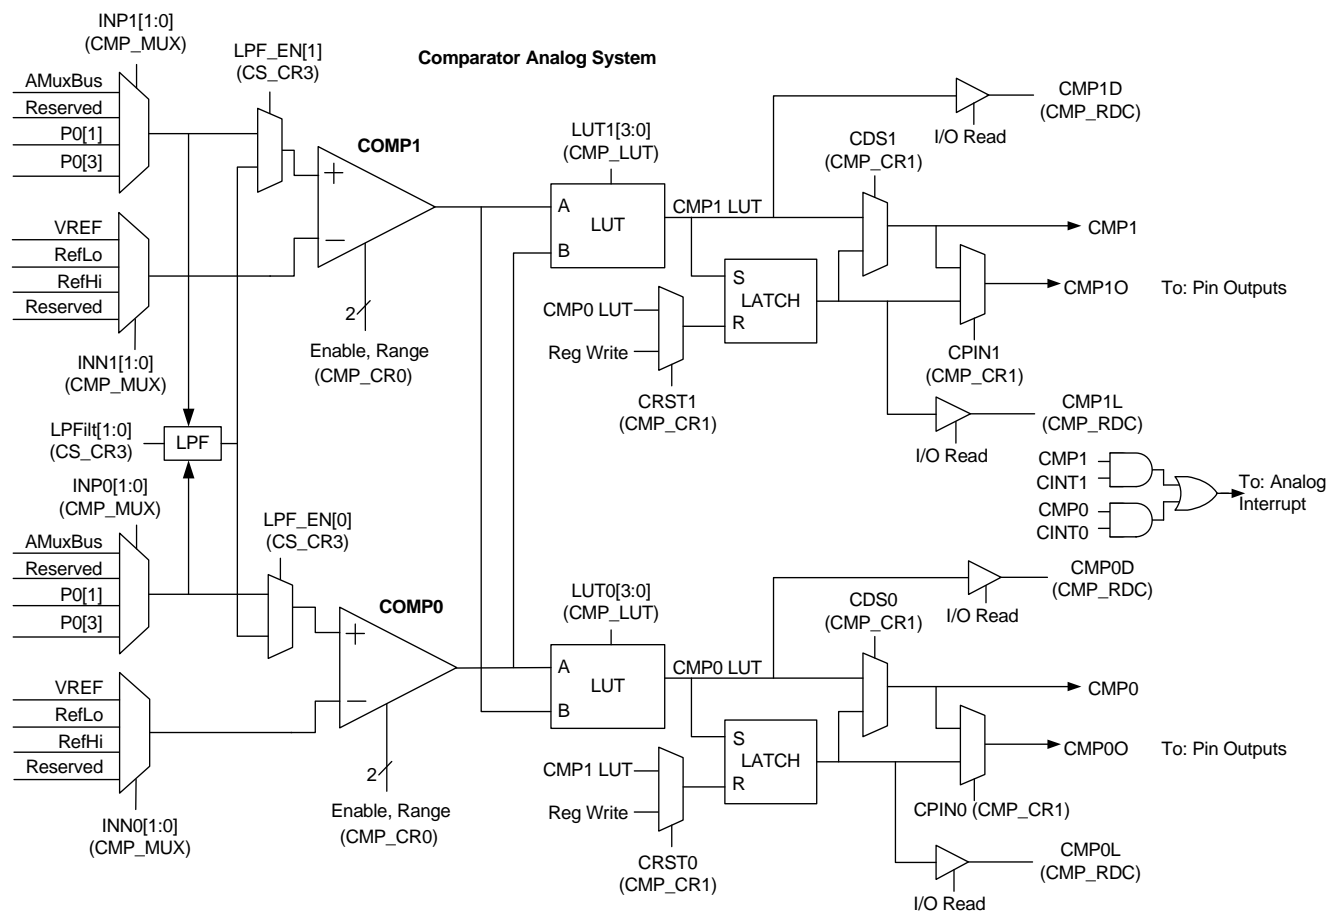

**Note:** LPF is available on for the devices CY8C093/293/393/693.

## Comparators

The comparator digital interface performs logic processing on one or more comparator signals, provides a latching capability, and routes the result to other chip subsystems. The comparator signal is routed through a lookup table (LUT) function. The other input to the LUT is the neighboring comparator output. The LUT implements 1 of 16 functions on the two inputs, as selected by the CMP\_LUT register. The LUT output also feeds the set input upon a reset/set (RS) latch. The latch is cleared by writing a '0' to the appropriate bit in the CMP\_RDC register or by a rising edge from the other comparator LUT.

The primary output for each comparator is the LUT output or its latched version. These are routed to the interrupt controller. The comparator LUT output state and latched state are directly read by the CPU through the CMP\_RDC register. A selection of comparator state may also be driven to an output pin.

When disabled, the comparators consume no power. Two active modes provide a full rail-to-rail input range or a somewhat lower power option with limited input range.

## 14.2 Register Definitions

The following registers are only associated with the Comparators in the CY8C24x93 PSoC devices and are listed in address order. For a complete table of the comparator registers, refer to the [Analog System Register Summary on page 88](#). Each register description has an associated register table showing the bit structure for that register. Register bits that are grayed out throughout this document are reserved bits and are not detailed in the register descriptions that follow. Always write reserved bits with a value of '0'.

### 14.2.1 CMP\_RDC Register

| Address | Name                    | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access |
|---------|-------------------------|-------|-------|-------|-------|-------|-------|-------|-------|--------|
| 0,78h   | <a href="#">CMP_RDC</a> |       |       | CMP1D | CMP0D |       |       | CMP1L | CMP0L | # : 00 |

#### Legend

# Access is bit specific.

The Comparator Read/Clear Register (CMP\_RDC) reads the state of the comparator data signal and the latched state of the comparator.

**Bit 5: CMP1D.** Comparator 1 Data State. This is a read-only bit and returns the dynamically changing state of the comparator.

**Bit 4: CMP0D.** Comparator 0 Data State. This bit is a read-only bit and returns the dynamically changing state of the comparator.

**Bit 1: CMP1L.** Comparator 1 Latched State. This bit is set and held high whenever the comparator 1 LUT goes high since the last time this register was read. Refer to the CRST1 bit in the CMP\_CR1 register for information on how the latch is cleared.

**Bit 0: CMP0L.** Comparator 0 Latched State. This bit is set and held high whenever the comparator 0 LUT goes high since the last time this register was read. Refer to the CRST0 bit in the CMP\_CR1 register for information on how the latch is cleared.

For additional information, refer to the [CMP\\_RDC register on page 194](#).

### 14.2.2 CMP\_MUX Register

| Address | Name                    | Bit 7     | Bit 6 | Bit 5     | Bit 4 | Bit 3     | Bit 2 | Bit 1     | Bit 0 | Access  |
|---------|-------------------------|-----------|-------|-----------|-------|-----------|-------|-----------|-------|---------|
| 0,79h   | <a href="#">CMP_MUX</a> | INP1[1:0] |       | INN1[1:0] |       | INP0[1:0] |       | INN0[1:0] |       | RW : 00 |

The Comparator Multiplexer Register (CMP\_MUX) contains control bits for input selection of comparators 0 and 1.

**Bits 7 and 6: INP1[1:0].** These bits select the positive input.

**Bits 5 and 4: INN1[1:0].** These bits select the negative input.

**Bits 3 and 2: INP0[1:0].** These bits select the positive input data source for comparator 0.

**Bits 1 and 0: INN0[1:0].** These bits select the negative input data source for comparator 0.

For additional information, refer to the [CMP\\_MUX register on page 195](#).

### 14.2.3 CMP\_CR0 Register

| Address | Name                    | Bit 7  | Bit 6 | Bit 5 | Bit 4  | Bit 3 | Bit 2 | Bit 1 | Bit 0  | Access  |
|---------|-------------------------|--------|-------|-------|--------|-------|-------|-------|--------|---------|
| 0,7Ah   | <a href="#">CMP_CR0</a> | CMP_TM |       |       | CMP1EN |       |       |       | CMP0EN | RW : 00 |

The Comparator Control Register 0 (CMP\_CR0) enables and configures the input range of the comparators.

**Bits 6: CMP\_TM.** Ref Hi or Analog global mux bus is connected to negative input of comparator when Ref Hi is selected in the CMP\_Mux (0, 7Ah) register.

**Bit 4: CMP1EN.** This bit enables comparator 1.

**Bit 0: CMP0EN.** This bit enables comparator 0.

For additional information, refer to the [CMP\\_CR0 register on page 196](#).

### 14.2.4 CMP\_CR1 Register

| Address | Name                    | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|-------------------------|-------|-------|-------|-------|-------|-------|-------|-------|---------|
| 0,7Bh   | <a href="#">CMP_CR1</a> | CINT1 | CPIN1 | CRST1 | CDS1  | CINT0 | CPIN0 | CRST0 | CDS0  | RW : 00 |

The Comparator Control Register 1 (CMP\_CR1) configures the comparator output options.

**Bit 7: CINT1.** This bit connects the comparator 1 output to the analog output.

**Bit 6: CPIN1.** This bit selects whether the comparator 1 LUT output or the latched output is routed to a GPIO pin.

**Bit 5: CRST1.** This bit selects whether the comparator 1 latch is reset upon a register write or by a rising edge from the comparator 0 LUT output.

**Bit 4: CDS1.** This bit selects between the comparator 1 LUT and the latched output for the main comparator output that drives to the interrupt logic.

**Bit 3: CINT0.** This bit connects the comparator 0 output to the analog output.

**Bit 2: CPIN0.** This bit selects whether the comparator 0 LUT output or the latched output is routed to a GPIO pin.

**Bit 1: CRST0.** This bit selects whether the comparator 0 latch is reset upon a register write or by a rising edge from the comparator 1 LUT output.

**Bit 0: CDS0.** This bit selects between the comparator 0 LUT and the latched output for the main comparator output that drives to the interrupt logic.

For additional information, refer to the [CMP\\_CR1 register on page 197](#).

### 14.2.5 CMP\_LUT Register

| Address | Name                    | Bit 7     | Bit 6 | Bit 5 | Bit 4 | Bit 3     | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|-------------------------|-----------|-------|-------|-------|-----------|-------|-------|-------|---------|
| 0,7Ch   | <a href="#">CMP_LUT</a> | LUT1[3:0] |       |       |       | LUT0[3:0] |       |       |       | RW : 00 |

The Comparator LUT Control Register (CMP\_LUT) selects the logic function.

**Bits 7 to 4: LUT1[3:0].** These bits control the selection of the LUT 1 logic functions that may be selected for the comparator channel 1.

**Bits 3 to 0: LUT0[3:0].** These bits control the selection of LUT 0 logic functions that may be selected for the comparator channel 0. The selections are shown in the following table:

|           |  |
|-----------|--|
| LUTx[3:0] | 0h: 0000: FALSE<br>1h: 0001: A .AND. B<br>2h: 0010: A .AND. B<br>3h: 0011: A<br>4h: 0100: A .AND. B<br>5h: 0101: B<br>6h: 0110: A .XOR. B<br>7h: 0111: A .OR. B<br>8h: 1000: A .NOR. B<br>9h: 1001: A .XNOR. B<br>Ah: 1010: B<br>Bh: 1011: A .OR. B<br>Ch: 1100: A<br>Dh: 1101: A .OR. B<br>Eh: 1110: A .NAND. B<br>Fh: 1111: TRUE |
|-----------|--|

For additional information, refer to the [CMP\\_LUT register on page 199](#).



# Section D: System Resources




This section discusses the system resources that are available for the PSoC devices and the registers associated with those resources. This section includes the following chapters:

- [Digital Clocks on page 103.](#)
- [I<sup>2</sup>C Slave on page 111.](#)
- [System Resets on page 127.](#)
- [POR and LVD on page 135.](#)
- [SPI on page 137.](#)
- [Programmable Timer on page 151.](#)
- [Full-Speed USB \(CY8C24193/493\) on page 155.](#)

## Top-Level System Resources Architecture

The following figure displays the top-level architecture of the PSoC system resources. Each component of the figure is discussed at length in the chapters that follow.

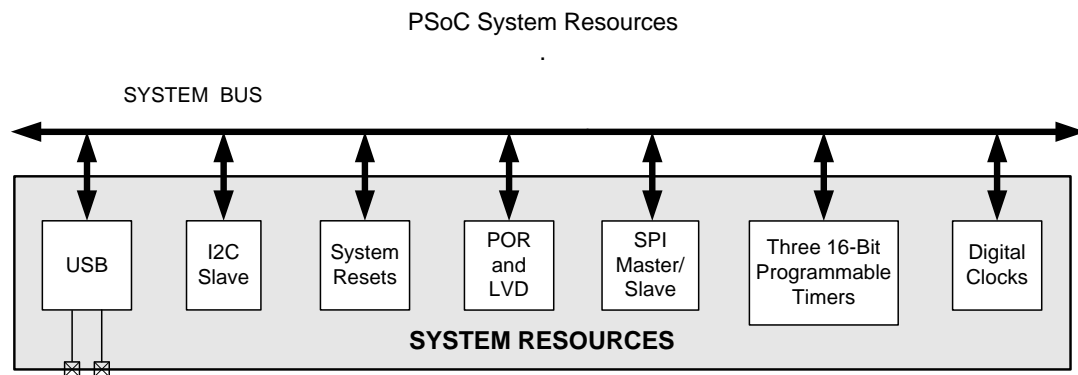

## System Resources Register Summary

The following table lists all the PSoC registers for the system resources, in address order, within their system resource configuration. The bits that are grayed out are reserved bits. If you write these bits, always write them with a value of '0'.

Summary Table of the System Resource Registers

| Address                                 | Name          | Bit 7              | Bit 6        | Bit 5           | Bit 4        | Bit 3           | Bit 2          | Bit 1          | Bit 0         | Access  |
|---|---------------|--------------------|--------------|-----------------|--------------|-----------------|----------------|----------------|---------------|---------|
| DIGITAL CLOCK REGISTERS (page 106)      |               |                    |              |                 |              |                 |                |                |               |         |
| 1,BDh                                   | USB_MISC_CR   |                    |              |                 |              |                 | USB_SE_EN      | USB_ON         | USB_CLK_ON    | RW : 0  |
| 1,D1h                                   | OUT_P0        | P0P7D              | P0P7EN       | P0P4D           | P0P4EN       |                 |                |                |               | RW : 00 |
| 1,DDh                                   | OUT_P1        | P16D               | P16EN        | P14D            | P14EN        | P12D            | P12EN          | P10D           | P10EN         | RW : 00 |
| 1,E0h                                   | OSC_CR0       | X32ON              | Disable Buzz | No Buzz         | Sleep[1:0]   |                 | CPU Speed[2:0] |                |               | RW : 01 |
| 1,E2h                                   | OSC_CR2       |                    |              |                 | CLK48MEN     |                 | EXT-CLKEN      | RSVD           |               | RW : 0  |
| I2C SLAVE REGISTERS (page 114)          |               |                    |              |                 |              |                 |                |                |               |         |
| 0,C8h                                   | I2C_XCFG      | CSR_CLK_EN         |              | FORCE_NACK_MODE | FORCE_NACK   | No BC Int       |                | Buffer Mode    | HW Addr EN    | RW : 80 |
| 0,CAh                                   | I2C_ADDR      | Slave Address[6:0] |              |                 |              |                 |                |                |               | RW : 00 |
| 0,C9h                                   | I2C_XSTAT     |                    |              |                 |              |                 |                |                |               |         |
| 0,CBh                                   | I2C_BP_EZ_CFG |                    |              |                 |              |                 |                |                |               |         |
| 0,CCh                                   | I2C_CP        |                    |              |                 |              |                 |                |                |               |         |
| 0,CDh                                   | CPU_BP        |                    |              |                 |              |                 |                |                |               |         |
| 0,CEh                                   | CPU_CP        |                    |              |                 |              |                 |                |                |               |         |
| 0,D6h                                   | I2C_CFG       |                    | PSelect      |                 | Stop IE      | Clock Rate[1:0] |                |                | Enable        | RW : 00 |
| 0,D7h                                   | I2C_SCR       | Bus Error          |              | Stop Status     | ACK          | Address         | Transmit       | LRB            | Byte Complete | # : 00  |
| 0,D8h                                   | I2C_DR        | Data[7:0]          |              |                 |              |                 |                |                |               | RW : 00 |
| SYSTEM RESET REGISTERS (page 129)       |               |                    |              |                 |              |                 |                |                |               |         |
| x,FEh                                   | CPU_SCR1      | IRESS              |              |                 | SLIMO[1:0]   |                 |                |                | IRAMDIS       | # : 0   |
| x,FFh                                   | CPU_SCR0      | GIES               |              | WDRS            | PORS         | Sleep           |                |                | STOP          | # : XX  |
| POR REGISTERS (page 135)                |               |                    |              |                 |              |                 |                |                |               |         |
| 1,E3h                                   | VLT_CR        |                    |              | PORLEV[1:0]     |              | LVDTBEN         | VM[2:0]        |                |               | RW : 00 |
| 1,E4h                                   | VLT_CMP       |                    |              |                 | NoWrite      |                 | POR_EXT        | LVD            |               | R : #   |
| SPI REGISTERS (page 139)                |               |                    |              |                 |              |                 |                |                |               |         |
| 0,29h                                   | SPI_TXR       | Data[7:0]          |              |                 |              |                 |                |                |               | W : 00  |
| 0,2Ah                                   | SPI_RXR       | Data[7:0]          |              |                 |              |                 |                |                |               | R : 00  |
| 0,2Bh                                   | SPI_CR        | LSb First          | Overrun      | SPI Complete    | TX Reg Empty | RX Reg Full     | Clock Phase    | Clock Polarity | Enable        | # : 00  |
| 1,29h                                   | SPI_CFG       | Clock Sel [2:0]    |              |                 | Bypass       | SS_             | SS_EN_         | Int Sel        | Slave         | RW : 00 |
| PROGRAMMABLE TIMER REGISTERS (page 153) |               |                    |              |                 |              |                 |                |                |               |         |
| 0,B0h                                   | PT0_CFG       |                    |              |                 |              |                 | CLKSEL         | One Shot       | START         | RW : 0  |
| 0,B1h                                   | PT0_DATA1     | DATA[7:0]          |              |                 |              |                 |                |                |               | RW : 00 |
| 0,B2h                                   | PT0_DATA0     | DATA[7:0]          |              |                 |              |                 |                |                |               | RW : 00 |
| 0,B3h                                   | PT1_CFG       |                    |              |                 |              |                 | CLKSEL         | One Shot       | START         | RW : 0  |
| 0,B4h                                   | PT1_DATA1     | DATA[7:0]          |              |                 |              |                 |                |                |               | RW : 00 |
| 0,B5h                                   | PT1_DATA0     | DATA[7:0]          |              |                 |              |                 |                |                |               | RW : 00 |
| 0,B6h                                   | PT2_CFG       |                    |              |                 |              |                 | CLKSEL         | One Shot       | START         | RW : 0  |
| 0,B7h                                   | PT2_DATA1     | DATA[7:0]          |              |                 |              |                 |                |                |               | RW : 00 |
| 0,B8h                                   | PT2_DATA0     | DATA[7:0]          |              |                 |              |                 |                |                |               | RW : 00 |
| USB REGISTERS (page 161)                |               |                    |              |                 |              |                 |                |                |               |         |
| 0,58h                                   | PMAx_DR       | Data Byte[7:0]     |              |                 |              |                 |                |                |               | RW : 00 |

Summary Table of the System Resource Registers<continue> (continued)

| Address | Name      | Bit 7             | Bit 6               | Bit 5        | Bit 4             | Bit 3          | Bit 2              | Bit 1 | Bit 0     | Access  |         |
|---------|-----------|-------------------|---------------------|--------------|-------------------|----------------|--------------------|-------|-----------|---------|---------|
| 0,59h   | PMAX_DR   |                   |                     |              |                   | Data Byte[7:0] |                    |       |           |         | RW : 00 |
| 0,5Ah   | PMAX_DR   |                   |                     |              |                   | Data Byte[7:0] |                    |       |           |         | RW : 00 |
| 0,5Bh   | PMAX_DR   |                   |                     |              |                   | Data Byte[7:0] |                    |       |           |         | RW : 00 |
| 0,5Ch   | PMAX_DR   |                   |                     |              |                   | Data Byte[7:0] |                    |       |           |         | RW : 00 |
| 0,5Dh   | PMAX_DR   |                   |                     |              |                   | Data Byte[7:0] |                    |       |           |         | RW : 00 |
| 0,5Eh   | PMAX_DR   |                   |                     |              |                   | Data Byte[7:0] |                    |       |           |         | RW : 00 |
| 0,5Fh   | PMAX_DR   |                   |                     |              |                   | Data Byte[7:0] |                    |       |           |         | RW : 00 |
| 0,64h   | PMAX_DR   |                   |                     |              |                   | Data Byte[7:0] |                    |       |           |         | RW : 00 |
| 0,65h   | PMAX_DR   |                   |                     |              |                   | Data Byte[7:0] |                    |       |           |         | RW : 00 |
| 0,66h   | PMAX_DR   |                   |                     |              |                   | Data Byte[7:0] |                    |       |           |         | RW : 00 |
| 0,67h   | PMAX_DR   |                   |                     |              |                   | Data Byte[7:0] |                    |       |           |         | RW : 00 |
| 0,68h   | PMAX_DR   |                   |                     |              |                   | Data Byte[7:0] |                    |       |           |         | RW : 00 |
| 0,69h   | PMAX_DR   |                   |                     |              |                   | Data Byte[7:0] |                    |       |           |         | RW : 00 |
| 0,6Ah   | PMAX_DR   |                   |                     |              |                   | Data Byte[7:0] |                    |       |           |         | RW : 00 |
| 0,6Bh   | PMAX_DR   |                   |                     |              |                   | Data Byte[7:0] |                    |       |           |         | RW : 00 |
| 0,31h   | USB_SOF0  | Frame Number[7:0] |                     |              |                   |                |                    |       |           |         | R : 00  |
| 0,32h   | USB_SOF1  |                   |                     |              |                   |                | Frame Number[10:8] |       |           |         | R : 0   |
| 0,33h   | USB_CR0   | USB Enable        | Device Address[6:0] |              |                   |                |                    |       |           |         | RW : 00 |
| 0,34h   | USBIO_CR0 | TEN               | TSE0                | TD           |                   |                |                    |       | RD        |         | # : 0   |
| 0,35h   | USBIO_CR1 | IOMode            | Drive Mode          | DPI          | DMI               | PS2PUEN        | USB-PUEN           | DPO   | DMO       | RW : 00 |         |
| 0,41h   | EPx_CNT1  | Data Count[7:0]   |                     |              |                   |                |                    |       |           |         | RW : 00 |
| 0,43h   | EPx_CNT1  | Data Count[7:0]   |                     |              |                   |                |                    |       |           |         | RW : 00 |
| 0,45h   | EPx_CNT1  | Data Count[7:0]   |                     |              |                   |                |                    |       |           |         | RW : 00 |
| 0,47h   | EPx_CNT1  | Data Count[7:0]   |                     |              |                   |                |                    |       |           |         | RW : 00 |
| 0,49h   | EPx_CNT1  | Data Count[7:0]   |                     |              |                   |                |                    |       |           |         | RW : 00 |
| 0,4Bh   | EPx_CNT1  | Data Count[7:0]   |                     |              |                   |                |                    |       |           |         | RW : 00 |
| 0,4Dh   | EPx_CNT1  | Data Count[7:0]   |                     |              |                   |                |                    |       |           |         | RW : 00 |
| 0,4Fh   | EPx_CNT1  | Data Count[7:0]   |                     |              |                   |                |                    |       |           |         | RW : 00 |
| 0,31h   | USB_SOF0  | Frame Number[7:0] |                     |              |                   |                |                    |       |           |         | R : 00  |
| 0,32h   | USB_SOF1  |                   |                     |              |                   |                | Frame Number[10:8] |       |           |         | R : 0   |
| 0,33h   | USB_CR0   | USB Enable        | Device Address[6:0] |              |                   |                |                    |       |           |         | RW : 00 |
| 0,34h   | USBIO_CR0 | TEN               | TSE0                | TD           |                   |                |                    |       | RD        |         | # : 00  |
| 0,35h   | USBIO_CR1 | IOMode            | Drive Mode          | DPI          | DMI               | PSPUEN         | USB-PUEN           | DPO   | DMO       | RW : 00 |         |
| 0,36h   | EP0_CR    | Setup Received    | IN Received         | OUT Received | ACK'd Transaction | Mode[3:0]      |                    |       |           |         | RW : 00 |
| 0,37h   | EP0_CNT   | Data Toggle       | Data Valid          |              |                   |                | Byte Count[3:0]    |       |           |         | # : 00  |
| 0,38h   | EP0_DRx   | Data Byte[7:0]    |                     |              |                   |                |                    |       |           |         | RW : 00 |
| 0,39h   | EP0_DRx   | Data Byte[7:0]    |                     |              |                   |                |                    |       |           |         | RW : 00 |
| 0,3Ah   | EP0_DRx   | Data Byte[7:0]    |                     |              |                   |                |                    |       |           |         | RW : 00 |
| 0,3Bh   | EP0_DRx   | Data Byte[7:0]    |                     |              |                   |                |                    |       |           |         | RW : 00 |
| 0,3Ch   | EP0_DRx   | Data Byte[7:0]    |                     |              |                   |                |                    |       |           |         | RW : 00 |
| 0,3Dh   | EP0_DRx   | Data Byte[7:0]    |                     |              |                   |                |                    |       |           |         | RW : 00 |
| 0,3Eh   | EP0_DRx   | Data Byte[7:0]    |                     |              |                   |                |                    |       |           |         | RW : 00 |
| 0,3Fh   | EP0_DRx   | Data Byte[7:0]    |                     |              |                   |                |                    |       |           |         | RW : 00 |
| 0,40h   | EPx_CNT0  | Data Toggle       | Data Valid          |              |                   |                |                    |       | Count MSB |         | # : 0   |
| 0,42h   | EPx_CNT0  | Data Toggle       | Data Valid          |              |                   |                |                    |       | Count MSB |         | # : 0   |
| 0,44h   | EPx_CNT0  | Data Toggle       | Data Valid          |              |                   |                |                    |       | Count MSB |         | # : 0   |

Summary Table of the System Resource Registers<continue> (continued)

| Address | Name     | Bit 7              | Bit 6      | Bit 5      | Bit 4    | Bit 3     | Bit 2        | Bit 1       | Bit 0     | Access  |
|---------|----------|--------------------|------------|------------|----------|-----------|--------------|-------------|-----------|---------|
| 0,46h   | EPx_CNT0 | Data Toggle        | Data Valid |            |          |           |              |             | Count MSB | # : 0   |
| 0,48h   | EPx_CNT0 | Data Toggle        | Data Valid |            |          |           |              |             | Count MSB | # : 0   |
| 0,4Ah   | EPx_CNT0 | Data Toggle        | Data Valid |            |          |           |              |             | Count MSB | # : 0   |
| 0,4Ch   | EPx_CNT0 | Data Toggle        | Data Valid |            |          |           |              |             | Count MSB | # : 0   |
| 0,4Eh   | EPx_CNT0 | Data Toggle        | Data Valid |            |          |           |              |             | Count MSB | # : 0   |
| 1,30h   | USB_CR1  |                    |            |            |          |           | BusActiv-ity | Ena-bleLock | RegEnable | RW : 0  |
| 1,34h   | PMAx_WA  | Write Address[7:0] |            |            |          |           |              |             |           | RW : 00 |
| 1,35h   | PMAx_WA  | Write Address[7:0] |            |            |          |           |              |             |           | RW : 00 |
| 1,36h   | PMAx_WA  | Write Address[7:0] |            |            |          |           |              |             |           | RW : 00 |
| 1,37h   | PMAx_WA  | Write Address[7:0] |            |            |          |           |              |             |           | RW : 00 |
| 1,38h   | PMAx_WA  | Write Address[7:0] |            |            |          |           |              |             |           | RW : 00 |
| 1,39h   | PMAx_WA  | Write Address[7:0] |            |            |          |           |              |             |           | RW : 00 |
| 1,3Ah   | PMAx_WA  | Write Address[7:0] |            |            |          |           |              |             |           | RW : 00 |
| 1,3Bh   | PMAx_WA  | Write Address[7:0] |            |            |          |           |              |             |           | RW : 00 |
| 1,44h   | PMAx_WA  | Write Address[7:0] |            |            |          |           |              |             |           | RW : 00 |
| 1,45h   | PMAx_WA  | Write Address[7:0] |            |            |          |           |              |             |           | RW : 00 |
| 1,46h   | PMAx_WA  | Write Address[7:0] |            |            |          |           |              |             |           | RW : 00 |
| 1,47h   | PMAx_WA  | Write Address[7:0] |            |            |          |           |              |             |           | RW : 00 |
| 1,48h   | PMAx_WA  | Write Address[7:0] |            |            |          |           |              |             |           | RW : 00 |
| 1,49h   | PMAx_WA  | Write Address[7:0] |            |            |          |           |              |             |           | RW : 00 |
| 1,4Ah   | PMAx_WA  | Write Address[7:0] |            |            |          |           |              |             |           | RW : 00 |
| 1,4Bh   | PMAx_WA  | Write Address[7:0] |            |            |          |           |              |             |           | RW : 00 |
| 1,3Ch   | PMAx_RA  | Read Address[7:0]  |            |            |          |           |              |             |           | RW : 00 |
| 1,3Dh   | PMAx_RA  | Read Address[7:0]  |            |            |          |           |              |             |           | RW : 00 |
| 1,3Eh   | PMAx_RA  | Read Address[7:0]  |            |            |          |           |              |             |           | RW : 00 |
| 1,3Fh   | PMAx_RA  | Read Address[7:0]  |            |            |          |           |              |             |           | RW : 00 |
| 1,40h   | PMAx_RA  | Read Address[7:0]  |            |            |          |           |              |             |           | RW : 00 |
| 1,41h   | PMAx_RA  | Read Address[7:0]  |            |            |          |           |              |             |           | RW : 00 |
| 1,42h   | PMAx_RA  | Read Address[7:0]  |            |            |          |           |              |             |           | RW : 00 |
| 1,43h   | PMAx_RA  | Read Address[7:0]  |            |            |          |           |              |             |           | RW : 00 |
| 1,4Ch   | PMAx_RA  | Read Address[7:0]  |            |            |          |           |              |             |           | RW : 00 |
| 1,4Dh   | PMAx_RA  | Read Address[7:0]  |            |            |          |           |              |             |           | RW : 00 |
| 1,4Eh   | PMAx_RA  | Read Address[7:0]  |            |            |          |           |              |             |           | RW : 00 |
| 1,4Fh   | PMAx_RA  | Read Address[7:0]  |            |            |          |           |              |             |           | RW : 00 |
| 1,50h   | PMAx_RA  | Read Address[7:0]  |            |            |          |           |              |             |           | RW : 00 |
| 1,51h   | PMAx_RA  | Read Address[7:0]  |            |            |          |           |              |             |           | RW : 00 |
| 1,52h   | PMAx_RA  | Read Address[7:0]  |            |            |          |           |              |             |           | RW : 00 |
| 1,53h   | PMAx_RA  | Read Address[7:0]  |            |            |          |           |              |             |           | RW : 00 |
| 1,54h   | EPx_CR0  | Stall              |            | NAK_INT_EN | ACKed Tx | Mode[3:0] |              |             |           | # : 00  |
| 1,55h   | EPx_CR0  | Stall              |            | NAK_INT_EN | ACKed Tx | Mode[3:0] |              |             |           | # : 00  |
| 1,56h   | EPx_CR0  | Stall              |            | NAK_INT_EN | ACKed Tx | Mode[3:0] |              |             |           | # : 00  |
| 1,57h   | EPx_CR0  | Stall              |            | NAK_INT_EN | ACKed Tx | Mode[3:0] |              |             |           | # : 00  |
| 1,58h   | EPx_CR0  | Stall              |            | NAK_INT_EN | ACKed Tx | Mode[3:0] |              |             |           | # : 00  |
| 1,59h   | EPx_CR0  | Stall              |            | NAK_INT_EN | ACKed Tx | Mode[3:0] |              |             |           | # : 00  |
| 1,5Ah   | EPx_CR0  | Stall              |            | NAK_INT_EN | ACKed Tx | Mode[3:0] |              |             |           | # : 00  |
| 1,5Bh   | EPx_CR0  | Stall              |            | NAK_INT_EN | ACKed Tx | Mode[3:0] |              |             |           | # : 00  |

# Summary Table of the System Resource Registers<continue> (continued)

| Address | Name | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access |
|---------|------|-------|-------|-------|-------|-------|-------|-------|-------|--------|
|---------|------|-------|-------|-------|-------|-------|-------|-------|-------|--------|

## Legend

# Access is bit specific. Refer to the [Register Reference chapter on page 177](#) for additional information.

R Read register or bit(s).

W Write register or bit(s).

Blue fields denotes "These registers are available only for devices CY8C24093/293/393/693".



# 15. Digital Clocks



This chapter discusses the Digital Clocks and their associated registers. It serves as an overview of the clocking options available in the PSoC devices. For detailed information on specific oscillators, see the individual oscillator chapters in the section called [PSoC Core on page 27](#). For a complete table of the digital clock registers, refer to the [System Resources Register Summary on page 98](#). For a quick reference of all PSoC registers in address order, refer to the [Register Reference chapter on page 177](#).

## 15.1 Architectural Description

The PSoC M8C core has a large number of clock sources that increase the flexibility of the PSoC device, as listed in [Table 15-1](#) and illustrated in [Figure 15-1](#).

Table 15-1. System Clocking Signals and Definitions

| Signal | Definition   |
|--------|--|
| SYSCLK | Either the direct output of the Internal Main Oscillator or the direct input of the EXTCLK pin while in external clocking mode.  |
| CPUCLK | SYSCLK is divided down to one of eight possible frequencies to create CPUCLK, which determines the speed of the M8C. See the <a href="#">OSC_CR0 Register on page 108</a> .  |
| CLK32K | The Internal Low-speed Oscillators output. See the <a href="#">OSC_CR0 Register on page 108</a> .  |
| CLKIMO | The internally generated clock from the IMO. By default, this clock drives SYSCLK; however, an external clock may be used by enabling EXTCLK mode. The IMO can be set to various frequencies; the default is 12 MHz. |
| SLEEP  | One of four sleep intervals may be selected from 1.95 ms to 1 second. See the <a href="#">OSC_CR0 Register on page 108</a> .   |

### 15.1.1 Internal Main Oscillator

The Internal Main Oscillator (IMO) is the foundation upon which almost all other clock sources in the PSoC device are based. The default mode of the IMO creates a 12 MHz reference clock that is used by many other circuits in the device. The PSoC device has an option to replace the IMO with an externally supplied clock that becomes the base for all of the clocks the IMO normally serves. The internal base clock net is called SYSCLK and is driven by either the IMO or an external clock (EXTCLK).

Whether the external clock or the internal main oscillator is selected, all device functions are clocked from a derivative of SYSCLK or are resynchronized to SYSCLK. All external asynchronous signals and the internal low-speed oscillator are resynchronized to SYSCLK for use in the digital blocks.

The IMO frequency can be adjusted to other frequencies besides 12 MHz. See the [Architectural Description on page 67](#) for more information.


The IMO is discussed in detail in the [Internal Main Oscillator \(IMO\) chapter on page 67](#).

### 15.1.2 Internal Low-speed Oscillator

The Internal Low-speed Oscillator (ILO) is available as a general clock, but is also the clock source for the sleep and watchdog timers. The ILO can be disabled in deep sleep mode, or in other sleep modes when the ECO is enabled.

The ILO is discussed in detail in the [Internal Low-speed Oscillator \(ILO\) chapter on page 71](#).

Figure 15-1. Overview of PSoC Clock Sources

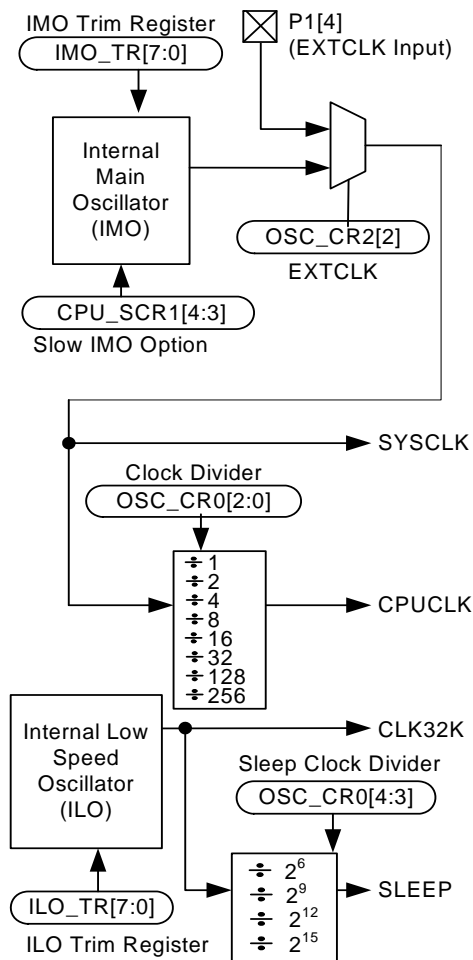

that the external clock is glitch free. See the device data-sheet for the clock specifications.

### 15.1.3.1 Switch Operation

Switching between the IMO and the external clock is done in firmware at any time and is transparent to the user.

Switch timing depends upon whether the CPU clock divider is set for divide by 1, or divide by 2 or greater. If the CPU clock divider is set for divide by 2 or greater, as shown in [Figure 15-2](#), the setting of the EXTCLKEN bit occurs shortly after the rising edge of SYSCLK. The SYSCLK output is then disabled after the next falling edge of SYSCLK, but before the next rising edge. This ensures a glitch free transition and provides a full cycle of setup time from SYSCLK to output disable. After the current clock selection is disabled, the enable of the newly selected clock is double synchronized to that clock. After synchronization, on the subsequent negative edge, SYSCLK is enabled to output the newly selected clock.

In the 12 MHz case, as shown in [Figure 15-3](#), the assertion of IOW\_ and thus the setting of the EXTCLKEN bit occurs on the falling edge of SYSCLK. Because SYSCLK is already low, the output is immediately disabled. Therefore, the setup time from SYSCLK to disable is one-half SYSCLK.

## 15.1.3 External Clock

In addition to the IMO clock source, an externally supplied clock may be selected as the device master clock (see [Figure 15-1](#)).

Pin P1[4] is the input pin for the external clock. If P1[4] is selected as the external clock source, the drive mode of the pin must be set to High-Z (not High-Z Analog).

An external clock with a frequency between 1 MHz and 24 MHz can be supplied. The reset state of the EXTCLKEN bit is '0'. With this setting, the device always boots up under the control of the IMO. The system cannot be started from a reset with the external clock.

When the EXTCLKEN bit is set, the external clock becomes the source for the internal clock tree, SYSCLK, which drives most PSoC device clocking functions. All external and internal signals, including the ILO or ECO low frequency clock, are synchronized to this clock source. Note that there is no glitch protection in the device for an external clock. Ensure



Figure 15-2. Switch from IMO to the External Clock with a CPU Clock Divider of Two or Greater


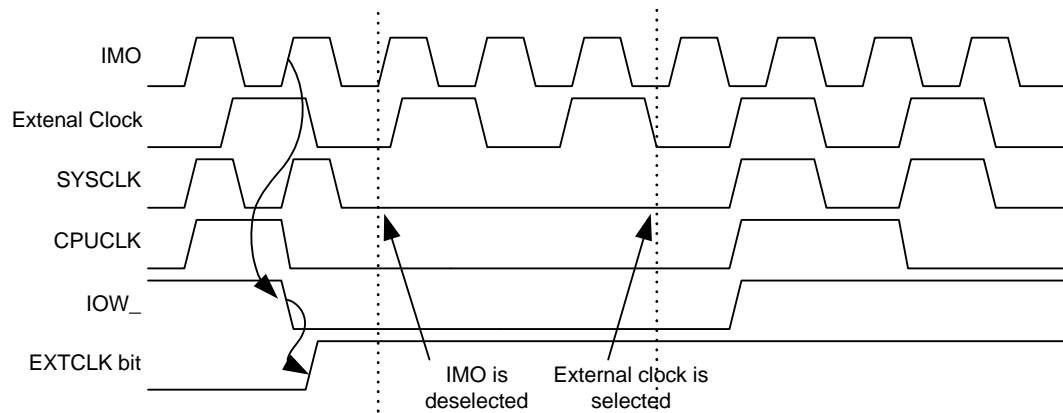


Figure 15-3. Switch from IMO to External Clock with the CPU Running with a CPU Clock Divider of One

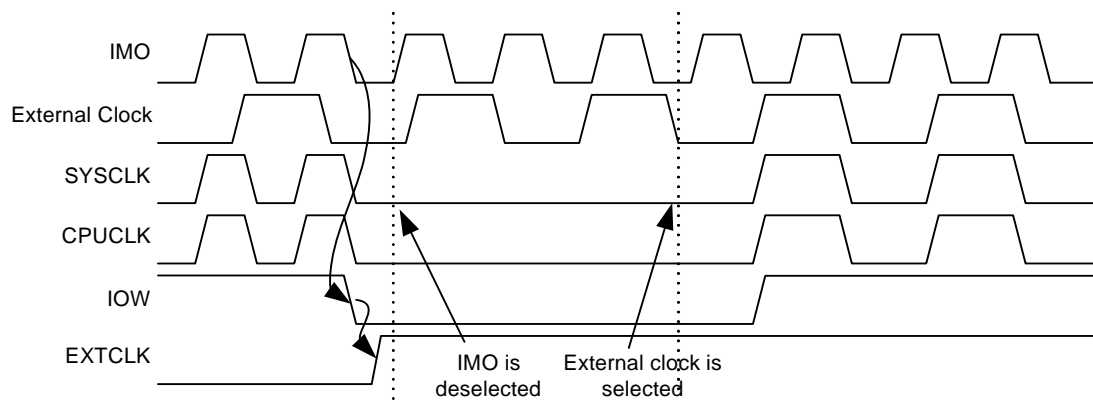

## 15.2 Register Definitions

The following registers are associated with the Digital Clocks and are listed in address order. Each register description has an associated register table showing the bit structure for that register. The bits in the tables that are grayed out throughout this manual are reserved bits and are not detailed in the register descriptions that follow. Always write reserved bits with a value of '0'. For a complete table of digital clock registers, refer to the [“System Resources Register Summary” on page 98](#).

### 15.2.1 USB\_MISC\_CR Register

| Address | Name                        | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2     | Bit 1  | Bit 0      | Access |
|---------|-----------------------------|-------|-------|-------|-------|-------|-----------|--------|------------|--------|
| 1, BDh  | <a href="#">USB_MISC_CR</a> |       |       |       |       |       | USB_SE_EN | USB_ON | USB_CLK_ON | RW : 0 |

The USB Miscellaneous Control Register controls the clocks to the USB block, to make the IMO work with better accuracy for the USB part and to disable the single-ended input of the USBIO in the case of a non-USB part.

**Bit 2: USB\_SE\_EN.** The single-ended outputs of USBIO is enabled or disabled based upon this bit setting. Set this bit to '1' when using this part as a USB part for USB transactions to occur. Set this bit to '0' to disable single-ended outputs of USBIO. The DPO and DMO are held at logic high state and RSE0 is held at a low state.

**Note** Bit [1:0] of the USBIO\_CR1 register is also affected depending on this register setting. When this bit is '0' (default), regardless of the DP and DM state, the DPO and DMO bits of USBIO\_CR1 are '11b'.

**Bit 1: USB\_ON.** This bit is used by the IMO DAC block to either work with better DNL consuming higher power, or with sacrificed DNL consuming lower power. Set this bit to '1' when the part is used as a USB part. A '0' runs the IMO with sacrificed DNL by consuming less power. A '1' runs the IMO with better DNL by consuming more power.

**Bit 0: USB\_CLK\_ON.** This bit either enables or disables the clocks to the USB block. It is used to save power in cases when the device need not respond to USB traffic. Set this bit to '1' when the device is used as a USB part.

When this bit is a '0', all clocks to the USB block are driven. The device does not respond to USB traffic and none of the USB registers, except IMO\_TR, IMO\_TR1 and USBIO\_CR1, listed in the [Register Definitions on page 161](#) are writable.

When this bit is a '1', clocks are not blocked to the USB block. The device responds to USB traffic depending on the other register settings mentioned under [Register Definitions in the Full-Speed USB \(CY8C24193/493\) chapter on page 155](#).

For additional information, refer to the [USB\\_MISC\\_CR on page 249](#).

### 15.2.2 OUT\_P0 Register

| Address | Name                   | Bit 7 | Bit 6  | Bit 5 | Bit 4  | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|------------------------|-------|--------|-------|--------|-------|-------|-------|-------|---------|
| 1, D1h  | <a href="#">OUT_P0</a> | P0P7D | P0P7EN | P0P4D | P0P4EN |       |       |       |       | RW : 00 |

This register enables specific internal signals to be output to Port 0 pins. The GPIO drive modes must be specified to support the desired output mode (registers PRT0DM1 and PRT0DM0). If a pin is enabled for output by a bit in this register, the corresponding signal has priority over any other internal function that may be configured to output to that pin.

**Bit 7: P0P7D.** '0' selects main system clock (SYSCLK).  
'1' Reserved

**Bit 6: P0P7EN.** This bit enables pin P0[7] for output of the signal selected by P0P7D. '0' is no internal signal output to P0[7]. '1' outputs the signal selected by P0P7D onto P0[7].

**Bit 5: P0P4D.** '0' selects Timer Output (TIMEROUT). '1' selects CLK32.

**Note** During sleep mode, these outputs will not be passed through to P0[4].

**Bit 4: P0P4EN.** This bit enables pin P0[4] for output of the signal selected by P0P4D. '0' is no internal signal output to P0[4]. '1' outputs the signal selected by P0P4D onto P0[4].

### 15.2.3 OUT\_P1 Register

| Address | Name   | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|--------|-------|-------|-------|-------|-------|-------|-------|-------|---------|
| 1,DDh   | OUT_P1 | P16D  | P16EN | P14D  | P14EN | P12D  | P12EN | P10D  | P10EN | RW : 00 |

The Output Override to Port 1 Register (OUT\_P1) enables specific internal signals to output to Port 1 pins. If any other function, such as I2C, is enabled for output on these pins, that function has higher priority than the OUT\_P1 signals.

**Bit 7: P16D.** Bit selects the data output to P1[6] when P16EN is high. In CY8C24x93 Timer Output and CLK32 are available on P0[4] as well, but outputs on P0[4] will not be passed through during sleep modes. Refer to the OUT\_P0 register for more details.

0 - Select Timer output (TIMEROUT)

1 - Select CLK32

**Bit 6: P16EN.** This bit enables pin P1[6] for signal output selected by the P16D bit.

0 - No internal signal output to P1[6]

1 - Output the signal selected by P16D to P1[6]

**Bit 5: P14D.** This bit selects the data output to P1[4] when P14EN is high and P14DB is low.

**Bit 4: P14EN.** This bit enables pin P1[4] for output of the signal selected by the P14D bit.

**Bit 3: P12D.** This bit selects data output to P1[2] when P12EN is high. Refer OUT\_P0 register for more details.

**Bit 2: P12EN.** This bit enables pin P1[2] for output of the signal selected by the P12D bit.

**Bit 1: P10D.** This bit selects data output to P1[0] when P10EN is high.

**Bit 0: P10EN.** Bit enables pin P1[0] for output of the signal selected by the P10D bit.

0 - No internal signal output to P1[0]

1 - Output the signal selected by P10D to P1[0]

For additional information, refer to the [OUT\\_P1](#) on page 255.

## 15.2.4 OSC\_CR0 Register

| Address | Name    | Bit 7 | Bit 6        | Bit 5   | Bit 4      | Bit 3 | Bit 2          | Bit 1 | Bit 0 | Access  |
|---------|---------|-------|--------------|---------|------------|-------|----------------|-------|-------|---------|
| 1,E0h   | OSC_CR0 | X32ON | Disable Buzz | No Buzz | Sleep[1:0] |       | CPU Speed[2:0] |       |       | RW : 01 |

The Oscillator Control Register 0 (OSC\_CR0) configures various features of internal clock sources and clock nets.

**Bit 7: X32ON.** This bit enables the 32-kHz external crystal oscillator (ECO) when set high. See the [Application Overview on page 74](#) for the proper sequence to enable the ECO.

**Bit 6: Disable Buzz.** Setting this bit high causes the bandgap and POR/LVD systems to remain powered off continuously during sleep. In this case, there is no periodic “buzz” (brief wakeup) of these functions during sleep. This bit has no effect when the No Buzz bit is set high.

**Bit 5: No Buzz.** Normally, when the SLEEP bit is set in the CPU\_SCR register, all PSoC device systems are powered down, including the bandgap reference. However, to facilitate the detection of POR and LVD events at a rate higher than the sleep interval, the bandgap circuit is powered up periodically (for about 60  $\mu$ s) at the Sleep System Duty Cycle, which is independent of the sleep interval and typically higher. When the No Buzz bit is set, the Sleep System Duty Cycle value is overwritten and the bandgap circuit is forced to be on during sleep. This results in faster response to an LVD or POR event (continuous detection as opposed to periodic), at the expense of higher average sleep current.

**Bits 4 and 3: Sleep[1:0].** The available sleep interval selections are shown in the following table. Sleep intervals are approximate based upon the accuracy of the internal low-speed oscillator.

| Sleep Interval<br>OSC_CR[4:3] | Sleep<br>Timer<br>Clocks | Sleep<br>Period<br>(32-kHz ILO) | Sleep<br>Period<br>(1-kHz ILO) | Watchdog<br>Period<br>(Nominal) |
|-------------------------------|--------------------------|---------------------------------|--------------------------------|---------------------------------|
| 00b (Default)                 | 64                       | 1.95 ms                         | 64 ms                          | 6 ms                            |
| 01b                           | 512                      | 15.6 ms                         | 512 ms                         | 47 ms                           |
| 10b                           | 4096                     | 125 ms                          | 4 s                            | 375 ms                          |
| 11b                           | 32,768                   | 1 s                             | 32 s                           | 3 s                             |

**Bits 2 to 0: CPU Speed[2:0].** The PSoC M8C operates over a range of CPU clock speeds, allowing you to tailor the M8C’s performance and power requirements to the application.

The reset value for the CPU speed bits is 010b. Therefore, the default CPU speed is one-half of the clock source. The internal main oscillator is the default clock source for the CPU speed circuit; therefore, the default CPU speed is 6.0 MHz. See [External Clock on page 104](#) for more information on the supported frequencies for externally supplied clocks.

The CPU frequency is changed with a write to the OSC\_CR0 register. There are eight frequencies generated from a power-of-two divide circuit that is selected by a 3-bit code. At any given time, the CPU 8-to-1 clock mux is selecting one of the available frequencies, which is resynchronized to the 24-MHz master clock at the output. The IMO frequency is also selectable, as discussed in [Architectural Description on page 67](#). This offers an option to lower both system and CPU clock speed to save power. The selections are shown in the following table (reset state is 010b).

| Bits | 6 MHz<br>Internal Main<br>Oscillator | 12 MHz<br>Internal Main<br>Oscillator | 24 MHz<br>Internal Main<br>Oscillator | External Clock |
|------|--------------------------------------|---------------------------------------|---------------------------------------|----------------|
| 000b | 750 kHz                              | 1.5 MHz                               | 3 MHz                                 | EXTCLK/ 8      |
| 001b | 1.5 MHz                              | 3.0 MHz                               | 6 MHz                                 | EXTCLK/ 4      |
| 010b | 3 MHz                                | 6.0 MHz                               | 12 MHz                                | EXTCLK/ 2      |
| 011b | 6 MHz                                | 12.0 MHz                              | 24 MHz                                | EXTCLK/ 1      |
| 100b | 375 kHz                              | 750 Hz                                | 1.5 MHz                               | EXTCLK/ 16     |
| 101b | 187.5 kHz                            | 375 kHz                               | 750 kHz                               | EXTCLK/ 32     |
| 110b | 46.8 kHz                             | 93.7 kHz                              | 187.5 kHz                             | EXTCLK/ 128    |
| 111b | 23.4 kHz                             | 46.8 kHz                              | 93.7 kHz                              | EXTCLK/ 256    |

An automatic protection mechanism is available for systems that need to run at peak CPU clock speed but cannot guarantee a high enough supply voltage for that clock speed. See the LVDTBEN bit in the [VLT\\_CMP Register on page 136](#) for more information.

**Note** During USB operation, the CPU speed can be set to any setting. Be aware that USB throughput decreases with a decrease in CPU speed. For maximum throughput, the CPU clock should be made equal to the system clock. The system clock must be 24 MHz for USB operation.

For additional information, refer to the [OSC\\_CR0 on page 258](#).

## 15.2.5 OSC\_CR2 Register

| Address | Name    | Bit 7 | Bit 6 | Bit 5 | Bit 4    | Bit 3 | Bit 2    | Bit 1 | Bit 0 | Access  |
|---------|---------|-------|-------|-------|----------|-------|----------|-------|-------|---------|
| 1,E2h   | OSC_CR2 |       |       |       | CLK48MEN |       | EXTCLKEN | RSVD  |       | RW : 00 |

The Oscillator Control Register 2 (OSC\_CR2) configures various features of internal clock sources and clock nets.

### Bit 4: CLK48MEN

This is the 48-MHz clock enable bit.

'0' disables the bit and '1' enables the bit. This register setting applies only when the device is **not** in OCD mode. When in OCD mode, the 48-MHz clock is always active.

### Bit 2: EXTCLKEN.

When the EXTCLKEN bit is set, the external clock becomes the source for the internal clock tree, SYSCLK, which drives

most device clocking functions. All external and internal signals, including the low-speed oscillator, are synchronized to this clock source. The external clock input operates from the clock supplied at P1[4] or P1[1] based on the TSYNC bit in CPU\_SCR1. When using this input, the pin drive mode must be set to High-Z (not High-Z Analog), such as drive mode 11b with the PRT1DR bit 4 set high.

### Bit 1: RSVD

This is a reserved bit. It should always be 0..

For additional information, refer to the [OSC\\_CR2 on page 260](#).



# 16. I<sup>2</sup>C Slave



This chapter explains the I<sup>2</sup>C Slave block and its associated registers. The I<sup>2</sup>C communications block is a serial processor designed to implement a complete I<sup>2</sup>C slave. For a complete table of the I<sup>2</sup>C registers, refer to the [Summary Table of the System Resource Registers on page 98](#). For a quick reference of all PSoC registers in address order, refer to the [Register Reference chapter on page 177](#).


## 16.1 Architectural Description

The I<sup>2</sup>C slave enhanced communications block is a serial-to-parallel processor, designed to interface the PSoC device to a two-wire I<sup>2</sup>C serial communications bus. To eliminate the need for excessive M8C microcontroller intervention and

overhead, the block provides I<sup>2</sup>C-specific support for status detection and generation of framing bits.

This block has a low-power bus monitoring mode.

Figure 16-1. I<sup>2</sup>C Slave Block Diagram

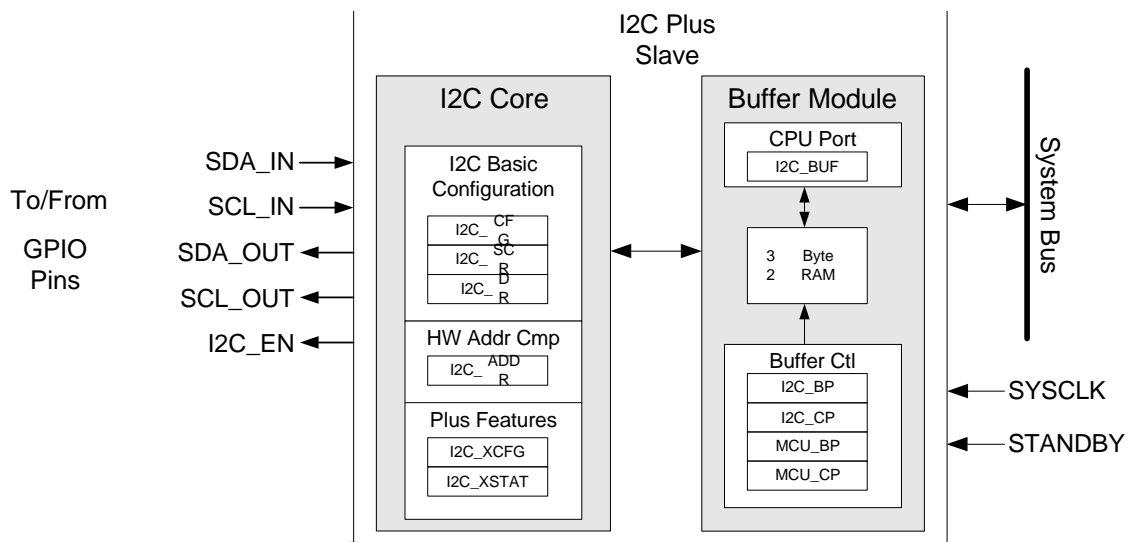

**Note:** The buffer module is only present in devices CY8C24093/293/393/693.

The I<sup>2</sup>C block controls the data (SDA) and the clock (SCL) to the external I<sup>2</sup>C interface, through direct connections to two dedicated GPIO pins. When I<sup>2</sup>C is enabled, these GPIO pins are not available for general-purpose use. The PSoC device firmware interacts with the block through I/O (input/ output) register reads and writes, and firmware synchronization will be implemented through polling and/or interrupts.

PSoC I<sup>2</sup>C features include:

- Slave, Transmitter/Receiver operation
- Byte processing for low CPU overhead
- Interrupt or polling CPU interface
- Support for clock rates up to 400 kHz
- Support for 7-bit hardware address compare
- Support for 7- or 10-bit addressing (through firmware support)

Hardware functionality provides basic I<sup>2</sup>C control, data, status, and address detection primitives. A combination of hardware support and firmware command sequencing provides a high degree of flexibility for implementing the required I<sup>2</sup>C functionality.

Hardware limitations in regards to I<sup>2</sup>C: Because receive and transmitted data are not buffered, there is no support for automatic receive acknowledge for data bytes. The M8C microcontroller must intervene at the boundary of each byte and either send a byte or ACK received bytes.

The I<sup>2</sup>C block is designed to support a set of primitive operations and detect a set of status conditions specific to the I<sup>2</sup>C protocol. These primitive operations and conditions are manipulated and combined at the firmware level to support the required data transfer modes. The CPU will set up control options and issue commands to the unit through IO

writes and obtain status through IO reads and interrupts. The block operates as a slave. In Slave mode, the unit is always listening for a Start condition, or sending or receiving data.


The block operates as a slave. In Slave mode, the unit is always listening for a Start condition, or sending or receiving data.

### 16.1.1 Basic I<sup>2</sup>C Data Transfer

Figure 16-2 shows the basic form of data transfers on the I<sup>2</sup>C bus with a 7-bit address format. For a detailed description, see the Philips Semiconductors (now NXP Semiconductors) I<sup>2</sup>C-Bus Specification, version 2.1.

A Start condition (generated by the master) is followed by a data byte, consisting of a 7-bit slave address (there is also a 10-bit address mode) and a read/write (RW) bit. The RW bit sets the direction of data transfer. The addressed slave is required to acknowledge (ACK) the bus by pulling the data line low during the ninth bit time. If the ACK is received, the transfer proceeds and the master transmits or receives an indeterminate number of bytes, depending upon the RW direction. If, for any reason, the slave does not respond with an ACK, a Stop condition is generated by the master to terminate the transfer or a Restart condition is generated for a retry attempt.

Figure 16-2. Basic I<sup>2</sup>C Data Transfer with 7-Bit Address Format

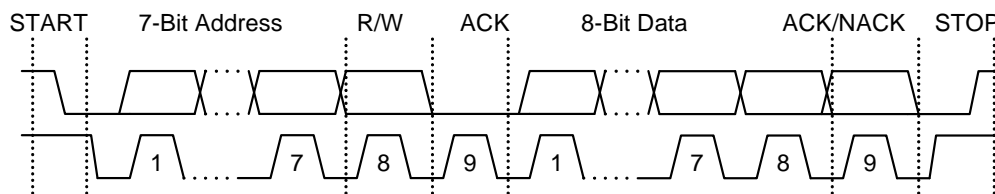



## 16.2 Application Overview


### 16.2.1 Slave Operation

When Slave mode is enabled, it is continually listening on the bus for a Start condition. When detected, the transmitted address/RW byte is received and read from the I<sup>2</sup>C block by firmware. At the point where eight bits of the address/RW byte are received, a byte complete interrupt is generated. On the following low of the clock, the bus is stalled by holding the SCL line low until the PSoC device has had a chance to read the address byte and compare it to its own address. It Issues an ACK or NACK command based upon that comparison.

If there is an address match, the RW bit determines how the PSoC device sequences the data transfer in Slave mode, as shown in the two branches of Figure 16-3. I<sup>2</sup>C handshaking methodology (slave holds the SCL line low to “stall” the bus) is used, as necessary, to give the PSoC device time to respond to the events and conditions on the bus. Figure 16-3 is a graphical representation of a typical data transfer from the slave perspective.

**Note:** This feature is available on for devices CY8C24093/293/393/693.

Figure 16-3. Slave Operation

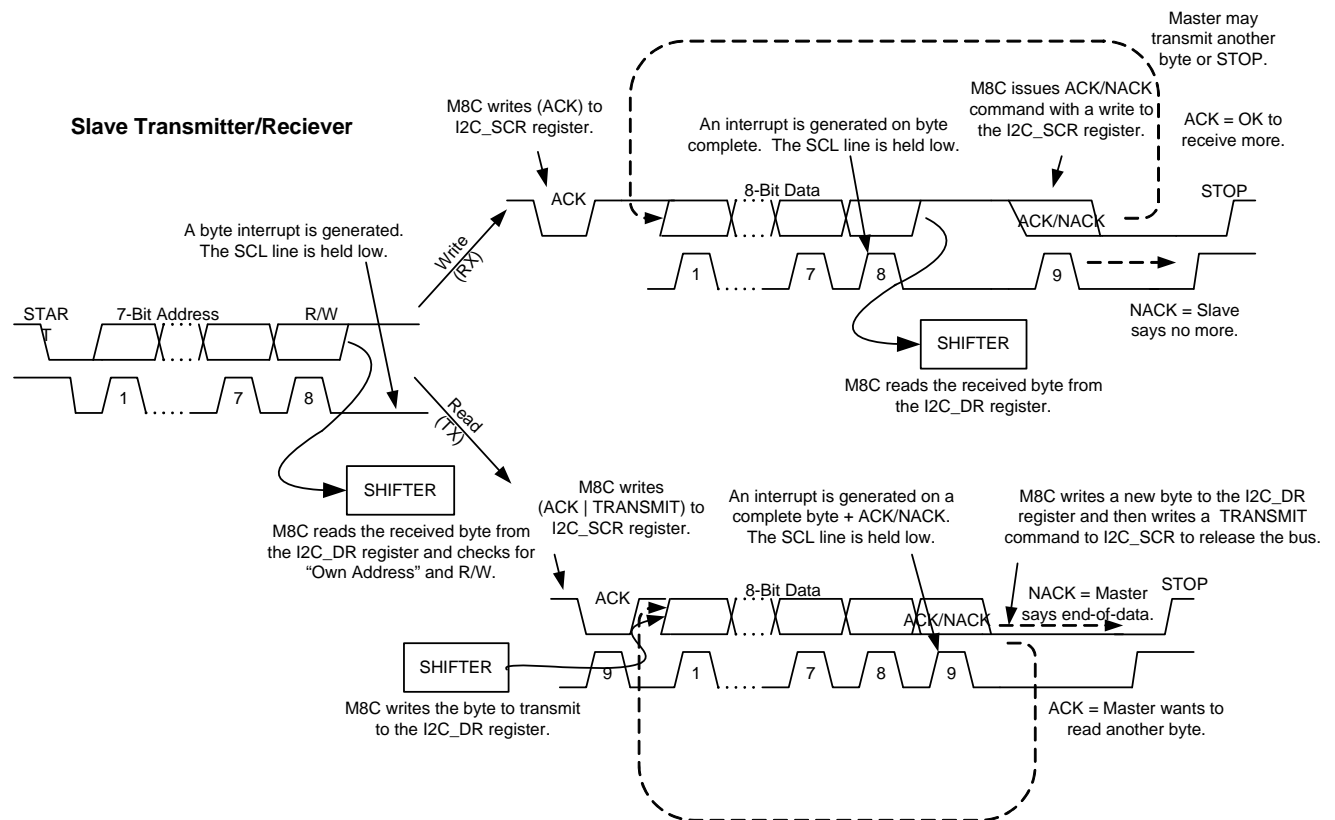

## 16.3 Register Definitions

The registers shown here are associated with I<sup>2</sup>C slave and are listed in address order. Each register description has an associated register table showing the bit structure for that register. The grayed out bits in the tables are reserved bits and are not detailed in the register descriptions that follow. Always write reserved bits with a value of '0'. For a complete table of I<sup>2</sup>C registers, refer to the [“Summary Table of the System Resource Registers” on page 98](#).

### 16.3.1 I2C\_XCFG Register <sup>1</sup>

| Address | Name     | Bit 7      | Bit 6 | Bit 5           | Bit 4      | Bit 3     | Bit 2 | Bit 1       | Bit 0      | Access  |
|---------|----------|------------|-------|-----------------|------------|-----------|-------|-------------|------------|---------|
| 0,C8h   | I2C_XCFG | CSR_CLK_EN |       | FORCE_NACK_MODE | FORCE_NACK | No BC Int |       | Buffer Mode | HW Addr EN | RW : 80 |

The Enable bit (bit 0) of the I2C\_CFG (0,D6h) register should be set to 1 for the I<sup>2</sup>C enhanced features to work.

| HW Addr EN | Buffer Mode | No BC Int | Byte Complete Interrupt                           | Clock (SCL) Stalling             |
|------------|-------------|-----------|---|----------------------------------|
| On         | On          | On        | No interrupt.                                     | No stalling.                     |
|            |             | Off       | Interrupt generated upon every byte. <sup>a</sup> |                                  |
| On         | Off         | On        | No Interrupt                                      | SCL stalls at each byte.         |
|            |             | Off       | Interrupt generated upon every byte.              |                                  |
| Off        | On          | On        | No Interrupt                                      | SCL stalls only at address byte. |
|            |             | Off       | Interrupt generated upon every byte. <sup>b</sup> |                                  |
| Off        | Off         | On        | No Interrupt                                      | SCL stalls at every byte.        |
|            |             | Off       | Interrupt generated upon every byte.              |                                  |

a. Non-address BC interrupts are only posted if the BC bit is cleared in I2C\_SCR. Putting the M8C to sleep without clearing the BC bit in I2C\_SCR will mask I<sup>2</sup>C interrupts. This will stall the I<sup>2</sup>C bus.

b. Non-address BC interrupts are only posted if the BC bit is cleared in I2C\_SCR

**Bit 7. CSR\_CLK\_EN.** This bit is used for gating system clock for the blocks core logic interface. Clock is made available to the core logic only when this bit is set to 1. If not active, the blocks core logic does not receive the system clock. The CSR\_CLK\_EN bit should be set to 1 in all modes for the block to function and this bit should be set before enabling or configuring the block register associated with I2C block.

**Bit 6:** Reserved bit

**Bit 5: FORCE\_NACK\_MODE.** This bit is used to select the FORCE\_NACK mode. When '1', FORCE\_NACK mode is engaged at the next possible byte boundary. When '0', the FORCE\_NACK mode is engaged at the next STOP condition on the I2C bus. During a read transaction FORCE\_NACK mode is engaged after the next stop condition if FORCE\_NACK\_MODE is 0 or when the master provides a NACK if FORCE\_NACK\_MODE is 1.

**Note** FORCE\_NACK\_MODE should be set before setting FORCE\_NACK bit.

**Bit4: FORCE\_NACK.** This bit must be set the CPU to engage the FORCE\_NACK mode. This bit will be cleared on assertion of PD.

**Bit 3: No BC Int.** In compatibility mode, every received or transmitted byte generates a byte complete interrupt. This is also true in buffered mode regardless of whether the bus is stalled or not. In compatibility mode this bit should always be set.

**Note** When this bit is set to a '1', A BC interrupt is never generated. When the bit is set, it is possible to implement packet transfers without CPU intervention by enabling an interrupt upon the Stop detect.

**Bit 1: Buffer Mode.** This bit determines the operation mode of the enhanced buffer module. The following table describes the available modes.

| Buffer Mode | Name       | Description   |
|-------------|------------|---|
| 0           | Compatible | There is no buffering in the default compatibility mode. The I <sup>2</sup> C bus is stalled upon every received or transmitted byte, including address bytes. The CPU is required to process the interrupt and write or read the data and status as required to continue the operation.  |
| 1           | EZI2C      | The I <sup>2</sup> C slave appears as a 32-byte RAM interface to an external master. A specific protocol must be followed, in which the master controls the RAM pointer for both read and write operations. The I <sup>2</sup> C bus is never stalled. Receive ACKs are automatically generated. The CPU is responsible for putting valid data into the RAM for external reads, and for reading received data. I2C bus will be stalled during address phase if HW_ADDR_EN bit is not set. |

**Bit 0: HW Addr En.** When this bit is set to a '1', hardware address compare is enabled. Upon a compare, the address is automatically ACKed, and upon a mismatch, the address is automatically NAKed and the hardware reverts to an idle state waiting for the next Start detection. You must configure the compare address in the I2C\_ADDR register. When this

1. Only bit 0 is available for devices CY8C24193/493.

bit is a '0', bit 3 of the I2C\_SCR register is set and the bus stalls, and the received address is available in the I2C\_DR register to enable the CPU to do a firmware address com-

pare. This bit does not have any effect during compatibility mode. To wakeup the device from sleep this bit needs to be set.

### 16.3.2 I2C\_XSTAT Register <sup>2</sup>

| Address | Name      | Bit 7         | Bit 6            | Bit 5            | Bit 4 | Bit 3 | Bit 2         | Bit 1 | Bit 0      | Access |
|---------|-----------|---------------|------------------|------------------|-------|-------|---------------|-------|------------|--------|
| 0,C9h   | I2C_XSTAT | EZ_SLAVE_BUSY | EZ_I2C_WR_STATUS | EZ_I2C_RD_STATUS |       |       | READY_TO_NACK | Dir   | Slave Busy | R : 0  |

The I<sup>2</sup>C Extended Status Register (I2C\_XSTAT) reads enhanced feature status. All bits are read only.

**Bit 7: EZ\_SLAVE\_BUSY.** This bit is set upon a address match and is reset upon a start, repeated start or a stop signal. **Note** This is applicable only in buffer mode.

**Bit 6: EZ\_I2C\_WR\_STATUS.** This bit will be SET if current I2C transaction by host is a write operation. On reset the value of this bit will be 1. This bit gets cleared when CPU writes a '0'. This bit is valid only after the address phase is completed. **Note** This is applicable only in buffer mode.

**Bit 5: EZ\_I2C\_RD\_STATUS.** This bit will be SET if current I2C transaction by host is a read operation. On reset the value of this bit will be 0. This bit gets cleared when CPU writes a '0'. This bit is valid only after the address phase is completed. **Note** This is applicable only in buffer mode.

**Bit 2: READY\_TO\_NACK.** This status bit indicates that the FORCE\_NACK mode has been engaged by the I2C slave. If

FORCE\_NACK mode is set during Bus Idle state or before an address match event, this bit will be set immediately. Other wise the behavior is defined by FORCE\_NACK mode bit. When FORCE\_NACK mode is disabled, this bit is reset upon the first start condition following this. This bit will be cleared on assertion of PD. If READY\_TO\_NACK is set, none of the status bits will be set and all status bits will be cleared.

**Bit 1: Dir.** This bit indicates the direction of the current transfer. A '1' indicates a master read, and a '0' indicates a master write. This bit will be cleared upon the next start detected on the bus. **Note** This bit only applicable in buffer mode.

**Bit 0: Slave Busy.** This bit is set upon a address match and is reset upon the following stop signal. **Note** This Bit is set only during buffer mode.

### 16.3.3 I2C\_ADDR Register <sup>3</sup>

| Address | Name     | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|----------|-------|-------|-------|-------|-------|-------|-------|-------|---------|
| 0,CAh   | I2C_ADDR |       |       |       |       |       |       |       |       | RW : 00 |

The I<sup>2</sup>C Slave Address Register (I2C\_ADDR) holds the slave's 7-bit address. All bits are RW.

**Note** When hardware address compare mode is not enabled in the I2C\_XCFG register, this register is not in use.

**Bits 6 to 0: Slave Address[6:0].** These 7 bits hold the slave's own device address.

For additional information, refer to the [I2C\\_ADDR register on page 209](#).

2. This register is available only for devices CY8C24093/293/393/693.

3. This register is available only for devices CY8C24193/493/593.

### 16.3.4 I2C\_ADDR Register <sup>4</sup>

| Address | Name     | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|----------|-------|-------|-------|-------|-------|-------|-------|-------|---------|
| 0,CAh   | I2C_ADDR |       |       |       |       |       |       |       |       | RW : 00 |

The I<sup>2</sup>C Slave Address Register (I2C\_ADDR) holds the slave's 7-bit address. All bits are RW.

**Bits 6 to 0: Slave Address[6:0].** These 7 bits hold the slave's own device address.

**Note** When hardware address compare mode is not enabled in the I2C\_XCFG register, this register is not in use.

### 16.3.5 I2C\_BP\_EZ\_CFG Register <sup>5</sup>

| Address | Name          | Bit 7    | Bit 6    | Bit 5          | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access |
|---------|---------------|----------|----------|----------------|-------|-------|-------|-------|-------|--------|
| 0,CBh   | I2C_BP_EZ_CFG | EZ_RD_IE | EZ_WR_IE | CLK_STRETCH_EN |       |       |       |       |       | R : 00 |

The I<sup>2</sup>C Base Address Pointer and EZI2C Configuration Register (I2C\_BP\_EZ\_CFG) contains the base address value of the RAM data buffer.

mode is the base address for subsequent reads and writes and it is transferred directly into this register. If the desired transaction is a master write to the slave, subsequent bytes are written to the RAM buffer starting with this address and auto incremented (see [I2C\\_CP Register](#)).

**Bit 7: EZ\_RD\_IE.** Interrupt enable for EZ\_RD\_STATUS

**Bit 6: EZ\_WR\_IE.** Interrupt enable for EZ\_WR\_STATUS

**Bit 5: CLK\_STRETCH\_EN.** This bit configures the clock stretch mode during sleep to wakeup transition.

When '1', the slave stretches the I2C clock during the sleep to wakeup transition and releases the clock after the device wakes up and CPU sets the ACK bit.

When '0', the slave NACKs any I2C transactions addressed to the device during the sleep to wakeup transition time.

In case of a read, a Start or Restart must be issued and the read location starts with this address and again subsequent read addresses are auto incremented as pointed to by the I2C\_CP register value. The value of this register is modified only at the beginning of every I<sup>2</sup>C write transaction. The I<sup>2</sup>C master must always supply a value for this register in the first byte of data after the slave's address in a given write transaction. If performing reads, the master need not set the value of this register. The current value of this register is also used directly for reads.

**Bits 4 to 0: I2C Base Pointer[4:0].** In the EZI2C protocol, the first data byte after the slave address transaction in write

4. This register is available only for devices CY8C24093/293/393/693.

5. This register is available only for devices CY8C24093/293/393/693.

### 16.3.6 I2C\_CP Register <sup>6</sup>

| Address | Name   | Bit 7 | Bit 6 | Bit 5 | Bit 4                    | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access |
|---------|--------|-------|-------|-------|--------------------------|-------|-------|-------|-------|--------|
| 0,CCh   | I2C_CP |       |       |       | I2C Current Pointer[4:0] |       |       |       |       | R : 00 |

The I<sup>2</sup>C Current Address Pointer Register (I2C\_CP) contains the current address value of the RAM data buffer.

**Note** When in compatibility mode, this register is not in use.

**Bits 4 to 0: I2C Current Pointer[4:0].** This register gets set at the same time and with the same value as the [I2C\\_BP\\_EZ\\_CFG Register](#). After each completed data byte

of the current I<sup>2</sup>C transaction, the value of this register is incremented by one. The value is saturated when it reaches 31.

The value of this register always determines the location that read or write data comes from or is written to. This register is set to the value contained in the [I2C\\_BP\\_EZ\\_CFG Register](#) on every start condition detected in the bus, followed by an address match event.

### 16.3.7 CPU\_BP Register <sup>7</sup>

| Address | Name   | Bit 7 | Bit 6 | Bit 5 | Bit 4                 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|--------|-------|-------|-------|-----------------------|-------|-------|-------|-------|---------|
| 0,CDh   | CPU_BP |       |       |       | CPU Base Pointer[4:0] |       |       |       |       | RW : 00 |

The CPU Base Address Pointer Register (CPU\_BP) contains the base address value of the RAM data buffer.

**Note** When in compatibility mode, this register is not in use.

**Bits 4 to 0: CPU Base Pointer[4:0].** This register value is completely controlled by I/O writes by the CPU. Firmware routines must set this register. As with the I2C\_BP, the value of this register sets the starting address for the data location being written or read. When this register is written, the cur-

rent address pointer, CPU\_CP, is also updated with the same value. CPU\_CP rolls over to 'h0 if CPU access beyond the buffer boundary of 'h1F.

The first read or write from/to the I2C\_BUF register start at this address. The location of the data in subsequent read or writes is determined by the CPU\_CP register value, which auto increments after each read or write. Firmware makes certain that the slave device always has valid data or the data is read before overwritten.

### 16.3.8 CPU\_CP Register <sup>8</sup>

| Address | Name   | Bit 7 | Bit 6 | Bit 5 | Bit 4                    | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access |
|---------|--------|-------|-------|-------|--------------------------|-------|-------|-------|-------|--------|
| 0,CEh   | CPU_CP |       |       |       | CPU Current Pointer[4:0] |       |       |       |       | R : 00 |

The CPU Current Address Pointer Register (CPU\_CP) contains the current address value of the RAM data buffer.

**Note** When in compatibility mode, this register is not in use.

**Bits 4 to 0: CPU Current Pointer[4:0].** This register is set at the same time and with the same value as the [CPU\\_BP Register](#). Whenever the [I2C\\_CFG Register](#) is written or read, the CPU\_CP increments automatically.

6. This register is available only for devices CY8C24093/293/393/693.

7. This register is available only for devices CY8C24093/293/393/693.

8. This register is available only for devices CY8C24093/293/393/693.

### 16.3.9 I2C\_BUF Register

| Address | Name    | Bit 7            | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|---------|------------------|-------|-------|-------|-------|-------|-------|-------|---------|
| 0,CFh   | I2C_BUF | Data Buffer[7:0] |       |       |       |       |       |       |       | RW : 00 |

The I<sup>2</sup>C Data Buffer Register (I2C\_BUF) is the CPU read/write interface to the data buffer. Whenever this register is read, the data at the location pointed to by the CPU current pointer (CPU\_CP) is returned. Similarly, whenever this register is written, the data is transferred to the buffer and written at the location pointed to by the CPU current pointer (CPU\_CP). Whenever this register is read, without initializing the RAM contents either through the I<sup>2</sup>C or CPU interface, no valid value is returned.

The M8C accesses the data buffer through this register interface (I2C\_BUF). Since the M8C issues an I/O read signal before an I/O write for some opcodes, the pointers (CPU\_CP) to the data buffer increment unnecessarily because of an extra I/O read before an I/O write. Hence, all the I/O reads that occur in FIRST phase are ignored. The I/O reads that occur only in EXEC phase are taken as actual I/O reads for this register.

So, only the following basic M8C register access instructions may be used for accessing this register:

```
MOV A, reg[expr]
MOV A, reg[X+expr]
MOV [expr], [expr]
MOV reg[expr], A
MOV reg[X+expr], A
MOV reg[expr], expr
MOV reg[X+expr], expr
```

**Note** When in compatibility mode, this register is not in use.

**Bits 7 to 0: Data Buffer[7:0].** The I<sup>2</sup>C Data Buffer Register (I2C\_BUF) is the CPU read/write interface to the data buffer. Whenever this register is read, the data at the location pointed to by the CPU current pointer (CPU\_CP) is returned. Similarly, whenever this register is written, the data is transferred to the buffer and written at the location pointed to by the CPU current pointer (CPU\_CP). Whenever this register is read, without initializing the RAM contents either through the I<sup>2</sup>C or CPU interface, no valid value is returned.

### 16.3.10 I2C\_CFG Register

| Address | Name    | Bit 7 | Bit 6   | Bit 5 | Bit 4   | Bit 3           | Bit 2 | Bit 1 | Bit 0  | Access  |
|---------|---------|-------|---------|-------|---------|-----------------|-------|-------|--------|---------|
| 0,D6h   | I2C_CFG |       | PSelect |       | Stop IE | Clock Rate[1:0] |       |       | Enable | RW : 00 |

The I<sup>2</sup>C Configuration Register (I2C\_CFG) is used to set the basic operating modes, baud rate, and selection of interrupts. The bits in this register control baud rate selection and optional interrupts. The values are typically set once for a given configuration. The bits in this register are all RW.

Table 16-1. I2C\_CFG Configuration Register

| Bit | Access | Description  | Mode  |
|-----|--------|--|-------|
| 6   | RW     | I2C Pin Select<br>0 = P1[7], P1[5]<br>1 = P1[1], P1[0]   | Slave |
| 4   | RW     | Stop IE<br>Stop interrupt enable.<br>0 = Disabled.<br>1 = Enabled. An interrupt is generated upon the detection of a Stop condition. | Slave |
| 3:2 | RW     | Clock Rate<br>00 = 100K Standard Mode<br>01 = 400K Fast Mode<br>10 = 50K Standard Mode<br>11 = Reserved                              | Slave |

**Bit 6: PSelect.** Pin Select. With the default value of zero, the I<sup>2</sup>C pins are P1[7] for clock and P1[5] for data. When this bit is set, the pins for I<sup>2</sup>C switch to P1[1] for clock and P1[0] for data. You cannot change this bit while the Enable bit is set. However, the PSelect bit may be set at the same time as the enable bits. The two sets of pins used on I<sup>2</sup>C are not equivalent. The default set, P1[7] and P1[5], are the preferred set. The alternate set, P1[1] and P1[0], are provided so that I<sup>2</sup>C may be used with 8-pin PSoC devices.

If In-System Serial Programming (ISSP) is used and the alternate I<sup>2</sup>C pin set is also used, you must consider the interaction between the PSoC Test Controller and the I<sup>2</sup>C bus. The interface requirements for ISSP must be reviewed to ensure that they are not violated.

Even if ISSP is not used, pins P1[1] and P1[0] respond differently than other I/O pins to a POR or XRES event. After an XRES event, both pins are pulled down to ground by going into the resistive zero drive mode before reaching the High-Z drive mode. After a POR event, P1[0] drives out a one, then goes to the resistive zero state for some time, and finally reaches the High-Z drive mode state. After POR, P1[1] goes into a resistive zero state for a while before going to the High-Z drive mode.

**Bit 4: Stop IE.** Stop Interrupt Enable. When this bit is set, a slave can interrupt upon Stop detection. The status bit associated with this interrupt is the Stop Status bit in the [I2C\\_SCR Register](#). When the Stop Status bit transitions from '0' to '1', the interrupt is generated. It is important to note that the Stop Status bit is not automatically cleared. Therefore, if it is already set, no new interrupts are generated until it is cleared by firmware.

**Bits 3 and 2: Clock Rate[1:0].** These bits offer a selection of three sampling and bit rates. All block clocking is based on the SYSCLK input, which is nominally 12 MHz or 6 MHz, or 24 MHz for CY8C24x93 (unless the PSoC device is in external clocking mode). The sampling rate and the baud rate are determined as follows:

- Sample Rate = SYSCLK/Prescale Factor
- Baud Rate = 1/(Sample Rate x Samples per Bit)

The nominal clocking values when using the internal 24 MHz, 12 MHz, or 6 MHz are shown for CY8C24x93.

Table 16-2. Nominal Clocking Values for CY8C24x93

| Clock Rate[1:0] | SLIMO[1:0] | I2C Mode      | SYSCLK Prescale Factor | Samples Per Bit | Internal Sampling Freq/<br>Period    | Master Baud Rate   | Start/Stop Hold Time<br>(8 Clocks) |
|-----------------|------------|---------------|------------------------|-----------------|--------------------------------------|--------------------|------------------------------------|
| 00b             | 00         | Standard      | /8                     | 16              | 1.5 MHz/<br>667 ns                   | 93.75 kHz          | 5.3 μs                             |
|                 | 01         |               | /4                     |                 |                                      |                    |                                    |
|                 | 10         |               | /16                    |                 |                                      |                    |                                    |
| 01b             | 00         | Standard      | /2                     | 16              | 6 MHz/<br>167 ns                     | 375 kHz            | 1.33 μs                            |
|                 | 01         |               | /1                     |                 |                                      |                    |                                    |
|                 | 10         |               | /4                     |                 |                                      |                    |                                    |
| 10b             | 00         | Standard      | /8                     | 32              | 1.5 MHz/<br>667 ns                   | 46.8 kHz           | 10.7 μs                            |
|                 | 01         |               | /4                     |                 |                                      |                    |                                    |
|                 | 10         |               | /16                    |                 |                                      |                    |                                    |
| 11b             | 00         | Reserved PSoC | /1                     | 16              | 12 MHz/<br>84 ns                     | 750 kHz            | 672 ns                             |
|                 | 01         |               | /1                     |                 |                                      |                    |                                    |
|                 | 10         |               | /1                     |                 | 6 MHz/<br>167 ns<br>24 MHz/<br>42 ns | 375 kHz<br>1.5 MHz | 1.33 μs<br>333 ns                  |

When clocking the input with a frequency other than 6-/12-MHz (for example, clocking the device with an external clock), the baud rates and sampling rates scale accordingly. Whether the block works in a Standard Mode or Fast Mode system depends upon the sample rate.



## I<sup>2</sup>C Slave

The sample rate must be sufficient to resolve bus events, such as Start and Stop conditions. See the Philips Semiconductors (now NXP Semiconductors) I<sup>2</sup>C-Bus Specification, version 2.1, for minimum start and stop hold times.

**Bit 0: Enable.** When the slave is enabled, the block generates an interrupt upon any Start condition and an address byte that it receives indicating the beginning of an I<sup>2</sup>C transfer. When operating as a slave, the block is clocked from an external master. Therefore, the block works at any frequency up to the maximum defined by the currently selected clock rate. The internal clock is only used in slave mode, to ensure that there is adequate setup time from data output to the next clock upon the release of a slave stall. When the Enable bit is '0', the block is held in reset and all status is cleared. Block enable is synchronized to the SYSCLK clock input (see [“Timing Diagrams” on page 123](#)). If the block is enabled when there is an I<sup>2</sup>C transaction already on the I<sup>2</sup>C bus, an erroneous start is detected if SCL is high and SDA is low. (SDA in this case is low because of a data/ack bit.) Thus, to avoid this erroneous start detection, enable the block only when the bus is idle (SCL and SDA are high when idle) or only when both SCL and SDA are low.

The other option is to change the drive modes of the I<sup>2</sup>C pins to be other than open drain mode and then enable the I<sup>2</sup>C block. After enabling the I<sup>2</sup>C block, wait for three I<sup>2</sup>C sample clocks, then configure the drive modes of the I<sup>2</sup>C pins to be in open drain mode.

Table 16-3. Enable Operation in I2C\_CFG

| Enable | Block Operation   |
|--------|---|
| No     | <p>Disabled</p> <p>The block is disconnected from the GPIO pins, P1[5] and P1[7]. (The pins may be used as general-purpose I/O.) When the slave is enabled, the GPIO pins are under control of the I<sup>2</sup>C hardware and are unavailable.</p> <p>All internal registers (except I2C_CFG) are held in reset.</p> |
| Yes    | <p>Slave Mode</p> <p>Any external Start condition causes the block to start receiving an address byte. Regardless of the current state, any Start resets the interface and initiates a Receive operation. Any Stop causes the block to revert to an idle state</p>  |

For additional information, refer to the [I2C\\_CFG register on page 221](#).



### 16.3.11 I2C\_SCR Register

| Address | Name    | Bit 7     | Bit 6 | Bit 5       | Bit 4 | Bit 3   | Bit 2    | Bit 1 | Bit 0         | Access |
|---------|---------|-----------|-------|-------------|-------|---------|----------|-------|---------------|--------|
| 0,D7h   | I2C_SCR | Bus Error |       | Stop Status | ACK   | Address | Transmit | LRB   | Byte Complete | # : 00 |

#### Legend

# Access is bit specific.

The I<sup>2</sup>C Status and Control Register (I2C\_SCR) is used by the slave to control the flow of data bytes and to keep track of the bus state during a transfer.

This register contains status bits to determine the state of the current I<sup>2</sup>C transfer, and control bits to determine the actions for the next byte transfer. At the end of each byte transfer, the I<sup>2</sup>C hardware interrupts the M8C microcontroller and stalls the I<sup>2</sup>C bus on the subsequent low of the clock, until the PSoC device intervenes with the next command. This register may be read as many times as necessary; but on a subsequent write to this register, the bus stall is released and the current transfer continues.

There are five status bits: Byte Complete, LRB, Address, Stop Status, and Bus Error. These bits have Read/Clear (RC) access, which means that they are set by hardware but may be cleared by a write of '0' to the bit position. Under certain conditions, status is cleared automatically by the hardware.

There are two control bits: Transmit and ACK. These bits have RW access and may be cleared by hardware.

**Bit 7: Bus Error.** The Bus Error status detects misplaced Start or Stop conditions on the bus. These may be due to noise, rogue devices, or other devices that are not yet synchronized with the I<sup>2</sup>C bus traffic. According to the I<sup>2</sup>C specification, all compatible devices must reset their interface upon a received Start or Stop. This is a natural thing to do in slave mode because a Start initiates an address reception and a Stop idles the slave.

A bus error is defined as follows. A Start is only valid if the block is idle or a slave receiver is ready to receive the first bit of a new byte after an ACK. Any other timing for a Start condition sets the Bus Error bit. A Stop is only valid if the block is idle or a slave receiver is ready to receive the first bit of a new byte after an ACK. Any other timing for a Stop condition sets the Bus Error bit.

**Bit 5: Stop Status.** Stop status is set upon detection of an I<sup>2</sup>C Stop condition. This bit is sticky, which means that it remains set until a '0' is written back to it by the firmware. This bit may only be cleared if the Byte Complete status bit is set. If the Stop Interrupt Enable bit is set, an interrupt is also generated upon Stop detection. It is never automatically cleared. Using this bit, a slave can distinguish between a previous Stop or Restart upon a given address byte interrupt.

The selections are shown in the following table:

| Bit | Access | Description   |
|-----|--------|---|
| 7   | RC     | Bus Error<br>1 = A misplaced Start or Stop condition was detected.<br>This status bit must be cleared by firmware with a write of '0' to the bit position. It is never cleared by the hardware.   |
| 5   | RC     | Stop Status<br>1 = A Stop condition was detected.<br>This status bit must be cleared by firmware with a write of '0' to the bit position. It is never cleared by the hardware.  |
| 4   | RW     | ACK: Acknowledge Out<br>0 = NACK the last received byte.<br>1 = ACK the last received byte.<br>This bit is automatically cleared by hardware upon the following byte complete event.  |
| 3   | RC     | Address<br>1 = The transmitted or received byte is an address.<br>This status bit must be cleared by firmware with a write of '0' to the bit position.  |
| 2   | RW     | Transmit<br>0 = Receive Mode.<br>1 = Transmit Mode.<br>This bit is set by firmware to define the direction of the byte transfer.<br>Any Start detect automatically clears this bit.   |
| 1   | RC     | LRB: Last Received Bit<br>The value of the ninth bit in a transmit sequence, which is the acknowledge bit from the receiver.<br>0 = Last transmitted byte was ACKed by the receiver.<br>1 = Last transmitted byte was NAKed by the receiver.<br>Any Start detect automatically clears this bit. |
| 0   | RC     | Byte Complete<br>Transmit Mode:<br>1 = 8 bits of data have been transmitted and an ACK or NACK is received.<br>Receive Mode:<br>1 = 8 bits of data have been received.<br>Any Start detect automatically clears this bit.   |

#### Bit 4: ACK.

This control bit defines the acknowledge data bit that is transmitted out in response to a received byte. When receiving, a byte complete interrupt is generated after the eighth data bit is received. Upon the subsequent write to this register to continue (or terminate) the transfer, the state of this bit determines the next transmitted data bit. It is **active high**. A '1' sends an ACK and a '0' sends a NACK. A slave receiver sends a NACK to inform the master that it cannot receive any more bytes.

**Bit 3: Address.**

This bit is set when an address is received. This consists of a Start or Restart, and an address byte.

In slave mode when this status is set, firmware reads the received address from the data register and compares it with its own address. If the address does not match, the firmware writes a NACK indication to this register. No further interrupts occur until the next address is received. If the address does match, firmware must ACK the received byte, then byte complete interrupts are generated on subsequent bytes of the transfer.

When in I<sup>2</sup>C compatibility mode the Address bit should not be cleared between a start and the next byte complete. If it is cleared during this time the start status is cleared internally.

**Bit 2: Transmit.** This bit sets the direction of the shifter for a subsequent byte transfer. The shifter is always shifting in data from the I<sup>2</sup>C bus, but a write of '1' enables the output of the shifter to drive the SDA output line. Because a write to this register initiates the next transfer, data must be written to the data register before writing this bit. In receive mode, the previously received data must have been read from the data register before this write. Firmware derives this direction from the RW bit in the received slave address.

This direction control is only valid for data transfers. The direction of address bytes is determined by the hardware.

**Bit 1: LRB.** Last Received Bit. This is the last received bit in response to a previously transmitted byte. In transmit

mode, the hardware sends a byte from the data register and clock in an acknowledge bit from the receiver. Upon the subsequent byte complete interrupt, firmware checks the value of this bit. A '0' is the ACK value and a '1' is a NACK value.

The meaning of LRB depends upon the current operating mode.

**'0': ACK.** The master wants to read another byte. The slave loads the next byte into the [I2C\\_DR Register](#) and sets the Transmit bit in the I2C\_SCR register to continue the transfer.

**'1': NACK.** The master is done reading bytes. The slave reverts to IDLE state on the subsequent I2C\_SCR write (regardless of the value written).

**Bit 0: Byte Complete.** The I<sup>2</sup>C hardware operates on a byte basis. In transmit mode, this bit is set and an interrupt is generated at the end of nine bits (the transmitted byte + the received ACK). In receive mode, the bit is set after the eight bits of data are received. When this bit is set, an interrupt is generated at these data sampling points, which are associated with the SCL input clock rising (see details in [Timing Diagrams on page 123](#)). If the PSoC device responds with a write back to this register before the subsequent falling edge of SCL (which is approximately one-half bit time), the transfer continues without interruption. However, if the device cannot respond within that time, the hardware holds the SCL line low, stalling the I<sup>2</sup>C bus. A subsequent write to the I2C\_SCR register releases the stall.

For additional information, refer to the [I2C\\_SCR register on page 222](#).

### 16.3.12 I2C\_DR Register

| Address | Name                   | Bit 7     | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|------------------------|-----------|-------|-------|-------|-------|-------|-------|-------|---------|
| 0,D8h   | <a href="#">I2C_DR</a> | Data[7:0] |       |       |       |       |       |       |       | RW : 00 |

The I<sup>2</sup>C Data Register (I2C\_DR) provides read/write access to the Shift register.

**Bits 7 to 0: Data[7:0].** This register is not buffered; therefore, writes and valid data reads occur at specific points in the transfer. These cases are outlined as follows:

- **Slave Receiver** – Data in the I2C\_DR register is only valid for reading when the Byte Complete status bit is set. Data bytes must be read from the I2C\_DR register

before writing to the [I2C\\_SCR Register](#), which continues the transfer.


- **Slave Transmitter** – Data bytes must be written to the I2C\_DR register before the Transmit bit is set in the [I2C\\_SCR Register](#), which continues the transfer.

For additional information, refer to the [I2C\\_DR register on page 223](#).

## 16.4 Timing Diagrams


### 16.4.1 Clock Generation

Figure 16-4 illustrates the I<sup>2</sup>C input clocking scheme. The SYSCLK pin is an input into a three-stage ripple divider that provides the baud rate selections. When the block is disabled, all internal state is held in a reset state. When the Enable bit in the I2C\_CFG Register is set, the reset is synchronously released and the clock generation is enabled. All three taps from the **ripple divider** are selectable ( $/2$ ,  $/4$ ,  $/8$ ) from the clock rate bits in the I2C\_CFG Register. If any of the three divider taps is selected, that clock is resynchronized to SYSCLK. The resulting clock is routed to all of the synchronous elements in the design.

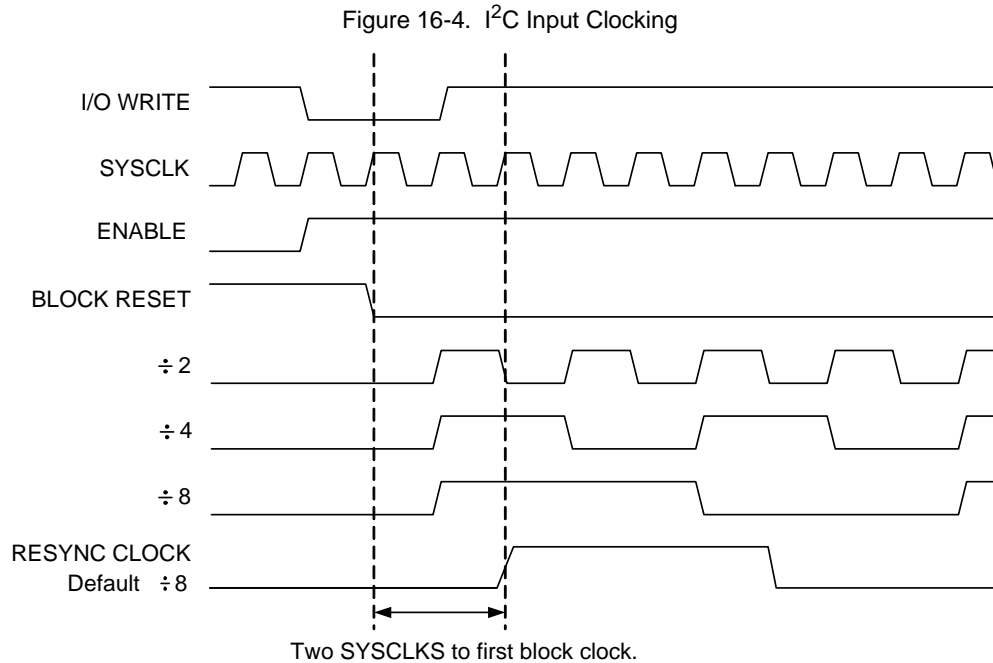

### 16.4.2 Basic I/O Timing

Figure 16-5 illustrates basic input/output timing that is valid for both 16 times sampling and 32 times sampling. For 16 times sampling,  $N=4$ ; for 32 times sampling,  $N=12$ .  $N$  is derived from the half-bit rate sampling of eight and 16 clocks, respectively, minus the input latency of three (count of 4 and 12 correspond to 5 and 13 clocks).

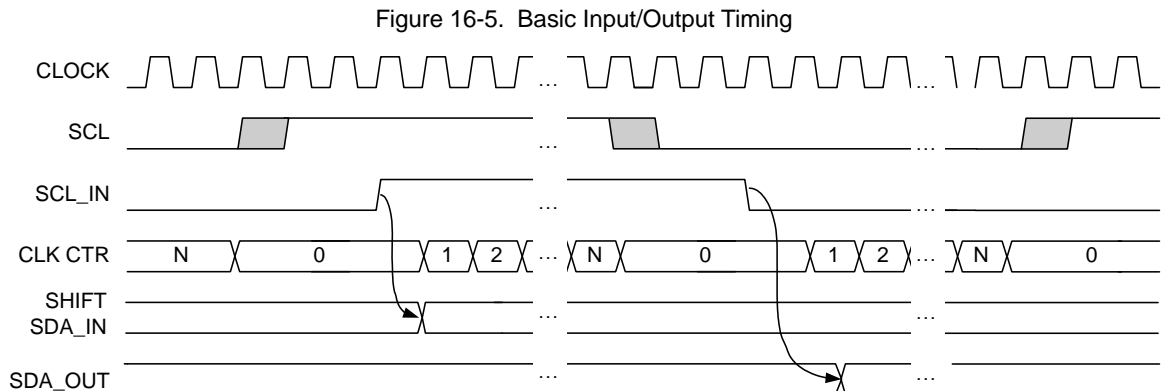

### 16.4.3 Status Timing

Figure 16-6 illustrates the interrupt timing for byte complete, which occurs on the positive edge of the ninth clock (byte + ACK/NACK) in transmit mode and on the positive edge of the eighth clock in receive mode. There is a maximum of three cycles of latency due to the input synchronizer/filter circuit. As shown, the interrupt occurs on the clock following a valid SCL positive edge input transition (after the synchronizers). The Address bit is set with the same timing but only after a slave address is received. The LRB (Last Received Bit) status is also set with the same timing but only on the ninth bit after a transmitted byte.

Figure 16-6. Byte Complete, Address, LRB Timing

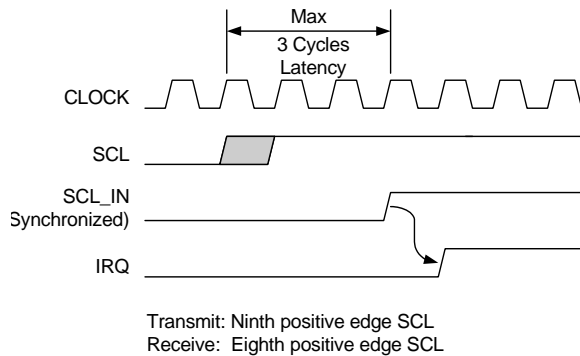


Figure 16-7 shows the timing for Stop status. This bit is set (and the interrupt occurs) two clocks after the synchronized and filtered SDA line transitions to a '1', when the SCL line is high.

Figure 16-7. Stop Status and Interrupt Timing


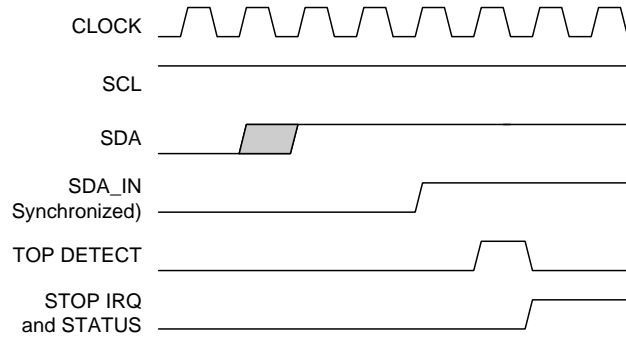



Figure 16-8 illustrates the timing for bus error interrupts. Bus Error status (and interrupt) occurs one cycle after the internal Start or Stop detect (two cycles after the filtered and synchronized SDA input transition).

Figure 16-8. Bus Error Interrupt Timing

#### Misplaced Start

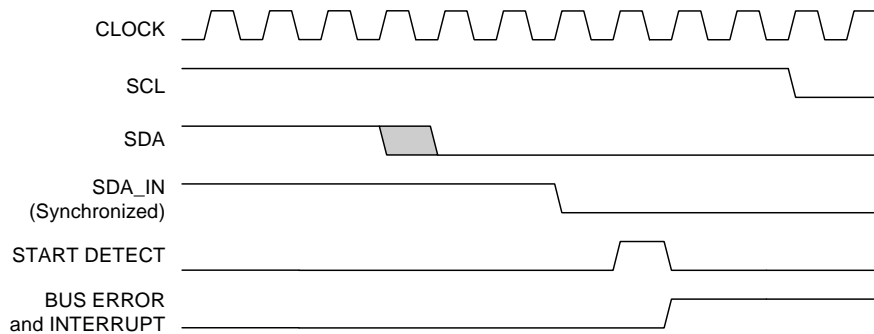

#### Misplaced Stop

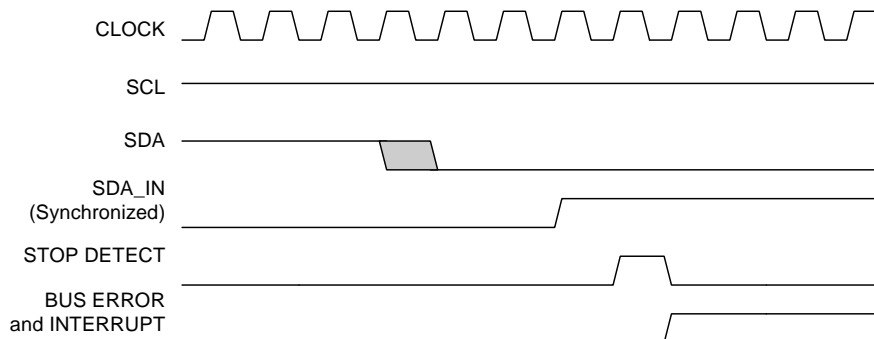


#### 16.4.4 Slave Stall Timing

When a byte complete interrupt occurs, the PSoC device firmware must respond with a write to the [I2C\\_SCR Register](#) to continue the transfer (or terminate the transfer). The interrupt occurs two clocks after the rising edge of SCL\_IN (see [Status Timing on page 124](#)). As illustrated in [Figure 16-9](#), firmware has until one clock after the falling edge of SCL\_IN to write to the [I2C\\_SCR Register](#); otherwise, a stall occurs. After stalled, the I/O write releases the stall. The setup time between data output and the next rising edge of SCL is always N-1 clocks.

**Note:** This feature is available only in devices CY8C24093/293/393/693.

Figure 16-9. Slave Stall Timing

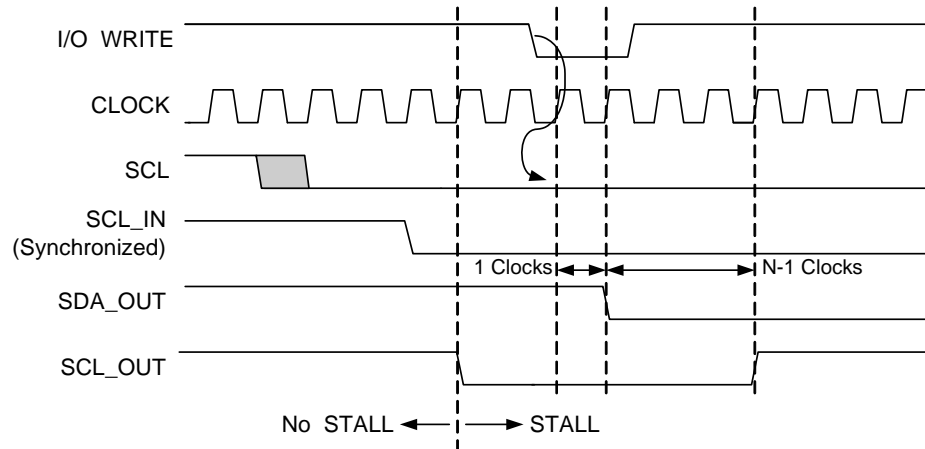

I<sup>2</sup>C Slave

# 17. System Resets



This chapter discusses the System Resets and their associated registers. PSoC devices support several types of resets. The various resets are designed to provide error-free operation during power up for any voltage ramping profile, to allow user-supplied external reset, and to provide recovery from errant code operation. For a complete table of the System Reset registers, refer to the [Summary Table of the System Resource Registers on page 98](#). For a quick reference of all PSoC registers in address order, refer to the [Register Reference chapter on page 177](#).

## 17.1 Architectural Description

When reset is initiated, all registers are restored to their default states. In the [Register Reference chapter on page 177](#), this is indicated by the POR row in the register tables and elsewhere it is indicated in the Access column values on the right side of the colon, in the register tables. Minor exceptions are explained ahead.

The following types of resets occur in the PSoC device:

- **Power-on-Reset (POR).** This occurs at low supply voltage and is comprised of multiple sources.
- **External Reset (XRES).** This active high reset is driven into the PSoC device on parts that contain an XRES pin.
- **Watchdog Reset (WDR).** This optional reset occurs when the watchdog timer expires before being cleared by user firmware. Watchdog resets default to off.
- **Internal Reset (IRES).** This occurs during the boot sequence if the SROM code determines that flash reads are invalid.

The occurrence of a reset is recorded in the Status and Control registers (CPU\_SCR0 for POR, XRES, and WDR) or in the System Status and Control Register 1 (CPU\_SCR1 for IRESS). Firmware can interrogate these registers to determine the cause of a reset.


## 17.2 Pin Behavior During Reset

POR and XRES cause toggling on two GPIO pins, P1[0] and P1[1], as described ahead and illustrated in [Figure 17-1](#) and [Figure 17-2](#). This allows programmers to synchronize with the PSoC device. All other GPIO pins are placed in a high-impedance state during and immediately following reset.

### 17.2.1 GPIO Behavior on Power Up

At power-up, the internal POR causes P1[0] to initially drive a strong high (1) while P1[1] drives a resistive low (0). After 256 sleep oscillator cycles (approximately 8 ms), the P1[0] signal transitions to a resistive low state. After an additional 256 sleep oscillator clocks, both pins transition to a high-impedance state and normal CPU operation begins. This is illustrated in the following figure.

Figure 17-1. P1[1:0] Behavior on Power Up

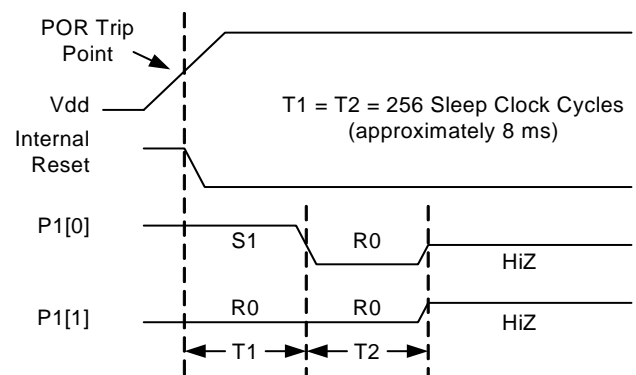


### 17.2.2 Powerup External Reset Behavior

The device's core runs on chip regulated supply, so there is a time delay in powering up the core. A short XRES pulse at power up causes an external reset startup behavior. However, the event is latched and applied only after the core has powered up (a delay of about 1 ms).

### 17.2.3 GPIO Behavior on External Reset

During external reset ( $XRES=1$ ), both P1[0] and P1[1] drive resistive low (0). After XRES deasserts, these pins continue to drive resistive low for another eight sleep clock cycles (approximately 200  $\mu s$ ). After this time, both pins transition to a high-impedance state and normal CPU operation begins. This is illustrated in [Figure 17-2](#).

Figure 17-2. P1[1:0] Behavior on External Reset (XRES)

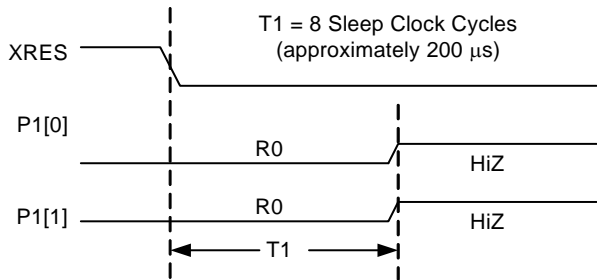



## 17.3 Register Definitions

The following registers are associated with the PSoC System Resets and are listed in address order. Each register description has an associated register table showing the bit structure for that register. The bits in the tables that are grayed out are reserved bits and are not detailed in the register descriptions that follow. Always write reserved bits with a value of 0. For a complete table of system reset registers, refer to the [“Summary Table of the System Resource Registers” on page 98](#).

### 17.3.1 CPU\_SCR1 Register

| Address | Name     | Bit 7 | Bit 6 | Bit 5 | Bit 4      | Bit 3 | Bit 2 | Bit 1 | Bit 0   | Access |
|---------|----------|-------|-------|-------|------------|-------|-------|-------|---------|--------|
| x,FEh   | CPU_SCR1 | IRESS |       |       | SLIMO[1:0] |       |       |       | IRAMDIS | # : 0  |

#### Legend

x An “x” before the comma in the address field indicates that this register can be read or written to no matter what bank is used.

# Access is bit specific. Refer to the [Register Reference chapter on page 177](#) for additional information.

The System Status and Control Register 1 (CPU\_SCR1) conveys the status and control of events related to internal resets and watchdog reset.

**Bit 7: IRESS.** Internal Reset Status. This bit is a read-only bit that determines if the booting process occurred more than once.

When this bit is set, it indicates that the SROM SWBootReset code executed more than once. If this bit is not set, the SWBootReset executed only once. In either case, the SWBootReset code does not allow execution from code stored in flash until the M8C core is in a safe operating mode with respect to supply voltage and flash operation. There is no need for concern when this bit is set. It is provided for systems that may be sensitive to boot time, so that they can determine if the normal one-pass boot time was exceeded.

For more information on the SWBootReset code see the [Supervisory ROM \(SROM\) on page 37](#).

**Bit 4:3 SLIMO[1:0].** These bits set the IMO frequency range. See the table ahead for more information. These

changes allow optimization of speed and power. The IMO trim value must also be changed when SLIMO is changed (see [Engaging Slow IMO on page 67](#)).

When not in external clocking mode, the IMO is the source for SYSCLK; therefore, when the speed of the IMO changes so does SYSCLK.

| SLIMO | CY8C24x93 |
|-------|-----------|
| 00    | 12        |
| 01    | 6         |
| 10    | 24        |
| 11    | Reserved  |

**Bit 0: IRAMDIS.** Initialize RAM Disable. This bit is a control bit that is readable and writeable. The **default value** for this bit is ‘0’, which indicates that the maximum amount of SRAM must be initialized on watchdog reset to a value of 00h. When the bit is ‘1’, the minimum amount of SRAM is initialized after a watchdog reset.

For additional information, refer to the [CPU\\_SCR1 register on page 239](#).

### 17.3.2 CPU\_SCR0 Register

| Address | Name                     | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access |
|---------|--------------------------|-------|-------|-------|-------|-------|-------|-------|-------|--------|
| x,FFh   | <a href="#">CPU_SCR0</a> | GIES  |       | WDRS  | PORS  | Sleep |       |       | STOP  | # : XX |

**Legend**

# Access is bit specific. Refer to register detail for additional information.

XX The reset value is 10h after POR/XRES and 20h after a watchdog reset.

The System Status and Control Register 0 (CPU\_SCR0) is used to convey the status and control of events for various functions of a PSoC device.

**Bit 7: GIES.** Global Interrupt Enable Status. This bit is a read-only status bit and its use is discouraged. The GIES bit is a legacy bit that was used to provide the ability to read the GIE bit of the CPU\_F register. However, the CPU\_F register is now readable. When this bit is set, it indicates that the GIE bit in the CPU\_F register is also set, which in turn, indicates that the microprocessor services interrupts.

**Bit 5: WDRS.** WatchDog Reset Status. This bit may not be set. It is normally '0' and automatically set whenever a watchdog reset occurs. The bit is readable and clearable by writing a '0' to its bit position in the CPU\_SCR0 register.

**Bit 4: PORS.** Power-on-reset Status. This bit, which is the watchdog enable bit, is set automatically by a POR or XRES. If the bit is cleared by user code, the watchdog timer is enabled. After cleared, the only way to reset the PORS bit is to go through a POR or XRES. Thus, there is no way to disable the watchdog timer other than to go through a POR or XRES.

**Bit 3: Sleep.** This bit is used to enter Low-power Sleep mode when set. To wake up the system, this register bit is cleared asynchronously by any enabled interrupt. Two special features of this bit ensure proper sleep operation. First, the write to set the register bit is blocked if an interrupt is about to be taken on that instruction boundary (immediately after the write). Second, there is a hardware interlock to ensure that, when set, the SLEEP bit may not be cleared by an incoming interrupt until the sleep circuit has finished performing the sleep sequence and the system-wide power down signal is asserted. This prevents the sleep circuit from being interrupted in the middle of the process of system power down, possibly leaving the system in an indeterminate state.

**Bit 0: STOP.** This bit is readable and writeable. When set, the PSoC M8C stops executing code until a reset event occurs. This can be either a POR, WDR, or XRES. If an application wants to stop code execution until a reset, the preferred method is to use the HALT instruction rather than a register write to this bit.

For additional information, refer to the [CPU\\_SCR0 register on page 240](#).

## 17.4 Timing Diagrams

### 17.4.1 Power-On-Reset

A power-on-reset (POR) is triggered whenever the supply voltage is below the POR trip point. POR ends when the supply voltage rises above this voltage. Refer to the [POR and LVD chapter on page 135](#) for more information on the operation of the POR block.

POR consists of two pieces: an Imprecise POR (IPOR) and a Precision POR (PPOR). POR refers to the OR of these two functions. IPOR has coarser accuracy and its trip point is typically lower than PPOR's trip point. PPOR is derived from a circuit that is calibrated (during boot) for a very accurate location of the POR trip point.

During POR (POR=1), the IMO is powered off for low power during startup. After POR deasserts, the IMO is started (see [Figure 17-4](#)).

POR configures register reset status bits, as shown in [17.4.4 Reset Details on page 133](#).

### 17.4.2 External Reset

An external reset (XRES) is caused by pulling the XRES pin high. The XRES pin has an always-on, pull-down resistor, so it does not require an external pull down for operation and can be tied directly to ground or left open. Behavior after XRES is similar to POR. In reset, shifting key AC52h (with MSB shifted in first) onto ISSP bus lines can lead to permanent chip damage. This is possible because, upon reception of key AC52h, the chip enters a test mode in which the internal regulator is bypassed and the core powered with a

higher voltage than specified. For this reason, avoid shifting key AC52h while in reset.

During XRES (XRES=1), the IMO is powered off for low power during startup. After XRES deasserts, the IMO is started (see [Figure 17-4](#)).

[17.4.4 Reset Details on page 133](#) shows how the XRES configures register reset status bits.

### 17.4.3 Watchdog Timer Reset

You can enable the Watchdog Timer Reset (WDR), by clearing the PORS bit in the CPU\_SCR0 register. After the PORS bit is cleared, the watchdog timer cannot be disabled. The only exception to this is if a POR/XRES event takes place, which disables the WDR. Note that a WDR does not clear the watchdog timer. See [Watchdog Timer on page 85](#) for details of the watchdog operation.

When the watchdog timer expires, a watchdog event occurs, resulting in the reset sequence. Some characteristics unique to the WDR are as follows.

- PSoC device reset asserts for one cycle of the CLK32K clock (at its reset state).
- The IMO is not halted during or after WDR (that is, the part does not go through a low-power phase).
- CPU operation re-starts one CLK32K cycle after the internal reset deasserts (see [Figure 17-3](#)).

[17.4.4 Reset Details on page 133](#) shows how the WDR configures register reset status bits.

Figure 17-3. Key Signals During WDR



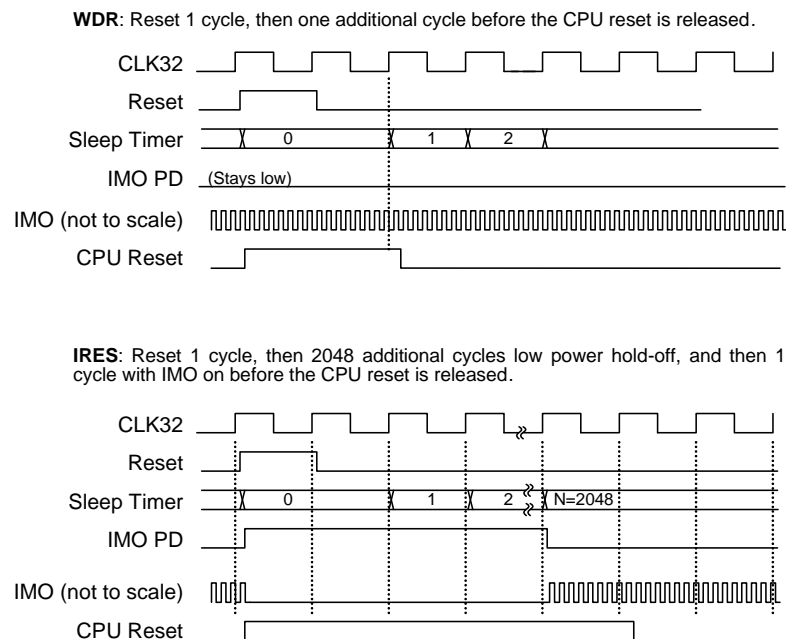


Figure 17-4. Key Signals During POR and XRES


**POR** (IPOR followed by PPOR): Reset while POR is high (IMO off), then 511(+) cycles (IMO on), and then the CPU reset is released. **XRES** is the same, with N=8.

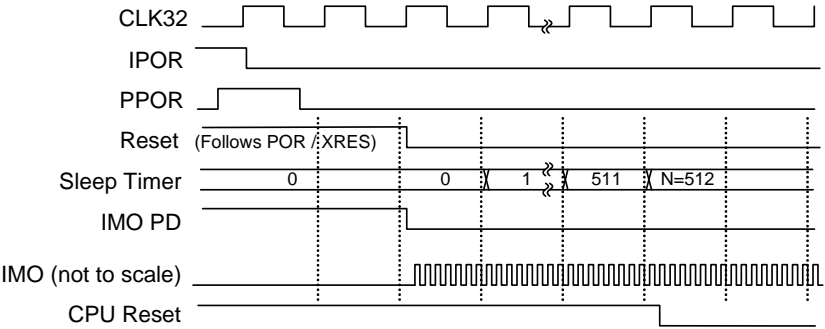

**PPOR** (with no IPOR): Reset while PPOR is high and to the end of the next 32K cycle (IMO off); 1 cycle IMO on before the CPU reset is released. Note that at the 3V level, PPOR tends to be brief because the reset clears the POR range register (VLT\_CR) back to the default 2.4V setting.

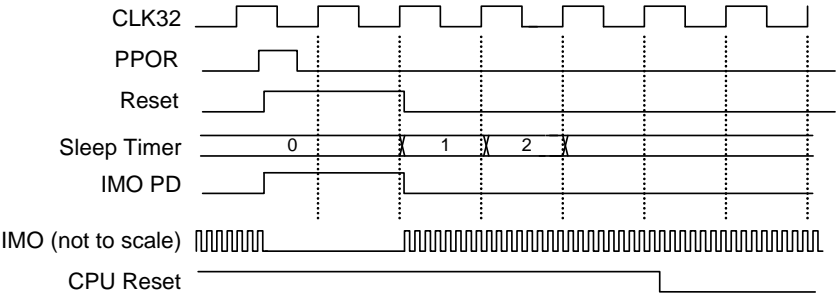

**XRES**: Reset while XRES is high (IMO off), then 7(+) cycles (IMO on), and then the CPU reset is released.

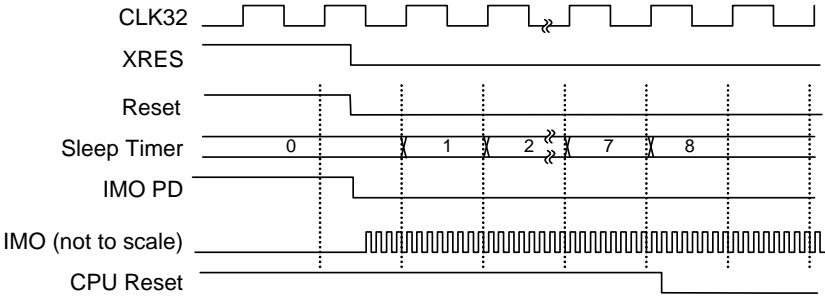

## 17.4.4 Reset Details

Timing and functionality details are summarized in [Table 17-1](#). [Figure 17-4 on page 132](#) shows some of the relevant signals for IPOR, PPOR, XRES, and WDR.

Table 17-1. Reset Functionality

| Item  | IPOR (Part of POR)                        | PPOR (Part of POR)                                    | XRES                                      | WDR   |
|---|---|---|---|---|
| Reset Length  | While POR=1                               | While PPOR=1, plus 30-60 $\mu$ s (1-2 clocks)         | While XRES=1                              | 30 $\mu$ s (1 clock)                          |
| Low-power (IMO Off) During Reset?                                   | Yes                                       | Yes   | Yes                                       | No  |
| Low-power Wait Following Reset?                                     | No  | No  | No  | No  |
| CLK32K Cycles from End of Reset to CPU Reset Deasserts <sup>a</sup> | 512                                       | 1   | 8   | 1   |
| Register Reset<br>(See Next Line for CPU_SCR0, CPU_SCR1)            | All                                       | All, except PPOR does not reset Bandgap Trim register | All                                       | All   |
| Reset Status Bits in CPU_SCR0, CPU_SCR1                             | Set PORS,<br>Clear WDRS,<br>Clear IRAMDIS | Set PORS,<br>Clear WDRS,<br>Clear IRAMDIS             | Set PORS,<br>Clear WDRS,<br>Clear IRAMDIS | Clear PORS,<br>Set WDRS,<br>IRAMDIS unchanged |
| Bandgap Power   | On  | On  | On  | On  |
| Boot Time <sup>b</sup>  | 2.2 ms                                    | 2.2 ms  | 2.2 ms                                    | 2.2 ms  |

a. CPU reset is released after synchronization with the CPU clock.

b. Measured from CPU reset release to execution of the code at flash address 0x0000.

## 17.5 Power Modes

- The ILO block drives the CLK32K clock used to time most events during the reset sequence. This clock is powered down by IPOR but not by any other reset. The sleep timer provides interval timing.
- While POR or XRES assert, the IMO is powered off to reduce startup power consumption.
- During and following IRES (for 64 ms nominally), the IMO is powered off for low average power during slow supply ramps.
- During and after POR or XRES, the bandgap circuit is powered up.
- The IMO is always on for at least one CLK32K cycle before CPU reset is deasserted.



## 18. POR and LVD



This chapter briefly discusses the power-on-reset (POR) and low-voltage detect (LVD) circuits and their associated registers. For a complete table of the POR registers, refer to the [Summary Table of the System Resource Registers on page 98](#). For a quick reference of all PSoC registers in address order, refer to the [Register Reference chapter on page 177](#).

### 18.1 Architectural Description

The power-on-reset (POR) and low-voltage detect (LVD) circuits provide protection against low voltage conditions. The POR function senses  $V_{cc}$  and  $V_{core}$  (regulated voltage) holding the system in reset until the magnitude of  $V_{cc}$  and  $V_{core}$  supports operation to specification. The LVD function senses  $V_{cc}$  and provides an interrupt to the system when  $V_{cc}$  falls below a selected threshold. Other outputs and status bits are provided to indicate important voltage trip levels. Refer to [Section 17.2 Pin Behavior During Reset](#) for a description of GPIO pin behavior during power up.

---

## 18.2 Register Definitions

The following registers are associated with the POR and LVD, and are listed in address order. The following register descriptions have an associated register table showing the bit structure. The bits that are grayed out in the register tables are reserved bits and are not detailed in the register descriptions that follow. Reserved bits must always be written with a value of '0'. For a complete table of the POR registers, refer to the [Summary Table of the System Resource Registers on page 98](#).

### 18.2.1 VLT\_CR Register

| Address | Name   | Bit 7 | Bit 6 | Bit 5       | Bit 4 | Bit 3   | Bit 2 | Bit 1   | Bit 0 | Access  |
|---------|--------|-------|-------|-------------|-------|---------|-------|---------|-------|---------|
| 1,E3h   | VLT_CR |       |       | PORLEV[1:0] |       | LVDTBEN |       | VM[2:0] |       | RW : 00 |

The Voltage Monitor Control Register (VLT\_CR) sets the trip points for POR, MON1 and LVD.

The VLT\_CR register is cleared by all resets. This can cause reset cycling during very slow supply ramps to 5 V when the MON1 range is set for the 5-V range. This is because the reset clears the MON1 range setting back to 1.8 V and a new boot or startup occurs (possibly many times). You can manage this with sleep mode or reading voltage status bits if such cycling is an issue.

**Bits 5 and 4: PORLEV[1:0].** These bits set the Vcc level at which PPOR switches to one of three valid values. Do not use 11b because it is reserved.

See the “DC POR and LVD Specifications” table in the Electrical Specifications section of the PSoC device datasheet for voltage tolerances for each setting.

**Bit 3: LVDTBEN.** This bit is ANDed with LVD to produce a throttle back signal that reduces CPU clock speed when low voltage conditions are detected. When the throttle back signal is asserted, the CPU speed bits in the OSC\_CR0 register are reset, forcing the CPU speed to its reset state.

**Bits 2 to 0: VM[2:0].** These bits set the Vdd level at which the LVD Comparator switches.

See the “DC POR and LVD Specifications” table in the Electrical Specifications section of the PSoC device datasheet for voltage tolerances for each setting.

For additional information, refer to the [VLT\\_CR register on page 261](#).

### 18.2.2 VLT\_CMP Register

| Address | Name    | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access |
|---------|---------|-------|-------|-------|-------|-------|-------|-------|-------|--------|
| 1,E4h   | VLT_CMP |       |       |       |       |       |       | LVD   |       | RW : 0 |

The Voltage Monitor Comparators Register (VLT\_CMP) reads the state of internal supply voltage monitors.

**Bit 1: LVD.** This bit reads the state of the LVD comparator. Zero Vdd is above the trip point. The trip points for LVD are set by VM[2:0] in the VLT\_CR register.

For additional information, refer to the [VLT\\_CMP register on page 262](#).



# 19. SPI




This chapter presents the Serial Peripheral Interconnect (SPI) and its associated registers. For a complete table of the SPI registers, see the [Summary Table of the System Resource Registers on page 98](#). For a quick reference of all PSoC registers in address order, refer to the [Register Reference chapter on page 177](#).

## 19.1 Architectural Description

The Serial Peripheral Interconnect (SPI) block is a dedicated master or slave SPI. The SPI slave function requires three inputs: Clock, Data, and SS\_ (unless the SS\_ is forced active with the SS\_bit in the configuration register).


Figure 19-1. SPI Block Diagram

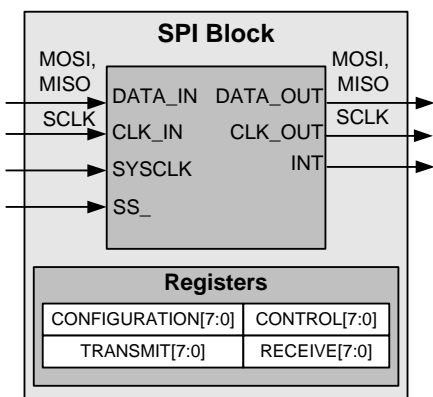

### 19.1.1 SPI Protocol Function

The SPI is a Motorola™ specification for implementing full-duplex synchronous serial communication between devices. The 3-wire protocol uses both edges of the clock to enable synchronous communication without the need for stringent setup and hold requirements. [Figure 19-2](#) shows the basic signals in a simple connection.

Figure 19-2. Basic SPI Configuration

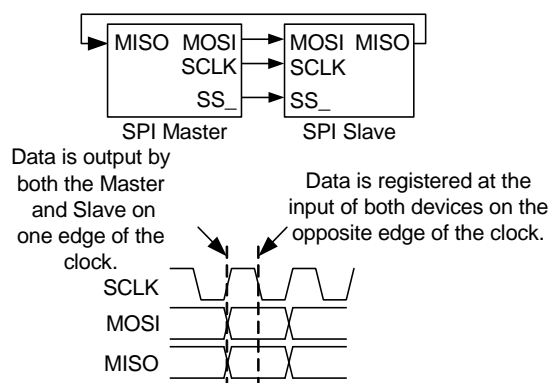

A device can be a master or slave. A master outputs clock and data to the **slave device** and inputs slave data. A slave device inputs clock and data from the master device and outputs data for input to the master. Together, the master and slave are essentially a circular Shift register, where the master generates the clocking and initiates data transfers.

A basic data transfer occurs when the master sends eight bits of data, along with eight clocks. In any transfer, both master and slave transmit and receive simultaneously. If the master only sends data, the received data from the slave is ignored. If the master wishes to receive data from the slave, the master must send dummy bytes to generate the clocking for the slave to send data back.

### 19.1.1.1 SPI Protocol Signal Definitions

The SPI protocol signal definitions are located in [Table 19-1](#). The use of the SS\_ signal varies according to the capability of the slave device.

Table 19-1. SPI Protocol Signal Definitions

| Name | Function                  | Description  |
|------|---------------------------|--|
| MOSI | Master Out Slave In       | Master data output.  |
| MISO | Master In Slave Out       | Slave data output.   |
| SCLK | Serial Clock              | Clock generated by the master.   |
| SS_  | Slave Select (Active Low) | This signal is provided to enable multi-slave connections to the MISO pin. The MOSI and SCLK pins can be connected to multiple slaves, and the SS_ input selects which slave receives the input data and drives the MISO line. |

### 19.1.2 SPI Master Function

The SPI Master (SPIM) offers SPI operating modes 0-3. By default, the most significant bit (MSb) of the data byte is shifted out first. An additional option can be set to reverse the direction and shift the data byte out the least significant bit (LSb) first. (Refer to the timing diagrams for this function on page [144](#).)

When configured for SPIM, DR0 functions as a Shift register with input from the DATA input (MISO) and output to the primary output F1 (MOSI). DR1 is the TX Buffer register and DR2 is the RX Buffer register.

The SPI protocol requires data to be registered at the device input, on the opposite edge of the clock that operates the output shifter. An additional register (RXD), at the input to the DR0 Shift register, has been implemented for this purpose. This register stores received data for one-half cycle before it is clocked into the Shift register.

The SPIM controls data transmission between master and slave because it generates the bit clock for internal clocking and for clocking the SPIS. The bit clock is derived from the CLK input selection.

There are four control bits and four status bits in the Control register (SPI\_CR) that provide for PSoC device interfacing and synchronization.

The SPIM hardware has no support for driving the Slave Select (SS\_) signal. The behavior and use of this signal is application and PSoC device dependent and, if required, must be implemented in firmware.

#### 19.1.2.1 Usability Exceptions

The following are usability exceptions for the SPI Protocol function.

- The SPI\_RXR (RX Buffer) register is not writeable.
- The SPI\_TXR (TX Buffer) register is not readable.

### 19.1.2.2 Block Interrupt

The SPIM block has a selection of two interrupt sources: interrupt on TX Reg Empty (default) or interrupt on SPI Complete. Mode bit 1 in the Function register controls the selection. These modes are discussed in detail in [SPIM Timing on page 144](#).

If SPI Complete is selected as the block interrupt, the Control register must be read in the interrupt routine so that this status bit is cleared; otherwise, no subsequent interrupts are generated.

### 19.1.3 SPI Slave Function

The SPI Slave (SPIS) offers SPI operating modes 0-3. By default, the MSb of the data byte is shifted out first. An additional option can be set to reverse the direction and shift the data byte out LSb first. (Refer to the timing diagrams for this function on page [148](#).)

The SPI protocol requires data to be registered at the device input, on the opposite edge of the clock that operates the output shifter. An additional register (RXD), at the input to the DR0 Shift register, is implemented for this purpose. This register stores received data for one-half cycle before it is clocked into the Shift register.

The SPIS function derives all clocking from the SCLK input (typically an external SPI Master). This means that the master must initiate all transmissions. For example, to read a byte from the SPIS, the master must send a byte.

There are four control bits and four status bits in the Control register (SPI\_CR) that provide for PSoC device interfacing and synchronization.

There is an additional data input in the SPIS, Slave Select (SS\_), which is an active low signal. SS\_ must be asserted to enable the SPIS to receive and transmit. SS\_ has two high level functions: 1) To allow the selection of a given slave in a multi-slave environment, and 2) To provide additional clocking for TX data queuing in SPI modes 0 and 1.

SS\_ may be controlled from an external pin or can be controlled by way of user firmware.

When SS\_ is negated, the SPIS ignores any MOSI/SCLK input from the master. In addition, the SPIS state machine is reset and the MISO output is forced to idle at logic 1. This allows for a wired-AND connection in a multi-slave environment. Note that if High-Z output is required when the slave is not selected, this behavior must be implemented in firmware with I/O writes to the Port Drive register.

#### 19.1.3.1 Usability Exceptions

The following are usability exceptions for the SPI Slave function.

- The SPI\_RXR (RX Buffer) register is not writeable.
- The SPI\_TXR (TX Buffer) register is not readable.

### 19.1.3.2 Block Interrupt

The SPIS block has a selection of two interrupt sources: Interrupt on TX Reg Empty (default) or interrupt on SPI Complete (same selection as the SPIM). Mode bit 1 in the Function register controls the selection.

If SPI Complete is selected as the block interrupt, the Control register must still be read in the interrupt routine so that this status bit is cleared; otherwise, no subsequent interrupts are generated.

### 19.1.4 Input Synchronization

All pin inputs are double synchronized to SYSCLK by default. Synchronization can be bypassed by setting the BYPS bit in the SPI\_CFG register.

## 19.2 Register Definitions

The following registers are associated with the SPI and are listed in address order. The register descriptions have an associated register table showing the bit structure for that register. For a complete table of SPI registers, refer to the [Summary Table of the System Resource Registers on page 98](#).

### Data Registers

#### 19.2.1 SPI\_TXR Register

| Address | Name                    | Bit 7     | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access |
|---------|-------------------------|-----------|-------|-------|-------|-------|-------|-------|-------|--------|
| 0,29h   | <a href="#">SPI_TXR</a> | Data[7:0] |       |       |       |       |       |       |       | W : 00 |

The SPI Transmit Data Register (SPI\_TXR) is the SPI's transmit data register.

**Bits 7 to 0: Data[7:0].** These bits encompass the SPI Transmit register. They are discussed by function type in [Table 19-2](#) and [Table 19-3](#).

For additional information, refer to the [SPI\\_TXR register on page 180](#).

## 19.2.2 SPI\_RXR Register

| Address | Name                    | Bit 7     | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access |
|---------|-------------------------|-----------|-------|-------|-------|-------|-------|-------|-------|--------|
| 0,2Ah   | <a href="#">SPI_RXR</a> | Data[7:0] |       |       |       |       |       |       |       | R : 00 |

The SPI Receive Data Register (SPI\_RXR) is the SPI's receive data register. A write to this register clears the RX Reg Full status bit in the Control register (SPI\_CR).

**Bits 7 to 0: Data[7:0].** These bits encompass the SPI Receive register. They are discussed by function type in [Table 19-2](#) and [Table 19-3](#).

For additional information, refer to the [SPI\\_RXR register on page 181](#).

### 19.2.2.1 SPI Master Data Register Definitions

There are two 8-bit Data registers and one 8-bit Control/Status register. [Table 19-2](#) explains the meaning of the Transmit and Receive registers in the context of SPIM operation.

Table 19-2. SPIM Data Register Descriptions

| Name    | Function  | Description   |
|---------|-----------|---|
| SPI_TXR | TX Buffer | Write only register.<br>If no transmission is in progress and this register is written to, the data from this register is loaded into the Shift register on the following clock edge, and a transmission is initiated. If a transmission is currently in progress, this register serves as a buffer for TX data.<br>This register must only be written to when TX Reg Empty status is set and the write clears the TX Reg Empty status bit in the Control register. When the data is transferred from this register to the Shift register, then TX Reg Empty status is set. |
| SPI_RXR | RX Buffer | Read-only register.<br>When a byte transmission/reception is complete, the data in the shifter is transferred into the RX Buffer register and RX Reg Full status is set in the Control register.<br>A read from this register clears the RX Reg Full status bit in the Control register.  |

### 19.2.2.2 SPI Slave Data Register Definitions

There are two 8-bit Data registers and one 8-bit Control/Status register. [Table 19-3](#) explains the meaning of the Transmit and Receive registers in the context of SPIS operation.

Table 19-3. SPIS Data Register Descriptions

| Name    | Function  | Description  |
|---------|-----------|--|
| SPI_TXR | TX Buffer | Write only register.<br>This register must only be written to when TX Reg Empty status is set and the write clears the TX Reg Empty status bit in the Control register. When the data is transferred from this register to the Shift register, then TX Reg Empty status is set.          |
| SPI_RXR | RX Buffer | Read-only register.<br>When a byte transmission/reception is complete, the data in the shifter is transferred into the RX Buffer register and RX Reg Full status is set in the Control register.<br>A read from this register clears the RX Reg Full status bit in the Control register. |

## Control Register

### 19.2.3 SPI\_CR Register

| Address | Name                   | Bit 7     | Bit 6   | Bit 5        | Bit 4        | Bit 3       | Bit 2       | Bit 1          | Bit 0  | Access |
|---------|------------------------|-----------|---------|--------------|--------------|-------------|-------------|----------------|--------|--------|
| 0,2Bh   | <a href="#">SPI_CR</a> | LSb First | Overrun | SPI Complete | TX Reg Empty | RX Reg Full | Clock Phase | Clock Polarity | Enable | # : 00 |

#### Legend

# Access is bit specific. Refer to the register detail for additional information.

The SPI Control Register (SPI\_CR) is the SPI's control register.

**Bit 7: LSb First.** This bit determines how the serial data is shifted out, either LSb or MSb first.

**Bit 6: Overrun.** This status bit indicates whether there was a receive buffer overrun. A read from the receive buffer after each received byte must be performed before the reception of the next byte to avoid an overrun condition.

**Bit 5: SPI Complete.** This status bit indicates the completion of a transaction. A read from this register clears this bit.

**Bit 4: TX Reg Empty.** This status bit indicates whether the Transmit register is empty.

**Bit 3: RX Reg Full.** This status bit indicates a Receive register full condition.

**Bit 2: Clock Phase.** This bit determines the edge (rising or falling) on which the data changes.

**Bit 1: Clock Polarity.** This bit determines the logic level the clock codes to in its idle state.

**Bit 0: Enable.** This bit enables the SPI block.

For additional information, refer to the [SPI\\_CR register on page 182](#).

#### 19.2.3.1 SPI Control Register Definitions

Table 19-4. SPI Control Register Descriptions

| Bit # | Name           | Access     | Description  |
|-------|----------------|------------|--|
| 7     | LSb First      | Read/Write | 0 = Data shifted out MSb First.<br>1 = Data shifted out LSb First.                                 |
| 6     | Overrun        | Read Only  | 0 = No overrun.<br>1 = Indicates new byte received before previous one is read.                    |
| 5     | SPI Complete   | Read Only  | 0 = Transaction in progress.<br>1 = Transaction is complete. Reading SPI_CR clears this bit.       |
| 4     | TX Reg Empty   | Read Only  | 0 = TX register is full.<br>1 = TX register is empty. Writing SPI_TXR register clears this bit.    |
| 3     | RX Reg Full    | Read Only  | 0 = RX register is not full.<br>1 = RX register is full. Reading SPI_RXR register clears this bit. |
| 2     | Clock Phase    | Read/Write | 0 = Data changes on trailing edge.<br>1 = Data changes on leading clock edge.                      |
| 1     | Clock Polarity | Read/Write | 0 = Non-inverted, clock idles low (modes 0, 2).<br>1 = Inverted, clock idles high (modes 1, 3).    |
| 0     | Enable         | Read/Write | 0 = Disable SPI function.<br>1 = Enable SPI function.  |

## Configuration Register

The configuration block contains 1 register. This register must not be changed while the block is enabled. Note that the SPI Configuration register is located in bank 1 of the PSoC device's memory map.

### 19.2.4 SPI\_CFG Register

| Address | Name                    | Bit 7          | Bit 6 | Bit 5 | Bit 4  | Bit 3 | Bit 2  | Bit 1   | Bit 0 | Access  |
|---------|-------------------------|----------------|-------|-------|--------|-------|--------|---------|-------|---------|
| 1,29h   | <a href="#">SPI_CFG</a> | Clock Sel[2:0] |       |       | Bypass | SS_   | SS_EN_ | Int Sel | Slave | RW : 00 |

The SPI Configuration Register (SPI\_CFG) is used to configure the SPI.

**Bits 7 to 5: Clock Sel [2:0].** Clock Selection. These bits determine the operating frequency of the SPI Master.

**Bit 4: Bypass.** This bit determines whether the inputs are synchronized to SYSCLK.

**Bit 3: SS\_.** Slave Select. This bit determines the logic value of the SS\_ signal when the SS\_EN\_ signal is asserted (SS\_EN\_ = 0).

**Bit 2: SS\_EN\_.** Slave Select Enable. This active low bit determines if the slave select (SS\_) signal is driven internally. If it is driven internally, its logic level is determined by the SS\_ bit. If it is driven externally, its logic level is determined by the external pin.

**Bit 1: Int Sel.** Interrupt Select. This bit selects which condition produces an interrupt.

**Bit 0: Slave.** This bit determines whether the block functions as a master or slave.

For additional information, refer to the [SPI\\_CFG register on page 243](#).

#### 19.2.4.1 SPI Configuration Register Definitions

Table 19-5. SPI Configuration Register Descriptions

| Bit # | Name      | Access     | Mode         | Description   |
|-------|-----------|------------|--------------|---|
| 7:5   | Clock Sel | Read/Write | Master       | SYSCLK<br>000b / 2<br>001b / 4<br>010b / 8<br>011b / 16<br>100b / 32<br>101b / 64<br>110b / 128<br>111b / 256 |
| 4     | Bypass    | Read/Write | Master/Slave | 0 = All pin inputs are doubled, synchronized.<br>1 = Input synchronization is bypassed.                       |
| 3     | SS_       | Read/Write | Slave        | 0 = Slave selected.<br>1 = Slave not selected. Slave selection is determined from external SS_ pin.           |
| 2     | SS_EN_    | Read/Write | Slave        | 0 = Slave selection determined from SS_ bit.<br>1 = Slave selection determined from external SS_ pin.         |
| 1     | Int Sel   | Read/Write | Master/Slave | 0 = Interrupt on TX Reg Empty.<br>1 = Interrupt on SPI Complete.  |
| 0     | Slave     | Read/Write | Master/Slave | 0 = Operates as a master.<br>1 = Operates as a slave.   |

### 19.2.5 Related Registers

- [IO\\_CFG1 Register on page 254](#).

## 19.3 Timing Diagrams


### 19.3.1 SPI Mode Timing

Figure 19-3 shows the SPI modes that are typically defined as 0, 1, 2, or 3. These mode numbers are an encoding of two control bits: Clock Phase and Clock Polarity.

Clock Phase indicates the relationship of the clock to the data. When the clock phase is '0', it means that the data is registered as an input on the leading edge of the clock and the next data is output on the trailing edge of the clock. When the clock phase is '1', it means that the next data is output on the leading edge of the clock and that data is registered as an input on the trailing edge of the clock.

Clock Polarity controls clock inversion. When clock polarity is set to '1', the clock idle state is high.

Figure 19-3. SPI Mode Timing

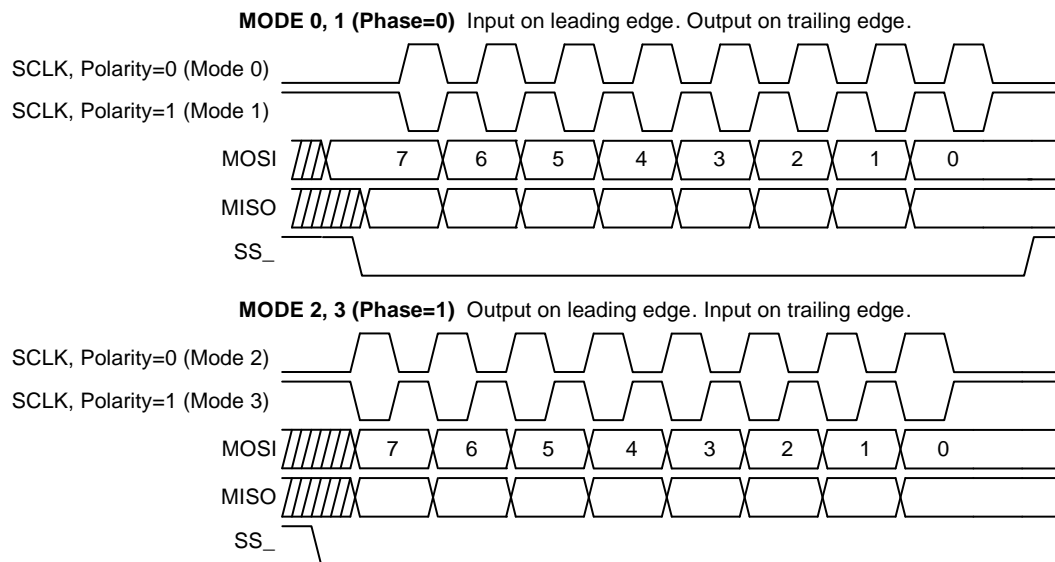

### 19.3.2 SPIM Timing


**Enable/Disable Operation.** As soon as the block is configured for SPIM, the primary output is the MSb or LSb of the Shift register, depending on the LSb First configuration in bit 7 of the Control register. The auxiliary output is '1' or '0', depending on the idle clock state of the SPI mode. This is the idle state.

**Clock Generation.** Figure 19-4 illustrates the SPIM input clocking scheme. The SYSCLK pin is an input into an eight-stage ripple divider that provides the baud rate selections. When the block is disabled, all internal state is held in a reset state.

When the Enable bit in the SPI\_CR register is set, the reset is synchronously released and the clock generation is enabled. All eight taps from the ripple divider are selectable ( $/2$ ,  $/4$ ,  $/8$ ,  $/16$ ,  $/32$ ,  $/64$ ,  $/128$ ,  $/256$ ) from the Clock Sel bits in the SPI\_CFG register. The selected divider tap is resynchronized to SYSCLK. The resulting clock is routed to all of the synchronous elements in the design.

When the block is disabled, the SCLK and MOSI outputs revert to their idle state. All internal state is reset (including CR0 status) to its configuration-specific reset state, except for DR0, DR1, and DR2, which are unaffected.

Figure 19-4. SPI Input Clocking

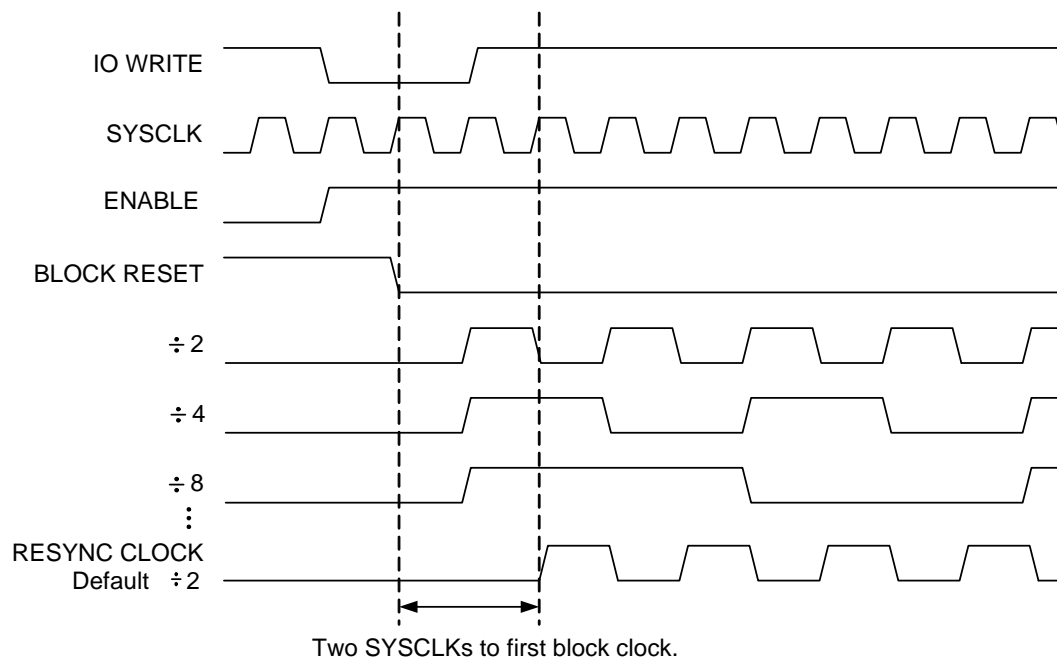



**Normal Operation.** Typical timing for an SPIM transfer is shown in Figure 19-5 and Figure 19-6. The user initially writes a byte to transmit when TX Reg Empty status is true. If no transmission is currently in progress, the data is loaded into the shifter and the transmission is initiated. The TX Reg Empty status is asserted again and the user is allowed to write the next byte to be transmitted to the TX Buffer register.

After the last bit is output, if TX Buffer data is available with one-half clock setup time to the next clock, a new byte transmission is initiated. An SPIM block receives a byte at the same time that it sends one. The SPI Complete or RX Reg Full can be used to determine when the input byte is received.

Figure 19-5. Typical SPIM Timing in Mode 0 and 1


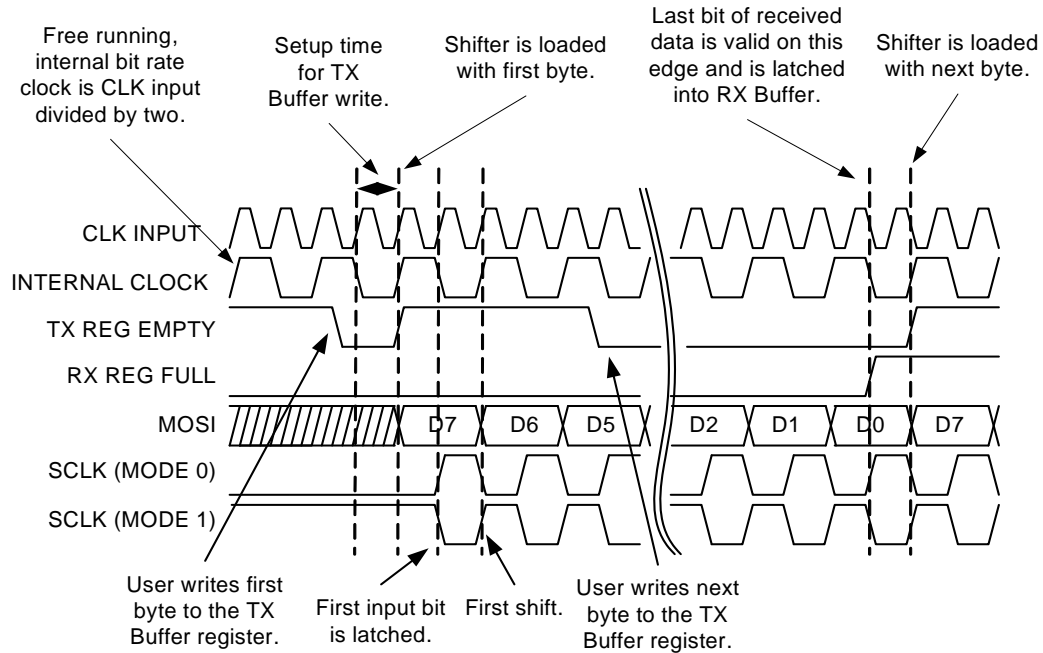


Figure 19-6. Typical SPIM Timing in Mode 2 and 3

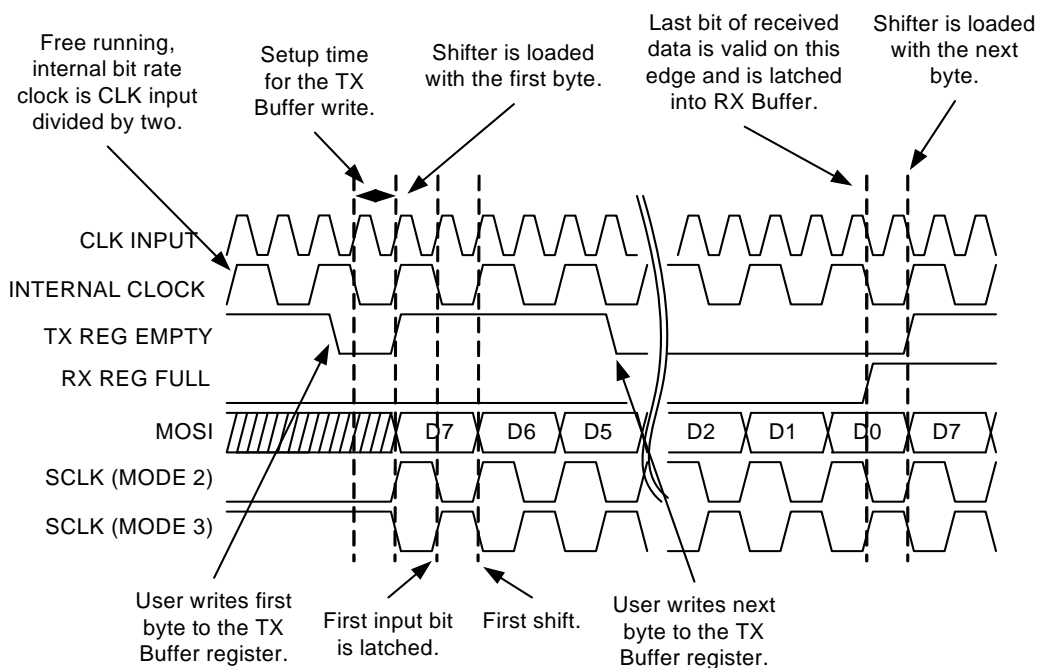

**Status Generation and Interrupts.** There are four status bits in an SPI block: TX Reg Empty, RX Reg Full, SPI Complete, and Overrun.

TX Reg Empty indicates that a new byte can be written to the TX Buffer register. When the block is enabled, this status bit is immediately asserted. This status bit is cleared when the user writes a byte of data to the TX Buffer register. TX Reg Empty is a control input to the state machine and, if a transmission is not already in progress, the assertion of this control signal initiates one. This is the default SPIM block interrupt. However, an initial interrupt is not generated when the block is enabled. The user must write a byte to the TX Buffer register and that byte must be loaded into the shifter before interrupts generated from the TX Reg Empty status bit are enabled.

RX Reg Full is asserted on the edge that captures the eighth bit of receive data. This status bit is cleared when the user reads the RX Buffer register (DR2).

SPI Complete is an optional interrupt and is generated when eight bits of data and clock are sent. In modes 0 and 1, this occurs one-half cycle after RX Reg Full is set; because in these modes, data is latched on the leading edge of the clock and there is an additional one-half cycle remaining to complete that clock. In modes 2 and 3, this occurs at the same edge that the receive data is latched. This signal may be used to read the received byte or it may be used by the SPIM to disable the block after data transmission is complete.

Overrun status is set if RX Reg Full is still asserted from a previous byte when a new byte is about to be loaded into the RX Buffer register. Because the RX Buffer register is imple-

mented as a latch, Overrun status is set one-half bit clock before RX Reg Full status.

See [Figure 19-7](#) and [Figure 19-8](#) for status timing relationships.

Figure 19-7. SPI Status Timing for Modes 0 and 1


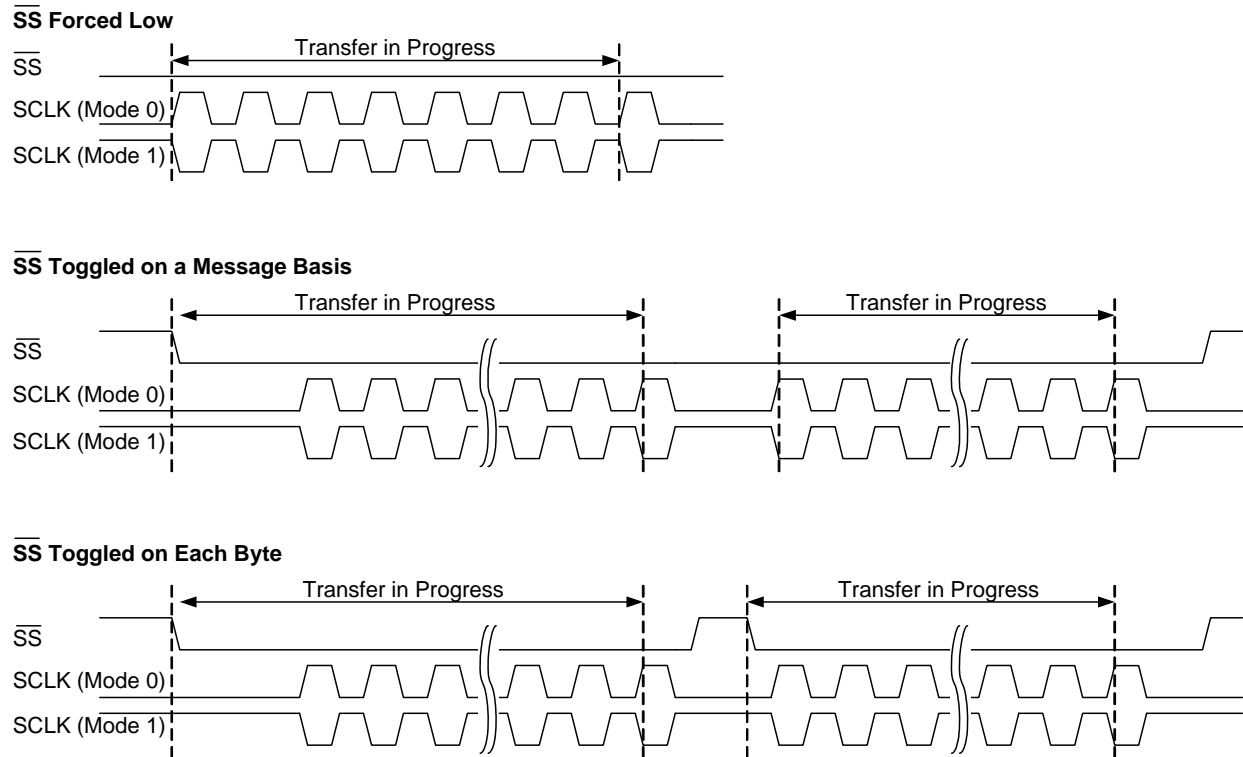


Figure 19-8. SPI Status Timing for Modes 2 and 3

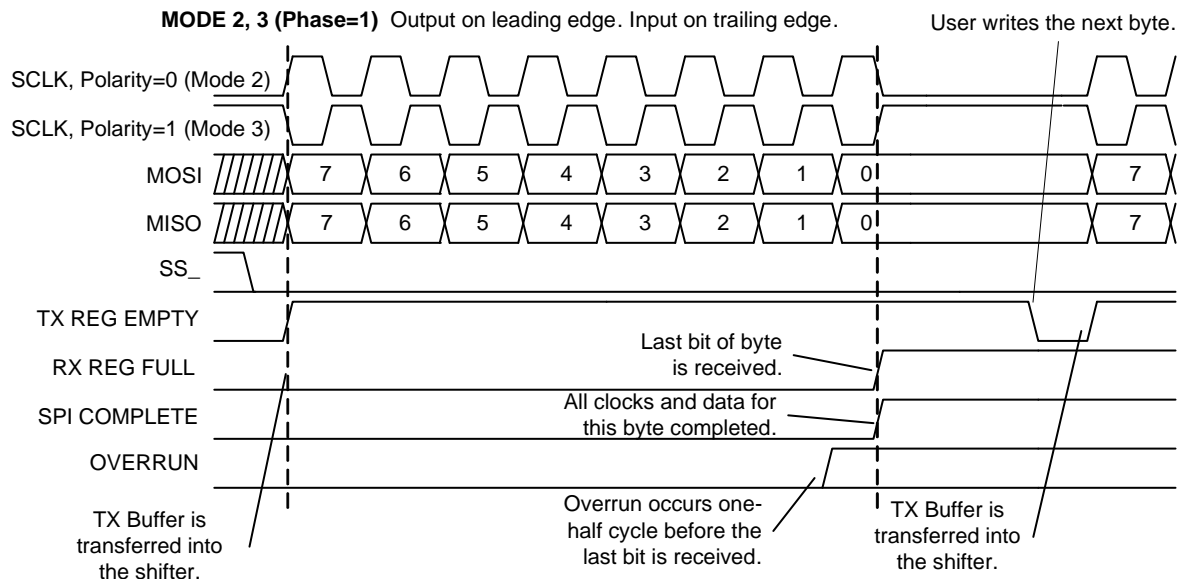

### 19.3.3 SPIS Timing

**Enable/Disable Operation.** As soon as the block is configured for SPI Slave and before enabling, the MISO output is set to idle at logic 1. The Enable bit must be set and the SS<sub>—</sub> asserted (either driven externally or forced by firmware programming) for the block to output data. When enabled, the primary output is the MSb or LSb of the Shift register, depending on the LSb First configuration in bit 7 of the Control register. The auxiliary output of the SPIS is always forced into tristate.

The SPIS has no internal clock and must be enabled with setup time to any external master supplying the clock. Setup time is also required for a TX Buffer register write before the first edge of the clock or the first falling edge of SS<sub>—</sub>, depending on the mode. This setup time must be assured through the protocol and an understanding of the timing between the master and slave in a system.

When the block is disabled, the MISO output reverts to its idle 1 state. All internal state is reset (including CR0 status) to its configuration-specific reset state, except for DR0, DR1, and DR2, which are unaffected.

**Normal Operation.** Typical timing for an SPIS transfer is shown in Figure 19-9 and Figure 19-10. If the SPIS is primarily being used as a receiver, the RX Reg Full (polling only) or SPI Complete (polling or interrupt) status may be used to determine when a byte is received. In this way, the SPIS operates identically with the SPIM. However, there are two main areas in which the SPIS operates differently: 1) SPIS behavior related to the SS<sub>—</sub> signal, and 2) TX data queuing (loading the TX Buffer register).

Figure 19-9. Typical SPIS Timing in Modes 0 and 1


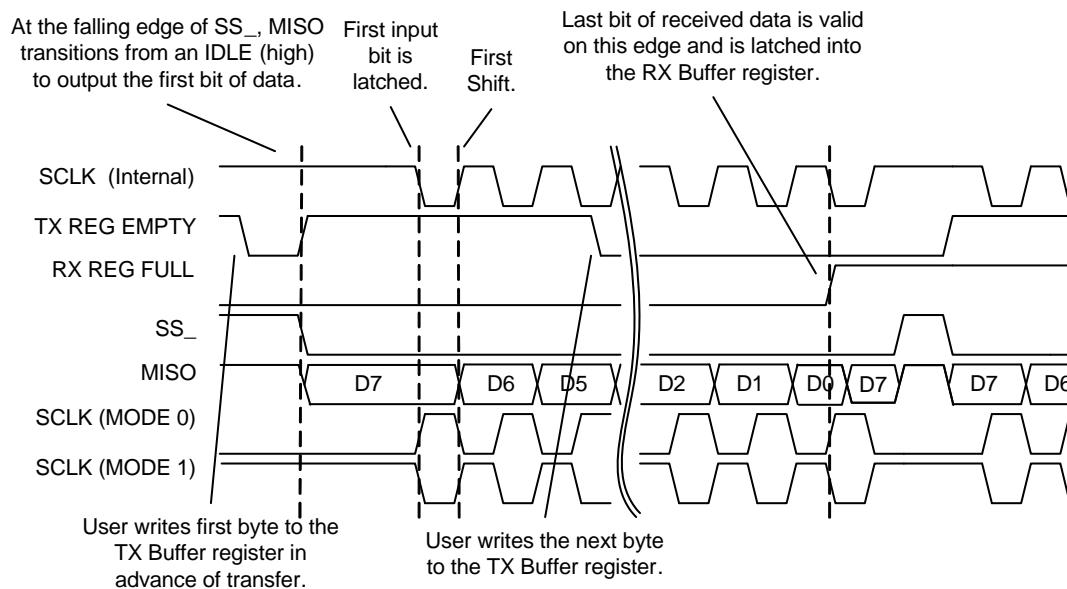


Figure 19-10. Typical SPIS Timing in Modes 2 and 3

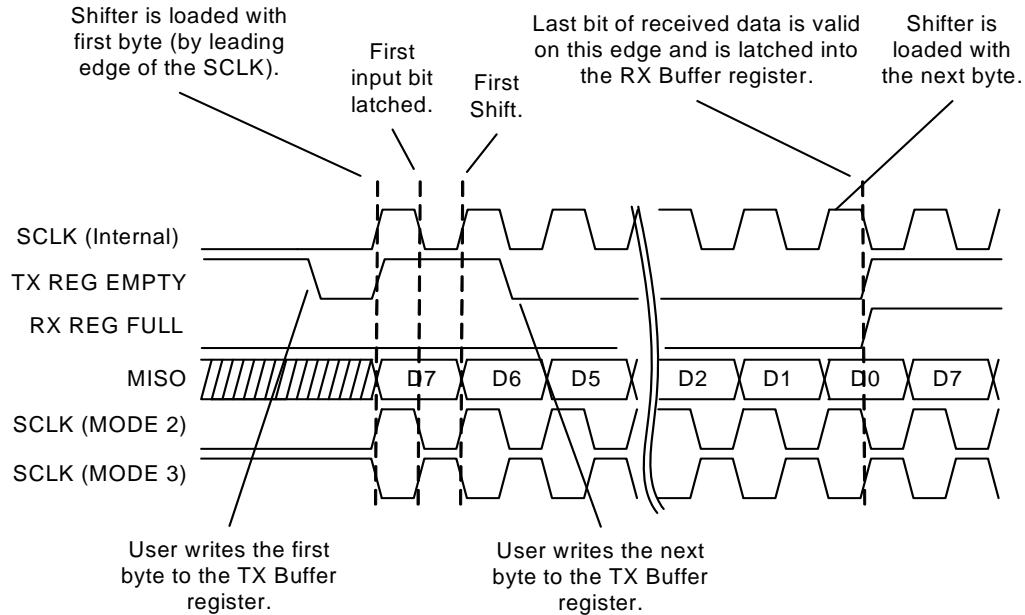

**Slave Select (SS<sub>+</sub>, Active Low).** Slave Select must be asserted to enable the SPIS for receive and transmit. There are two ways to do this:

- Drive the auxiliary input from a pin (selected by the Aux I/O Select bits in the output register). This gives the SPI master control of the slave selection in a multi-slave environment.
- SS<sub>+</sub> may be controlled in firmware with register writes to the output register. When Aux I/O Enable = 1, Aux I/O Select bit 0 becomes the SS<sub>+</sub> input. This allows the user to save an input pin in single-slave environments.

When SS<sub>+</sub> is negated (whether from an external or internal source), the SPIS state machine is reset and the MISO output is forced to idle at logic 1. In addition, the SPIS ignores any incoming MOSI/SCLK input from the master.

**Status Generation and Interrupts.** There are four status bits in the SPIS block: TX Reg Empty, RX Reg Full, SPI Complete, and Overrun. The timing of these status bits are identical to the SPIM, with the exception of TX Reg Empty, which is covered in the section on TX data queuing.

**Status Clear On Read.** Refer to the same subsection in [SPIM Timing on page 144](#).

**TX Data Queuing.** Most SPI applications call for data to be sent back from the slave to the master. Writing firmware to accomplish this requires an understanding of how the Shift register is loaded from the TX Buffer register.

All modes use the following mechanism: 1) If there is no transfer in progress, 2) if the shifter is empty, and 3) if data is available in the TX Buffer register, the byte is loaded into the shifter.

The only difference between the modes is that the definition of “transfer in progress” is slightly different between modes 0 and 1, and modes 2 and 3.

Figure 19-11 illustrates TX data loading in modes 0 and 1. A transfer in progress is defined to be from the falling edge of  $\overline{SS}_-$  to the point at which the RX Buffer register is loaded with the received byte. This means that to send a byte in the next transfer, it must be loaded into the TX Buffer register before the falling edge of  $\overline{SS}_-$ . This ensures a minimum setup time for the first bit, because the leading edge of the first SCLK must latch in the received data. If  $\overline{SS}_-$  is not toggled between each byte or is forced low through the configuration register, the leading edge of SCLK is used to define the start of transfer. However, the user must provide the required setup time (one-half clock minimum before the leading edge) with a knowledge of system latencies and response times.

Figure 19-11. Mode 0 and 1 Transfer in Progress


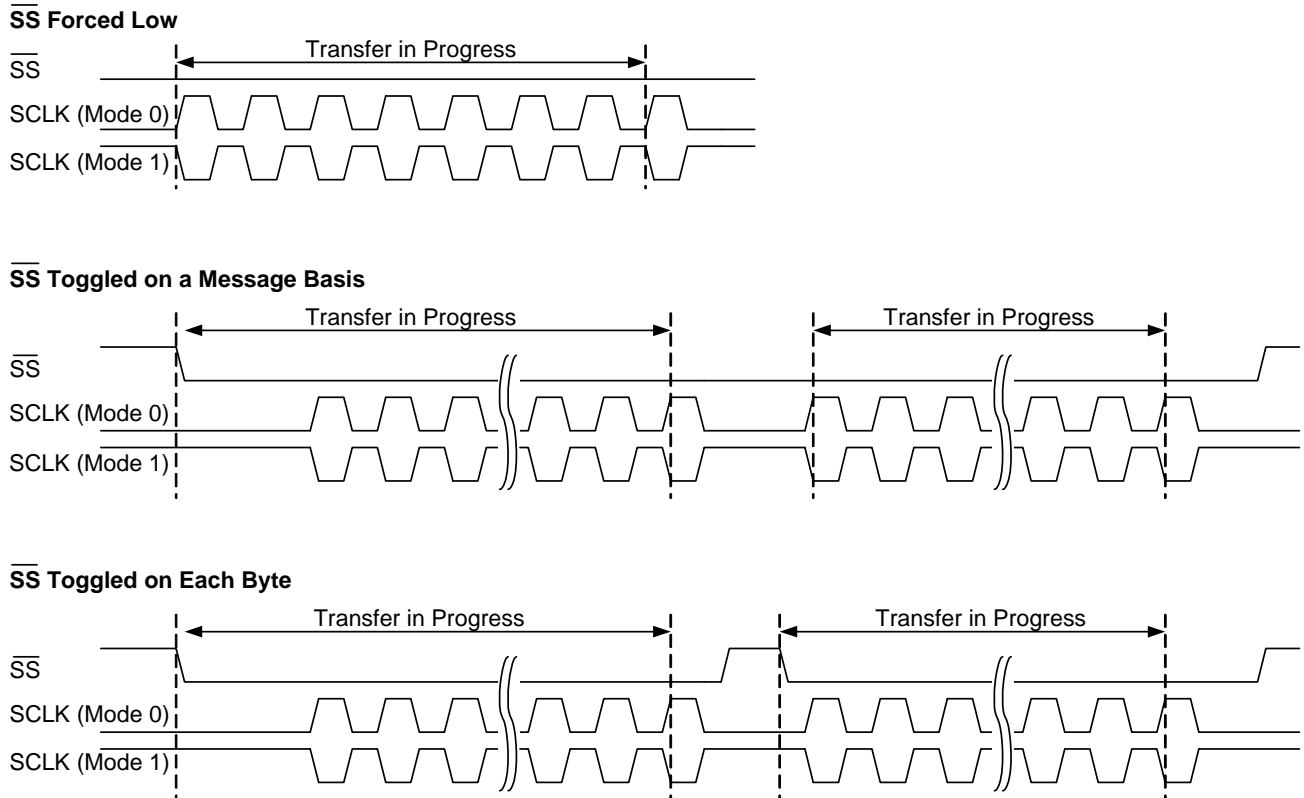


Figure 19-12 illustrates TX data loading in modes 2 and 3. In this case, a transfer in progress is defined to be from the leading edge of the first SCLK to the point at which the RX Buffer register is loaded with the received byte. Loading the shifter by the leading edge of the clock has the effect of providing the required one-half clock setup time, as the data is latched into the receiver on the trailing edge of the SCLK in these modes.

Figure 19-12. Mode 2 and 3 Transfer in Progress



## 20. Programmable Timer

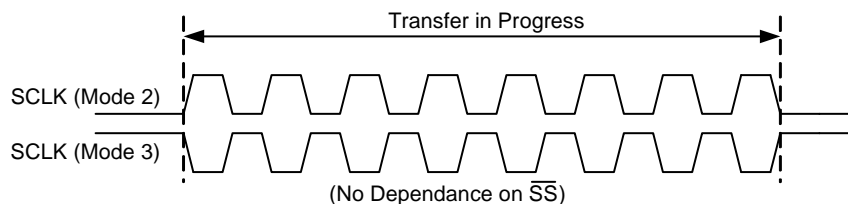


This chapter presents the Programmable Timer and its associated registers. For a complete table of the programmable timer registers, refer to the [Summary Table of the System Resource Registers on page 98](#). For a quick reference of all PSoC registers in address order, refer to the [Register Reference chapter on page 177](#).

### 20.1 Architectural Description

The device has three programmable timers (TIMER0, TIMER1, TIMER2). All three timers are individually controlled. The programmable timers are 16-bit down counters for the device. TIMER0 has a terminal count output. The timers have one configuration and two data registers associated with them. You start these timers by setting the START bit in their configuration registers (PT0\_CFG, PT1\_CFG, PT2\_CFG). When started, the timers always start counting down from the value loaded into their data registers (PT\*\_DATA1, PT\*\_DATA0). The timers have a one-shot mode, in which the timers complete one full count cycle and stop. In one-shot mode the START bit in the configuration register is cleared after completion of one full count cycle. Setting the START bit restarts the timer.

Figure 20-1. Programmable Timer Block Diagram

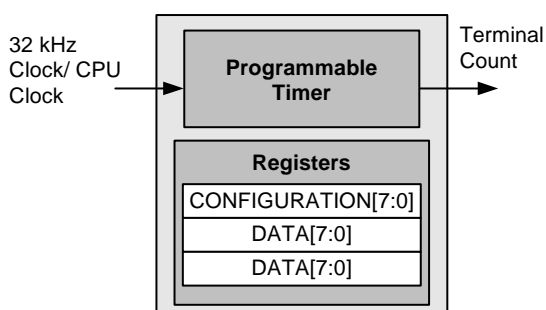

#### 20.1.1 Operation

When started, the programmable timer loads the value contained in its data registers and counts down to its terminal count of zero. The timers output an active high terminal count pulse for one clock cycle upon reaching the terminal count. The low time of the terminal count pulse is equal to the loaded decimal count value, multiplied by the clock period ( $TC_{pw} = \text{COUNT VALUE}_{\text{decimal}} * CLK_{\text{period}}$ ). The period of the terminal count output is the pulse width of the terminal count, plus one clock period ( $TC_{\text{period}} = TC_{pw} + CLK_{\text{period}}$ ). Refer to [Figure 20-2](#) and [Figure 20-3](#).

Only TIMER0 outputs this terminal count output. TIMER1 and TIMER2 do not have a terminal count output.

The timers work on either the 32-kHz clock or CPU clock. This clock selection is done using the CLKSEL bits in the respective configuration registers (PT0\_CFG, PT1\_CFG, PT2\_CFG). Make clock selections before setting the START bit so that the timing is not affected and clock frequency does not change while the timer is running.

Figure 20-2. Continuous Operation Example


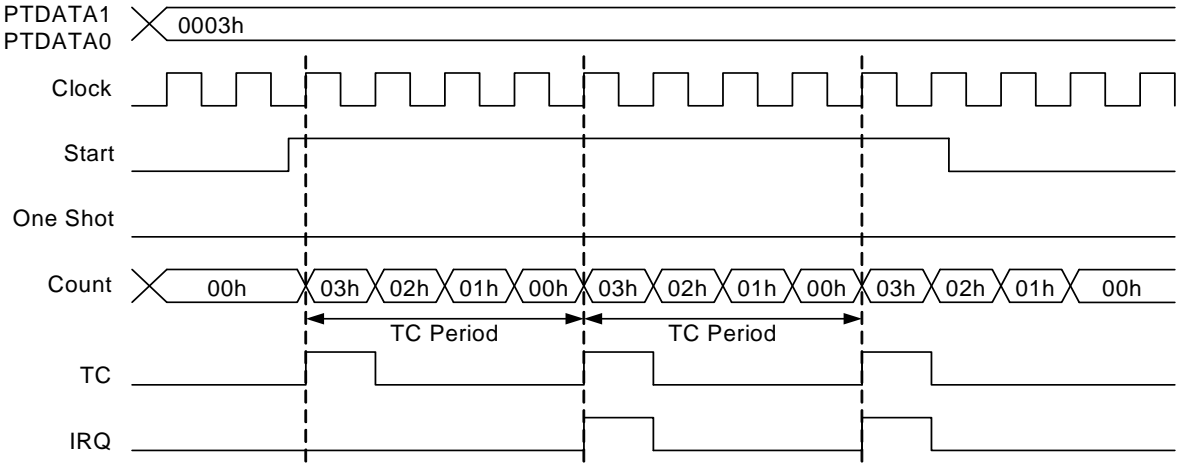


Figure 20-3. One-Shot Operation Example



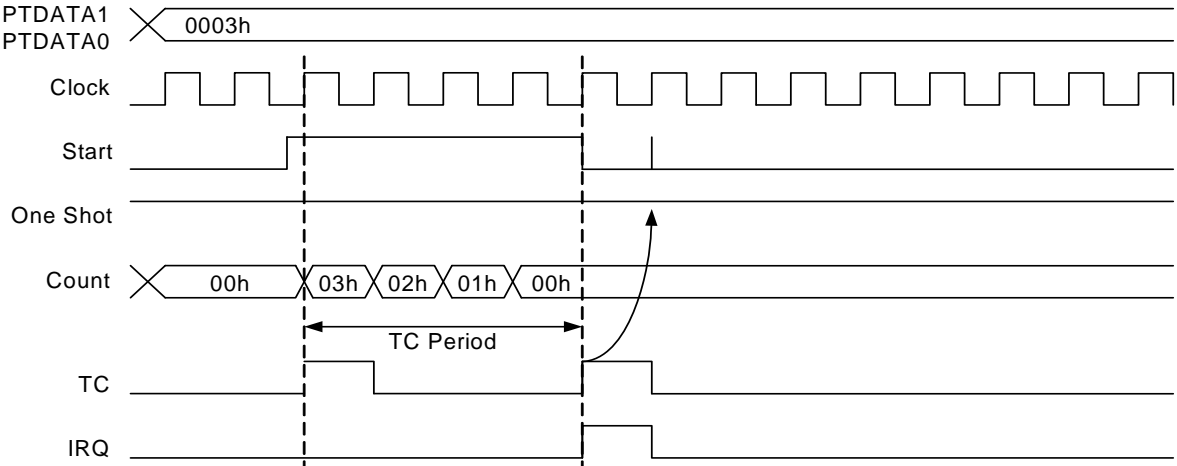

## 20.2 Register Definitions

The following registers are associated with the Programmable Timer and are listed in address order. The register descriptions have an associated register table showing the bit structure for that register. The bits in the tables that are grayed out are reserved bits and are not detailed in the register descriptions that follow. Reserved bits must always be written with a value of '0'. For a complete table of programmable timer registers, refer to the [Summary Table of the System Resource Registers on page 98](#).

### 20.2.1 PT0\_CFG Register

| Address | Name                    | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2  | Bit 1    | Bit 0 | Access |
|---------|-------------------------|-------|-------|-------|-------|-------|--------|----------|-------|--------|
| 0.B0h   | <a href="#">PT0_CFG</a> |       |       |       |       |       | CLKSEL | One Shot | START | RW : 0 |

The Programmable Timer Configuration Register (PT0\_CFG) configures the PSoC's programmable timer.

**Bit 2: CLKSEL.** This bit determines if the timer runs on the 32-kHz clock or CPU clock. If the bit is set to 1, the timer runs on the CPU clock, otherwise, the timer runs on the 32-kHz clock.

**Bit 1: One Shot.** This bit determines if the timer runs in one-shot mode or continuous mode. In one-shot mode the timer completes one full count cycle and terminates. Upon termination, the START bit in this register is cleared. In continuous mode, the timer reloads the count value each time upon completion of its count cycle and repeats.

**Bit 0: START.** This bit starts the timer counting from a full count. The full count is determined by the value loaded into the data registers. This bit is cleared when the timer is running in one-shot mode upon completion of a full count cycle.

For additional information, refer to the [PT0\\_CFG register on page 202](#).

### 20.2.2 PT1\_CFG Register

| Address | Name                    | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2  | Bit 1    | Bit 0 | Access |
|---------|-------------------------|-------|-------|-------|-------|-------|--------|----------|-------|--------|
| 0.B3h   | <a href="#">PT1_CFG</a> |       |       |       |       |       | CLKSEL | One Shot | START | RW : 0 |

The Programmable Timer Configuration Register (PT1\_CFG) configures the PSoC's programmable timer.

**Bit 2: CLKSEL.** This bit determines if the timer runs on the 32-kHz clock or CPU clock. If the bit is set to '1', the timer runs on the CPU clock, otherwise, the timer runs on the 32-kHz clock.

**Bit 1: One Shot.** This bit determines if the timer runs in one-shot mode or continuous mode. In one-shot mode the timer completes one full count cycle and terminates. Upon termination, the START bit in this register is cleared. In continuous mode, the timer reloads the count value each time upon completion of its count cycle and repeats.

**Bit 0: START.** This bit starts the timer counting from a full count. The full count is determined by the value loaded into the data registers. This bit is cleared when the timer is running in one-shot mode upon completion of a full count cycle.

For additional information, refer to the [PT1\\_CFG register on page 205](#).

## 20.2.3 PT2\_CFG Register

| Address | Name                    | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2  | Bit 1    | Bit 0 | Access |
|---------|-------------------------|-------|-------|-------|-------|-------|--------|----------|-------|--------|
| 0,B6h   | <a href="#">PT2_CFG</a> |       |       |       |       |       | CLKSEL | One Shot | START | RW : 0 |

The Programmable Timer Configuration Register (PT2\_CFG) configures the PSoC's programmable timer.

**Bit 2: CLKSEL.** This bit determines if the timer runs on the 32-kHz clock or CPU clock. If the bit is set to 1, the timer runs on the CPU clock, otherwise, the timer runs on the 32-kHz clock.

**Bit 1: One Shot.** This bit determines if the timer runs in one-shot mode or continuous mode. In one-shot mode the timer completes one full count cycle and terminates. Upon termination, the START bit in this register is cleared. In con-

tinuous mode, the timer reloads the count value each time upon completion of its count cycle and repeats.

**Bit 0: START.** This bit starts the timer counting from a full count. The full count is determined by the value loaded into the data registers. This bit is cleared when the timer is running in one-shot mode upon completion of a full count cycle.

For additional information, refer to the [PT2\\_CFG register on page 206](#).

## 20.2.4 PTx\_DATA0 Register

| Address | Name                      | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|---------------------------|-------|-------|-------|-------|-------|-------|-------|-------|---------|
| 0,B2h   | <a href="#">PT0_DATA0</a> |       |       |       |       |       |       |       |       | RW : 00 |
| 0,B5h   | <a href="#">PT1_DATA0</a> |       |       |       |       |       |       |       |       | RW : 00 |
| 0,B8h   | <a href="#">PT2_DATA0</a> |       |       |       |       |       |       |       |       | RW : 00 |

The Programmable Timer Data Register 0 (PT0\_DATA0, PT1\_DATA0, PT2\_DATA0) holds the lower 8 bits of the programmable timer's count value.

For additional information, refer to the [PT0\\_DATA0 register on page 204](#), [PT1\\_DATA0 register on page 204](#) and [PT2\\_DATA0 register on page 204](#).

**Bits 7 to 0: DATA[7:0].** This is the lower byte of a 16-bit timer. The upper byte is in the corresponding PTx\_DATA1 register.

## 20.2.5 PTx\_DATA1 Register

| Address | Name                      | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|---------------------------|-------|-------|-------|-------|-------|-------|-------|-------|---------|
| 0,B1h   | <a href="#">PT0_DATA1</a> |       |       |       |       |       |       |       |       | RW : 00 |
| 0,B4h   | <a href="#">PT1_DATA1</a> |       |       |       |       |       |       |       |       | RW : 00 |
| 0,B7h   | <a href="#">PT2_DATA1</a> |       |       |       |       |       |       |       |       | RW : 00 |

The Programmable Timer Data Register 1 (PT0\_DATA1, PT1\_DATA1, PT2\_DATA1) holds the 8 bits of the programmable timer's count value for the device

For additional information, refer to the [PT0\\_DATA1 register on page 203](#), [PT1\\_DATA1 register on page 203](#), and [PT2\\_DATA1 register on page 203](#).

**Bits 7 to 0: DATA[7:0].** This is the upper byte of a 16-bit timer. The lower byte is in the corresponding PTx\_DATA0 register.

# 21. Full-Speed USB (CY8C24193/493)




This chapter explains the Full-Speed USB (Universal Serial Bus) resource and its associated registers. For a quick reference of all PSoC registers in address order, refer to the [Register Reference chapter on page 177](#). USB is only available on certain devices.

## 21.1 Architectural Description

The PSoC USB system resource adheres to the USB 2.0 Specification for full-speed devices operating at 12 Mbps with one upstream port and one USB address. PSoC USB consists of these components:

- Serial Interface Engine (SIE) block
- PSoC Memory Arbiter (PMA) block
- 512 bytes of dedicated SRAM
- A Full-Speed USB Transceiver with internal regulator and two dedicated USB pins

Figure 21-1. USB Block Diagram

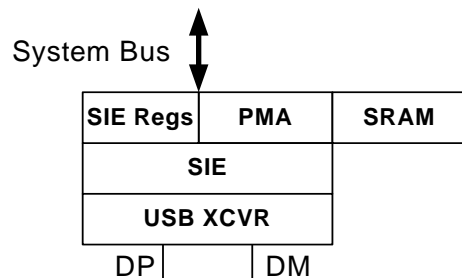

At the PSoC system level, the full-speed USB system resource interfaces to the rest of the PSoC by way of the M8C's register access instructions and to the outside world by way of the two USB pins. The SIE supports nine endpoints including a bidirectional control endpoint (endpoint 0) and eight uni-directional data endpoints (endpoints 1 to 8). The uni-directional data endpoints are individually configurable as either IN or OUT.

## 21.2 Application Description

The individual components and issues of the USB system are described in detail in the following sections.

### 21.2.1 USB SIE

The USB Serial Interface Engine (SIE) allows the PSoC device to communicate with the USB host at full-speed data rates (12 Mbps). The SIE simplifies the interface to USB traffic by automatically handling the following USB processing tasks without firmware intervention:

- Translates the encoded received data and formats the data to be transmitted on the bus.
- Generates and checks CRCs. Incoming packets failing checksum verification are ignored.
- Checks addresses. Ignores all transactions not addressed to the device.
- Sends appropriate ACK/NAK/Stall handshakes.
- Identifies token type (SETUP, IN, OUT) and sets the appropriate token bit when a valid token is received.
- Identifies Start-of-Frame (SOF) and saves the frame count.
- Sends data to or retrieves data from the USB SRAM, by way of the PSoC Memory Arbiter (PMA).

Firmware is required to handle various parts of the USB interface. The SIE issues interrupts after key USB events to direct firmware to appropriate tasks:

- Fill and empty the USB data buffers in USB SRAM.
- Enable PMA channels appropriately.
- Coordinate enumeration by decoding USB device requests.
- Suspend and resume coordination.
- Verify and select data toggle values.

Table 21-1. Mode Encoding for Control and Non-Control Endpoints

| Mode                | Encoding | SETUP  | IN        | OUT    | Comments  |
|---------------------|----------|--------|-----------|--------|---|
| Disable             | 0000     | Ignore | Ignore    | Ignore | Ignore all USB traffic to this endpoint.  |
| NAK IN/OUT          | 0001     | Accept | NAK       | NAK    | NAK IN and OUT token.   |
| Status OUT Only     | 0010     | Accept | STALL     | Check  | For control endpoint, STALL IN and ACK zero byte OUT.                                     |
| STALL IN/OUT        | 0011     | Accept | STALL     | STALL  | For control endpoint, STALL IN and OUT token.   |
| Reserved            | 0100     | Ignore | Ignore    | Ignore |   |
| ISO OUT             | 0101     | Ignore | Ignore    | Always | Isochronous OUT.  |
| Status IN Only      | 0110     | Accept | TX 0 Byte | STALL  | For control endpoint, STALL OUT and send zero byte data for IN token.                     |
| ISO IN              | 0111     | Ignore | TX Count  | Ignore | Isochronous IN.   |
| NAK OUT             | 1000     | Ignore | Ignore    | NAK    | Send NAK handshake to OUT token.  |
| ACK OUT (STALL = 0) | 1001     | Ignore | Ignore    | ACK    | This mode is changed by the SIE to mode 1000 on issuance of ACK handshake to an OUT.      |
| ACK OUT (STALL = 1) | 1001     | Ignore | Ignore    | STALL  | STALL the OUT transfer.   |
| Reserved            | 1010     | Ignore | Ignore    | Ignore |   |
| ACK OUT – STATUS IN | 1011     | Accept | TX0 Byte  | ACK    | ACK the OUT token or send zero byte data for IN token.                                    |
| NAK IN              | 1100     | Ignore | NAK       | Ignore | Send NAK handshake for IN token.  |
| ACK IN (STALL = 0)  | 1101     | Ignore | TX Count  | Ignore | This mode is changed by the SIE to mode 1100 after receiving ACK handshake to an IN data. |
| ACK IN (STALL = 1)  | 1101     | Ignore | STALL     | Ignore | STALL the IN transfer.  |
| Reserved            | 1110     | Ignore | Ignore    | Ignore |   |
| ACK IN – Status OUT | 1111     | Accept | TX Count  | Check  | Respond to IN data or Status OUT.   |

## 21.2.2 USB SRAM

The PSoC USB System Resource contains dedicated 512 bytes SRAM. This SRAM is identical to two SRAM pages used in the PSoC core; however, it is not accessible by way of the M8C memory access instructions. The USB's dedicated SRAM may only be accessed by way of the PMA registers. For more information on how to use the USB's dedicated SRAM, see the next section, PSoC Memory Arbiter (PMA).

The USB SRAM contents are not directly affected by any reset, but must be treated as unknown after any POR, WDR, and XRES.

### 21.2.2.1 PSoC Memory Arbiter

The PSoC Memory Arbiter (PMA) is the interface between the USB's dedicated SRAM and the two blocks that access the SRAM: the M8C and the USB SIE. The PMA provides 16 channels to manage data with four Endpoints/8 channels mapped to Page 0 of USB dedicated SRAM and other four Endpoints/8 channels mapped to Page 1 of USB dedicated SRAM. All the channel registers may be used by the M8C, but the eight non-control USB endpoints are each allocated to a specific set of PMA channel registers. It is the responsibility of the firmware to ensure that the M8C is not accessing a set of channel registers that are in use by the USB SIE.

If the M8C wants to access the same data that an SIE channel is using, two channels must be configured to access the same SRAM address ranges. [Table 21-2](#) shows the mapping between PMA channels and the blocks that can use them.

Table 21-2. PMA Channel Assignments

| PMA Channel | USB SIE | M8C    | Channel Registers (PMAx_xx)  |
|-------------|---------|--------|------------------------------|
| 0           |         | Page 0 | PMA0_DR, PMA0_RA, PMA0_WA    |
| 1           | EP1     | Page 0 | PMA1_DR, PMA1_RA, PMA1_WA    |
| 2           | EP2     | Page 0 | PMA2_DR, PMA2_RA, PMA2_WA    |
| 3           | EP3     | Page 0 | PMA3_DR, PMA3_RA, PMA3_WA    |
| 4           | EP4     | Page 0 | PMA4_DR, PMA4_RA, PMA4_WA    |
| 5           |         | Page 0 | PMA5_DR, PMA5_RA, PMA5_WA    |
| 6           |         | Page 0 | PMA6_DR, PMA6_RA, PMA6_WA    |
| 7           |         | Page 0 | PMA7_DR, PMA7_RA, PMA7_WA    |
| 8           |         | Page 1 | PMA8_DR, PMA8_RA, PMA8_WA    |
| 9           | EP5     | Page 1 | PMA9_DR, PMA9_RA, PMA9_WA    |
| 10          | EP6     | Page 1 | PMA10_DR, PMA10_RA, PMA10_WA |
| 11          | EP7     | Page 1 | PMA11_DR, PMA11_RA, PMA11_WA |
| 12          | EP8     | Page 1 | PMA12_DR, PMA12_RA, PMA12_WA |
| 13          |         | Page 1 | PMA13_DR, PMA13_RA, PMA13_WA |
| 14          |         | Page 1 | PMA14_DR, PMA14_RA, PMA14_WA |
| 15          |         | Page 1 | PMA15_DR, PMA15_RA, PMA15_WA |

The PMA's purpose is to manage the potentially conflicting SRAM access requests from the M8C and the USB SIE. From a performance standpoint, the PMA guarantees that a continuous stream of move instructions (see ahead), are serviced by the PMA without delay even while the USB SIE is transferring data at its maximum rate in to or out of the dedicated USB SRAM.

When servicing a request, the PMA is in one of two addressing modes. For M8C access the PMA always uses Post-Increment Addressing. After a read or write request is made to the channel's PMAx\_DR register, the PMA automatically increments the pointer into SRAM. For a read access, the next value is also automatically prefetched. For USB SIE accesses, the PMA uses an offset addressing mode. In this mode, the channel's base address, as stored in the PMAx\_WA and PMAx\_RA registers, is added to the byte count value provided by the USB SIE.

A PMA channel does not have a defined upper limit. It is the responsibility of the firmware to ensure that channels do not access memory outside of the range defined by the application.

During SIE writes to the USB SRAM, the maximum number of bytes written is limited to the count value in the respective endpoint's count registers. This value must be loaded by firmware before data is received.

The rest of the description of the PMA is broken into two parts: the M8C interface and the USB SIE interface, which are described as follows.

### PMA to M8C Interface

The M8C accesses the PMA, and thus the USB's dedicated SRAM, by way of a register interface. Each PMA channel has three registers associated with it, as shown in [Table 21-2 on page 156](#). Only the following basic M8C register access instructions may be used with these registers.

```
MOV A, reg[expr]
MOV A, reg[X+expr]
MOV [expr], [expr]
MOV reg[expr], A
MOV reg[X+expr], A
MOV reg[expr], expr
MOV reg[X+expr], expr
```

When the M8C uses a PMA channel to write data into SRAM, follow these steps:

1. Choose a PMA channel that is not allocated to a USB endpoint, or choose a channel where the endpoint is inactive.
2. Write the channel's PMAx\_WA register with the first address in SRAM that must be used by this channel.
3. Write data to the channel's PMAx\_DR register. The PMA logic automatically increments the PMAx\_WA address after each write.

While these steps are executed by the M8C, the USB SIE may be fully active on any other PMA channel.

The M8C may also service another channel and come back to the channel being serviced by the previous steps. To determine the next address that is used when data is written to the channel's PMAx\_DR register, the PMAx\_WA register may be read.

When the M8C uses a PMA channel to read data from SRAM, follow these steps:

1. Choose a PMA channel that is not allocated to a USB endpoint, or choose a channel where the endpoint is inactive.
2. Write the channel's PMAx\_RA register with the first address in SRAM that must be read by this channel.
3. Read data from the channel's PMAx\_DR register. The PMA logic automatically increments the PMAx\_RA address after each read.

When data is read from a PMA channel the data is prefetched; therefore, the channel must be pre-loaded prior to the first M8C read that expects to get actual data. This pre-loading is taken care of automatically when the PMAx\_RA register is written. This pre-loading mechanism is actually the only difference between the PMAx\_RA and PMAx\_WA registers.

### PMA to USB SIE Interface

The USB SIE accesses the PMA, and thus the dedicated USB SRAM, by way of a private interface and does not affect the PSoC Core address or data bus. The only area of contention that is not automatically arbitrated between the M8C, PMA, and USB SIE are the PMAx\_xx registers. When the USB SIE is actively using a PMA channel, the M8C must not attempt to access that channel's PMA registers. If the M8C wants to access the same data as an active USB endpoint, the M8C must use a PMA channel separate from the PMA channel that is permanently allocated to that endpoint.

Just as the M8C has two uses for PMA channels, read or write, the USB SIE has two uses for a PMA channel. The USB SIEs use of a channel may be thought of as read or write; but, in USB terms the USB SIEs need to read data is associated with an IN transaction and the need to write data with an OUT transaction.

For a USB IN transaction, the USB SIE is reading data from the PMA and sending the data to the USB host. The following steps must be used to set up a PMA channel for a USB IN transaction. These steps assume that the data has already been written by the M8C into the dedicated USB SRAM.

1. Select the PMA channel whose number matches the endpoint number that is handling the IN transaction.
2. Write the PMA channel's PMAx\_RA register with the address of the first byte in SRAM that is used for the IN transaction.
3. Configure the USB endpoint registers with the proper byte count and enable the endpoint to send data when the IN transaction occurs.

Because the PMA prefetches data for M8C and USB SIE reads, step two above is very important. This step not only sets the first address from which data is read by the USB SIE; but, it also triggers a read operation on the dedicated USB SRAM and stores the result of that read in the PMAx\_DR ready for the USB SIE to read. When the USB SIE begins the IN transaction for the endpoint, it uses its byte counter to tell the PMA which byte is needed next. Therefore, when the first byte of the transaction is read by the SIE, the PMA automatically fetches the next byte in preparation for the USB SIEs next byte request.

For a USB OUT transaction, the USB SIE is writing data to the PMA that was received from the USB host. The following steps must be used to set up a PMA channel for a USB OUT transaction.

1. Select the PMA channel whose number matches the endpoint number that is handling the OUT transaction.
2. Write the PMA channel's PMAx\_WA register with the address of the first byte in SRAM that is used for the OUT transaction.
3. Configure the USB endpoint with the proper maximum receive byte count and enable the endpoint to receive the OUT transaction.

As with the IN transaction, the PMA uses the byte counter from the SIE as an offset to the value of the PMAx\_WA register. As the USB SIE sends bytes to the PMA, the counter is added to the base address and the data byte is written into the dedicated USB SRAM. Should an error occur in the OUT transaction and the packet be resent by the USB host, the byte count is reset to zero and the PMA writes the new data over top of the potentially corrupt data from the previous failed transaction.

If the number of bytes received exceeds the count in the endpoint's count register, the extra bytes are not written into the USB SRAM, but the received byte count reported in the endpoint count registers includes the ignored bytes.

### 21.2.3 Oscillator Lock

The PSoC device can operate without using any external components, such as a crystal, and still achieve the clock accuracy required for full-speed USB. It does this by locking its internal oscillator to the incoming USB traffic. Therefore, the initial accuracy of the oscillator may not meet the required accuracy ( $\pm 0.25\%$ ), but it self-tunes to this precision before the device needs to transmit USB data.

This oscillator locking feature is disabled by default and must be enabled by firmware. In USB systems, this feature must always be enabled unless the device is being used with an accurate external clock. The EnableLock bit in the USB\_CR1 register is used to turn on the locking feature.

### 21.2.4 Transceiver

The internal USB transceiver interfaces to the external USB bus to transmit and receive signals according to the USB 2.0 Specification. In normal USB operation, the transceiver interfaces directly to the SIE and no user interaction is needed after initialization. The USB Enable bit in the USB\_CR0 register must be set to enable the transceiver for USB operation. The I/O Mode bit in USBIO\_CR1 must not be set during normal USB mode of operation. The transceiver can also be used in non-USB modes, because the D+ and D– pins can be read and written through register control bits. This enables multi-purpose use of these pins (for example, in a system that supports both USB and PS/2 signaling). Clearing the USB Enable bit of USB\_CR0 powers down the USB differential receiver and disables USB communication.

For USB operation, the transceiver contains an internal 1.5-k $\Omega$  pull-up resistor on the D+ line. This resistor is isolated from the D+ pin at reset and is attached under firmware control through the USBPUEN bit in the USBIO\_CR1 register. After the D+ pull-up resistor is connected to the D+ line, the system normally detects that as an attach and begins the USB enumeration process. No additional external pull-up resistor must be added to the D+ line, because the transceiver signaling is optimized for use with the internal D+ pull-up resistor. However, low-value series resistors (22  $\Omega$ ) must be added externally to meet the driving impedance requirement for full-speed USB.

The transceiver also includes 5-k $\Omega$  pull-up resistors on both the D+ and D– pins for communication at PS/2 or similar signaling levels. These resistors are disconnected at reset and can be connected with the PS2PUEN bit in the USBIO\_CR1 register. The D+ and D– pins can also be driven individually high and low in both USB and non-USB modes. The state of those pins can be read in any mode. Refer to the description of the [USBIO\\_CR0](#) and [USBIO\\_CR1](#) registers for more detail.



## 21.2.5 USB Suspend

Loss of USB activity, while the USB VBus is still asserted, indicates that the device must enter USB Suspend mode. (Self-powered devices do not need to go into Suspend mode.) This condition is detected by monitoring the Bus Activity bit in the USB\_CR1 register. This bit must be polled periodically. If it reads high (bus activity present), it must be cleared by firmware. If no activity is detected for the desired time (for example, 3 ms), then the device must enter Suspend mode.

Not all sleep modes preserve the USB configuration register states during sleep. The Standby I2C-USB mode is the preferred sleep mode for USB operation because the state of all USB registers is maintained during sleep. The other sleep modes do not preserve all of these registers to save sleep power.

The USB regulator settings must not be changed when entering sleep state, because the regulator automatically enters a low-power state for the given regulator mode (pass-through or regulating).

### 21.2.5.1 Using Standby I2C-USB Sleep Mode for USB Suspend

To enter Standby I2C-USB mode, firmware powers down the desired functions, as it would to enter a Standby I2C-USB mode sleep state as documented in [11.1.1 Sleep Control Implementation Logic on page 78](#), including writing the SLEEP bit of the CPU\_SCR0 register. In this mode, USB configuration registers and data are preserved during sleep.

### 21.2.5.2 Using Standby or Deep Sleep Modes for USB Suspend

The Standby and Deep Sleep modes do not have hardware supported for USB suspend operation because not all USB registers are preserved in these modes. In USB parts, if there is a need to enter Standby or Deep Sleep mode, then user firmware must save the non-retained registers to SRAM before entering into sleep and restore these registers after the device wakes up. Some configuration registers retain their values in all sleep modes: USB\_CR0, USB\_CR1, USBIO\_CR0, USBIO\_CR1, IMO\_TR, IMO\_TR1. In addition, the USB SRAM contents are preserved in all sleep modes.

The USB registers that retain state in Standby I2C-USB mode but not in other sleep modes are: the endpoint control registers (EPx\_CRx), endpoint PMA write address (PMAx\_WA)/read address (PMAx\_RA) registers, PMA data registers (PMAx\_DR), endpoint count registers (EPx\_CNTx), endpoint 0 data register (EP0\_DRx) and start

of frame registers (USB\_SOFx). These registers are reset after the device comes out of sleep.

An alternative is to simply disconnect from the USB bus before going into one of these sleep modes, and then re-connect to re-initialize the USB system after waking up.

### 21.2.5.3 Wakeup from Suspend

The USB wake interrupt must be enabled to allow the device to exit the sleep state when there is activity on the USB bus. This interrupt can be enabled at any time because it only asserts when the device is in the sleep state. Other interrupts may be optionally enabled, such as the sleep interrupt, GPIO, I2C, to periodically wake the device while in USB suspend state. The USB wake interrupt can wake up the device from all the three sleep states (standby sleep, I2C-USB sleep and deep sleep). If D+ is low when the SLEEP bit is being set, the device briefly enters sleep state, and then exits sleep due to the USB wake interrupt.

By carefully using a sleep timer interrupt, the device can wake periodically, monitor the environment, and return to sleep while maintaining a low average current that meets the USB suspend current specification.

If the device needs to issue a resume signal to the USB system, firmware can write to the TEN and TD bits in the USBIO\_CR0 register to manually force a K state on the bus. Using these bits produces signaling that meets the USB timing specifications.


When driving a resume, the J state (TD=1) must be driven briefly before driving the K state (TD=0). The steps are summarized as follows:

1. Drive the J state (TEN=1, TD=1) for one instruction.
2. Drive the resume, or K state (TEN=1, TD=0) for the proper time (1 ms to 15 ms).
3. Stop driving the USB bus manually (TEN=0).

## 21.2.6 Regulator

The transceiver contains a built-in regulator that can be used to power the transceiver from the USB bus voltage or other supply around 5 V. The regulator supplies the proper levels for USB signals, which switch between 0 V and 3.3 V nominally. If the PSoC device is operating with a Vdd supply near 3.3 V, then the regulator must be placed into a pass-through mode so that the Vdd voltage is directly supplied to the transceiver, without regulation. The RegEnable bit (bit 0 in the USB\_CR1 register) is used to pick between the regulating mode (5-V supply) or the passthrough mode (3.3-V supply). At power-up, the regulator is automatically held in pass-through mode, but the USB transceiver pins are tristated.

Figure 21-2. Transceiver and Regulator Block Diagram

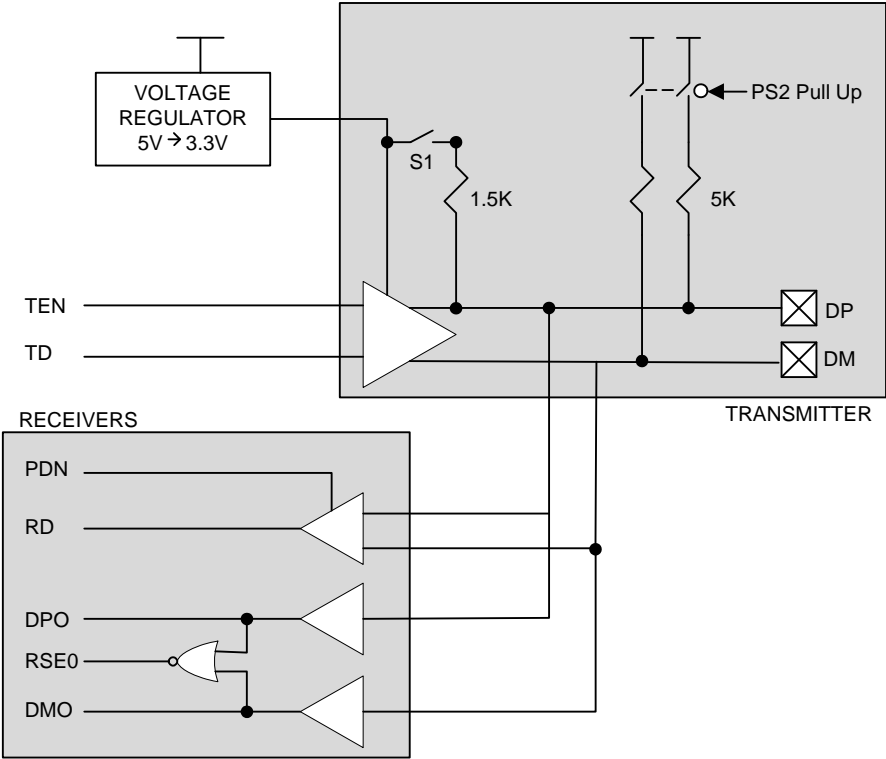



## 21.3 Register Definitions

The following registers are related to Full-Speed USB in the PSoC device. For a complete table of the Full-Speed USB registers, refer to the Registers table [Summary Table of the System Resource Registers on page 98](#). Register bits that are grayed out in this document are reserved bits and are not detailed in the register descriptions that follow. Always write reserved bits with a value of '0'.

### 21.3.1 USB\_SOF0 Register

| Address | Name                     | Bit 7             | Bit 6 | Bit 5 | Bit 4 | Bit 3              | Bit 2 | Bit 1 | Bit 0 | Access |
|---------|--------------------------|-------------------|-------|-------|-------|--------------------|-------|-------|-------|--------|
| 0,31h   | <a href="#">USB_SOF0</a> | Frame Number[7:0] |       |       |       |                    |       |       |       | R : 00 |
| 0,32h   | <a href="#">USB_SOF1</a> |                   |       |       |       | Frame Number[10:8] |       |       |       | R : 0  |

The USB Start of Frame Registers (USB\_SOF0 and USB\_SOF1) provide access to the 11-bit SOF frame number. Start of frame packets are sent from the host (for example, the PC) every 1 ms. For more information, see the *Universal Serial Bus Specification, revision 2.0*.

**Bits 7 to 0: Frame Number.** The USB\_SOF0 register has the lower 8 bits [7:0] and the USB\_SOF1 register has the upper 3 bits [10:8] of the SOF frame number.

For additional information, refer to the [USB\\_SOF0 register on page 183](#) and the [USB\\_SOF1 register on page 184](#).

### 21.3.2 USB\_CR0 Register

| Address | Name                    | Bit 7      | Bit 6               | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|-------------------------|------------|---------------------|-------|-------|-------|-------|-------|-------|---------|
| 0,33h   | <a href="#">USB_CR0</a> | USB Enable | Device Address[6:0] |       |       |       |       |       |       | RW : 00 |

The USB Control Register 0 (USB\_CR0) is used to set the PSoC's USB address and enable the USB system resource. The [USB\\_MISC\\_CR register on page 249](#) must be set correctly for the bits in this register to function as described here.

All bits in this register are reset to zero when a USB bus reset interrupt occurs.

**Note** Set the IMO frequency to 24 MHz and enable the 48-MHz clock in the OSC\_CR2 register before USB is enabled. See IMO\_TR and CPU\_SCR1 registers for selecting IMO frequency as 24 MHz.

**Bit 7: USB Enable.** This bit enables the PSoC device to respond to USB traffic. '0' is USB disabled. The device does not respond to USB traffic. '1' is USB enabled.

**Bits 6 to 0: Device Address[6:0].** These bits specify the USB device address to which the SIE responds. This address must be set by firmware and is specified by the USB host with a SET ADDRESS command during USB enumeration. This value must be programmed by firmware when assigned during enumeration. It is not set automatically by the hardware.

For additional information, refer to the [USB\\_CR0 register on page 185](#).

### 21.3.3 USBIO\_CR0 Register

| Address | Name                      | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access |
|---------|---------------------------|-------|-------|-------|-------|-------|-------|-------|-------|--------|
| 0,34h   | <a href="#">USBIO_CR0</a> | TEN   | TSE0  | TD    |       |       |       |       | RD    | # : 0  |

The USB I/O Control Register 0 (USBIO\_CR0) is used for manually transmitting on the USB D+ and D– pins, or reading the differential receiver.

**Bit 7: TEN.** This is used to manually transmit on the D+ and D– pins. Normally, this bit must be cleared to allow the internal SIE to drive the pins. The most common reason for manually transmitting is to force a resume state on the bus. '0' is manual transmission off (TSE0 and TD have no effect). '1' is manual transmission enabled (TSE0 and TD determine the state of the D+ and D– pins).

**Bit 6: TSE0.** Transmit Single-Ended Zero. SE0: both D+ and D– low. No effect if TEN=0. '0' is do not force SE0. '1' is force SE0 on D+ and D–.

**Bit 5: TD.** Transmit a USB J or K state on the USB bus. No effect if TEN=0 or TSE0=1. '0' forces USB K state (D+ is low, D– is high). '1' forces USB J state (D+ is high, D– is low).

**Bit 0: RD.** This read only bit gives the state of the USB differential receiver. '0' is D+ < D– or D+ = D– = 0. '1' is D+ > D–.

For additional information, refer to the [USBIO\\_CR0 register on page 186](#).

### 21.3.4 USBIO\_CR1 Register

| Address | Name                      | Bit 7  | Bit 6      | Bit 5 | Bit 4 | Bit 3   | Bit 2    | Bit 1 | Bit 0 | Access |
|---------|---------------------------|--------|------------|-------|-------|---------|----------|-------|-------|--------|
| 0,35h   | <a href="#">USBIO_CR1</a> | IOMode | Drive Mode | DPI   | DMI   | PS2PUEN | USBPUEEN | DPO   | DMO   | # : 03 |

The USB I/O Control Register 1 (USBIO\_CR1) is used to manually read or write the D+ and D– pins, and to configure internal pull-up resistors on those pins.

**Bit 7: IOMode.** This bit allows the D+ and D– pins to be configured for either USB mode or bit banded modes. If this bit is set, the DMI and DPI bits are used to drive the D– and D+ pins. '0' is USB mode. Drive mode has no effect. '1' is drive mode, DMI and DPI determine state of the D+ and D– pins.

**Bit 6: Drive Mode.** If the IOMode bit is set, this bit configures the D– and D+ pins for either CMOS drive or open drain drive. If IOMode is cleared, this bit has no effect. Note that in open drain mode, 5-k $\Omega$  pull-up resistors can be connected internally with the PS2PUEN bit. '0' is D+ and D– are in open drain mode. If the DPI or DMI bits are set high, the corresponding D+ or D– pad is high-impedance. '1' is D+ and D– are in CMOS drive mode. D+ follows DPI and D– follows DMI.

**Bit 5: DPI.** This bit is used to drive the D+ pin if IOMode=1. Refer to the Drive Mode bit for drive state of pad. '0' is drive D+ pad low. '1' is drive D+ pad high (unless Drive Mode=0).

**Bit 4: DMI.** This bit is used to drive the D– pin if IOMode=1. Refer to the Drive Mode bit for drive state of pad. '0' is drive D– pad low. '1' is drive D– pad high (unless Drive Mode=0).

**Bit 3: PS2PUEN.** This bit controls the connection of the two internal 5-k $\Omega$  pull-up resistors to the D+ and D– pins. '0' is no effect. '1' is apply 5k pull ups between Vdd and both D+ and D– pads, independent of the IOMode and Drive Mode bits.

**Bit 2: USBPUEEN.** This bit controls the connection of the internal 1.5-k $\Omega$  pull-up resistor on the D+ pin. '0' is no effect. '1' is apply internal USB pull-up resistor to D+ pad.

**Bit 1: DPO.** This read-only bit gives the state of the D+ pin.

**Bit 0: DMO.** This read-only bit gives the state of the D– pin.

For additional information, refer to the [USBIO\\_CR1 register on page 187](#).

### 21.3.5 EP0\_CR Register

| Address | Name   | Bit 7          | Bit 6       | Bit 5        | Bit 4             | Bit 3     | Bit 2 | Bit 1 | Bit 0 | Access |
|---------|--------|----------------|-------------|--------------|-------------------|-----------|-------|-------|-------|--------|
| 0,36h   | EP0_CR | Setup Received | IN Received | OUT Received | ACKed Transaction | Mode[3:0] |       |       |       | # : 00 |

The Endpoint Control Register (EP0\_CR) is used to configure endpoint 0.

Because both firmware and the SIE are allowed to write to the Endpoint 0 Control and Count registers, the SIE provides an interlocking mechanism to prevent accidental overwriting of data. When the SIE writes to these registers they are locked and the processor cannot write to them until after reading the EP0\_CR register. Writing to this register clears the upper four bits regardless of the value written.

**Note** The register lock is removed when the following M8C instructions are used to write the EP0\_CR register as these instructions generate a read (IOR\_) signal, which causes the lock to be removed even without the firmware actually reading the EP0\_CR register.

```
mov reg[expr], expr
mov reg[X+expr], expr
```

**Bit 7: Setup Received.** When set, this bit indicates a valid setup packet was received and ACKed. This bit is forced high from the start of the data packet phase of the setup transaction, until the start of the ACK packet returned by the SIE. The CPU is prevented from clearing this bit during this interval. After this interval, the bit remains set until cleared by firmware. While this bit is set to '1', the CPU cannot write to the EP0\_DRx registers. This prevents firmware from overwriting an incoming setup transaction before firmware has a chance to read the setup data. This bit is cleared by any non-locked writes to the register.

**Bit 6: IN Received.** When set, this bit indicates a valid IN packet has been received. This bit is updated to '1' after the host acknowledges an IN data packet. When clear, this bit indicates either no IN has been received or that the host did not acknowledge the IN data by sending an ACK handshake. It is cleared by any non-locked writes to the register.

**Bit 5: OUT Received.** When set, this bit indicates a valid OUT packet has been received and ACKed. This bit is updated to '1' after the last received packet in an OUT transaction. When clear, this bit indicates no OUT has been received. It is cleared by any non-locked writes to the register.

**Bit 4: ACKed Transaction.** This bit is set whenever the SIE engages in a transaction to the register's endpoint that completes with an ACK packet. This bit is cleared by any non-locked writes to the register.

**Bits 3 to 0: Mode[3:0].** The mode bits control how the USB SIE responds to traffic and how the USB SIE changes the mode of that endpoint as a result of host packets to the endpoint.

For additional information, refer to the [EP0\\_CR register on page 188](#).

## 21.3.6 EP0\_CNT Register

| Address | Name    | Bit 7       | Bit 6      | Bit 5 | Bit 4 | Bit 3           | Bit 2 | Bit 1 | Bit 0 | Access |
|---------|---------|-------------|------------|-------|-------|-----------------|-------|-------|-------|--------|
| 0,37h   | EP0_CNT | Data Toggle | Data Valid |       |       | Byte Count[3:0] |       |       |       | # : 00 |

The Endpoint 0 Count Register (EP0\_CNT) is used to configure endpoint 0.

Whenever the count updates from a setup or OUT transaction, this register locks and cannot be written by the CPU. Reading the EP0\_CR register unlocks this register. This prevents firmware from overwriting a status update on incoming setup or OUT transactions, before firmware has a chance to read the data.

**Bit 7: Data Toggle.** This bit selects the data packet's toggle state. For IN transactions, firmware must set this bit. For OUT or setup transactions, the SIE hardware sets this bit to the state of the received Data Toggle bit. '0' is DATA0. '1' is DATA1.

**Bit 6: Data Valid.** This bit indicates whether there were errors in OUT or setup transactions. It is cleared to '0' if CRC, bit stuff, or PID errors have occurred. This bit does not update for some endpoint mode settings. This bit may be cleared by writing a zero to it when the register is not locked. '0' is error in data received. '1' is no error.

**Bits 3 to 0: Byte Count[3:0].** These bits indicate the number of data bytes in a transaction. For IN transactions, firmware loads the count with the number of bytes to be transmitted to the host from the endpoint FIFO. Valid values are 0 to 8. For OUT or setup transactions, the count is updated by hardware to the number of data bytes received, plus two for the CRC bytes. Valid values are 2 to 10.

For additional information, refer to the [EP0\\_CNT register on page 189](#).

## 21.3.7 EP0\_DRx Register

| Address | Name    | Bit 7          | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|---------|----------------|-------|-------|-------|-------|-------|-------|-------|---------|
| 0,38h   | EP0_DR0 | Data Byte[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,39h   | EP0_DR1 | Data Byte[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,3Ah   | EP0_DR2 | Data Byte[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,3Bh   | EP0_DR3 | Data Byte[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,3Ch   | EP0_DR4 | Data Byte[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,3Dh   | EP0_DR5 | Data Byte[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,3Eh   | EP0_DR6 | Data Byte[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,3Fh   | EP0_DR7 | Data Byte[7:0] |       |       |       |       |       |       |       | RW : 00 |

The Endpoint 0 Data Register (EP0\_DRx) is used to read and write data to the USB control endpoint.

The EP0\_DRx registers have a hardware-locking feature that prevents the CPU write when setup is active. The registers are locked as soon as the setup token is decoded and remain locked throughout the setup transaction and until the EP0\_CR register has been read. This is to prevent overwriting new setup data before firmware knows it has arrived.

All other endpoint data buffers do not have this locking feature.

**Bits 7 to 0: Data Byte[7:0].** These registers are shared for both transmit and receive. The count in the EP0\_CNT register determines the number of bytes received or to be transferred.

For additional information, refer to the [EP0\\_DRx register on page 190](#).

### 21.3.8 EPx\_CNT1 Register

| Address | Name     | Bit 7           | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|----------|-----------------|-------|-------|-------|-------|-------|-------|-------|---------|
| 0,41h   | EP1_CNT1 | Data Count[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,43h   | EP2_CNT1 | Data Count[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,45h   | EP3_CNT1 | Data Count[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,47h   | EP4_CNT1 | Data Count[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,49h   | EP5_CNT1 | Data Count[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,4Bh   | EP6_CNT1 | Data Count[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,4Dh   | EP7_CNT1 | Data Count[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,4Fh   | EP8_CNT1 | Data Count[7:0] |       |       |       |       |       |       |       | RW : 00 |

The Endpoint Count Register 1 (EPx\_CNT1) sets or reports the number of bytes in a USB data transfer to the non-control endpoints.

**Bit 7 to 0: Data Count.** These bits are the eight LSb of a 9-bit counter. The MSb is the Count MSb bit of the EPx\_CNT0 register. The 9-bit count indicates the number of data bytes in a transaction. For IN transactions, firmware loads the count with the number of data bytes to be transmitted to the host. Valid values are 0 to 256. The 9-bit count also sets the limit for the number of bytes that are received for an OUT transaction. Before an OUT transaction is received for an endpoint, this count value must be set to the maximum number of data bytes to receive. If this count value is set to a value greater than the number of bytes (Data + CRC) received, both the data from the USB packet and the two-byte CRC are written to the USB's dedicated SRAM.

If the number of data bytes received is exactly the same as the 9-bit count, then only the data is updated into the USB SRAM and the CRC is discarded but the OUT transaction is completed according to the Mode bits of the EPx Control Register. If the number of data bytes received is more than the 9-bit count, then the OUT transaction is ignored.

After the OUT transaction is complete, the full 9-bit count is updated by the SIE to the actual number of data bytes received by the SIE plus two for the packet's CRC. Valid values are 2 to 258.

To get the actual number of bytes received, firmware must decrement the 9-bit count by two.

For additional information, refer to the [EPx\\_CNT1 register on page 192](#).

### 21.3.9 EPx\_CNT0 Register

| Address | Name     | Bit 7       | Bit 6      | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0     | Access |
|---------|----------|-------------|------------|-------|-------|-------|-------|-------|-----------|--------|
| 0,40h   | EP1_CNT0 | Data Toggle | Data Valid |       |       |       |       |       | Count MSB | # : 0  |
| 0,42h   | EP2_CNT0 | Data Toggle | Data Valid |       |       |       |       |       | Count MSB | # : 0  |
| 0,44h   | EP3_CNT0 | Data Toggle | Data Valid |       |       |       |       |       | Count MSB | # : 0  |
| 0,46h   | EP4_CNT0 | Data Toggle | Data Valid |       |       |       |       |       | Count MSB | # : 0  |
| 0,48h   | EP5_CNT0 | Data Toggle | Data Valid |       |       |       |       |       | Count MSB | # : 0  |
| 0,4Ah   | EP6_CNT0 | Data Toggle | Data Valid |       |       |       |       |       | Count MSB | # : 0  |
| 0,4Ch   | EP7_CNT0 | Data Toggle | Data Valid |       |       |       |       |       | Count MSB | # : 0  |
| 0,4Eh   | EP8_CNT0 | Data Toggle | Data Valid |       |       |       |       |       | Count MSB | # : 0  |

The Endpoint Count Register 0 (EPx\_CNT0) is used for configuring endpoints 1 through 8.

**Bit 7: Data Toggle.** This bit selects the data packet's toggle state. For IN transactions, firmware must set this bit to the expected state. For OUT transactions, the hardware sets this bit to the state of the received Data Toggle bit. '0' is DATA0. '1' is DATA1.

**Bit 6: Data Valid.** This bit is used for OUT transactions only and is read only. It is cleared to '0' if CRC, bit stuffing errors, or PID errors occur. This bit does not update for some endpoint mode settings. '0' is error in data received. '1' is no error.

**Bit 0: Count MSB.** This bit is the one MSb of a 9-bit counter. The LSb are the Data Count[7:0] bits of the EPx\_CNT1 register. Refer to the [EPx\\_CNT1 Register](#) for more information.

For additional information, refer to the [EPx\\_CNT0 register on page 191](#).

### 21.3.10 EPx\_CR0 Register

| Address | Name    | Bit 7 | Bit 6 | Bit 5      | Bit 4    | Bit 3     | Bit 2 | Bit 1 | Bit 0 | Access |
|---------|---------|-------|-------|------------|----------|-----------|-------|-------|-------|--------|
| 1,54h   | EP1_CR0 | Stall |       | NAK_INT_EN | ACKed Tx | Mode[3:0] |       |       |       | # : 00 |
| 1,55h   | EP2_CR0 | Stall |       | NAK_INT_EN | ACKed Tx | Mode[3:0] |       |       |       | # : 00 |
| 1,56h   | EP3_CR0 | Stall |       | NAK_INT_EN | ACKed Tx | Mode[3:0] |       |       |       | # : 00 |
| 1,57h   | EP4_CR0 | Stall |       | NAK_INT_EN | ACKed Tx | Mode[3:0] |       |       |       | # : 00 |
| 1,58h   | EP5_CR0 | Stall |       | NAK_INT_EN | ACKed Tx | Mode[3:0] |       |       |       | # : 00 |
| 1,59h   | EP6_CR0 | Stall |       | NAK_INT_EN | ACKed Tx | Mode[3:0] |       |       |       | # : 00 |
| 1,5Ah   | EP7_CR0 | Stall |       | NAK_INT_EN | ACKed Tx | Mode[3:0] |       |       |       | # : 00 |
| 1,5Bh   | EP8_CR0 | Stall |       | NAK_INT_EN | ACKed Tx | Mode[3:0] |       |       |       | # : 00 |

The Endpoint Control Register 0 (EPx\_CR0) is used for status and configuration of the non-control endpoints 1 to 8.

**Bit 7: Stall.** When this bit is set, the SIE stalls an OUT packet if the mode bits are set to ACK-OUT. The SIE stalls an IN packet if the mode bits are set to ACK-IN. This bit must be cleared for all other modes. '0' is do not issue a stall. '1' is stall an OUT packet if mode bits are set to ACK-OUT, or stall an IN packet if mode bits are set to ACK-IN.

**Bit 5: NAK Int Enable.** When set, this bit causes an endpoint interrupt to be generated even when a transfer completes with a NAK. '0' is do not issue an interrupt after completing the transaction by sending NAK. '1' is interrupt after transaction is complete by sending NAK.

**Bit 4: ACKed Transaction.** The ACKed Transaction bit is set whenever the SIE engages in a transaction to the register's endpoint that completes with an ACK packet. This bit is cleared by any writes to the register. '0' is no ACKed transactions since bit was last cleared. '1' indicates a transaction ended with an ACK.

**Bits 3 to 0: Mode[3:0].** The mode controls how the USB SIE responds to traffic and how the USB SIE changes the mode of that endpoint as a result of host packets to the endpoint. Refer to ["Mode Encoding for Control and Non-Control Endpoints"](#) on page 156.

For additional information, refer to the [EPx\\_CR0 register](#) on page 247.

### 21.3.11 PMAx\_WA Register

| Address | Name     | Bit 7              | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|----------|--------------------|-------|-------|-------|-------|-------|-------|-------|---------|
| 1,34h   | PMA0_WA  | Write Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,35h   | PMA1_WA  | Write Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,36h   | PMA2_WA  | Write Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,37h   | PMA3_WA  | Write Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,38h   | PMA4_WA  | Write Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,39h   | PMA5_WA  | Write Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,3Ah   | PMA6_WA  | Write Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,3Bh   | PMA7_WA  | Write Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,44h   | PMA8_WA  | Write Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,45h   | PMA9_WA  | Write Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,46h   | PMA10_WA | Write Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,47h   | PMA11_WA | Write Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,48h   | PMA12_WA | Write Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,49h   | PMA13_WA | Write Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,4Ah   | PMA14_WA | Write Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,4Bh   | PMA15_WA | Write Address[7:0] |       |       |       |       |       |       |       | RW : 00 |

The PSoC Memory Arbiter Write Address Register (PMAx\_WA) is used to set the beginning SRAM address for the PMA channel. A PMAx\_WA register address uses the same physical register as the PMAx\_RA register address. Therefore, when the read address is changed, the write address is also changed and the PMAx\_RA and PMAx\_WA registers always return the same value when read.

**Bits 7 to 0: Address[7:0].** The value returned when this register is read depends on whether the PMA channel is being used by the USB SIE or by the M8C. In the USB case, this register always returns the beginning SRAM address for the PMA channel. In the M8C case, this register always returns the next SRAM address that is used by the PMA channel, if a byte is written to the channel's data register (PMAx\_DR) by the M8C.

For additional information, refer to the [PMAx\\_WA register on page 245](#).



### 21.3.12 PMAx\_DR Register

| Address | Name     | Bit 7          | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|----------|----------------|-------|-------|-------|-------|-------|-------|-------|---------|
| 0,58h   | PMA0_DR  | Data Byte[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,59h   | PMA1_DR  | Data Byte[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,5Ah   | PMA2_DR  | Data Byte[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,5Bh   | PMA3_DR  | Data Byte[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,5Ch   | PMA4_DR  | Data Byte[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,5Dh   | PMA5_DR  | Data Byte[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,5Eh   | PMA6_DR  | Data Byte[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,5Fh   | PMA7_DR  | Data Byte[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,64h   | PMA8_DR  | Data Byte[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,65h   | PMA9_DR  | Data Byte[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,66h   | PMA10_DR | Data Byte[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,67h   | PMA11_DR | Data Byte[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,68h   | PMA12_DR | Data Byte[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,69h   | PMA13_DR | Data Byte[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,6Ah   | PMA14_DR | Data Byte[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 0,6Bh   | PMA15_DR | Data Byte[7:0] |       |       |       |       |       |       |       | RW : 00 |

The PSoC Memory Arbiter Data Register (PMAx\_DR) is used to read and write to a particular PMA channel by either the USB SIE or the M8C. Note that a PMA channel may not be used simultaneously by both the USB SIE and the M8C.

**Bits 7 to 0: Data Byte[7:0].** When the M8C writes to this register, the PMA registers the byte and then stores the value at the address in SRAM indicated by the PMAx\_WA register.

After the value is written to SRAM, the PMAx\_WA register is automatically incremented. When the USB SIE writes to this register, the PMA registers the byte and then stores the value in SRAM using the sum of the value of the PMAx\_WA register and the USB SIEs received byte count. When the M8C reads this register, a pre-loaded value is returned and the PMAx\_RA value is automatically incremented.

The new PMAx\_RA value is used to fetch the next value from the SRAM, to be ready for the next read from the channel's PMAx\_DR register. When the USB SIE reads the PMAx\_DR register, it also receives a pre-loaded value, which triggers the PMA logic to fetch the next value in SRAM to be ready for the USB SIEs next read request. In all read cases, the initial pre-load of the first address of the channel is triggered by writing the first address of the channel to the channel's PMAx\_RA register. Therefore, the PMAx\_RA register must be written after data is stored for the channel.

For additional information, refer to the [PMAx\\_DR register on page 193](#).

### 21.3.13 PMAx\_RA Register

| Address | Name     | Bit 7             | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Access  |
|---------|----------|-------------------|-------|-------|-------|-------|-------|-------|-------|---------|
| 1,3Ch   | PMA0_RA  | Read Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,3Dh   | PMA1_RA  | Read Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,3Eh   | PMA2_RA  | Read Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,3Fh   | PMA3_RA  | Read Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,40h   | PMA4_RA  | Read Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,41h   | PMA5_RA  | Read Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,42h   | PMA6_RA  | Read Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,43h   | PMA7_RA  | Read Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,4Ch   | PMA8_RA  | Read Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,4Dh   | PMA9_RA  | Read Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,4Eh   | PMA10_RA | Read Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,4Fh   | PMA11_RA | Read Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,50h   | PMA12_RA | Read Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,51h   | PMA13_RA | Read Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,52h   | PMA14_RA | Read Address[7:0] |       |       |       |       |       |       |       | RW : 00 |
| 1,53h   | PMA15_RA | Read Address[7:0] |       |       |       |       |       |       |       | RW : 00 |

The PSoC Memory Arbiter Read Address Register (PMAx\_RA) is used to set the beginning address for the PMA channel. A PMAx\_RA register address uses the same physical register as the PMAx\_WA register address. Therefore, when the read address is changed, the write address is also changed and the PMAx\_WA and PMAx\_RA registers always return the same value when read. When a PMAx\_RA register is written, the address is stored and the value of the corresponding SRAM address is loaded into the channel's PMAx\_DR. Therefore, this register must only be written after valid data is stored in SRAM for the channel.

**Bits 7 to 0: Address[7:0].** The value returned when this register is read depends on whether the PMA channel is being used by the USB SIE or by the M8C. In the USB SIE case, this register always returns the beginning SRAM address for the PMA channel. In the M8C case, this register always returns the next SRAM address that is used by the PMA channel, if a byte is read from the channel's data register (PMAx\_DR) by the M8C.

For additional information, refer to the [PMAx\\_RA register on page 246](#).

### 21.3.14 USB\_CR1 Register

| Address | Name                    | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2       | Bit 1      | Bit 0     | Access |
|---------|-------------------------|-------|-------|-------|-------|-------|-------------|------------|-----------|--------|
| 1,30h   | <a href="#">USB_CR1</a> |       |       |       |       |       | BusActivity | EnableLock | RegEnable | # : 0  |

The USB Control Register 1 (USB\_CR1) is used to configure the internal regulator and the oscillator tuning capability.

**Bit 2: BusActivity.** The BusActivity bit is a “sticky” bit that detects any non-idle USB event that has occurred on the USB bus. After set to high by the SIE to indicate the bus activity, this bit retains its logical high value until firmware clears it. Writing a '0' to this bit clears it; writing a '1' preserves its value. '0' is no activity. '1' is non-idle activity (D+ = low) was detected since the last time the bit was cleared.

**Bit 1: EnableLock.** Set this bit to turn on the automatic frequency locking of the internal oscillator to USB traffic. Unless an external clock is being provided, this bit must remain set for proper USB operation. '0' is locking disabled. '1' is locking enabled.

**Bit 0: RegEnable.** This bit controls the operation of the internal USB regulator. For applications with device supply voltages in the 5-V range, set this bit high to enable the internal regulator. For device supply voltages in the 3.3-V range, clear this bit to connect the transceiver directly to the supply. '0' is passthrough mode. Use for Vdd = 3.3-V range. '1' is regulating mode. Use for Vdd = 5-V range.

For additional information, refer to the [USB\\_CR1 register on page 244](#).

### 21.3.15 USB\_MISC\_CR Register

| Address | Name                        | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2     | Bit 1  | Bit 0      | Access |
|---------|-----------------------------|-------|-------|-------|-------|-------|-----------|--------|------------|--------|
| 1,BDh   | <a href="#">USB_MISC_CR</a> |       |       |       |       |       | USB_SE_EN | USB_ON | USB_CLK_ON | RW : 0 |

The USB Miscellaneous Control Register controls the clocks to the USB block, to make the IMO work with better accuracy for the USB part and to disable the single-ended input of the USBIO in the case of a non-USB part.

**Bit 2: USB\_SE\_EN.** The single-ended outputs of USBIO is enabled or disabled based upon this bit setting. Set this bit to '1' when using this part as a USB part for USB transactions to occur. Set this bit to '0' to disable single-ended outputs of USBIO. The DPO and DMO are held at logic high state and RSE0 is held at a low state.

**Note** Bit [1:0] of the USBIO\_CR1 register is also affected depending on this register setting. When this bit is '0' (default), regardless of the DP and DM state, the DPO and DMO bits of USBIO\_CR1 are '11b'.

**Bit 1: USB\_ON.** This bit is used by the IMO DAC block to either work with better DNL consuming higher power, or with sacrificed DNL consuming lower power. Set this bit to '1' when the part is used as a USB part. A '0' runs the IMO with sacrificed DNL by consuming less power. A '1' runs the IMO with better DNL by consuming more power.

**Bit 0: USB\_CLK\_ON.** This bit either enables or disables the clocks to the USB block. It is used to save power in cases when the device need not respond to USB traffic. Set this bit to '1' when the device is used as a USB part.

When this bit is a '0', all clocks to the USB block are driven. The device does not respond to USB traffic and none of the USB registers, except IMO\_TR, IMO\_TR1, and USBIO\_CR1, listed in the [Register Definitions on page 161](#) are writable.

When this bit is a '1', clocks are not blocked to the USB block. The device responds to USB traffic depending on the other register settings mentioned under [Register Definitions in the Full-Speed USB \(CY8C24193/493\) chapter on page 155](#).

For additional information, refer to the [USB\\_MISC\\_CR register on page 249](#).

### 21.3.16 IMO\_TR1 Register

| Address | Name    | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2          | Bit 1 | Bit 0 | Access  |
|---------|---------|-------|-------|-------|-------|-------|----------------|-------|-------|---------|
| 1,FAh   | IMO_TR1 |       |       |       |       |       | Fine Trim[2:0] |       |       | RW : 00 |

**INTERNAL Register** – The Internal Main Oscillator Trim Register 1 (IMO\_TR1) fine tunes the IMO frequency.

For information on the other IMO trim register (IMO\_TR), see the [Internal Main Oscillator \(IMO\) chapter on page 67](#) or refer to the [IMO\\_TR1 register on page 268](#) in the Register Details chapter.

**Bits 2 to 0: Fine Trim[2:0].** These bits provide a fine tuning capability to the IMO trim. These three bits are the three LSB of the IMO trim with the IMO\_TR register supplying the eight MSb.

For additional information, refer to the [IMO\\_TR1 register on page 268](#).

# Section E: Registers



The Registers section discusses the registers of the PSoC device. It lists all the registers in mapping tables, in address order. For easy reference, each register is linked to the page of a detailed description located in the next chapter. This section includes the following chapter:

- [Register Reference chapter on page 177.](#)

## Register General Conventions

The register conventions specific to this section and the Register Reference chapter are listed in the following table:

Register Conventions

| Convention                         | Description  |
|------------------------------------|--|
| Empty, grayed-out table cell       | Illustrates a reserved bit or group of bits.                                     |
| 'x' before the comma in an address | Indicates the register exists in register bank 1 and register bank 2.            |
| 'x' in a register name             | Indicates that there are multiple instances/address ranges of the same register. |
| R                                  | Read register or bit(s).   |
| W                                  | Write register or bit(s).  |
| O                                  | Only a read/write register or bit(s).  |
| L                                  | Logical register or bit(s).  |
| C                                  | Clearable register or bit(s).  |
| #                                  | Access is bit specific.  |

## Register Mapping Tables

The PSoC device has a total register address space of 512 bytes. The register space is also referred to as I/O space and is broken into two parts: Bank 0 (user space) and Bank 1 (configuration space). The XIO bit in the Flag register (CPU\_F) determines which bank the user is currently in. When the XIO bit is set, the user is said to be in the “extended” address space or the “configuration” registers.

Refer to the individual PSoC device datasheets for device-specific register mapping information.

Register Map Bank 0 Table: User Space

| Name      | Addr (0.Hex) | Access | Page | Name     | Addr (0.Hex) | Access | Page | Name      | Addr (0.Hex) | Access | Page | Name      | Addr (0.Hex) | Access | Page |
|-----------|--------------|--------|------|----------|--------------|--------|------|-----------|--------------|--------|------|-----------|--------------|--------|------|
| PRT0DR    | 00           | RW     | 178  | EP1_CNT0 | 40           | #      | 191  |           | 80           |        |      |           | C0           |        |      |
| PRT0IE    | 01           | RW     | 179  | EP1_CNT1 | 41           | RW     | 192  |           | 81           |        |      |           | C1           |        |      |
|           | 02           |        |      | EP2_CNT0 | 42           | #      | 191  |           | 82           |        |      |           | C2           |        |      |
|           | 03           |        |      | EP2_CNT1 | 43           | RW     | 192  |           | 83           |        |      |           | C3           |        |      |
| PRT1DR    | 04           | RW     | 178  | EP3_CNT0 | 44           | #      | 191  |           | 84           |        |      |           | C4           |        |      |
| PRT1IE    | 05           | RW     | 179  | EP3_CNT1 | 45           | RW     | 192  |           | 85           |        |      |           | C5           |        |      |
|           | 06           |        |      | EP4_CNT0 | 46           | #      | 191  |           | 86           |        |      |           | C6           |        |      |
|           | 07           |        |      | EP4_CNT1 | 47           | RW     | 192  |           | 87           |        |      |           | C7           |        |      |
| PRT2DR    | 08           | RW     | 178  | EP5_CNT0 | 48           | #      | 191  |           | 88           |        |      | I2C_XCFG  | C8           | RW     | 207  |
| PRT2IE    | 09           | RW     | 179  | EP5_CNT1 | 49           | RW     | 192  |           | 89           |        |      | I2C_XSTAT | C9           | R      | 210  |
|           | 0A           |        |      | EP6_CNT0 | 4A           | #      | 191  |           | 8A           |        |      | I2C_ADDR  | CA           | RW     | 209  |
|           | 0B           |        |      | EP6_CNT1 | 4B           | RW     | 192  |           | 8B           |        |      | I2C_BP    | CB           | R      |      |
| PRT3DR    | 0C           | RW     | 178  | EP7_CNT0 | 4C           | #      | 191  |           | 8C           |        |      | I2C_CP    | CC           | R      | 212  |
| PRT3IE    | 0D           | RW     | 179  | EP7_CNT1 | 4D           | RW     | 192  |           | 8D           |        |      | CPU_BP    | CD           | RW     | 213  |
|           | 0E           |        |      | EP8_CNT0 | 4E           | #      | 191  |           | 8E           |        |      | CPU_CP    | CE           | R      | 214  |
|           | 0F           |        |      | EP8_CNT1 | 4F           | RW     | 192  |           | 8F           |        |      | I2C_BUF   | CF           | RW     | 215  |
| PRT4DR    | 10           | RW     | 178  |          | 50           |        |      |           | 90           |        |      | CUR_PP    | D0           | RW     | 216  |
| PRT4IE    | 11           | RW     | 179  |          | 51           |        |      |           | 91           |        |      | STK_PP    | D1           | RW     | 217  |
|           | 12           |        |      |          | 52           |        |      |           | 92           |        |      | D2        |              |        |      |
|           | 13           |        |      |          | 53           |        |      |           | 93           |        |      | IDX_PP    | D3           | RW     | 218  |
|           | 14           |        |      |          | 54           |        |      |           | 94           |        |      | MVR_PP    | D4           | RW     | 219  |
|           | 15           |        |      |          | 55           |        |      |           | 95           |        |      | MVW_PP    | D5           | RW     | 220  |
|           | 16           |        |      |          | 56           |        |      |           | 96           |        |      | I2C_CFG   | D6           | RW     | 221  |
|           | 17           |        |      |          | 57           |        |      |           | 97           |        |      | I2C_SCR   | D7           | #      | 222  |
|           | 18           |        |      | PMA0_DR  | 58           | RW     | 193  |           | 98           |        |      | I2C_DR    | D8           | RW     | 223  |
|           | 19           |        |      | PMA1_DR  | 59           | RW     | 193  |           | 99           |        |      | D9        |              |        |      |
|           | 1A           |        |      | PMA2_DR  | 5A           | RW     | 193  |           | 9A           |        |      | INT_CLR0  | DA           | RW     | 224  |
|           | 1B           |        |      | PMA3_DR  | 5B           | RW     | 193  |           | 9B           |        |      | INT_CLR1  | DB           | RW     | 226  |
|           | 1C           |        |      | PMA4_DR  | 5C           | RW     | 193  |           | 9C           |        |      | INT_CLR2  | DC           | RW     | 228  |
|           | 1D           |        |      | PMA5_DR  | 5D           | RW     | 193  |           | 9D           |        |      | DD        |              |        |      |
|           | 1E           |        |      | PMA6_DR  | 5E           | RW     | 193  |           | 9E           |        |      | INT_MSK2  | DE           | RW     | 230  |
|           | 1F           |        |      | PMA7_DR  | 5F           | RW     | 193  |           | 9F           |        |      | INT_MSK1  | DF           | RW     | 231  |
|           | 20           |        |      |          | 60           |        |      |           | A0           |        | 200  | INT_MSK0  | E0           | RW     | 232  |
|           | 21           |        |      |          | 61           |        |      |           | A1           |        | 212  | INT_SW_EN | E1           | RW     | 233  |
|           | 22           |        |      |          | 62           |        |      | CS_CR2    | A2           | RW     | 200  | INT_VC    | E2           | RC     | 234  |
|           | 23           |        |      |          | 63           |        |      | CS_CR3    | A3           | RW     | 201  | RES_WDT   | E3           | W      | 235  |
|           | 24           |        |      | PMA8_DR  | 64           | RW     | 193  |           | A4           |        | 215  | E4        |              |        |      |
|           | 25           |        |      | PMA9_DR  | 65           | RW     | 193  |           | A5           |        | 216  | E5        |              |        |      |
|           | 26           |        |      | PMA10_DR | 66           | RW     | 193  |           | A6           |        | 217  | E6        |              |        |      |
|           | 27           |        |      | PMA11_DR | 67           | RW     | 193  |           | A7           |        | 218  | E7        |              |        |      |
|           | 28           |        |      | PMA12_DR | 68           | RW     | 193  |           | A8           |        | 202  | E8        |              |        |      |
| SPI_TXR   | 29           | W      | 180  | PMA13_DR | 69           | RW     | 193  |           | A9           |        | 202  | E9        |              |        |      |
| SPI_RXR   | 2A           | R      | 181  | PMA14_DR | 6A           | RW     | 193  |           | AA           |        |      | EA        |              |        |      |
| SPI_CR    | 2B           | #      | 182  | PMA15_DR | 6B           | RW     | 193  |           | AB           |        |      | EB        |              |        |      |
|           | 2C           |        |      | TMP_DR0  | 6C           | RW     | 248  |           | AC           |        |      | EC        |              |        |      |
|           | 2D           |        |      | TMP_DR1  | 6D           | RW     | 248  |           | AD           |        |      | ED        |              |        |      |
|           | 2E           |        |      | TMP_DR2  | 6E           | RW     | 248  |           | AE           |        |      | EE        |              |        |      |
|           | 2F           |        |      | TMP_DR3  | 6F           | RW     | 248  |           | AF           |        |      | EF        |              |        |      |
|           | 30           |        |      |          | 70           |        |      | PT0_CFG   | B0           | RW     | 202  | F0        |              |        |      |
| USB_SOF0  | 31           | R      | 183  |          | 71           |        |      | PT0_DATA1 | B1           | RW     | 204  | F1        |              |        |      |
| USB_SOF1  | 32           | R      | 184  |          | 72           |        |      | PT0_DATA0 | B2           | RW     | 204  | F2        |              |        |      |
| USB_CR0   | 33           | RW     | 185  |          | 73           |        |      | PT1_CFG   | B3           | RW     | 205  | F3        |              |        |      |
| USBIO_CR0 | 34           | #      | 186  |          | 74           |        |      | PT1_DATA1 | B4           | RW     | 204  | F4        |              |        |      |
| USBIO_CR1 | 35           | #      | 187  |          | 75           |        |      | PT1_DATA0 | B5           | RW     | 204  | F5        |              |        |      |
| EPO_CR    | 36           | #      | 188  |          | 76           |        |      | PT2_CFG   | B6           | RW     | 206  | F6        |              |        |      |
| EPO_CNT0  | 37           | #      | 189  |          | 77           |        |      | PT2_DATA1 | B7           | RW     | 204  | CPU_F     | F7           | RL     | 236  |
| EPO_DR0   | 38           | RW     | 190  | CMP_RDC  | 78           | #      | 194  | PT2_DATA0 | B8           | RW     | 204  | F8        |              |        |      |
| EPO_DR1   | 39           | RW     | 190  | CMP_MUX  | 79           | RW     | 195  |           | B9           |        |      | F9        |              |        |      |
| EPO_DR2   | 3A           | RW     | 190  | CMP_CR0  | 7A           | RW     | 196  |           | BA           |        |      | FA        |              |        |      |
| EPO_DR3   | 3B           | RW     | 190  | CMP_CR1  | 7B           | RW     | 197  |           | BB           |        |      | FB        |              |        |      |
| EPO_DR4   | 3C           | RW     | 190  | CMP_LUT  | 7C           | RW     | 199  |           | BC           |        |      | FC        |              |        |      |
| EPO_DR5   | 3D           | RW     | 190  |          | 7D           |        |      |           | BD           |        |      | IDAC_D    | FD           | RW     | 238  |

Gray fields are reserved. # Access is bit specific.

| Name    | Addr (0,Hex) | Access | Page | Name | Addr (0,Hex) | Access | Page | Name | Addr (0,Hex) | Access | Page | Name     | Addr (0,Hex) | Access | Page |
|---------|--------------|--------|------|------|--------------|--------|------|------|--------------|--------|------|----------|--------------|--------|------|
| EP0_DR6 | 3E           | RW     | 190  |      | 7E           |        |      |      | BE           |        |      | CPU_SCR1 | FE           | #      | 239  |
| EP0_DR7 | 3F           | RW     | 190  |      | 7F           |        |      |      | BF           |        |      | CPU_SCR0 | FF           | #      | 240  |

Gray fields are reserved. # Access is bit specific.

Dark Grey fields denotes "Registers are available only for CY8C24193/493".

Blue fields denotes "These registers are available only for devices CY8C24093/293/393/693".

Register Map Bank 1 Table: Configuration Space

| Name    | Addr (1,Hex) | Access | Page | Name     | Addr (1,Hex) | Access | Page | Name | Addr (1,Hex) | Access | Page | Name      | Addr (1,Hex) | Access | Page |
|---------|--------------|--------|------|----------|--------------|--------|------|------|--------------|--------|------|-----------|--------------|--------|------|
| PRT0DM0 | 00           | RW     | 241  | PMA4_RA  | 40           | RW     | 246  |      | 80           |        |      |           | C0           |        |      |
| PRT0DM1 | 01           | RW     | 242  | PMA5_RA  | 41           | RW     | 246  |      | 81           |        |      |           | C1           |        |      |
|         | 02           |        |      | PMA6_RA  | 42           | RW     | 246  |      | 82           |        |      |           | C2           |        |      |
|         | 03           |        |      | PMA7_RA  | 43           | RW     | 246  |      | 83           |        |      |           | C3           |        |      |
| PRT1DM0 | 04           | RW     | 241  | PMA8_WA  | 44           | RW     | 245  |      | 84           |        |      |           | C4           |        |      |
| PRT1DM1 | 05           | RW     | 242  | PMA9_WA  | 45           | RW     | 245  |      | 85           |        |      |           | C5           |        |      |
|         | 06           |        |      | PMA10_WA | 46           | RW     | 245  |      | 86           |        |      |           | C6           |        |      |
|         | 07           |        |      | PMA11_WA | 47           | RW     | 245  |      | 87           |        |      |           | C7           |        |      |
| PRT2DM0 | 08           | RW     | 241  | PMA12_WA | 48           | RW     | 245  |      | 88           |        |      |           | C8           |        |      |
| PRT2DM1 | 09           | RW     | 242  | PMA13_WA | 49           | RW     | 245  |      | 89           |        |      |           | C9           |        |      |
|         | 0A           |        |      | PMA14_WA | 4A           | RW     | 245  |      | 8A           |        |      |           | CA           |        |      |
|         | 0B           |        |      | PMA15_WA | 4B           | RW     | 245  |      | 8B           |        |      |           | CB           |        |      |
| PRT3DM0 | 0C           | RW     | 241  | PMA8_RA  | 4C           | RW     | 246  |      | 8C           |        |      |           | CC           |        |      |
| PRT3DM1 | 0D           | RW     | 242  | PMA9_RA  | 4D           | RW     | 246  |      | 8D           |        |      |           | CD           |        |      |
|         | 0E           |        |      | PMA10_RA | 4E           | RW     | 246  |      | 8E           |        |      |           | CE           |        |      |
|         | 0F           |        |      | PMA11_RA | 4F           | RW     | 246  |      | 8F           |        |      |           | CF           |        |      |
| PRT4DM0 | 10           | RW     | 242  | PMA12_RA | 50           | RW     | 246  |      | 90           |        |      |           | D0           |        |      |
| PRT4DM1 | 11           | RW     | 242  | PMA13_RA | 51           | RW     | 246  |      | 91           |        |      | OUT_P0    | D1           | RW     | 250  |
|         | 12           |        |      | PMA14_RA | 52           | RW     | 246  |      | 92           |        |      | ECO_ENBUS | D2           | RW     | 251  |
|         | 13           |        |      | PMA15_RA | 53           | RW     | 246  |      | 93           |        |      | ECO_TRIM  | D3           | RW     | 252  |
|         | 14           |        |      | EP1_CR0  | 54           | #      | 247  |      | 94           |        |      |           | D4           |        |      |
|         | 15           |        |      | EP2_CR0  | 55           | #      | 247  |      | 95           |        |      |           | D5           |        |      |
|         | 16           |        |      | EP3_CR0  | 56           | #      | 247  |      | 96           |        |      |           | D6           |        |      |
|         | 17           |        |      | EP4_CR0  | 57           | #      | 247  |      | 97           |        |      |           | D7           |        |      |
|         | 18           |        |      | EP5_CR0  | 58           | #      | 247  |      | 98           |        |      | MUX_CR0   | D8           | RW     | 253  |
|         | 19           |        |      | EP6_CR0  | 59           | #      | 247  |      | 99           |        |      | MUX_CR1   | D9           | RW     | 253  |
|         | 1A           |        |      | EP7_CR0  | 5A           | #      | 247  |      | 9A           |        |      | MUX_CR2   | DA           | RW     | 253  |
|         | 1B           |        |      | EP8_CR0  | 5B           | #      | 247  |      | 9B           |        |      | MUX_CR3   | DB           | RW     | 253  |
|         | 1C           |        |      |          | 5C           |        |      |      | 9C           |        |      | IO_CFG1   | DC           | RW     | 254  |
|         | 1D           |        |      |          | 5D           |        |      |      | 9D           |        |      | OUT_P1    | DD           | RW     | 255  |
|         | 1E           |        |      |          | 5E           |        |      |      | 9E           |        |      | IO_CFG2   | DE           | RW     | 257  |
|         | 1F           |        |      |          | 5F           |        |      |      | 9F           |        |      | MUX_CR4   | DF           | RW     | 253  |
|         | 20           |        |      |          | 60           |        |      |      | A0           |        |      | OSC_CR0   | E0           | RW     | 258  |
|         | 21           |        |      |          | 61           |        |      |      | A1           |        |      | ECO_CFG   | E1           | #      | 259  |
|         | 22           |        |      |          | 62           |        |      |      | A2           |        |      | OSC_CR2   | E2           | RW     | 260  |
|         | 23           |        |      |          | 63           |        |      |      | A3           |        |      | VLT_CR    | E3           | RW     | 261  |
|         | 24           |        |      |          | 64           |        |      |      | A4           |        |      | VLT_CMP   | E4           | R      | 262  |
|         | 25           |        |      |          | 65           |        |      |      | A5           |        |      |           | E5           |        |      |
|         | 26           |        |      |          | 66           |        |      |      | A6           |        |      |           | E6           |        |      |
|         | 27           |        |      |          | 67           |        |      |      | A7           |        |      |           | E7           |        |      |
|         | 28           |        |      |          | 68           |        |      |      | A8           |        |      | IMO_TR    | E8           | W      | 263  |
| SPI_CFG | 29           | RW     | 243  |          | 69           |        |      |      | A9           |        |      | ILO_TR    | E9           | W      | 264  |
|         | 2A           |        |      |          | 6A           |        |      |      | AA           |        |      |           | EA           |        |      |
|         | 2B           |        |      |          | 6B           |        |      |      | AB           |        |      | SLP_CFG   | EB           | RW     | 265  |
|         | 2C           |        |      | TMP_DR0  | 6C           | RW     | 248  |      | AC           |        |      | SLP_CFG2  | EC           | RW     | 266  |
|         | 2D           |        |      | TMP_DR1  | 6D           | RW     | 248  |      | AD           |        |      | SLP_CFG3  | ED           | RW     | 267  |
|         | 2E           |        |      | TMP_DR2  | 6E           | RW     | 248  |      | AE           |        |      |           | EE           |        |      |
|         | 2F           |        |      | TMP_DR3  | 6F           | RW     | 248  |      | AF           |        |      |           | EF           |        |      |
| USB_CR1 | 30           | #      | 244  |          | 70           |        |      |      | B0           |        |      |           | F0           |        |      |

Gray fields are reserved # Access is bit specific.

| Name    | Addr<br>(1,Hex) | Access | Page | Name | Addr<br>(1,Hex) | Access | Page | Name        | Addr<br>(1,Hex) | Access | Page | Name    | Addr<br>(1,Hex) | Access | Page |
|---------|-----------------|--------|------|------|-----------------|--------|------|-------------|-----------------|--------|------|---------|-----------------|--------|------|
|         | 31              |        |      |      | 71              |        |      |             | B1              |        |      |         | F1              |        |      |
|         | 32              |        |      |      | 72              |        |      |             | B2              |        |      |         | F2              |        |      |
|         | 33              |        |      |      | 73              |        |      |             | B3              |        |      |         | F3              |        |      |
| PMA0_WA | 34              | RW     | 245  |      | 74              |        |      |             | B4              |        |      |         | F4              |        |      |
| PMA1_WA | 35              | RW     | 245  |      | 75              |        |      |             | B5              |        |      |         | F5              |        |      |
| PMA2_WA | 36              | RW     | 245  |      | 76              |        |      |             | B6              |        |      |         | F6              |        |      |
| PMA3_WA | 37              | RW     | 245  |      | 77              |        |      |             | B7              |        |      | CPU_F   | F7              | RL     | 236  |
| PMA4_WA | 38              | RW     | 245  |      | 78              |        |      |             | B8              |        |      |         | F8              |        |      |
| PMA5_WA | 39              | RW     | 245  |      | 79              |        |      |             | B9              |        |      |         | F9              |        |      |
| PMA6_WA | 3A              | RW     | 245  |      | 7A              |        |      |             | BA              |        |      | IMO_TR1 | FA              | RW     | 268  |
| PMA7_WA | 3B              | RW     | 245  |      | 7B              |        |      |             | BB              |        |      |         | FB              |        |      |
| PMA0_RA | 3C              | RW     | 246  |      | 7C              |        |      |             | BC              |        |      |         | FC              |        |      |
| PMA1_RA | 3D              | RW     | 246  |      | 7D              |        |      | USB_MISC_CR | BD              | RW     | 249  |         | FD              |        |      |
| PMA2_RA | 3E              | RW     | 246  |      | 7E              |        |      |             | BE              |        |      |         | FE              |        |      |
| PMA3_RA | 3F              | RW     | 246  |      | 7F              |        |      |             | BF              |        |      |         | FF              |        |      |

Gray fields are reserved # Access is bit specific.

Dark Grey fields denotes "Registers are available only for CY8C24193/493".



## 22. Register Reference



This chapter is a reference for all the PSoC device registers in address order, for Bank 0 and Bank 1. The most detailed descriptions of the PSoC registers are in the Register Definitions section of each chapter. The registers that are in both banks are incorporated with the Bank 0 registers, designated with an 'x', rather than a '0' preceding the comma in the address. Bank 0 registers are listed first and begin on page 178. Bank 1 registers are listed second and begin on page 241. A condensed view of all the registers is shown in the register mapping tables starting on page 173.

### 22.1 Maneuvering Around the Registers

For ease-of-use, this chapter is formatted so that there is one register per page, although some registers use two pages. On each page, from top to bottom, there are four sections:

1. Register name and address (from lowest to highest).
2. Register table showing the bit organization, with reserved bits grayed out.
3. Written description of register specifics or links to additional register information.
4. Detailed register bit descriptions.

Use the register tables, in addition to the detailed register bit descriptions, to determine which bits are reserved. Reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For all registers, an 'x' before the comma in the address field indicates that the register can be accessed or written to no matter what bank is used. For example, the M8C flag register's (CPU\_F) address is 'x,F7h' meaning it is located in bank 0 and bank 1 at F7h.

### 22.2 Register Conventions

The following table lists the register conventions that are specific to this chapter.

Register Conventions

| Convention                   | Example | Description   |
|------------------------------|---------|---|
| 'x' in a register name       | PRTxIE  | Multiple instances/address ranges of the same register. |
| R                            | R : 00  | Read register or bit(s).                                |
| W                            | W : 00  | Write register or bit(s).                               |
| O                            | RO : 00 | Only a read/write register or bit(s).                   |
| L                            | RL : 00 | Logical register or bit(s).                             |
| C                            | RC : 00 | Clearable register or bit(s).                           |
| 00                           | RW : 00 | Reset value is 0x00 or 00h.                             |
| XX                           | RW : XX | Register is not reset.                                  |
| 0,                           | 0,04h   | Register is in bank 0.                                  |
| 1,                           | 1,23h   | Register is in bank 1.                                  |
| x,                           | x,F7h   | Register exists in register bank 0 and register bank 1. |
| Empty, grayed-out table cell |         | Reserved bit or group of bits, unless otherwise stated. |

## 22.3 Bank 0 Registers

The following registers are all in bank 0 and are listed in address order. An 'x' before the comma in the register's address indicates that the register can be accessed in Bank 0 and Bank 1, independent of the XIO bit in the CPU\_F register. Registers that are in both Bank 0 and Bank 1 are listed in address order in Bank 0. For example, the RDIxLT1 register has an address of x,B4h and is listed only in Bank 0 but is accessed in both Bank 0 and Bank 1.

### 22.3.1 PRTxDR

#### Port Data Registers

##### Individual Register Names and Addresses:

0,00h

PRT0DR : 0,00h

PRT1DR : 0,04h

PRT2DR : 0,08h

PRT3DR : 0,0Ch

PRT4DR : 0,10h

|              |           |   |   |   |   |   |   |   |
|--------------|-----------|---|---|---|---|---|---|---|
|              | 7         | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access : POR | RW : 00   |   |   |   |   |   |   |   |
| Bit Name     | Data[7:0] |   |   |   |   |   |   |   |

These registers allow write or read access, or the current logical equivalent, of pin voltage.

The upper nibble of the PRT4DR register returns the last data bus value when read. You need to mask it off before using this information. For additional information, refer to the [Register Definitions on page 61](#) in the GPIO chapter.

| Bit | Name      | Description   |
|-----|-----------|---|
| 7:0 | Data[7:0] | Write value to port or read value from port. Reads return the state of the pin, not the value in the PRTxDR register. |

## 22.3.2 PRTxIE

### Port Interrupt Enable Registers

#### Individual Register Names and Addresses:

PRT0IE : 0,01h      PRT1IE : 0,05h      PRT2IE : 0,09h      PRT3IE : 0,0Dh  
PRT4IE : 0,11h

|              | 7                      | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------------|------------------------|---|---|---|---|---|---|---|
| Access : POR | RW : 00                |   |   |   |   |   |   |   |
| Bit Name     | Interrupt Enables[7:0] |   |   |   |   |   |   |   |

These registers enable or disable interrupts from individual GPIO pins.

The upper nibble of the PRT4IE register returns the last data bus value when read and must be masked off before using this information. For additional information, refer to the [Register Definitions on page 61](#) in the GPIO chapter.

| Bit | Name                   | Description  |
|-----|------------------------|--|
| 7:0 | Interrupt Enables[7:0] | <p>These bits enable the corresponding port pin interrupt. Only four LSB are used because this port has four pins.</p> <p>0      Port pin interrupt disabled for the corresponding pin.</p> <p>1      Port pin interrupt enabled for the corresponding pin. Interrupt mode is determined by the IOINT bit in the <a href="#">IO_CFG1</a> register.</p> |

0,29h

## 22.3.3 SPI\_TXR

### SPI Transmit Data Register

Individual Register Names and Addresses:

0,29h

SPI\_TXR : 0,29h

|              |           |   |   |   |   |   |   |   |
|--------------|-----------|---|---|---|---|---|---|---|
|              | 7         | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access : POR | W : 00    |   |   |   |   |   |   |   |
| Bit Name     | Data[7:0] |   |   |   |   |   |   |   |

This register is the SPI's transmit data register.

For additional information, refer to the [Register Definitions on page 139](#) in the SPI chapter.

| Bit | Name      | Description                 |
|-----|-----------|-----------------------------|
| 7:0 | Data[7:0] | Data for selected function. |

## 22.3.4 SPI\_RXR

### SPI Receive Data Register

#### Individual Register Names and Addresses:

0,2Ah

SPI\_RXR : 0,2Ah

|              |           |   |   |   |   |   |   |   |
|--------------|-----------|---|---|---|---|---|---|---|
|              | 7         | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access : POR | R : 00    |   |   |   |   |   |   |   |
| Bit Name     | Data[7:0] |   |   |   |   |   |   |   |

This register is the SPI's receive data register.

For additional information, refer to the [Register Definitions on page 139](#) in the SPI chapter.

| Bit | Name      | Description                 |
|-----|-----------|-----------------------------|
| 7:0 | Data[7:0] | Data for selected function. |

**0,2Bh**

## 22.3.5 SPI\_CR

### SPI Control Register

**Individual Register Names and Addresses:**

SPI\_CR : 0,2Bh

|                     | 7         | 6       | 5            | 4            | 3           | 2           | 1              | 0      |
|---------------------|-----------|---------|--------------|--------------|-------------|-------------|----------------|--------|
| <b>Access : POR</b> | RW : 0    | R : 0   | R : 0        | R : 1        | R : 0       | RW : 0      | RW : 0         | RW : 0 |
| <b>Bit Name</b>     | LSb First | Overrun | SPI Complete | TX Reg Empty | RX Reg Full | Clock Phase | Clock Polarity | Enable |

This register is the SPI control register.

The LSb First, Clock Phase, and Clock Polarity bits are configuration bits. Do not change them when the block is enabled. These bits can be set at the same time that the block is enabled. For additional information, refer to the [Register Definitions on page 139](#) in the SPI chapter.

| Bit | Name                  | Description   |
|-----|-----------------------|---|
| 7   | <b>LSb First</b>      | Do not change this bit during an SPI transfer.<br>0 Data is shifted out MSb first.<br>1 Data is shifted out LSb first.  |
| 6   | <b>Overrun</b>        | 0 No overrun has occurred.<br>1 Overrun has occurred. Indicates that a new byte is received and loaded into the RX Buffer before the previous one is read. It is cleared on a read of this (CR0) register.  |
| 5   | <b>SPI Complete</b>   | 0 Indicates that a byte may still be in the process of shifting out, or no transmission is active.<br>1 Indicates that a byte is shifted out and all associated clocks are generated. It is cleared on a read of this (CR0) register. Optional interrupt.   |
| 4   | <b>TX Reg Empty</b>   | Reset state and the state when the block is disabled is '1'.<br>0 Indicates that a byte is currently buffered in the TX register.<br>1 Indicates that a byte is written to the TX register and cleared on write of the TX Buffer (DR1) register. This is the default interrupt. This status is initially asserted on block enable; however, the TX Reg Empty interrupt occurs only after the first data byte is written and transferred into the shifter. |
| 3   | <b>RX Reg Full</b>    | 0 RX register is empty.<br>1 A byte is received and loaded into the RX register. It is cleared on a read of the RX Buffer (DR2) register.   |
| 2   | <b>Clock Phase</b>    | 0 Data is latched on the leading clock edge. Data changes on the trailing edge (modes 0, 1).<br>1 Data changes on the leading clock edge. Data is latched on the trailing edge (modes 2, 3).  |
| 1   | <b>Clock Polarity</b> | 0 Non-inverted, clock idles low (modes 0, 2).<br>1 Inverted, clock idles high (modes 1, 3).   |
| 0   | <b>Enable</b>         | 0 SPI function is not enabled.<br>1 SPI function is enabled.  |

## 22.3.6 USB\_SOF0

### USB Start-of-Frame Register 0

#### Individual Register Names and Addresses:

0,31h

USB\_SOF0 : 0,31h

|              |                   |   |   |   |   |   |   |   |
|--------------|-------------------|---|---|---|---|---|---|---|
|              | 7                 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access : POR | R : 00            |   |   |   |   |   |   |   |
| Bit Name     | Frame Number[7:0] |   |   |   |   |   |   |   |

This register is a USB Start-of-Frame register 0.

For additional information, refer to the [Register Definitions on page 161](#) in the Full-Speed USB chapter.

| Bit | Name              | Description  |
|-----|-------------------|--|
| 7:0 | Frame Number[7:0] | Contains the lower eight bits of the frame number. |

0,32h

## 22.3.7 USB\_SOF1

### USB Start-of-Frame Register 1

#### Individual Register Names and Addresses:

0,32h

USB\_SOF1 : 0,32h

|              |   |   |   |   |   |   |   |                    |
|--------------|---|---|---|---|---|---|---|--------------------|
|              | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0                  |
| Access : POR |   |   |   |   |   |   |   | R : 0              |
| Bit Name     |   |   |   |   |   |   |   | Frame Number[10:8] |

This register is a USB Start-of-Frame register 1.

In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 161](#) in the Full-Speed USB chapter.

| Bit | Name               | Description  |
|-----|--------------------|--|
| 2:0 | Frame Number[10:8] | Contains the upper three bits of the frame number. |



## 22.3.8 USB\_CR0

### USB Control Register 0

#### Individual Register Names and Addresses:

0,33h

USB\_CR0 : 0,33h

|                     | 7          | 6                   | 5 | 4 | 3 | 2 | 1 | 0 |
|---------------------|------------|---------------------|---|---|---|---|---|---|
| <b>Access : POR</b> | RW : 0     | RW : 00             |   |   |   |   |   |   |
| <b>Bit Name</b>     | USB Enable | Device Address[6:0] |   |   |   |   |   |   |

This register is a USB control register 0. The [USB\\_MISC\\_CR register on page 249](#) must be set correctly for the bits in this register to function as described here.

For additional information, refer to the [Register Definitions on page 161](#) in the Full-Speed USB chapter.

| Bit | Name                  | Description  |
|-----|-----------------------|--|
| 7   | <b>USB Enable</b>     | This bit enables the PSoC device to respond to USB traffic.<br>0      USB disabled.<br>1      USB enabled. |
| 6:0 | <b>Device Address</b> | These bits specify the USB address to which the SIE responds.  |

## 22.3.9 USBIO\_CR0

### USB I/O Control Register 0

#### Individual Register Names and Addresses:

USBIO\_CR0 : 0,34h

|              | 7      | 6      | 5      | 4 | 3 | 2 | 1 | 0     |
|--------------|--------|--------|--------|---|---|---|---|-------|
| Access : POR | RW : 0 | RW : 0 | RW : 0 |   |   |   |   | R : 0 |
| Bit Name     | TEN    | TSE0   | TD     |   |   |   |   | RD    |

This register is a USBIO manual control register 0. This register is used to manually control or read the USB differential state of the D+ and D– pins. The [USB\\_MISC\\_CR register on page 249](#) must be set correctly for the bits in this register to function as described here.

In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 161](#) in the Full-Speed USB chapter.

| Bit | Name | Description  |
|-----|------|--|
| 7   | TEN  | Transmit Enable. This bit is used to manually transmit on D+, D– pins. Normally, this bit must be cleared to allow the internal SIE to drive the pins. The most common reason for manually transmitting is to force a resume state on the bus.<br>0 Manual transmission off.<br>1 Manual transmission enabled. |
| 6   | TSE0 | Both D+ and D– are low. There is no effect if TEN=0.   |
| 5   | TD   | This bit transmits a USB J or K state on the USB bus. There is no effect if TEN=0 or TSE0=1.<br>0 Force USB K state.<br>1 Force USB J state.   |
| 0   | RD   | This read-only bit gives the state of the USB differential receiver.<br>0 D+ < D– or D+ = D– = 0.<br>1 D+ > D–.  |

**Note** This note applies when you use the block in compatibility mode with the hardware address feature enabled and before going to I<sup>2</sup>C sleep mode. You need to disable and then re-enable the block to avoid any data corruption from I<sup>2</sup>C slave when the master is reading the data from the device's I<sup>2</sup>C slave.

## 22.3.10 USBIO\_CR1

### USB I/O Control Register 1

#### Individual Register Names and Addresses:

0,35h

USBIO\_CR1 : 0,35h

|              | 7      | 6          | 5      | 4      | 3       | 2       | 1     | 0     |
|--------------|--------|------------|--------|--------|---------|---------|-------|-------|
| Access : POR | RW : 0 | RW : 0     | RW : 0 | RW : 0 | RW : 0  | RW : 0  | R : 1 | R : 1 |
| Bit Name     | IOMode | Drive Mode | DPI    | DMI    | PS2PUEN | USBPUEN | DPO   | DMO   |

This register is a USBIO manual control register 1. This register is used to manually control or read the drive mode and state of the D+ and D– USB pins. The [USB\\_MISC\\_CR register on page 249](#) must be set correctly for the bits in this register to function as described here.

For additional information, refer to the [Register Definitions on page 161](#) in the Full-Speed USB chapter.

| Bit | Name              | Description  |
|-----|-------------------|--|
| 7   | <b>IOMode</b>     | This bit enables the D+ and D– pins to be manually set or read with this register.<br>0 Manual access mode disabled.<br>1 Manual access mode enabled.  |
| 6   | <b>Drive Mode</b> | This bit configures the D+ and D– pins for either CMOS drive mode or open drain drive mode. This bit has no effect if IOMode = 0.<br>0 Open drain drive mode.<br>1 CMOS drive mode.  |
| 5   | <b>DPI</b>        | This bit drives the D+ pin. This bit has no effect if IOMode = 0.<br>0 D+ pin drives a logic level LOW.<br>1 If Drive Mode bit is 0, D+ pin is tri-stated. If Drive Mode bit is 1, D+ pin drives a logic level HIGH.                       |
| 4   | <b>DMI</b>        | This bit drives the D– pin. This bit has no effect if IOMode = 0.<br>0 D– pin drives a logic level LOW.<br>1 If Drive Mode bit is 0, D– pin is tri-stated. If Drive Mode bit is 1, D– pin drives a logic level HIGH.                       |
| 3   | <b>PS2PUEN</b>    | This bit controls the connection of the two internal 5-k $\Omega$ pull-up resistors to the D+ and D– pins.<br>0 Pull-up resistors not connected.<br>1 Pull-up resistors connected.   |
| 2   | <b>USBPUEN</b>    | This bit controls the connection of the internal 1.5-k $\Omega$ pull-up resistor to the D+ pin.<br>0 Pull-up resistor not connected.<br>1 Pull-up resistor connected.<br><b>Note</b> Set bit2 of “USBIO_MISC_CR” register to enable USBIO. |
| 1   | <b>DPO</b>        | This read-only bit provides the D+ pin logic level state.  |
| 0   | <b>DMO</b>        | This read-only bit provides the D– pin logic level state.  |

## 22.3.11 EP0\_CR

### Endpoint 0 Control Register

#### Individual Register Names and Addresses:

EP0\_CR : 0,36h

|              | 7              | 6           | 5            | 4                 | 3         | 2 | 1 | 0 |
|--------------|----------------|-------------|--------------|-------------------|-----------|---|---|---|
| Access : POR | RC : 0         | RC : 0      | RC : 0       | RC : 0            | RW : 0    |   |   |   |
| Bit Name     | Setup Received | IN Received | OUT Received | ACKed Transaction | Mode[3:0] |   |   |   |

This register is an endpoint 0 control register.

For additional information, refer to the [Register Definitions on page 161](#) in the Full-Speed USB chapter.

| Bit | Name                     | Description  |
|-----|--------------------------|--|
| 7   | <b>Setup Received</b>    | When set, this bit indicates a valid setup packet was received and ACKed.  |
| 6   | <b>IN Received</b>       | When set, this bit indicates a valid IN packet was received.   |
| 5   | <b>OUT Received</b>      | When set, this bit indicates an OUT packet was received.   |
| 4   | <b>ACKed Transaction</b> | When set, this bit indicates a valid OUT packet has been received and ACKed.   |
| 3:0 | <b>Mode[3:0]</b>         | The mode bits control how the USB SIE responds to traffic and how the USB SIE changes the mode of that endpoint as a result of host packets to the endpoint. |

## 22.3.12 EP0\_CNT

### Endpoint 0 Count Register

#### Individual Register Names and Addresses:

0,37h

EP0\_CNT : 0,37h

|              | 7           | 6          | 5 | 4 | 3 | 2 | 1               | 0 |
|--------------|-------------|------------|---|---|---|---|-----------------|---|
| Access : POR | RW : 0      | RC : 0     |   |   |   |   | RW : 0          |   |
| Bit Name     | Data Toggle | Data Valid |   |   |   |   | Byte Count[3:0] |   |

The Endpoint 0 Count register (EP0\_CNT) configures endpoint 0.

In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 161](#) in the Full-Speed USB chapter.

| Bit | Name                   | Description  |
|-----|------------------------|--|
| 7   | <b>Data Toggle</b>     | This bit selects the data packet's toggle state.                           |
| 6   | <b>Data Valid</b>      | This bit indicates whether there were errors in OUT or setup transactions. |
| 3:0 | <b>Byte Count[3:0]</b> | These bits indicate the number of data bytes in a transaction.             |

## 22.3.13 EP0\_DRx

### Endpoint 0 Data Registers

#### Individual Register Names and Addresses:

EP0\_DR0 : 0,38h      EP0\_DR1 : 0,39h      EP0\_DR2 : 0,3Ah      EP0\_DR3 : 0,3Bh  
 EP0\_DR4 : 0,3Ch      EP0\_DR5 : 0,3Dh      EP0\_DR6 : 0,3Eh      EP0\_DR7 : 0,3Fh

|              | 7              | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------------|----------------|---|---|---|---|---|---|---|
| Access : POR | RW : 00        |   |   |   |   |   |   |   |
| Bit Name     | Data Byte[7:0] |   |   |   |   |   |   |   |

These registers are endpoint 0 data registers.

For additional information, refer to the [Register Definitions on page 161](#) in the Full-Speed USB chapter.

| Bit | Name           | Description   |
|-----|----------------|---|
| 7:0 | Data Byte[7:0] | These registers are shared for both transmit and receive. |

## 22.3.14 EPx\_CNT0

### Endpoint Count 0 Registers

#### Individual Register Names and Addresses:

EP1\_CNT0 : 0,40h      EP2\_CNT0 : 0,42h      EP3\_CNT0 : 0,44h      EP4\_CNT0 : 0,46h  
 EP5\_CNT0 : 0,48h      EP6\_CNT0 : 0,4Ah      EP7\_CNT0 : 0,4Ch      EP8\_CNT0 : 0,4Eh

|                     | 7           | 6          | 5 | 4 | 3 | 2 | 1 | 0         |
|---------------------|-------------|------------|---|---|---|---|---|-----------|
| <b>Access : POR</b> | RW : 0      | RC : 0     |   |   |   |   |   | # : 0     |
| <b>Bit Name</b>     | Data Toggle | Data Valid |   |   |   |   |   | Count MSB |

These registers are endpoint count 0 registers.

In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 161](#) in the Full-Speed USB chapter.

| Bit | Name               | Description  |
|-----|--------------------|--|
| 7   | <b>Data Toggle</b> | This bit selects the data packet's toggle state.             |
| 6   | <b>Data Valid</b>  | This bit is used for OUT transactions only and is read only. |
| 0   | <b>Count MSB</b>   | This bit is the 1 MSb of a 9-bit counter.                    |

## 22.3.15 EPx\_CNT1

### Endpoint Count 1 Registers

#### Individual Register Names and Addresses:

EP1\_CNT1 : 0,41h      EP2\_CNT1 : 0,43h      EP3\_CNT1 : 0,45h      EP4\_CNT1 : 0,47h  
 EP5\_CNT1 : 0,49h      EP6\_CNT1 : 0,4Bh      EP7\_CNT1 : 0,4Dh      EP8\_CNT1 : 0,4Fh

|              |                 |   |   |   |   |   |   |   |
|--------------|-----------------|---|---|---|---|---|---|---|
|              | 7               | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access : POR | RW : 00         |   |   |   |   |   |   |   |
| Bit Name     | Data Count[7:0] |   |   |   |   |   |   |   |

These registers are endpoint count 1 registers.

For additional information, refer to the [Register Definitions on page 161](#) in the Full-Speed USB chapter.

| Bit | Name            | Description   |
|-----|-----------------|---|
| 7:0 | Data Count[7:0] | These bits are the eight LSB of a 9-bit counter. The MSb is the Count MSb of the EPx_CNT0 register. |



## 22.3.16 PMAx\_DR

### PSoC Memory Arbiter Data Registers

#### Individual Register Names and Addresses:

0,58h

|                  |                  |                  |                  |
|------------------|------------------|------------------|------------------|
| PMA0_DR : 0,58h  | PMA1_DR : 0,59h  | PMA2_DR : 0,5Ah  | PMA3_DR : 0,5Bh  |
| PMA4_DR : 0,5Ch  | PMA5_DR : 0,5Dh  | PMA6_DR : 0,5Eh  | PMA7_DR : 0,5Fh  |
| PMA8_DR : 0,64h  | PMA9_DR : 0,65h  | PMA10_DR : 0,66h | PMA11_DR : 0,67h |
| PMA12_DR : 0,68h | PMA13_DR : 0,69h | PMA14_DR : 0,6Ah | PMA15_DR : 0,6Bh |

|              |                |   |   |   |   |   |   |   |
|--------------|----------------|---|---|---|---|---|---|---|
|              | 7              | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access : POR | RW : 00        |   |   |   |   |   |   |   |
| Bit Name     | Data Byte[7:0] |   |   |   |   |   |   |   |

These registers are PSoC Memory Arbiter write address registers.

For additional information, refer to the [Register Definitions on page 161](#) in the Full-Speed USB chapter.

| Bit | Name           | Description  |
|-----|----------------|--|
| 7:0 | Data Byte[7:0] | When the M8C writes to this register, the PMA registers the byte and then stores the value at the address in SRAM indicated by the PMAx_WA register. |

## 22.3.17 CMP\_RDC

### Comparator Read/Clear Register

#### Individual Register Names and Addresses:

CMP\_RDC : 0,78h

|              | 7 | 6 | 5     | 4     | 3 | 2 | 1      | 0      |
|--------------|---|---|-------|-------|---|---|--------|--------|
| Access : POR |   |   | R : 0 | R : 0 |   |   | RC : 0 | RC : 0 |
| Bit Name     |   |   | CMP1D | CMP0D |   |   | CMP1L  | CMP0L  |

This register is used to read the state of the comparator data signal and the latched state of the comparator.

In the table, reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 95](#) in the Comparators chapter.

| Bit | Name         | Description   |
|-----|--------------|---|
| 5   | <b>CMP1D</b> | Read-only bit that returns the dynamically changing state of comparator 1. This bit reads zero whenever the comparator is disabled.   |
| 4   | <b>CMP0D</b> | Read-only bit that returns the dynamically changing state of comparator 0. This bit reads zero whenever the comparator is disabled.   |
| 1   | <b>CMP1L</b> | This bit reads the latch output for comparator 1. It is cleared by either a write of '0' to this bit, or by a rising edge of the comparator 0 LUT, depending on the state of the CRST1 bit in the CMP_CR1 register. |
| 0   | <b>CMP0L</b> | This bit reads the latch output for comparator 0. It is cleared by either a write of '0' to this bit, or by a rising edge of the comparator 1 LUT, depending on the state of the CRST0 bit in the CMP_CR1 register. |

## 22.3.18 CMP\_MUX

### Comparator Multiplexer Register

#### Individual Register Names and Addresses:

0,79h

CMP\_MUX : 0,79h

|              | 7         | 6 | 5         | 4 | 3         | 2 | 1         | 0 |
|--------------|-----------|---|-----------|---|-----------|---|-----------|---|
| Access : POR | RW : 0    |   | RW : 0    |   | RW : 0    |   | RW : 0    |   |
| Bit Name     | INP1[1:0] |   | INN1[1:0] |   | INP0[1:0] |   | INN0[1:0] |   |

This register contains control bits for input selection of comparators 0 and 1.

For additional information, refer to the [Register Definitions on page 95](#) in the Comparators chapter.

| Bit | Name      | Description   |
|-----|-----------|---|
| 7:6 | INP1[1:0] | <p>Comparator 1 Positive Input Select</p> <p>00b Analog Global Mux Bus</p> <p>01b This line is driven to either 1.2V or 1.0V, as selected by the REFMUX bit in the CS_CR3 register</p> <p>10b P0[1] pin</p> <p>11b P0[3] pin</p>  |
| 5:4 | INN1[1:0] | <p>Comparator 1 Negative Input Select</p> <p>00b VREF (1.0 V)</p> <p>01b Ref Lo (approximately 0.6 V)</p> <p>10b Ref Hi (approximately 1.2 V) Ref HI is driven when CMP_TM bit in regis-ter CMP_CR0 is low and when CMP_TM is high Analog global Mux Bus is driven on nega-tive input</p> <p>11b Reserved</p> |
| 3:2 | INP0[1:0] | <p>Comparator 0 Positive Input Select</p> <p>00b Analog Global Mux Bus</p> <p>01b This line is driven to either 1.2V or 1.0V, as selected by the REFMUX bit in the CS_CR3 register</p> <p>10b P0[1] pin</p> <p>11b P0[3] pin</p>  |
| 1:0 | INN0[1:0] | <p>Comparator 0 Negative Input Select</p> <p>00b VREF (1.0 V)</p> <p>01b Ref Lo (approximately 0.6 V)</p> <p>10b Ref Hi (approximately 1.2 V) Ref HI is driven when CMP_TM bit in regis-ter CMP_CR0 is low and when CMP_TM is high Analog global Mux Bus is driven on nega-tive input</p> <p>11b Reserved</p> |

## 22.3.19 CMP\_CR0

### Comparator Control Register 0

#### Individual Register Names and Addresses:

CMP\_CR0 : 0,7Ah

|              | 7 | 6      | 5 | 4      | 3 | 2 | 1 | 0      |
|--------------|---|--------|---|--------|---|---|---|--------|
| Access : POR |   |        |   | RW : 0 |   |   |   | RW : 0 |
| Bit Name     |   | CMP_TM |   | CMP1EN |   |   |   | CMP0EN |

This register is used to enable and configure the input range of the comparators.

In the table, reserved bits are grayed table cells and are not described in the bit description section. Always write reserved bits with a value of '0'. For additional information, refer to the [Register Definitions on page 95](#) in the Comparators chapter.

| Bit | Name   | Description  |
|-----|--------|--|
| 6   | CMP_TM | <p>0 Ref Hi is connected to negative input of comparator when Ref Hi is selected in the CMP_Mux (0,7Ah) register.</p> <p>1 Analog global mux bus is connected to negative input of comparator when Ref Hi is selected in the CMP_Mux (0,7Ah) register.</p> |
| 4   | CMP1EN | <p>0 Comparator 1 disabled, powered off.</p> <p>1 Comparator 1 enabled.</p>  |
| 0   | CMP0EN | <p>0 Comparator 0 disabled, powered off.</p> <p>1 Comparator 0 enabled.</p>  |

## 22.3.20 CMP\_CR1

### Comparator Control Register 1

#### Individual Register Names and Addresses:

CMP\_CR1 : 0,7Bh

|              | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0      |
|--------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Access : POR | RW : 0 | RW : 0 | RW : 0 | RW : 0 | RW : 0 | RW : 0 | RW : 0 | RW : 0 |
| Bit Name     | CINT1  | CPIN1  | CRST1  | CDS1   | CINT0  | CPIN0  | CRST0  | CDS0   |

This register is used to configure the comparator output options.

For additional information, refer to the [Register Definitions on page 95](#) in the Comparators chapter.

| Bit | Name         | Description   |
|-----|--------------|---|
| 7   | <b>CINT1</b> | This bit selects comparator 1 for input to the analog interrupt. Note that if both CINT1 and CINT0 are set high, a rising edge on either comparator output may cause an interrupt.<br>0 Comparator 1 does not connect to the analog interrupt.<br>1 Comparator 1 connects to the analog interrupt. A rising edge asserts that interrupt, if it is enabled in the INT_MSK0 register. |
| 6   | <b>CPIN1</b> | This bit selects the comparator 1 signal for possible connection to the GPIO pin. Connection to the pin also depends on the configuration of the OUT_P1 register.<br>0 Select comparator 1 LUT output.<br>1 Select comparator 1 Latch output.   |
| 5   | <b>CRST1</b> | This bit selects the source for resetting the comparator 1 latch.<br>0 Reset by writing a '0' to the CMP_RDC register's CMP1L bit.<br>1 Reset by rising edge of comparator 0 LUT output.  |
| 4   | <b>CDS1</b>  | This bit selects the data output for the comparator 1 channel, for comparator 1 interrupt.<br>0 Select the comparator 1 LUT output.<br>1 Select the comparator 1 latch output.  |
| 3   | <b>CINT0</b> | This bit selects comparator 0 for input to the analog interrupt. Note that if both CINT1 and CINT0 are set high, a rising edge on either comparator output may cause an interrupt.<br>0 Comparator 0 does not connect to the analog interrupt.<br>1 Comparator 0 connects to the analog interrupt. A rising edge asserts that interrupt, if it is enabled in the INT_MSK0 register. |
| 2   | <b>CPIN0</b> | This bit selects the comparator 0 signal for possible connection to the GPIO pin. Connection to the pin also depends on the configuration of the OUT_P1 register.<br>0 Select comparator 0 LUT output.<br>1 Select comparator 0 Latch output.   |
| 1   | <b>CRST0</b> | This bit selects the source for resetting the comparator 0 latch.<br>0 Reset by writing a '0' to the CMP_RDC register's CMP0L bit.<br>1 Reset by rising edge of comparator 1 LUT output.  |

(continued on next page)

### 22.3.20 CMP\_CR1 (continued)

|   |             |  |
|---|-------------|--|
| 0 | <b>CDS0</b> | This bit selects the data output for the comparator 0 channel, for comparator 0 interrupt.<br>0      Select the comparator 0 LUT output.<br>1      Select the comparator 0 latch output. |
|---|-------------|--|

## 22.3.21 CMP\_LUT

### Comparator LUT Register

Individual Register Names and Addresses:

CMP\_LUT : 0,7Ch

|              | 7         | 6 | 5 | 4 | 3         | 2 | 1 | 0 |
|--------------|-----------|---|---|---|-----------|---|---|---|
| Access : POR | RW : 0    |   |   |   | RW : 0    |   |   |   |
| Bit Name     | LUT1[3:0] |   |   |   | LUT0[3:0] |   |   |   |

This register is used to select the logic function.

For additional information, refer to the [Register Definitions on page 95](#) in the Comparators chapter.

| Bits | Name      | Description  |
|------|-----------|--|
| 7:4  | LUT1[3:0] | Select 1 of 16 logic functions for output of comparator bus 1. A=Comp1 output, B=Comp0 output. |
|      |           | <b>Function</b>  |
|      | 0h        | FALSE  |
|      | 1h        | A AND B  |
|      | 2h        | A AND $\overline{B}$   |
|      | 3h        | A  |
|      | 4h        | $\overline{A}$ AND B   |
|      | 5h        | B  |
|      | 6h        | A XOR B  |
|      | 7h        | A OR B   |
|      | 8h        | A NOR B  |
|      | 9h        | A XNOR B   |
|      | Ah        | $\overline{B}$   |
|      | Bh        | $\overline{A}$ OR $\overline{B}$   |
|      | Ch        | $\overline{A}$   |
|      | Dh        | $\overline{A}$ OR B  |
|      | Eh        | A NAND B   |
|      | Fh        | TRUE   |
| 3:0  | LUT0[3:0] | Select 1 of 16 logic functions for output of comparator bus 0. A=Comp0 output, B=Comp1 output. |
|      |           | <b>Function</b>  |
|      | 0h        | FALSE  |
|      | 1h        | A AND B  |
|      | 2h        | A AND $\overline{B}$   |
|      | 3h        | A  |
|      | 4h        | $\overline{A}$ AND B   |
|      | 5h        | B  |
|      | 6h        | A XOR B  |
|      | 7h        | A OR B   |
|      | 8h        | A NOR B  |
|      | 9h        | A XNOR B   |
|      | Ah        | $\overline{B}$   |
|      | Bh        | $\overline{A}$ OR $\overline{B}$   |
|      | Ch        | $\overline{A}$   |
|      | Dh        | $\overline{A}$ OR B  |
|      | Eh        | A NAND B   |
|      | Fh        | TRUE   |

## 22.3.22 CS\_CR2

### Analog Control Register 2

#### Individual Register Names and Addresses:

CS\_CR2 : 0,A2h

|              | 7 | 6      | 5       | 4       | 3      | 2      | 1      | 0      |
|--------------|---|--------|---------|---------|--------|--------|--------|--------|
| Access : POR |   | RW : 0 | RW : 0  | RW : 0  | RW : 0 | RW : 0 | RW : 0 | RW : 0 |
| Bit Name     |   | IRANGE | IDACDIR | IDAC_EN |        |        |        |        |

This register contains additional Analog system control options.

For additional information, refer to the [Register Definitions on page 90](#) in the Analog Module chapter.

| Bit | Name     | Description  |
|-----|----------|--|
| 7:6 | IRANGE   | Bits scale the IDAC current output. The IDAC_D register sets the base current in the IDAC.<br>00b IDAC output scaled to 1X range.<br>01b IDAC output scaled to 2X range.<br>10b IDAC output scaled to 4X range.<br>11b IDAC output scaled to 8X range. |
| 5   | IDACDIR  | Bit determines the source/sink state of the IDAC when enabled (IDAC_EN = 1 or PXD_EN = 1 or CSD_MODE = 1).<br>0 IDAC sources current to analog global bus.<br>1 IDAC sinks current from analog global bus.   |
| 4   | IDAC_EN  | Bit provides manual connection of the IDAC to the analog global bus. The IDAC is automatically connected when RO_EN = 1 or PXD_EN = 1.<br>0 No manual connection.<br>1 IDAC is connected to analog global bus.   |
| 3   | Reserved |  |
| 2   | Reserved |  |
| 1   | Reserved |  |
| 0   | Reserved |  |



## 22.3.23 CS\_CR3

### Analog Control Register 3

#### Individual Register Names and Addresses:

CS\_CR3 : 0,A3h

|              | 7      | 6      | 5       | 4      | 3           | 2           | 1      | 0      |
|--------------|--------|--------|---------|--------|-------------|-------------|--------|--------|
| Access : POR | RW : 0 | RW : 0 | RW : 0  | RW : 0 | RW : 0      | RW : 0      | RW : 0 | RW : 0 |
| Bit Name     |        | REFMUX | REFMODE | REF_EN | LPFilt[1:0] | LPF_EN[1:0] |        |        |

For additional information, refer to the [Register Definitions on page 90](#) in the Analog Module chapter.

| Bit | Name        | Description   |
|-----|-------------|---|
| 6   | REFMUX      | This bit selects the reference voltage for the input of the reference buffer.<br>0 Select REFHI (1.2 V).<br>1 Select VREF (1.0 V).  |
| 5   | REFMODE     | This bit allows manual connection of the reference buffer output to the analog global bus. If either CI_EN = 1 or RO_EN = 1 in the CS_CR2 register, this bit has no effect (reference buffer connection is off or controlled by other settings).<br>0 No connection.<br>1 Reference buffer connected to the analog global bus.            |
| 4   | REF_EN      | This bit enables the reference buffer to drive the analog global bus.<br>0 Reference buffer is disabled, powered down.<br>1 Reference buffer is enabled. Connection to the analog global bus is controlled by the REF-MODE bit in this register, and by the CI_EN and RO_EN bits in the CS_CR2 register.                                  |
| 3:2 | LPFilt[1:0] | Low pass filter approximate time constant.<br>00b 1 $\mu$ s<br>01b 2 $\mu$ s<br>10b 5 $\mu$ s<br>11b 10 $\mu$ s   |
| 1:0 | LPF_EN[1:0] | Enable this bit for the low pass filter.<br>00b No connection of either comparator channel to low pass filter.<br>01b Connect comparator channel 0 through the low pass filter.<br>10b Connect comparator channel 1 through the low pass filter.<br>11b Connect both comparator channel inputs together, and through the low pass filter. |

## 22.3.24 PT0\_CFG

### Programmable Timer 0 Configuration Register

#### Individual Register Names and Addresses:

PT0\_CFG : 0,B0h

|              | 7 | 6 | 5 | 4 | 3 | 2      | 1        | 0      |
|--------------|---|---|---|---|---|--------|----------|--------|
| Access : POR |   |   |   |   |   | RW : 0 | RW : 0   | RW : 0 |
| Bit Name     |   |   |   |   |   | CLKSEL | One Shot | START  |

This register configures the programmable timer 0.

In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 153](#) in the Programmable Timer chapter.

| Bit | Name     | Description   |
|-----|----------|---|
| 2   | CLKSEL   | This bit determines if the timer runs on the 32-kHz clock or CPU clock. If the bit is set to 1, the timer runs on the CPU clock, otherwise, the timer runs on the 32-kHz clock.   |
| 1   | One Shot | 0 Continuous count mode. Timer reloads the count value from the data registers upon each terminal count, and continues counting.<br>1 One-shot mode. Timer goes through one complete count period and then stops. Upon completion, the START bit in this register is cleared. |
| 0   | START    | 0 Timer held in reset.<br>1 Timer counts down from a full count determined from its data registers (PT_DATA1, PT_DATA0). When complete, it either stops or reloads and continues, based on the One Shot bit in this register.   |

## 22.3.25 PTx\_DATA1

### Programmable Timers Data Register 1

#### Individual Register Names and Addresses:

PT0\_DATA1 : 0,B1h      PT1\_DATA1 : 0,B4h      PT2\_DATA1 : 0,B7h

|              |           |   |   |   |   |   |   |   |
|--------------|-----------|---|---|---|---|---|---|---|
|              | 7         | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access : POR | RW : 00   |   |   |   |   |   |   |   |
| Bit Name     | DATA[7:0] |   |   |   |   |   |   |   |

These registers hold the eight bits of the programmable timer's count value for the device.

For additional information, refer to the [Register Definitions on page 153](#) in the Programmable Timer chapter.

| Bit | Name      | Description  |
|-----|-----------|--|
| 7:0 | DATA[7:0] | This is the upper byte of a 16-bit timer. The lower byte is in the corresponding PTx_DATA0 register. |

0,B2h

## 22.3.26 PTx\_DATA0

### Programmable Timers Data Register 0

#### Individual Register Names and Addresses:

PT0\_DATA0 : 0,B2h      PT1\_DATA0 : 0,B5h      PT2\_DATA0 : 0,B8h

|              |           |   |   |   |   |   |   |   |
|--------------|-----------|---|---|---|---|---|---|---|
|              | 7         | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access : POR | RW : 00   |   |   |   |   |   |   |   |
| Bit Name     | DATA[7:0] |   |   |   |   |   |   |   |

These registers provide the programmable timer with its lower eight bits of the count value.

For additional information, refer to the [Register Definitions on page 153](#) in the Programmable Timer chapter.

| Bit | Name      | Description   |
|-----|-----------|---|
| 7:0 | DATA[7:0] | This is the lower byte of a 16-bit timer. The upper byte is in the corresponding PTxDATA1 register. |

## 22.3.27 PT1\_CFG

### Programmable Timer 1 Configuration Register

#### Individual Register Names and Addresses:

0,B3h

PT1\_CFG : 0,B3h

|              | 7 | 6 | 5 | 4 | 3 | 2      | 1        | 0      |
|--------------|---|---|---|---|---|--------|----------|--------|
| Access : POR |   |   |   |   |   | RW : 0 | RW : 0   | RW : 0 |
| Bit Name     |   |   |   |   |   | CLKSEL | One Shot | START  |

This register configures the programmable timer 1.

In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 153](#) in the Programmable Timer chapter.

| Bit | Name     | Description  |
|-----|----------|--|
| 2   | CLKSEL   | This bit determines if the timer runs on the 32-kHz clock or CPU clock. If the bit is set to 1, the timer runs on the CPU clock, otherwise, the timer runs on the 32-kHz clock.  |
| 1   | One Shot | 0 Continuos count mode. Timer reloads the count value from the data registers upon each terminal count, and continues counting.<br>1 One-shot mode. Timer goes through one complete count period and then stops. Upon completion, the START bit in this register is cleared. |
| 0   | START    | 0 Timer held in reset.<br>1 Timer counts down from a full count determined from its data registers (PT_DATA1, PT_DATA0). When complete, it either stops or reloads and continues, based on the One Shot bit in this register.  |

0,B6h

## 22.3.28 PT2\_CFG

### Programmable Timer 2 Configuration Register

#### Individual Register Names and Addresses:

PT2\_CFG : 0,B6h

|              | 7 | 6 | 5 | 4 | 3 | 2      | 1        | 0      |
|--------------|---|---|---|---|---|--------|----------|--------|
| Access : POR |   |   |   |   |   | RW : 0 | RW : 0   | RW : 0 |
| Bit Name     |   |   |   |   |   | CLKSEL | One Shot | START  |

This register configures the programmable timer 2.

In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 153](#) in the Programmable Timer chapter.

| Bit | Name     | Description   |
|-----|----------|---|
| 2   | CLKSEL   | This bit determines if the timer runs on the 32-kHz clock or CPU clock. If the bit is set to 1, the timer runs on the CPU clock; otherwise, the timer runs on the 32-kHz clock.   |
| 1   | One Shot | 0 Continuous count mode. Timer reloads the count value from the data registers upon each terminal count, and continues counting.<br>1 One-shot mode. Timer goes through one complete count period and then stops. Upon completion, the START bit in this register is cleared. |
| 0   | START    | 0 Timer held in reset.<br>1 Timer counts down from a full count determined from its data registers (PT_DATA1, PT_DATA0). When complete, it either stops or reloads and continues, based on the One Shot bit in this register.   |

## 22.3.29 I2C\_XCFG

### I<sup>2</sup>C Extended Configuration Register

#### Individual Register Names and Addresses:

I2C\_XCFG: 0,C8h

|              | 7          | 6 | 5               | 4          | 3         | 2 | 1           | 0          |
|--------------|------------|---|-----------------|------------|-----------|---|-------------|------------|
| Access : POR | RW : 80    |   | RW : 80         | RW : 80    | RW : 80   |   | RW : 80     | RW : 80    |
| Bit Name     | CSR_CLK_EN |   | FORCE_NACK_MODE | FORCE_NACK | No BC Int |   | Buffer Mode | HW Addr EN |

This register configures enhanced features. The Enable bit (bit 0) of the [I2C\\_CFG](#) (0,D6h) register should be set to 1 for the I2C enhanced features to work.

In the table above, note that reserved bits are grayed table cells and are not described in the bit description section below. Always write reserved bits with a value of '0'. For additional information, refer to the [Register Definitions on page 114](#) in the I2C Slave chapter.

| Bit | Name                   | Description  |
|-----|------------------------|--|
| 7   | <b>CSR_CLK_EN</b>      | This bit is used for gating system clock for the blocks core logic interface. Clock is made available to the core logic only when this bit is set to 1. If not active, the blocks core logic does not receive the system clock.  |
| 5   | <b>FORCE_NACK_MODE</b> | This bit is used to select the FORCE_NACK mode. When '1', FORCE_NACK mode is engaged at the next possible byte boundary. When '0', the FORCE_NACK mode is engaged at the next STOP condition on the I2C bus.   |
| 4   | <b>FORCE_NACK</b>      | This bit must be set the CPU to engage the FORCE_NACK mode.  |
| 3   | <b>No BC Int</b>       | In compatibility mode, every received or transmitted byte generates a Byte Complete Interrupt. This is also true in buffered mode regardless of whether the bus is stalled or not.<br><b>Note</b> When this bit is set to a '1', A BC interrupt is not enabled for any data byte that is automatically ACKed (i.e., does not require the bus to stall). A BC interrupt is always generated upon any stall so the CPU takes the appropriate action. When the bit is set, it is possible to implement packet transfers without CPU intervention by enabling an interrupt upon the Stop detect. |

(continued on next page)

## 22.3.29 I2C\_XCFG (continued)

### 1 Buffer Mode

This bit determines the operation mode of the enhanced buffer module. The following table describes the available modes.

| Buffer Mode | Name       | Description  |
|-------------|------------|--|
| 0           | Compatible | There is no buffering in the default compatibility mode. The I2C bus is stalled upon every received or transmitted byte, including address bytes. The CPU is required to process the interrupt and write or read the data and status as required to continue the operation.  |
| 1           | EZI2C      | The I2C slave appears as a 32-byte RAM interface to an external master. A specific protocol must be followed, in which the master controls the RAM pointer for both read and write operations. The I2C bus is never stalled. Receive ACKs are automatically generated. The CPU is responsible for putting valid data into the RAM for external reads, and for reading received data. |

### 0 HW Addr En

When this bit is set to a '1', hardware address compare is enabled. When enabled, bit 3 in the I2C\_SCR register is not set. Upon a compare, the address is automatically ACKed, and upon a mismatch, the address is automatically NAKed and the hardware reverts to an idle state waiting for the next Start detection. You must configure the compare address in the I2C\_ADDR register. When this bit is a '0', bit 3 of the I2C\_SCR register is set and the bus stalls, and the received address is available in the I2C\_DR register to enable the CPU to do a firmware address compare. The functionality of this bit is independent of the data buffering mode.

**Note:** For devices CY8C24193/493 only bit 0 is available.



## 22.3.30 I2C\_ADDR

### I<sup>2</sup>C Slave Address Register

#### Individual Register Names and Addresses:

0,CAh

0,00h

I2C\_ADDR : 0,CAh

|              | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------------|---|---|---|---|---|---|---|---|
| Access : POR |   |   |   |   |   |   |   |   |
| Bit Name     |   |   |   |   |   |   |   |   |

RW : 00

Slave Address[6:0]

This register holds the slave's 7-bit address.

When hardware address compare mode is not enabled in the [I2C\\_XCFG](#) register, this register is not in use. In the table, note that the reserved bit is a grayed table cell and not described in the bit description section. Always write reserved bits with a value of '0'. For additional information, refer to the [Register Definitions on page 114](#) in the I2C Slave chapter.

| Bit | Name               | Description   |
|-----|--------------------|---|
| 6:0 | Slave Address[6:0] | These seven bits hold the slave's own device address. |

## 22.3.31 I2C\_XSTAT

### I<sup>2</sup>C Extended Status Register

#### Individual Register Names and Addresses:

0,C9h

0,C9h

I2C\_XSTAT : 0,C9h

|              | 7             | 6                | 5                | 4 | 3 | 2             | 1     | 0          |
|--------------|---------------|------------------|------------------|---|---|---------------|-------|------------|
| Access : POR | R : 0         | R : 0            | R : 0            |   |   | R : 0         | R : 0 | R : 0      |
| Bit Name     | EZ_SLAVE_BUSY | EZ_I2C_WR_STATUS | EZ_I2C_RD_STATUS |   |   | READY_TO_NACK | Dir   | Slave Busy |

This register reads enhanced feature status.

When the bits of the [I2C\\_XCFG](#) register are left in their reset state, the block is in compatibility mode and this register is not in use. In the table above, note that reserved bits are grayed table cells and are not described in the bit description section below. Always write reserved bits with a value of '0'. For additional information, refer to the [Register Definitions on page 114](#) in the I2C Slave chapter.

| Bit | Name                    | Description   |
|-----|-------------------------|---|
| 7   | <b>EZ_SLAVE_BUSY</b>    | This bit is set upon a address match and is reset upon a start, repeated start or a stop signal.<br><b>Note</b> This is applicable only in buffer mode.   |
| 6   | <b>EZ_I2C_WR_STATUS</b> | This bit will be SET if current I2C transaction by host is a write operation. On reset the value of this bit will be 1. This bit gets cleared when CPU writes a '0'. This bit is valid only after the address phase is completed. <b>Note</b> This is applicable only in buffer mode. |
| 5   | <b>EZ_I2C_RD_STATUS</b> | This bit will be SET if current I2C transaction by host is a read operation. On reset the value of this bit will be 0. This bit gets cleared when CPU writes a '0'. This bit is valid only after the address phase is completed. <b>Note</b> This is applicable only in buffer mode.  |
| 2   | <b>READY_TO_NACK</b>    | This status bit indicates that the FORCE_NACK mode has been engaged by the I2C slave. If FORCE_NACK Mode is set during Bus Idle state or before an address match event, this bit will be set immediately. Other wise the behavior is defined by FORCE_NACK mode bit.                  |
| 1   | <b>Dir</b>              | This bit indicates the direction of the current transfer. A '1' indicates a master read, and a '0' indicates a master write. It is only valid when the Slave Busy bit (bit 0) is set to a '1'.  |
| 0   | <b>Slave Busy</b>       | This bit is set upon a hardware compare and is reset upon the following stop signal. Poll this bit to determine when the slave is busy and the buffer module is being accessed.   |

**Note:** This register is available only for CY8C24093/293/393/693.

## 22.3.32 I2C\_BP\_EZ\_CFG

### I<sup>2</sup>C Base Address Pointer Register

#### Individual Register Names and Addresses:

I2C\_BP\_EZ\_CFG : 0,CBh

|              | 7        | 6        | 5              | 4 | 3 | 2                     | 1 | 0 |
|--------------|----------|----------|----------------|---|---|-----------------------|---|---|
| Access : POR | RW : 0   | RW : 0   | RW : 0         |   |   | R : 00                |   |   |
| Bit Name     | EZ_RD_IE | EZ_WR_IE | CLK_STRETCH_EN |   |   | I2C Base Pointer[4:0] |   |   |

This register contains the base address value of the RAM data buffer and is read only.

In the table above, note that reserved bits are grayed table cells and are not described in the bit description section below. Always write reserved bits with a value of '0'. For additional information, refer to the [Register Definitions on page 114](#) in the I2C Slave chapter.

| Bit | Name                  | Description  |
|-----|-----------------------|--|
| 7   | EZ_RD_IE              | Interrupt enable for EZ_RD_STATUS  |
| 6   | EZ_WR_IE              | Interrupt enable for EZ_WR_STATUS  |
| 5   | CLK_STRETCH_EN        | This bit configures the clock stretch mode during sleep to wakeup transition.<br>When '1', the slave stretches the I2C clock during the sleep to wakeup transition and releases the clock after the device wakes up and CPU sets the ACK bit.<br>When '0', the slave NACKs any I2C transactions addressed to the device during the sleep to wakeup transition time.  |
| 4:0 | I2C Base Pointer[4:0] | In the EZI2C protocol, the first data byte after the slave address transaction in write mode is the base address for subsequent reads and writes and it is transferred directly into this register. If the desired transaction is a master write to the slave, subsequent bytes are written to the RAM buffer starting with this address and auto incremented (see I2C_CP register). In case of a read, a Start or Restart must be issued and the read location starts with this address and again subsequent read addresses are auto incremented as pointed to by the I2C_CP register value.<br><br>The value of this register is modified only at the beginning of every I2C write transaction. The I2C master must always supply a value for this register in the first byte of data after the slave's address in a given write transaction. If performing reads, the master need not set the value of this register. The current value of this register is also used directly for reads. |

**Note:** This register is available only for CY8C24093/293/393/693.

## 22.3.33 I2C\_CP

### I<sup>2</sup>C Current Address Pointer Register

Individual Register Names and Addresses: 0,CCh

I2C\_CP : 0,CCh

|              | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0                        |
|--------------|---|---|---|---|---|---|---|--------------------------|
| Access : POR |   |   |   |   |   |   |   | R : 00                   |
| Bit Name     |   |   |   |   |   |   |   | I2C Current Pointer[4:0] |

This register contains the current address value of the RAM data buffer and is read only.

In the table above, note that reserved bits are grayed table cells and are not described in the bit description section below. Always write reserved bits with a value of '0'. For additional information, refer to the [Register Definitions on page 114](#) in the I2C Slave chapter.

| Bit | Name                     | Description   |
|-----|--------------------------|---|
| 4:0 | I2C Current Pointer[4:0] | This register gets set at the same time and with the same value as the I2C_BP_EZ_CFG Register. After each completed data byte of the current I2C transaction, the value of this register is incremented by one. The value is saturated when it reaches 31. The value of this register always determines the location that read or write data comes from or is written to. This register is set to the value contained in the I2C_BP_EZ_CFG Register on every start condition detected in the bus. |

**Note:** This register is available only for CY8C24093/293/393/693.

## 22.3.34 CPU\_BP

### CPU Base Address Pointer Register

Individual Register Names and Addresses: 0,CDh

CPU\_BP : 0,CDh

|              |   |   |   |   |   |   |   |   |
|--------------|---|---|---|---|---|---|---|---|
|              | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access : POR |   |   |   |   |   |   |   |   |
| Bit Name     |   |   |   |   |   |   |   |   |

This register contains the base address value of the RAM data buffer.

In the table above, note that reserved bits are grayed table cells and are not described in the bit description section below. Always write reserved bits with a value of '0'. For additional information, refer to the [Register Definitions on page 114](#) in the I2C Slave chapter.

| Bit | Name                  | Description   |
|-----|-----------------------|---|
| 4:0 | CPU Base Pointer[4:0] | This register value is completely controlled by I/O writes by the CPU. Firmware routines must set this register. As with the I2C_BP, the value of this register sets the starting address for the data location being written or read. When this register is written, the current address pointer, CPU_CP, is also updated with the same value. CPU_CP rolls over to 'h0 if CPU access beyond the buffer boundary of 'h1F. The first read or write from/to the I2C_BUF register start at this address. The location of the data in subsequent read or writes is determined by the CPU_CP register value, which auto increments after each read or write. Firmware makes certain that the slave device always has valid data or the data is read before overwritten. |

**Note:** This register is available only for CY8C24093/293/393/693.

## 22.3.35 CPU\_CP

### CPU Current Address Pointer Register

Individual Register Names and Addresses: 0,CEh

CPU\_CP : 0,CEh

|              | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0                         |
|--------------|---|---|---|---|---|---|---|---------------------------|
| Access : POR |   |   |   |   |   |   |   | R : 00                    |
| Bit Name     |   |   |   |   |   |   |   | CPU Current Pointer [4:0] |

This register is a pointer into the RAM buffer for CPU reads and writes and is read only.

In the table above, note that reserved bits are grayed table cells and are not described in the bit description section below. Always write reserved bits with a value of '0'. For additional information, refer to the [Register Definitions on page 114](#) in the I2C Slave chapter.

| Bit | Name                     | Description  |
|-----|--------------------------|--|
| 4:0 | CPU Current Pointer[4:0] | This register is set at the same time and with the same value as the CPU_BP Register. Whenever the I2C_BUF Register is written or read, the CPU_CP increments automatically. |

**Note:** This register is available only for CY8C24093/293/393/693.

## 22.3.36 I2C\_BUF

### I<sup>2</sup>C Data Buffer Register

**Individual Register Names and Addresses:** 0,CFh

I2C\_BUF : 0,CFh

|              |                    |   |   |   |   |   |   |   |
|--------------|--------------------|---|---|---|---|---|---|---|
|              | 7                  | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access : POR | RW : 00            |   |   |   |   |   |   |   |
| Bit Name     | Data Buffer [7: 0] |   |   |   |   |   |   |   |

This register is the CPU read/write interface to the data buffer.

For additional information, refer to the [Register Definitions on page 114](#) in the I2C Slave chapter.

| Bit | Name             | Description  |
|-----|------------------|--|
| 7:0 | Data Buffer[7:0] | The I2C Data Buffer Register (I2C_BUF) is the CPU read/write interface to the data buffer. Whenever this register is read, the data at the location pointed to by the CPU current pointer (CPU_CP) is returned. Similarly, whenever this register is written, the data is transferred to the buffer and written at the location pointed to by the CPU current pointer (CPU_CP). Whenever this register is read, without initializing the RAM contents either through the I2C or CPU interface, no valid value is returned. |

**0,D0h**

## 22.3.37 CUR\_PP

### Current Page Pointer Register

#### Individual Register Names and Addresses:

CUR\_PP : 0,D0h

|              |   |   |   |   |   |   |                |   |
|--------------|---|---|---|---|---|---|----------------|---|
|              | 7 | 6 | 5 | 4 | 3 | 2 | 1              | 0 |
| Access : POR |   |   |   |   |   |   | RW : 0         |   |
| Bit Name     |   |   |   |   |   |   | Page Bits[2:0] |   |

This register is used to set the effective SRAM page for normal memory accesses in a multi-SRAM page PSoC device. It is only used when a device has more than one SRAM page.

In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 46](#) in the RAM Paging chapter.

| Bit | Name           | Description   |
|-----|----------------|---|
| 2:0 | Page Bits[2:0] | Bits determine which SRAM page is used for generic SRAM access. See the <a href="#">RAM Paging chapter on page 43</a> for more information.<br>000b SRAM Page 0<br>001b SRAM Page 1<br>010b SRAM Page 2<br>011b SRAM Page 3<br>100b SRAM Page 4<br>101b SRAM Page 5<br>110b SRAM Page 6<br>111b SRAM Page 7 |



## 22.3.38 STK\_PP

### Stack Page Pointer Register

Individual Register Names and Addresses:

0,D1h

STK\_PP : 0,D1h

|              |   |   |   |   |   |                |   |   |
|--------------|---|---|---|---|---|----------------|---|---|
|              | 7 | 6 | 5 | 4 | 3 | 2              | 1 | 0 |
| Access : POR |   |   |   |   |   | RW : 0         |   |   |
| Bit Name     |   |   |   |   |   | Page Bits[2:0] |   |   |

This register is used to set the effective SRAM page for stack memory accesses in a multi-SRAM page PSoC device. It is only used when a device has more than one SRAM page.

In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 46](#) in the RAM Paging chapter.

| Bit | Name           | Description   |
|-----|----------------|---|
| 2:0 | Page Bits[2:0] | Bits determine which SRAM page is used to hold the stack. See the <a href="#">RAM Paging chapter on page 43</a> for more information. |
|     | 000b           | SRAM Page 0   |
|     | 001b           | SRAM Page 1   |
|     | 010b           | SRAM Page 2   |
|     | 011b           | SRAM Page 3   |
|     | 100b           | SRAM Page 4   |
|     | 101b           | SRAM Page 5   |
|     | 110b           | SRAM Page 6   |
|     | 111b           | SRAM Page 7   |

**0,D3h**

## 22.3.39 IDX\_PP

### Indexed Memory Access Page Pointer Register

Individual Register Names and Addresses:

0,D3h

IDX\_PP : 0,D3h

|              |   |   |   |   |   |   |                |   |
|--------------|---|---|---|---|---|---|----------------|---|
|              | 7 | 6 | 5 | 4 | 3 | 2 | 1              | 0 |
| Access : POR |   |   |   |   |   |   | RW : 0         |   |
| Bit Name     |   |   |   |   |   |   | Page Bits[2:0] |   |

This register is used to set the effective SRAM page for indexed memory accesses in a multi-SRAM page PSoC device.

This register is only used when a device has more than one page of SRAM. In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 46](#) in the RAM Paging chapter.

| Bit | Name           | Description  |
|-----|----------------|--|
| 2:0 | Page Bits[2:0] | Bits determine which SRAM page an indexed memory access operates on. See the <a href="#">Register Definitions on page 46</a> for more information on when this register is active. |
|     | 000b           | SRAM Page 0  |
|     | 001b           | SRAM Page 1  |
|     | 010b           | SRAM Page 2  |
|     | 011b           | SRAM Page 3  |
|     | 100b           | SRAM Page 4  |
|     | 101b           | SRAM Page 5  |
|     | 110b           | SRAM Page 6  |
|     | 111b           | SRAM Page 7  |

## 22.3.40 MVR\_PP

### MVI Read Page Pointer Register

#### Individual Register Names and Addresses:

0,D4h

MVR\_PP : 0,D4h

|              |   |   |   |   |   |                |   |   |
|--------------|---|---|---|---|---|----------------|---|---|
|              | 7 | 6 | 5 | 4 | 3 | 2              | 1 | 0 |
| Access : POR |   |   |   |   |   | RW : 0         |   |   |
| Bit Name     |   |   |   |   |   | Page Bits[2:0] |   |   |

This register is used to set the effective SRAM page for MVI read memory accesses in a multi-SRAM page PSoC device.

This register is only used when a device has more than one page of SRAM. In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 46](#) in the RAM Paging chapter.

| Bit | Name           | Description   |
|-----|----------------|---|
| 2:0 | Page Bits[2:0] | Bits determine which SRAM page an MVI Read instruction operates on. |
|     | 000b           | SRAM Page 0   |
|     | 001b           | SRAM Page 1   |
|     | 010b           | SRAM Page 2   |
|     | 011b           | SRAM Page 3   |
|     | 100b           | SRAM Page 4   |
|     | 101b           | SRAM Page 5   |
|     | 110b           | SRAM Page 6   |
|     | 111b           | SRAM Page 7   |

0,D5h

## 22.3.41 MVW\_PP

### MVI Write Page Pointer Register

Individual Register Names and Addresses: 0,D5h

MVW\_PP : 0,D5h

|              | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0              |
|--------------|---|---|---|---|---|---|---|----------------|
| Access : POR |   |   |   |   |   |   |   | RW : 0         |
| Bit Name     |   |   |   |   |   |   |   | Page Bits[2:0] |

This register is used to set the effective SRAM page for MVI write memory accesses in a multi-SRAM page PSoC device.

This register is only used when a device has more than one page of SRAM. In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 46](#) in the RAM Paging chapter.

| Bit | Name           | Description  |
|-----|----------------|--|
| 2:0 | Page Bits[2:0] | Bits determine which SRAM page an MVI Write instruction operates on. |
|     | 000b           | SRAM Page 0  |
|     | 001b           | SRAM Page 1  |
|     | 010b           | SRAM Page 2  |
|     | 011b           | SRAM Page 3  |
|     | 100b           | SRAM Page 4  |
|     | 101b           | SRAM Page 5  |
|     | 110b           | SRAM Page 6  |
|     | 111b           | SRAM Page 7  |

## 22.3.42 I2C\_CFG

### I<sup>2</sup>C Configuration Register

Individual Register Names and Addresses: 0,D6h

I2C\_CFG : 0,D6h

|              | 7 | 6       | 5 | 4       | 3 | 2               | 1 | 0      |
|--------------|---|---------|---|---------|---|-----------------|---|--------|
| Access : POR |   | RW : 0  |   | RW : 0  |   | RW : 0          |   | RW : 0 |
| Bit Name     |   | PSelect |   | Stop IE |   | Clock Rate[1:0] |   | Enable |

This register is used to set the basic operating modes, baud rate, and interrupt selection.

In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Always write reserved bits with a value of '0'. For additional information, refer to the [Register Definitions on page 114](#) in the I2C Slave chapter.

| Bit | Name            | Description   |
|-----|-----------------|---|
| 6   | P Select        | I2C Pin Select.<br>0 P1[5] and P1[7].<br>1 P1[0] and P1[1].<br><b>Note</b> Read the <a href="#">I<sup>2</sup>C Slave chapter on page 111</a> for a discussion of the side effects of choosing the P1[0] and P1[1] pair of pins. |
| 4   | Stop IE         | Stop Interrupt Enable.<br>0 Disabled.<br>1 Enabled. An interrupt is generated on the detection of a Stop condition.   |
| 3:2 | Clock Rate[1:0] | 00b 100K Standard Mode.<br>01b 400K Fast Mode.<br>10b 50K Standard Mode.<br>11b Reserved.   |
| 0   | Enable          | 0 Disabled.<br>1 Enabled.   |

## 22.3.43 I2C\_SCR

### I<sup>2</sup>C Status and Control Register

Individual Register Names and Addresses: 0,D7h

I2C\_SCR : 0,D7h

|              | 7         | 6 | 5           | 4      | 3       | 2        | 1      | 0             |
|--------------|-----------|---|-------------|--------|---------|----------|--------|---------------|
| Access : POR | RC : 0    |   | RC : 0      | RW : 0 | RC : 0  | RW : 0   | RC : 0 | RC : 0        |
| Bit Name     | Bus Error |   | Stop Status | ACK    | Address | Transmit | LRB    | Byte Complete |

This register is used by the slave to control the flow of data bytes and to keep track of the bus state during a transfer.

Bits in this register are held in reset until one of the enable bits in I2C\_CFG is set. In the table, note that the reserved bit is a grayed table cell and not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 114](#) in the I2C Slave chapter.

| Bit | Name          | Description   |
|-----|---------------|---|
| 7   | Bus Error     | 0 Status bit. It must be cleared by firmware by writing a '0' to the bit position. It is never cleared by the hardware.<br>1 A misplaced Start or Stop condition was detected.  |
| 5   | Stop Status   | 0 Status bit. It must be cleared by firmware with a write of '0' to the bit position. It is never cleared by the hardware.<br>1 A Stop condition was detected.  |
| 4   | ACK           | Acknowledge Out. Bit is automatically cleared by hardware upon a Byte Complete event.<br>0 NACK the last received byte.<br>1 ACK the last received byte   |
| 3   | Address       | 0 Status bit. It must be cleared by firmware with a write of '0' to the bit position.<br>1 The received byte is a slave address.  |
| 2   | Transmit      | Bit is set by firmware to define the direction of the byte transfer. Any Start detect or a write to the Start or Restart generate bits when operating in master mode also clears the bit.<br>0 Receive mode.<br>1 Transmit mode.  |
| 1   | LRB           | Last Received Bit. The value of the 9 <sup>th</sup> bit in a Transmit sequence, which is the acknowledge bit from the receiver. Any Start detect or a write to the Start or Restart generate bits when operating in master mode also clears the bit.<br>0 Last transmitted byte was ACKed by the receiver.<br>1 Last transmitted byte was NAKed by the receiver.                  |
| 0   | Byte Complete | Transmit/Receive Mode:<br>0 No completed transmit/receive since last cleared by firmware. Any Start detect or a write to the Start or Restart generate bits when operating in master mode also clears the bit.<br>Transmit Mode:<br>1 Eight bits of data have been transmitted and an ACK or NACK has been received.<br>Receive Mode:<br>1 Eight bits of data have been received. |

## 22.3.44 I2C\_DR

### I<sup>2</sup>C Data Register

Individual Register Names and Addresses: 0,D8h

I2C\_DR : 0,D8h

|              | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0         |
|--------------|---|---|---|---|---|---|---|-----------|
| Access : POR |   |   |   |   |   |   |   | RW : 00   |
| Bit Name     |   |   |   |   |   |   |   | Data[7:0] |

This register provides read/write access to the Shift register.

This register is read only for received data and write only for transmitted data. For additional information, refer to the [Register Definitions on page 114](#) in the I2C Slave chapter.

| Bit | Name      | Description                                   |
|-----|-----------|---|
| 7:0 | Data[7:0] | Read received data or write data to transmit. |

## 22.3.45 INT\_CLR0

### Interrupt Clear Register 0

#### Individual Register Names and Addresses:

INT\_CLR0 : 0,DAh

|                     | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0         |
|---------------------|--------|--------|--------|--------|--------|--------|--------|-----------|
| <b>Access : POR</b> | RW : 0 | RW : 0 | RW : 0 | RW : 0 | RW : 0 | RW : 0 | RW : 0 | RW : 0    |
| <b>Bit Name</b>     | I2C    | Sleep  | SPI    | GPIO   | Timer0 |        | Analog | V Monitor |

This register enables the individual interrupt sources' ability to clear posted interrupts.

When bits in this register are read, a '1' is returned for every bit position that has a corresponding posted interrupt. When bits in this register are written with a '0' and ENSWINT is not set, posted interrupts are cleared at the corresponding bit positions. If there is no posted interrupt, there is no effect. When bits in this register are written with a '1' and ENSWINT is set, an interrupt is posted in the interrupt controller.

For additional information, refer to the [Register Definitions on page 51](#) in the Interrupt Controller chapter.

| Bit | Name  | Description  |
|-----|-------|--|
| 7   | I2C   | Read 0 No posted interrupt for I2C.<br>Read 1 Posted interrupt present for I2C.<br>Write 0 AND ENSWINT = 0 Clear posted interrupt if it exists.<br>Write 1 AND ENSWINT = 0 No effect.<br>Write 0 AND ENSWINT = 1 No effect.<br>Write 1 AND ENSWINT = 1 Post an interrupt for I2C.  |
| 6   | Sleep | Read 0 No posted interrupt for sleep timer.<br>Read 1 Posted interrupt present for sleep timer.<br>Write 0 AND ENSWINT = 0 Clear posted interrupt if it exists.<br>Write 1 AND ENSWINT = 0 No effect.<br>Write 0 AND ENSWINT = 1 No effect.<br>Write 1 AND ENSWINT = 1 Post an interrupt for sleep timer.  |
| 5   | SPI   | Read 0 No posted interrupt for SPI.<br>Read 1 Posted interrupt present for SPI.<br>Write 0 AND ENSWINT = 0 Clear posted interrupt if it exists.<br>Write 1 AND ENSWINT = 0 No effect.<br>Write 0 AND ENSWINT = 1 No effect.<br>Write 1 AND ENSWINT = 1 Post an interrupt for SPI.  |
| 4   | GPIO  | Read 0 No posted interrupt for general-purpose inputs and outputs (GPIO) (pins).<br>Read 1 Posted interrupt present for GPIO (pins).<br>Write 0 AND ENSWINT = 0 Clear posted interrupt if it exists.<br>Write 1 AND ENSWINT = 0 No effect.<br>Write 0 AND ENSWINT = 1 No effect.<br>Write 1 AND ENSWINT = 1 Post an interrupt for general-purpose inputs and outputs (pins). |

(continued on next page)



### 22.3.45 INT\_CLR0 (*continued*)

|          |                  |  |
|----------|------------------|--|
| <b>3</b> | <b>Timer0</b>    | Read 0 No posted interrupt for Timer.<br>Read 1 Posted interrupt present for Timer.<br>Write 0 AND ENSWINT = 0 Clear posted interrupt if it exists.<br>Write 1 AND ENSWINT = 0 No effect.<br>Write 0 AND ENSWINT = 1 No effect.<br>Write 1 AND ENSWINT = 1 Post an interrupt for Timer.  |
| <b>1</b> | <b>Analog</b>    | Read 0 No posted interrupt for Analog.<br>Read 1 Posted interrupt present for Analog.<br>Write 0 AND ENSWINT = 0 Clear posted interrupt if it exists.<br>Write 1 AND ENSWINT = 0 No effect.<br>Write 0 AND ENSWINT = 1 No effect.<br>Write 1 AND ENSWINT = 1 Post an interrupt for Analog.   |
| <b>0</b> | <b>V Monitor</b> | Read 0 No posted interrupt for Supply Voltage Monitor.<br>Read 1 Posted interrupt present for Supply Voltage Monitor.<br>Write 0 AND ENSWINT = 0 Clear posted interrupt if it exists.<br>Write 1 AND ENSWINT = 0 No effect.<br>Write 0 AND ENSWINT = 1 No effect.<br>Write 1 AND ENSWINT = 1 Post an interrupt for Supply Voltage Monitor. |

## 22.3.46 INT\_CLR1

### Interrupt Clear Register 1

Individual Register Names and Addresses: 0,DBh

INT\_CLR1 : 0,DBh

|                     | 7         | 6         | 5         | 4         | 3       | 2           | 1      | 0      |
|---------------------|-----------|-----------|-----------|-----------|---------|-------------|--------|--------|
| <b>Access : POR</b> | RW : 0    | RW : 0    | RW : 0    | RW : 0    | RW : 0  | RW : 0      | RW : 0 | RW : 0 |
| <b>Bit Name</b>     | Endpoint3 | Endpoint2 | Endpoint1 | Endpoint0 | USB_SOF | USB_BUS_RST | Timer2 | Timer1 |

This register is used to enable the individual interrupt sources' ability to clear posted interrupts.

When bits in this register are read, a '1' is returned for every bit position that has a corresponding posted interrupt. When bits in this register are written with a '0' and ENSWINT is not set, posted interrupts are cleared at the corresponding bit positions. If there is no posted interrupt, there is no effect. When bits in this register are written with a '1' and ENSWINT is set, an interrupt is posted in the interrupt controller.

For additional information, refer to the [Register Definitions on page 51](#) in the Interrupt Controller chapter.

| Bit | Name      | Description  |
|-----|-----------|--|
| 7   | Endpoint3 | <p>Read 0 No posted interrupt for USB Endpoint3.</p> <p>Read 1 Posted interrupt present for USB Endpoint3.</p> <p>Write 0 AND ENSWINT = 0 Clear posted interrupt if it exists.</p> <p>Write 1 AND ENSWINT = 0 No effect.</p> <p>Write 0 AND ENSWINT = 1 No effect.</p> <p>Write 1 AND ENSWINT = 1 Post an interrupt for USB Endpoint3.</p> |
| 6   | Endpoint2 | <p>Read 0 No posted interrupt for USB Endpoint2.</p> <p>Read 1 Posted interrupt present for USB Endpoint2.</p> <p>Write 0 AND ENSWINT = 0 Clear posted interrupt if it exists.</p> <p>Write 1 AND ENSWINT = 0 No effect.</p> <p>Write 0 AND ENSWINT = 1 No effect.</p> <p>Write 1 AND ENSWINT = 1 Post an interrupt for USB Endpoint2.</p> |
| 5   | Endpoint1 | <p>Read 0 No posted interrupt for USB Endpoint1.</p> <p>Read 1 Posted interrupt present for USB Endpoint1.</p> <p>Write 0 AND ENSWINT = 0 Clear posted interrupt if it exists.</p> <p>Write 1 AND ENSWINT = 0 No effect.</p> <p>Write 0 AND ENSWINT = 1 No effect.</p> <p>Write 1 AND ENSWINT = 1 Post an interrupt for USB Endpoint1.</p> |

(continued on next page)

## 22.3.46 INT\_CLR1 (continued)

|   |                    |  |
|---|--------------------|--|
| 4 | <b>Endpoint0</b>   | Read 0 No posted interrupt for USB Endpoint0.<br>Read 1 Posted interrupt present for USB Endpoint0.<br>Write 0 AND ENSWINT = 0 Clear posted interrupt if it exists.<br>Write 1 AND ENSWINT = 0 No effect.<br>Write 0 AND ENSWINT = 1 No effect.<br>Write 1 AND ENSWINT = 1 Post an interrupt for USB Endpoint0.                                  |
| 3 | <b>USB_SOF</b>     | Read 0 No posted interrupt for USB Start of Frame (SOF).<br>Read 1 Posted interrupt present for USB Start of Frame (SOF).<br>Write 0 AND ENSWINT = 0 Clear posted interrupt if it exists.<br>Write 1 AND ENSWINT = 0 No effect.<br>Write 0 AND ENSWINT = 1 No effect.<br>Write 1 AND ENSWINT = 1 Post an interrupt for USB Start of Frame (SOF). |
| 2 | <b>USB_BUS_RST</b> | Read 0 No posted interrupt for USB Bus Reset.<br>Read 1 Posted interrupt present for USB Bus Reset.<br>Write 0 AND ENSWINT = 0 Clear posted interrupt if it exists.<br>Write 1 AND ENSWINT = 0 No effect.<br>Write 0 AND ENSWINT = 1 No effect.<br>Write 1 AND ENSWINT = 1 Post an interrupt for USB Bus Reset.                                  |
| 1 | <b>Timer2</b>      | Read 0 No posted interrupt for Timer2.<br>Read 1 Posted interrupt present for Timer2.<br>Write 0 AND ENSWINT = 0 Clear posted interrupt if it exists.<br>Write 1 AND ENSWINT = 0 No effect.<br>Write 0 AND ENSWINT = 1 No effect.<br>Write 1 AND ENSWINT = 1 Post an interrupt for Timer2.   |
| 0 | <b>Timer1</b>      | Read 0 No posted interrupt for Timer1.<br>Read 1 Posted interrupt present for Timer1.<br>Write 0 AND ENSWINT = 0 Clear posted interrupt if it exists.<br>Write 1 AND ENSWINT = 0 No effect.<br>Write 0 AND ENSWINT = 1 No effect.<br>Write 1 AND ENSWINT = 1 Post an interrupt for Timer1.   |

## 22.3.47 INT\_CLR2

### Interrupt Clear Register 2

#### Individual Register Names and Addresses:

0,DCh

INT\_CLR2 : 0,DCh

|              | 7 | 6 | 5        | 4         | 3         | 2         | 1         | 0         |
|--------------|---|---|----------|-----------|-----------|-----------|-----------|-----------|
| Access : POR |   |   | RW : 0   | RW : 0    | RW : 0    | RW : 0    | RW : 0    | RW : 0    |
| Bit Name     |   |   | USB_WAKE | Endpoint8 | Endpoint7 | Endpoint6 | Endpoint5 | Endpoint4 |

This register is used to enable the individual interrupt sources' ability to clear posted interrupts.

When bits in this register are read, a '1' is returned for every bit position that has a corresponding posted interrupt. When bits in this register are written with a '0' and ENSWINT is not set, posted interrupts are cleared at the corresponding bit positions. If there is no posted interrupt, there is no effect. In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. When bits in this register are written with a '1' and ENSWINT is set, an interrupt is posted in the interrupt controller. For additional information, refer to the [Register Definitions on page 51](#) in the Interrupt Controller chapter.

| Bit | Name      | Description   |
|-----|-----------|---|
| 5   | USB_WAKE  | Read 0 No posted interrupt for USB Wake.<br>Read 1 Posted interrupt present for USB Wake.<br>Write 0 AND ENSWINT = 0 Clear posted interrupt if it exists.<br>Write 1 AND ENSWINT = 0 No effect.<br>Write 0 AND ENSWINT = 1 No effect.<br>Write 1 AND ENSWINT = 1 Post an interrupt for USB Wake.                |
| 4   | Endpoint8 | Read 0 No posted interrupt for USB Endpoint8.<br>Read 1 Posted interrupt present for USB Endpoint8.<br>Write 0 AND ENSWINT = 0 Clear posted interrupt if it exists.<br>Write 1 AND ENSWINT = 0 No effect.<br>Write 0 AND ENSWINT = 1 No effect.<br>Write 1 AND ENSWINT = 1 Post an interrupt for USB Endpoint8. |

(continued on next page)

## 22.3.47 INT\_CLR2 (continued)

|   |                  |   |
|---|------------------|---|
| 3 | <b>Endpoint7</b> | Read 0 No posted interrupt for USB Endpoint7.<br>Read 1 Posted interrupt present for USB Endpoint7.<br>Write 0 AND ENSWINT = 0 Clear posted interrupt if it exists.<br>Write 1 AND ENSWINT = 0 No effect.<br>Write 0 AND ENSWINT = 1 No effect.<br>Write 1 AND ENSWINT = 1 Post an interrupt for USB Endpoint7. |
| 2 | <b>Endpoint6</b> | Read 0 No posted interrupt for USB Endpoint6.<br>Read 1 Posted interrupt present for USB Endpoint6.<br>Write 0 AND ENSWINT = 0 Clear posted interrupt if it exists.<br>Write 1 AND ENSWINT = 0 No effect.<br>Write 0 AND ENSWINT = 1 No effect.<br>Write 1 AND ENSWINT = 1 Post an interrupt for USB Endpoint6. |
| 1 | <b>Endpoint5</b> | Read 0 No posted interrupt for USB Endpoint5.<br>Read 1 Posted interrupt present for USB Endpoint5.<br>Write 0 AND ENSWINT = 0 Clear posted interrupt if it exists.<br>Write 1 AND ENSWINT = 0 No effect.<br>Write 0 AND ENSWINT = 1 No effect.<br>Write 1 AND ENSWINT = 1 Post an interrupt for USB Endpoint5  |
| 0 | <b>Endpoint4</b> | Read 0 No posted interrupt for USB Endpoint4.<br>Read 1 Posted interrupt present for USB Endpoint4.<br>Write 0 AND ENSWINT = 0 Clear posted interrupt if it exists.<br>Write 1 AND ENSWINT = 0 No effect.<br>Write 0 AND ENSWINT = 1 No effect.<br>Write 1 AND ENSWINT = 1 Post an interrupt for USB Endpoint4. |

## 22.3.48 INT\_MSK2

### Interrupt Mask Register 2

Individual Register Names and Addresses:

INT\_MSK2 : 0,DEh

|              | 7 | 6 | 5          | 4         | 3         | 2         | 1         | 0         |
|--------------|---|---|------------|-----------|-----------|-----------|-----------|-----------|
| Access : POR |   |   | RW : 0     | RW : 0    | RW : 0    | RW : 0    | RW : 0    | RW : 0    |
| Bit Name     |   |   | USB Wakeup | Endpoint8 | Endpoint7 | Endpoint6 | Endpoint5 | Endpoint4 |

This register enables the individual sources' ability to create pending interrupts.

When an interrupt is masked off, the mask bit is '0'. The interrupt continues to post in the interrupt controller. Clearing the mask bit only prevents a posted interrupt from becoming a pending interrupt. In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 51](#) in the Interrupt Controller chapter.

| Bit | Name       | Description  |
|-----|------------|--|
| 5   | USB Wakeup | 0 Mask USB Wakeup interrupt.<br>1 Unmask USB Wakeup interrupt.       |
| 4   | Endpoint8  | 0 Mask USB Endpoint8 interrupt.<br>1 Unmask USB Endpoint8 interrupt. |
| 3   | Endpoint7  | 0 Mask USB Endpoint7 interrupt.<br>1 Unmask USB Endpoint7 interrupt. |
| 2   | Endpoint6  | 0 Mask USB Endpoint6 interrupt.<br>1 Unmask USB Endpoint6 interrupt. |
| 1   | Endpoint5  | 0 Mask USB Endpoint5 interrupt.<br>1 Unmask USB Endpoint5 interrupt. |
| 0   | Endpoint4  | 0 Mask USB Endpoint4 interrupt.<br>1 Unmask USB Endpoint4 interrupt. |

## 22.3.49 INT\_MSK1

### Interrupt Mask Register 1

Individual Register Names and Addresses: 0,DFh

INT\_MSK1 : 0,DFh

|              | 7         | 6         | 5         | 4         | 3       | 2             | 1      | 0      |
|--------------|-----------|-----------|-----------|-----------|---------|---------------|--------|--------|
| Access : POR | RW : 0    | RW : 0    | RW : 0    | RW : 0    | RW : 0  | RW : 0        | RW : 0 | RW : 0 |
| Bit Name     | Endpoint3 | Endpoint2 | Endpoint1 | Endpoint0 | USB SOF | USB Bus Reset | Timer2 | Timer1 |

This register enables the individual sources' ability to create pending interrupts.

When an interrupt is masked off, the mask bit is '0'. The interrupt continues to post in the interrupt controller. Clearing the mask bit only prevents a posted interrupt from becoming a pending interrupt.

For additional information, refer to the [Register Definitions on page 51](#) in the Interrupt Controller chapter.

| Bit | Name          | Description  |
|-----|---------------|--|
| 7   | Endpoint3     | 0 Mask USB Endpoint3 interrupt.<br>1 Unmask USB Endpoint3 interrupt. |
| 6   | Endpoint2     | 0 Mask USB Endpoint2 interrupt.<br>1 Unmask USB Endpoint2 interrupt. |
| 5   | Endpoint1     | 0 Mask USB Endpoint1 interrupt.<br>1 Unmask USB Endpoint1 interrupt. |
| 4   | Endpoint0     | 0 Mask USB Endpoint0 interrupt.<br>1 Unmask USB Endpoint0 interrupt. |
| 3   | USB SOF       | 0 Mask USB SOF interrupt.<br>1 Unmask USB SOF interrupt.             |
| 2   | USB Bus Reset | 0 Mask USB Bus Reset interrupt.<br>1 Unmask USB Bus Reset interrupt. |
| 1   | Timer2        | 0 Mask Timer2 interrupt.<br>1 Unmask Timer2 interrupt.               |
| 0   | Timer1        | 0 Mask Timer1 interrupt.<br>1 Unmask Timer1 interrupt.               |

## 22.3.50 INT\_MSK0

### Interrupt Mask Register 0

Individual Register Names and Addresses: 0,E0h

INT\_MSK0 : 0,E0h

|              | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0         |
|--------------|--------|--------|--------|--------|--------|--------|--------|-----------|
| Access : POR | RW : 0 | RW : 0 | RW : 0 | RW : 0 | RW : 0 | RW : 0 | RW : 0 | RW : 0    |
| Bit Name     | I2C    | Sleep  | SPI    | GPIO   | Timer0 |        | Analog | V Monitor |

This register enables the individual sources' ability to create pending interrupts.

When an interrupt is masked off, the mask bit is '0'. The interrupt continues to post in the interrupt controller. Clearing the mask bit only prevents a posted interrupt from becoming a pending interrupt. For additional information, refer to the [Register Definitions on page 51](#) in the Interrupt Controller chapter.

| Bit | Name      | Description  |
|-----|-----------|--|
| 7   | I2C       | 0 Mask I2C interrupt.<br>1 Unmask I2C interrupt.                         |
| 6   | Sleep     | 0 Mask Sleep interrupt.<br>1 Unmask Sleep interrupt.                     |
| 5   | SPI       | 0 Mask SPI interrupt.<br>1 Unmask SPI interrupt.                         |
| 4   | GPIO      | 0 Mask GPIO interrupt.<br>1 Unmask GPIO interrupt.                       |
| 3   | Timer0    | 0 Mask Timer0 interrupt.<br>1 Unmask Timer0 interrupt.                   |
| 1   | Analog    | 0 Mask Analog interrupt.<br>1 Unmask Analog interrupt.                   |
| 0   | V Monitor | 0 Mask Voltage Monitor interrupt.<br>1 Unmask Voltage Monitor interrupt. |



## 22.3.51 INT\_SW\_EN

### Interrupt Software Enable Register

#### Individual Register Names and Addresses:

INT\_SW\_EN : 0,E1h

|              |   |   |   |   |   |   |   |         |
|--------------|---|---|---|---|---|---|---|---------|
|              | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0       |
| Access : POR |   |   |   |   |   |   |   | RW : 0  |
| Bit Name     |   |   |   |   |   |   |   | ENSWINT |

This register is used to enable software interrupts.

In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 51](#) in the Interrupt Controller chapter.

| Bit | Name    | Description   |
|-----|---------|---|
| 0   | ENSWINT | 0 Disable software interrupts.<br>1 Enable software interrupts. |

0,E2h

## 22.3.52 INT\_VC

### Interrupt Vector Clear Register

Individual Register Names and Addresses: 0,E2h

INT\_VC : 0,E2h

|              |                        |   |   |   |   |   |   |   |
|--------------|------------------------|---|---|---|---|---|---|---|
|              | 7                      | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access : POR | RC : 00                |   |   |   |   |   |   |   |
| Bit Name     | Pending Interrupt[7:0] |   |   |   |   |   |   |   |

This register returns the next pending interrupt and clears all pending interrupts when written.

For additional information, refer to the [Register Definitions on page 51](#) in the Interrupt Controller chapter.

| Bit | Name                   | Description  |
|-----|------------------------|--|
| 7:0 | Pending Interrupt[7:0] | Read Returns vector for highest priority pending interrupt.<br>Write Clears all pending and posted interrupts. |

## 22.3.53 RES\_WDT

### Reset Watchdog Timer Register

#### Individual Register Names and Addresses:

RES\_WDT: 0,E3h

|              |                 |   |   |   |   |   |   |   |
|--------------|-----------------|---|---|---|---|---|---|---|
|              | 7               | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access : POR | W : 00          |   |   |   |   |   |   |   |
| Bit Name     | WDSL_Clear[7:0] |   |   |   |   |   |   |   |

This register is used to clear the watchdog timer alone, or clear both the watchdog timer and the sleep timer together. For additional information, refer to the [Register Definitions on page 81](#) in the Sleep and Watchdog chapter.

| Bit | Name            | Description  |
|-----|-----------------|--|
| 7:0 | WDSL_Clear[7:0] | Any write clears the watchdog timer. A write of 38h clears both the watchdog and sleep timers. |

## 22.3.54 CPU\_F

### M8C Flag Register

#### Individual Register Names and Addresses:

CPU\_F : x,F7h

|              | 7           | 6      | 5      | 4      | 3 | 2      | 1      | 0      |
|--------------|-------------|--------|--------|--------|---|--------|--------|--------|
| Access : POR | RL : 0      | RL : 0 | RL : 0 | RL : 0 |   | RL : 0 | RL : 0 | RL : 0 |
| Bit Name     | PgMode[1:0] | BINC   | XIO    |        |   | Carry  | Zero   | GIE    |

This register provides read access to the M8C flags.

The AND f, expr; OR f, expr; and XOR f, expr flag instructions are used to modify this register. In the table, note that the reserved bit is a grayed table cell and is not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 36](#) in the M8C chapter and the [Register Definitions on page 51](#) in the Interrupt Controller chapter.

| Bit | Name        | Description  |
|-----|-------------|--|
| 7:6 | PgMode[1:0] | <p>00b Direct Address mode and Indexed Address mode operands are referred to RAM Page 0, regardless of the values of CUR_PP and IDX_PP. Note that this condition prevails upon entry to an Interrupt Service Routine when the CPU_F register is cleared.</p> <p>01b Direct Address mode instructions are referred to Page 0.<br/>Indexed Address mode instructions are referred to the RAM page specified by the stack page pointer, STK_PP.</p> <p>10b Direct Address mode instructions are referred to the RAM page specified by the current page pointer, CUR_PP.<br/>Indexed Address mode instructions are referred to the RAM page specified by the index page pointer, IDX_PP.</p> <p>11b Direct Address mode instructions are referred to the RAM page specified by the current page pointer, CUR_PP.<br/>Indexed Address mode instructions are referred to the RAM page specified by the stack page pointer, STK_PP.</p> |
| 5   | BINC        | Bit Implemented Not Connected.   |
| 4   | XIO         | <p>0 Normal register address space.</p> <p>1 Extended register address space. Primarily used for configuration.</p>  |
| 2   | Carry       | <p>Set by the M8C CPU Core to indicate whether there was a carry in the previous logical/arithmetic operation.</p> <p>0 No carry.</p> <p>1 Carry.</p>  |

(continued on next page)

### 22.3.54 CPU\_F (continued)

|   |      |   |                               |
|---|------|---|-------------------------------|
| 1 | Zero | Set by the M8C CPU Core to indicate whether there was a zero result in the previous logical/arithmetic operation. |                               |
|   |      | 0   | Not equal to zero.            |
|   |      | 1   | Equal to zero.                |
| 0 | GIE  | M8C does not process any interrupts.  |                               |
|   |      | 1   | Interrupt processing enabled. |

0,FDh

## 22.3.55 IDAC\_D

### Current DAC Data Register

#### Individual Register Names and Addresses:

IDAC\_D : 0,FDh

|              |               |   |   |   |   |   |   |   |
|--------------|---------------|---|---|---|---|---|---|---|
|              | 7             | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access : POR | RW : 00       |   |   |   |   |   |   |   |
| Bit Name     | IDACDATA[7:0] |   |   |   |   |   |   |   |

This register specifies the 8-bit multiplying factor that determines the output IDAC current.

For additional information, refer to the [Register Definitions on page 90](#) in the Analog Module chapter.

| Bits | Name          | Description   |
|------|---------------|---|
| 7:0  | IDACDATA[7:0] | <p>This is an 8-bit value that selects the number of current units that combine to form the IDAC current. This current then drives the analog mux bus when IDAC mode is enabled. For example, a setting of 80h means that the charging current is 128 current units.</p> <p>The current size also depends on the IRANGE setting in the CS_CR2 register. This setting supplies the charging current for the relaxation oscillator. This current and the external capacitance connected to the analog global bus determines the RO frequency.</p> <p>This register is also used to set the charging current in the proximity detect mode.</p> <p>Step size is approximately 251 nA/bit for default IRANGE state 00b at 30°C.</p> <p>00h      Smallest current</p> <p>·</p> <p>·</p> <p>·</p> <p>FFh      Largest current.</p> |

## 22.3.56 CPU\_SCR1

### System Status and Control Register 1

#### Individual Register Names and Addresses:

CPU\_SCR1: x,FEh

|              | 7     | 6 | 5 | 4 | 3          | 2 | 1 | 0       |
|--------------|-------|---|---|---|------------|---|---|---------|
| Access : POR | R : 0 |   |   |   | RW : 0     |   |   | RW : 0  |
| Bit Name     | IRESS |   |   |   | SLIMO[1:0] |   |   | IRAMDIS |

This register is used to convey the status and control of events related to internal resets and watchdog reset.

In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 129](#) in the System Resets chapter.

| Bit   | Name       | Description   |       |           |    |    |    |   |    |    |    |          |
|-------|------------|---|-------|-----------|----|----|----|---|----|----|----|----------|
| 7     | IRESS      | This bit is read only.<br>0 Boot phase only executed once.<br>1 Boot phase occurred multiple times.   |       |           |    |    |    |   |    |    |    |          |
| 4:3   | SLIMO[1:0] | These bits set the frequency range for the IMO. <b>Note</b> When changing from the default setting, the corresponding trim value must be loaded into the IMO_TR register for highest frequency accuracy.<br><table><tr><th>SLIMO</th><th>CY8C24x93</th></tr><tr><td>00</td><td>12</td></tr><tr><td>01</td><td>6</td></tr><tr><td>10</td><td>24</td></tr><tr><td>11</td><td>Reserved</td></tr></table> | SLIMO | CY8C24x93 | 00 | 12 | 01 | 6 | 10 | 24 | 11 | Reserved |
| SLIMO | CY8C24x93  |   |       |           |    |    |    |   |    |    |    |          |
| 00    | 12         |   |       |           |    |    |    |   |    |    |    |          |
| 01    | 6          |   |       |           |    |    |    |   |    |    |    |          |
| 10    | 24         |   |       |           |    |    |    |   |    |    |    |          |
| 11    | Reserved   |   |       |           |    |    |    |   |    |    |    |          |
| 0     | IRAMDIS    | 0 SRAM is initialized to 00h after POR, XRES, and WDR.<br>1 Addresses 03h - D7h of SRAM Page 0 are not modified by WDR.   |       |           |    |    |    |   |    |    |    |          |

## 22.3.57 CPU\_SCR0

### System Status and Control Register 0

#### Individual Register Names and Addresses:

CPU\_SCR0 : x,FFh

|                     | 7     | 6 | 5      | 4      | 3      | 2 | 1 | 0      |
|---------------------|-------|---|--------|--------|--------|---|---|--------|
| <b>Access : POR</b> | R : 0 |   | RC : 0 | RC : 1 | RW : 0 |   |   | RW : 0 |
| <b>Bit Name</b>     | GIES  |   | WDRS   | PORS   | Sleep  |   |   | STOP   |

This register is used to convey the status and control of events for various functions of a PSoC device.

In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 129](#) in the System Resets chapter.

| Bit | Name         | Description  |
|-----|--------------|--|
| 7   | <b>GIES</b>  | Global Interrupt Enable Status. It is recommended that the user read the Global Interrupt Enable Flag bit from the <a href="#">CPU_F register on page 236</a> . This bit is read only for GIES. Its use is discouraged, as the Flag register is now readable at address x,F7h (read only). |
| 5   | <b>WDRS</b>  | Watchdog Reset Status. This bit may not be set by user code; however, it may be cleared by writing a '0'.<br>0 No watchdog reset has occurred.<br>1 Watchdog reset has occurred.   |
| 4   | <b>PORS</b>  | Power-On-Reset Status. This bit may not be set by user code; however, it may be cleared by writing a '0'.<br>0 Power-on-reset has not occurred and watchdog timer is enabled.<br>1 Is set after external reset or power-on-reset.  |
| 3   | <b>Sleep</b> | Set by the user to enable the CPU sleep state. CPU remains in Sleep mode until any interrupt is pending.<br>0 Normal operation.<br>1 Sleep.  |
| 0   | <b>STOP</b>  | 0 M8C is free to execute code.<br>1 M8C is halted and is only cleared by POR, XRES, or WDR.  |



## 22.4 Bank 1 Registers

The following registers are all in bank 1 and are listed in address order. Registers that are in both Bank 0 and Bank 1 are listed in address order in the section titled [Bank 0 Registers on page 178](#).

### 22.4.1 PRTxDM0

#### Port Drive Mode Bit Registers 0

##### Individual Register Names and Addresses:

PRT0DM0 : 1,00h      PRT1DM0 : 1,04h      PRT2DM0 : 1,08h      PRT3DM0 : 1,0Ch  
PRT4DM0 : 1,10h

|              | 7                 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------------|-------------------|---|---|---|---|---|---|---|
| Access : POR | RW : 00           |   |   |   |   |   |   |   |
| Bit Name     | Drive Mode 0[7:0] |   |   |   |   |   |   |   |

This register is one of two registers where the combined value determines the unique drive mode of each bit in a GPIO port.

In register PRTxDM0 there are four possible drive modes for each port pin. Two mode bits are required to select one of these modes, and these two bits are spread into two different registers (PRTxDM0 and [PRTxDM1 on page 242](#)). The bit position of the effected port pin (for example, Pin[2] in Port 0) is the same as the bit position of each of the two Drive Mode register bits that control the drive mode for that pin (for example, bit[2] in PRT0DM0 and bit[2] in PRT0DM1). The two bits from the two registers are treated as a group. These are referred to as DM1 and DM0, or together as DM[1:0].

All drive mode bits are shown in the sub-table ([10] refers to the combination (in order) of bits in a given bit position); however, this register only controls the **least significant bit (LSb)** of the drive mode.

The upper nibble of the PRT4DM0 register returns the last data bus value when read. You need to mask it off prior to using this information. For additional information, refer to the [Register Definitions on page 61](#) in the GPIO chapter.

| Bit  | Name              | Description  |  |                 |                |       |     |           |        |  |     |        |        |  |     |        |        |   |     |        |        |  |
|------|-------------------|--|--|-----------------|----------------|-------|-----|-----------|--------|--|-----|--------|--------|--|-----|--------|--------|---|-----|--------|--------|--|
| 7:0  | Drive Mode 0[7:0] | Bit 0 of the drive mode, for each of 8-port pins, for a GPIO port.   |  |                 |                |       |     |           |        |  |     |        |        |  |     |        |        |   |     |        |        |  |
|      |                   | <table><tr><th>[10]</th><th>Pin Output High</th><th>Pin Output Low</th><th>Notes</th></tr><tr><td>00b</td><td>Resistive</td><td>Strong</td><td></td></tr><tr><td>01b</td><td>Strong</td><td>Strong</td><td></td></tr><tr><td>10b</td><td>High-Z</td><td>High-Z</td><td>Reset state. Digital input disabled for zero power.</td></tr><tr><td>11b</td><td>High-Z</td><td>Strong</td><td>I2C compatible mode. For digital inputs, use this mode with data bit (PRTxDR register) set high.</td></tr></table> | [10]   | Pin Output High | Pin Output Low | Notes | 00b | Resistive | Strong |  | 01b | Strong | Strong |  | 10b | High-Z | High-Z | Reset state. Digital input disabled for zero power. | 11b | High-Z | Strong | I2C compatible mode. For digital inputs, use this mode with data bit (PRTxDR register) set high. |
| [10] | Pin Output High   | Pin Output Low   | Notes  |                 |                |       |     |           |        |  |     |        |        |  |     |        |        |   |     |        |        |  |
| 00b  | Resistive         | Strong   |  |                 |                |       |     |           |        |  |     |        |        |  |     |        |        |   |     |        |        |  |
| 01b  | Strong            | Strong   |  |                 |                |       |     |           |        |  |     |        |        |  |     |        |        |   |     |        |        |  |
| 10b  | High-Z            | High-Z   | Reset state. Digital input disabled for zero power.  |                 |                |       |     |           |        |  |     |        |        |  |     |        |        |   |     |        |        |  |
| 11b  | High-Z            | Strong   | I2C compatible mode. For digital inputs, use this mode with data bit (PRTxDR register) set high. |                 |                |       |     |           |        |  |     |        |        |  |     |        |        |   |     |        |        |  |
|      |                   | <b>Note</b> A bold digit in the table signifies that the digit is used in this register.   |  |                 |                |       |     |           |        |  |     |        |        |  |     |        |        |   |     |        |        |  |

### 22.4.2 PRTxDM1

#### Port Drive Mode Bit Registers 1

##### Individual Register Names and Addresses:

PRT0DM1 : 1,01h

PRT1DM1 : 1,05h

PRT2DM1 : 1,09h

PRT3DM1 : 1,0Dh

PRT4DM1 : 1,11h

|              |                   |   |   |   |   |   |   |   |
|--------------|-------------------|---|---|---|---|---|---|---|
|              | 7                 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access : POR | RW : FF           |   |   |   |   |   |   |   |
| Bit Name     | Drive Mode 1[7:0] |   |   |   |   |   |   |   |

This register is one of three registers where the combined value determines the unique drive mode of each bit in a GPIO port.

In register PRTxDM1 there are four possible drive modes for each port pin. Two mode bits are required to select one of these modes, and these two bits are spread into two different registers (PRTxDM1 and [PRTxDM0 on page 241](#)). The bit position of the effected port pin (for example, Pin[2] in Port 0) is the same as the bit position of each of the two Drive Mode register bits that control the drive mode for that pin (for example, bit[2] in PRT0DM0 and bit[2] in PRT0DM1). The two bits from the two registers are treated as a group. These are referred to as DM1 and DM0, or together as DM[1:0].

All drive mode bits are shown in the sub-table ([10] refers to the combination (in order) of bits in a given bit position); however, this register only controls the most significant bit (MSb) of the drive mode.

The upper nibble of the PRT4DM1 register returns the last data bus value when read. You need to mask it off before using this information. For additional information, refer to the [Register Definitions on page 61](#) in the GPIO chapter.

| Bit | Name              | Description  |                        |                       |  |
|-----|-------------------|--|------------------------|-----------------------|--|
| 7:0 | Drive Mode 1[7:0] | Bit 1 of the drive mode, for each of 8-port pins, for a GPIO port.                       |                        |                       |  |
|     |                   | <b>[10]</b>  | <b>Pin Output High</b> | <b>Pin Output Low</b> | <b>Notes</b>   |
|     |                   | 00b  | Resistive              | Strong                |  |
|     |                   | 01b  | Strong                 | Strong                |  |
|     |                   | 10b  | High-Z                 | High-Z                | Reset state. Digital input disabled for zero power.  |
|     |                   | 11b  | High-Z                 | Strong                | I2C compatible mode. For digital inputs, use this mode with data bit (PRTxDR register) set high. |
|     |                   | <b>Note</b> A bold digit in the table signifies that the digit is used in this register. |                        |                       |  |

## 22.4.3 SPI\_CFG

### SPI Configuration Register

#### Individual Register Names and Addresses:

SPI\_CFG : 1,29h

|              | 7 | 6               | 5 | 4      | 3      | 2      | 1       | 0      |
|--------------|---|-----------------|---|--------|--------|--------|---------|--------|
| Access : POR |   | RW : 0          |   | RW : 0 | RW : 0 | RW : 0 | RW : 0  | RW : 0 |
| Bit Name     |   | Clock Sel [2:0] |   | Bypass | SS_    | SS_EN_ | Int Sel | Slave  |

This register is used to configure the SPI.

Do not change the values in this register while the block is enabled. For additional information, refer to the [Register Definitions on page 139](#) in the SPI chapter.

| Bit | Name            | Description  |
|-----|-----------------|--|
| 7:5 | Clock Sel [2:0] | SYSCLK in Master mode.<br>000b / 2<br>001b / 4<br>010b / 8<br>011b / 16<br>100b / 32<br>101b / 64<br>110b / 128<br>111b / 256      |
| 4   | Bypass          | Bypass Synchronization.<br>0 All pin inputs are doubled and synchronized.<br>1 Input synchronization is bypassed.                  |
| 3   | SS_             | Slave Select in Slave mode.<br>0 Slave selected.<br>1 Slave not selected.  |
| 2   | SS_EN_          | Internal Slave Select Enable.<br>0 Slave selection determined from SS_ bit.<br>1 Slave selection determined from external SS_ pin. |
| 1   | Int Sel         | Interrupt Select.<br>0 Interrupt on TX Reg Empty.<br>1 Interrupt on SPI Complete.  |
| 0   | Slave           | 0 Operates as a master.<br>1 Operates as a slave.  |

**1,30h**

## 22.4.4 USB\_CR1

### USB Control Register 1

#### Individual Register Names and Addresses:

USB\_CR1 : 1,30h

|              | 7 | 6 | 5 | 4 | 3 | 2           | 1          | 0         |
|--------------|---|---|---|---|---|-------------|------------|-----------|
| Access : POR |   |   |   |   |   | RC : 0      | RW : 0     | RW : 0    |
| Bit Name     |   |   |   |   |   | BusActivity | EnableLock | RegEnable |

This register is used to configure the internal regulator and the oscillator tuning capability.

This register is only used by the CY8C24x93 PSoC devices. In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 161](#) in the Full-Speed USB chapter.

| Bit | Name               | Description   |
|-----|--------------------|---|
| 2   | <b>BusActivity</b> | Monitors activity on USB bus. This bit is only set by the hardware. Writing a '0' clears this bit. Writing a '1' preserves its present state.<br>0 No activity.<br>1 Non-idle activity (D+ = Low) was detected since the last time the bit was cleared.                             |
| 1   | <b>EnableLock</b>  | Controls the automatic tuning of the internal oscillator. Hardware locks the internal oscillator based on the frequency of incoming USB data when this bit is set. Normally, this is set when the device is used in a USB application.<br>0 Locking disabled.<br>1 Locking enabled. |
| 0   | <b>RegEnable</b>   | Configures USB regulator for appropriate power supply range.<br>0 Pass-through mode. Use for Vdd = 3.3-V range.<br>1 Regulating mode. Use for Vdd = 5-V range.  |

## 22.4.5 PMAx\_WA

### PSoC Memory Arbiter Write Address Registers

#### Individual Register Names and Addresses:

|                   |                  |                  |                  |
|-------------------|------------------|------------------|------------------|
| PMA0_WA : 1,34h   | PMA1_WA : 1,35h  | PMA2_WA : 1,36h  | PMA3_WA : 1,37h  |
| PMA4_WA : 1,38h   | PMA5_WA : 1,39h  | PMA6_WA : 1,3Ah  | PMA7_WA : 1,3Bh  |
| PMA8_WA : 1,44H   | PMA9_WA : 1,45H  | PMA10_WA : 1,46H | PMA11_WA : 1,47H |
| PMA12_WA : 1, 48H | PMA13_WA : 1,49h | PMA14_WA : 1,4Ah | PMA15_WA : 1,4Bh |

|              | 7                  | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------------|--------------------|---|---|---|---|---|---|---|
| Access : POR | RW : 00            |   |   |   |   |   |   |   |
| Bit Name     | Write Address[7:0] |   |   |   |   |   |   |   |

These registers are PSoC Memory Arbiter write address registers.

For additional information, refer to the [Register Definitions on page 161](#) in the Full-Speed USB chapter.

| Bit | Name               | Description  |
|-----|--------------------|--|
| 7:0 | Write Address[7:0] | The value returned when this register is read depends on whether the PMA channel is being used by the USB SIE or by the M8C. |

## 22.4.6 PMAx\_RA

### PSoC Memory Arbiter Read Address Registers

#### Individual Register Names and Addresses:

|                   |                  |                  |                  |
|-------------------|------------------|------------------|------------------|
| PMA0_RA : 1,3Ch   | PMA1_RA : 1,3Dh  | PMA2_RA : 1,3Eh  | PMA3_RA : 1,3Fh  |
| PMA4_RA : 1,40h   | PMA5_RA : 1,41h  | PMA6_RA : 1,42h  | PMA7_RA : 1,43h  |
| PMA8_RA : 1,4Ch   | PMA9_RA : 1,4Dh  | PMA10_RA : 1,4Eh | PMA11_RA : 1,4Fh |
| PMA12_RA : 1, 50h | PMA13_RA : 1,51h | PMA14_RA : 1,52h | PMA15_RA : 1,53h |

|              |                   |   |   |   |   |   |   |   |
|--------------|-------------------|---|---|---|---|---|---|---|
|              | 7                 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access : POR | RW : 00           |   |   |   |   |   |   |   |
| Bit Name     | Read Address[7:0] |   |   |   |   |   |   |   |

These registers are PSoC Memory Arbiter read address registers.

For additional information, refer to the [Register Definitions on page 161](#) in the Full-Speed USB chapter.

| Bit | Name             | Description  |
|-----|------------------|--|
| 7:0 | ReadAddress[7:0] | The value returned when this register is read depends on whether the PMA channel is being used by the USB SIE or by the M8C. In the USB case, this register always returns the beginning SRAM address for the PMA channel. |

## 22.4.7 EPx\_CR0

### Endpoint Control Registers 0

#### Individual Register Names and Addresses:

EP1\_CR0 : 1,54h      EP2\_CR0 : 1,55h      EP3\_CR0 : 1,56h      EP4\_CR0 : 1,57h  
 EP5\_CR0 : 1,58h      EP6\_CR0 : 1,59h      EP7\_CR0 : 1,5Ah      EP7\_CR0 : 1,5Bh

|                     | 7      | 6 | 5          | 4        | 3 | 2 | 1 | 0         |
|---------------------|--------|---|------------|----------|---|---|---|-----------|
| <b>Access : POR</b> | RW : 0 |   | RW : 0     | RC : 0   |   |   |   | RW : 0    |
| <b>Bit Name</b>     | Stall  |   | NAK_INT_EN | ACKed Tx |   |   |   | Mode[3:0] |

These registers endpoint control registers.

In the table, note that the reserved bit is a grayed table cell and is not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 161](#) in the Full-Speed USB chapter.

| Bit | Name              | Description   |
|-----|-------------------|---|
| 7   | <b>Stall</b>      | When this bit is set, the SIE stalls an OUT packet if the Mode bits are set to ACK-OUT. The SIE stalls an IN packet if the Mode bits are set to ACK-IN. This bit must be clear for all other modes. |
| 5   | <b>NAK_INT_EN</b> | When set, this bit causes an endpoint interrupt to be generated even when a transfer completes with a NAK.  |
| 4   | <b>ACKed Tx</b>   | The ACKed transaction bit is set whenever the SIE engages in a transaction to the register's endpoint that completes with an ACK packet.  |
| 3:0 | <b>Mode[3:0]</b>  | The mode controls how the USB SIE responds to traffic and how the USB SIE changes the mode of that endpoint as a result of host packets to the endpoint.  |

## 22.4.8 TMP\_DRx

### Temporary Data Registers

#### Individual Register Names and Addresses:

TMP\_DR0 : x,6Ch      TMP\_DR1 : x,6Dh      TMP\_DR2 : x,6Eh      TMP\_DR3 : x,6Fh

|              |           |   |   |   |   |   |   |   |
|--------------|-----------|---|---|---|---|---|---|---|
|              | 7         | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access : POR | RW : 00   |   |   |   |   |   |   |   |
| Bit Name     | Data[7:0] |   |   |   |   |   |   |   |

These registers enhance the performance in multiple SRAM page PSoC devices.

All bits in this register are reserved for PSoC devices with 256 bytes of SRAM. For additional information, refer to the [Register Definitions on page 46](#) in the RAM Paging chapter.

| Bit | Name      | Description                    |
|-----|-----------|--------------------------------|
| 7:0 | Data[7:0] | General-purpose register space |



## 22.4.9 USB\_MISC\_CR

### USB Miscellaneous Control Register

#### Individual Register Names and Addresses:

USB\_MISC\_CR: 1,BDh

|              | 7 | 6 | 5 | 4 | 3 | 2         | 1      | 0          |
|--------------|---|---|---|---|---|-----------|--------|------------|
| Access : POR |   |   |   |   |   | RW : 0    | RW : 0 | RW : 0     |
| Bit Name     |   |   |   |   |   | USB_SE_EN | USB_ON | USB_CLK_ON |

The USB Miscellaneous Control Register controls the clocks to the USB block to make IMO work with better accuracy for the USB part and to disable the single-ended input of USBIO in the case of a non-USB part.

In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 106](#) in the Digital Clocks chapter.

| Bit | Name       | Description   |
|-----|------------|---|
| 2   | USE_SE_EN  | <p>The single-ended outputs of USBIO is enabled or disabled based upon this bit setting. Set this bit to '1' when using this part as a USB part.</p> <p>0 The single-ended outputs of USBIO are disabled. The DPO and DMO is held at logic high state and RSEO is held at a low state.</p> <p>1 The single-ended output of USBIO is enabled and USB transactions can occur.</p> <p><b>Note</b> Bit [1:0] of the USBIO_CR1 register is also affected by this register setting. When this bit is '0' (default) regardless of the DP and DM state, the DPO and DMO bits of USBIO_CR1 are '11b'.</p>  |
| 1   | USB_ON     | <p>This bit is used by the IMO DAC block to either work with better DNL consuming higher power, or with sacrificed DNL consuming lower power. Set this bit to '1' when the part is used as a USB part.</p> <p>0 The IMO runs with sacrificed DNL by consuming less power.</p> <p>1 The IMO runs with better DNL by consuming more power.</p>  |
| 0   | USB_CLK_ON | <p>This bit either enables or disables the clocks to the USB block. It is used to save power in cases when the device need not respond to USB traffic. Set this bit to '1' when the device is used as a USB part.</p> <p>0 All clocks to the USB block are driven as '0'. The device does not respond to USB traffic and none of the USB registers, except IMO_TR, IMO_TR1 and USBIO_CR1, listed in the <a href="#">Register Definitions on page 161</a> are writable.</p> <p>1 Clocks are not blocked to the USB block. The device responds to USB traffic depending upon the other register settings mentioned in <a href="#">Register Definitions on page 161</a> in the Full-Speed USB chapter.</p> |

## 22.4.10 OUT\_P0

### Output Override to Port 0 Register

#### Individual Register Names and Addresses:

OUT\_P0: 1,D1h

|              | 7      | 6      | 5      | 4      | 3 | 2 | 1 | 0 |
|--------------|--------|--------|--------|--------|---|---|---|---|
| Access : POR | RW : 0 | RW : 0 | RW : 0 | RW : 0 |   |   |   |   |
| Bit Name     | P0P7D  | P0P7EN | P0P4D  | P0P4EN |   |   |   |   |

This register enables specific internal signals to output to Port 0 pins.

The GPIO drive modes must be specified to support the desired output mode (registers PRT1DM1 and PRT1DM0). If a pin is enabled for output by a bit in this register, the corresponding signal has priority over any other internal function that may be configured to output to that pin.

For additional information, refer to the [Register Definitions on page 106](#) in the Digital Clocks chapter.

| Bit | Name   | Description   |
|-----|--------|---|
| 7   | P0P7D  | 0 Select Main system clock (SYSCLK).<br>1 Reserved  |
| 6   | P0P7EN | This bit enables pin P0 [7] for output of the signal selected by P0P7D.<br>0 No internal signal output to P0 [7].<br>1 Output the signal selected by P0P7D on to P0[7]. |
| 5   | P0P4D  | 0 Select Timer Output (TIMEROUT)<br>1 Select CLK32<br><b>Note</b> During sleep mode these outputs will not be passed through P0[4].                                     |
| 4   | P0P4EN | This bit enables pin P0 [4] for output of the signal selected by P0P4D.<br>0 No internal signal output to P0 [4].<br>1 Output the signal selected by P0P4D on to P0[4]. |

## 22.4.11 ECO\_ENBUS

### External Oscillator ENBUS Register

#### Individual Register Names and Addresses:

ECO\_ENBUS : 1,D2h

|              |   |   |   |   |   |   |   |   |
|--------------|---|---|---|---|---|---|---|---|
|              | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access : POR |   |   |   |   |   |   |   |   |
| Bit Name     |   |   |   |   |   |   |   |   |

The ECO\_ENBUS register is used to disable and enable the external crystal oscillator (ECO). In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits should always be written with a value of '0'. See the [Application Overview on page 74](#) for the proper sequence for enabling the ECO.

| Bits | Name           | Description  |
|------|----------------|--|
| 2:0  | ECO_ENBUS[2:0] | These bits should be written with a value of 011b to allow the ECO to be enabled by bits in the ECO_CFG register, or a value of 111b (default) to disable the ECO. Other values in this register are reserved. |

## External Oscillator Trim Register

|              | 7 | 6 | 5 | 4            | 3 | 2 | 1           | 0 |
|--------------|---|---|---|--------------|---|---|-------------|---|
| Access : POR |   |   |   | RW : 4       |   |   | RW : 1      |   |
| Bit Name     |   |   |   | ECO_XGM[2:0] |   |   | ECO_LP[1:0] |   |

| Bits | Name         | Description   |
|------|--------------|---|
| 4:2  | ECO_XGM[2:0] | <p>These bits set the amplifier gain.</p> <p>The high-power mode (ECO_LPM=0) step size of the current source is approximately 400 nA.</p> <p>In low-power mode (ECO_LPM=1), the overall power is approximately 5% lower with the '000' setting than with the '111' setting.</p> <p>000      Highest gain setting. Lowest power setting in low-power mode.</p> <p>111      Lowest gain setting.</p> <p>101      Typical Value (factory trimmed).</p> |
| 1:0  | ECO_LP[1:0]  | <p>These regulate low-power mode settings.</p> <p>00      Highest Power Setting.</p> <p>11      Lowest power setting (30% power reduction).</p> <p>00      Default value.</p>   |

## 22.4.13 MUX\_CRx

### Analog Mux Port Bit Enable Registers

#### Individual Register Names and Addresses:

MUX\_CR0 : 1,D8h      MUX\_CR1 : 1,D9h      MUX\_CR2 : 1,DAh      MUX\_CR3 : 1,DBh  
MUX\_CR4 : 1,DFh

|              | 7           | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------------|-------------|---|---|---|---|---|---|---|
| Access : POR | RW : 00     |   |   |   |   |   |   |   |
| Bit Name     | ENABLE[7:0] |   |   |   |   |   |   |   |

This register is used to control the connection between the analog mux bus and the corresponding pin.

Port 4 is a 4-bit port, so the upper 4 bits of the MUX\_CR4 register are reserved and return zeros when read.

For additional information, refer to the [Register Definitions on page 92](#) in the I/O Analog Multiplexer chapter.

| Bits | Name        | Description  |
|------|-------------|--|
| 7:0  | ENABLE[7:0] | Each bit controls the connection between the analog mux bus and the corresponding port pin. For example, MUX_CR2[3] controls the connection to bit 3 in Port 2. Any number of pins may be connected at the same time.<br>0      No connection between port pin and analog mux bus.<br>1      Connect port pin to analog mux bus. |

## 22.4.14 IO\_CFG1

### Input/Output Configuration Register 1

#### Individual Register Names and Addresses:

IO\_CFG1 : 1,DCh

|              | 7       | 6 | 5          | 4 | 3           | 2             | 1      | 0      |
|--------------|---------|---|------------|---|-------------|---------------|--------|--------|
| Access : POR | RW : 0  |   | RW : 0     |   | RW : 0      | RW : 0        | RW : 0 | RW : 0 |
| Bit Name     | StrongP |   | Range[1:0] |   | P1_LOW_THRS | SPICLK_ON_P10 | REG_EN | IO INT |

This register is used to configure the Port 1 output regulator and set the interrupt mode for all GPIO.

In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 61](#) in the GPIO chapter.

| Bits | Name                 | Description   |
|------|----------------------|---|
| 7    | <b>StrongP</b>       | Setting this bit increases the drive strength and edge ratio for high outputs.  |
| 5:4  | <b>Range[1:0]</b>    | Selects the high output level for Port 1 outputs.<br>00 3.0 volts<br>01 3.0 volts<br>10 1.8 volts<br>11 2.5 volts   |
| 3    | <b>P1-LOW_THRS</b>   | This bit reduces the threshold voltage of the P1 port input buffers so that there are no compatibility issues when Port 1 is communicating at regulated voltage levels.<br>0 Standard threshold of VIH, VIL<br>1 Reduce threshold of VIH, VIL   |
| 2    | <b>SPICLK_ON_P10</b> | When set to '1', the SPI clock is mapped to Port 1 pin 0. Otherwise, it is mapped to Port 1 pin 3.  |
| 1    | <b>REG_EN</b>        | Controls the regulator on Port 1 outputs.<br>0 Regulator disabled, so Port 1 strong outputs drive to Vdd.<br>1 Regulator enabled, so Port 1 strong outputs drive to approximately 3 V (for Vdd > 3 V).  |
| 0    | <b>IO INT</b>        | Sets the GPIO interrupt mode for all pins in the PSoC device. GPIO interrupts are also controlled at each pin by the PRTxIE registers, and by the global GPIO bit in the INT_MSK0 register.<br>0 GPIO interrupt configured for interrupt when pin is low.<br>1 GPIO interrupt configured for interrupt when pin state changes from last time port was read. |

## 22.4.15 OUT\_P1

### Output Override to Port 1 Register

#### Individual Register Names and Addresses:

OUT\_P1: 1,DDh

|              | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0      |
|--------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Access : POR | RW : 0 | RW : 0 | RW : 0 | RW : 0 | RW : 0 | RW : 0 | RW : 0 | RW : 0 |
| Bit Name     | P16D   | P16EN  | P14D   | P14EN  | P12D   | P12EN  | P10D   | P10EN  |

This register enables specific internal signals to be output to Port 1 pins.

The GPIO drive modes must be specified to support the desired output mode (registers PRT1DM1 and PRT1DM0). If a pin is enabled for output by a bit in this register, the corresponding signal has priority over any other internal function that may be configured to output to that pin.

For additional information, refer to the [Register Definitions on page 106](#) in the Digital Clocks chapter.

| Bit | Name  | Description   |
|-----|-------|---|
| 7   | P16D  | Bit selects the data output to P1[6] when P16EN is high. In CY8C24x93 Timer Output and CLK32 are available on P0[4] as well, but outputs on P0[4] will not be passed through during sleep modes. Refer to the OUT_P0 register for more details.<br>0 Select Timer output (TIMEROUT)<br>1 Select CLK32 |
| 6   | P16EN | Bit enables pin P1[6] for output of the signal selected by the P16D bit.<br>0 No internal signal output to P1[6]<br>1 Output the signal selected by P16D to P1[6]   |
| 5   | P14D  | Bit selects the data output to P1[4] when P14EN is high.<br>0 Select Relaxation Oscillator (RO)<br>1 Select Comparator 1 Output (CMP1)  |
| 4   | P14EN | Bit enables pin P1[4] for output of the signal selected by the P14D bit.<br>0 No internal signal output to P1[4]<br>1 Output the signal selected by P14D to P1[4]   |
| 3   | P12D  | Bit selects the data output to P1[2] when P12EN is high. Refer OUT_P0 register for more details.<br>0 Select Main System Clock (SYSCLOCK)<br>1 Reserved   |
| 2   | P12EN | Bit enables pin P1[2] for output of the signal selected by the P12D bit.<br>0 No internal signal output to P1[2]<br>1 Output the signal selected by P12D to P1[2]   |

(continued on next page)

### 22.4.15 OUT\_P1 (continued)

|   |       |   |
|---|-------|---|
| 1 | P10D  | Bit selects the data output to P1[0] when P10EN is high.<br>0 Select Sleep Interrupt (SLPINT)<br>1 Select Comparator 0 Output (CMP0)                              |
| 0 | P10EN | Bit enables pin P1[0] for output of the signal selected by the P10D bit.<br>0 No internal signal output to P1[0]<br>1 Output the signal selected by P10D to P1[0] |



## 22.4.16 IO\_CFG2

### Input/Output Configuration Register 2

#### Individual Register Names and Addresses:

IO\_CFG2 : 1,DEh

|              | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------------|---|---|---|---|---|---|---|---|
| Access : POR |   |   |   |   |   |   |   |   |
| Bit Name     |   |   |   |   |   |   |   |   |

The Input/Output Configuration 2 Register (IO\_CFG2) selects output regulated supply and clock rates.

In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits should always be written with a value of '0'. For additional information, refer to the [IO\\_CFG2 Register on page 63](#) in the GPIO chapter.

| Bits | Name | Description |
|------|------|-------------|
|------|------|-------------|

|     |                |   |
|-----|----------------|---|
| 5:3 | REG_LEVEL[2:0] | These bits select output regulated supply |
|-----|----------------|---|

| REG_LEVEL[2:0] | Approx. Regulated Supply (V) |     |     |
|----------------|------------------------------|-----|-----|
| 000            | 3                            | 2.5 | 1.8 |
| 001            | 3.1                          | 2.6 | 1.9 |
| 010            | 3.2                          | 2.7 | 2.0 |
| 011            | 3.3                          | 2.8 | 2.1 |
| 100            | 3.4                          | 2.9 | 2.2 |
| 101            | 3.5                          | 3.0 | 2.3 |
| 110            | 3.6                          | 3.1 | 2.4 |
| 111            | 3.7                          | 3.2 | 2.5 |

|     |                |   |
|-----|----------------|---|
| 1:0 | REG_CLOCK[1:0] | The Regulated I/O charge pump can operate with a maximum clock speed of 12 MHz. The REG_CLOCK[1:0] bits select clocking options for the regulator. Setting REG_CLOCK[1:0] to '10' should be used with 24-MHz SYSCLK and '01' should be used with 6/12-MHz SYSCLK. |
|-----|----------------|---|

| REG_CLOCK[1:0] | SYSCLK Clock Rate |
|----------------|-------------------|
| 10             | 24 MHz            |
| 01             | 6/12 MHz          |

## 22.4.17 OSC\_CR0

### Oscillator Control Register 0

#### Individual Register Names and Addresses:

OSC\_CR0: 1,E0h

|              | 7      | 6            | 5       | 4          | 3 | 2 | 1 | 0              |
|--------------|--------|--------------|---------|------------|---|---|---|----------------|
| Access : POR | RW : 0 | RW : 0       | RW : 0  | RW : 0     |   |   |   | RW : 010b      |
| Bit Name     | X32ON  | Disable Buzz | No Buzz | Sleep[1:0] |   |   |   | CPU Speed[2:0] |

This register is used to configure various features of internal clock sources and clock nets.

In the table, note that the reserved bit is a grayed table cell and is not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 106](#) in the Digital Clocks chapter.

| Bit  | Name             | Description   |            |                        |               |            |                  |                 |         |                 |                  |          |               |                |       |           |                 |      |       |       |        |                        |      |       |        |        |          |      |         |         |         |           |      |           |         |         |           |      |          |          |           |            |      |          |          |          |            |
|------|------------------|---|------------|------------------------|---------------|------------|------------------|-----------------|---------|-----------------|------------------|----------|---------------|----------------|-------|-----------|-----------------|------|-------|-------|--------|------------------------|------|-------|--------|--------|----------|------|---------|---------|---------|-----------|------|-----------|---------|---------|-----------|------|----------|----------|-----------|------------|------|----------|----------|----------|------------|
| 7    | X32ON            | Select bit for the external 32-kHz external crystal oscillator (ECO). See the <a href="#">Application Overview on page 74</a> for the proper sequence for enabling the ECO.<br>0 The internal 32 kHz oscillator is the source of the 32K clock.<br>1 The external crystal oscillator is the source of the 32K clock.  |            |                        |               |            |                  |                 |         |                 |                  |          |               |                |       |           |                 |      |       |       |        |                        |      |       |        |        |          |      |         |         |         |           |      |           |         |         |           |      |          |          |           |            |      |          |          |          |            |
| 6    | Disable Buzz     | Option to disable buzz during sleep. This bit has lower priority than the No Buzz bit. Therefore, if No Buzz = 1, the Disable Buzz bit has no effect.<br>0 No effect on buzz modes.<br>1 Buzz is disabled during sleep, with bandgap powered down. No periodic wakeup of the bandgap during sleep.  |            |                        |               |            |                  |                 |         |                 |                  |          |               |                |       |           |                 |      |       |       |        |                        |      |       |        |        |          |      |         |         |         |           |      |           |         |         |           |      |          |          |           |            |      |          |          |          |            |
| 5    | No Buzz          | This bit allows the bandgap to stay powered during sleep.<br>0 Buzz bandgap during power down.<br>1 Bandgap is always powered even during sleep.  |            |                        |               |            |                  |                 |         |                 |                  |          |               |                |       |           |                 |      |       |       |        |                        |      |       |        |        |          |      |         |         |         |           |      |           |         |         |           |      |          |          |           |            |      |          |          |          |            |
| 4:3  | Sleep[1:0]       | Sleep interval. <table><thead><tr><th></th><th>For 32-kHz ILO</th><th>For 1-kHz ILO</th></tr></thead><tbody><tr><td>00b</td><td>1.95 ms (512 Hz)</td><td>64 ms (15.6 Hz)</td></tr><tr><td>01b</td><td>15.6 ms (64 Hz)</td><td>512 ms (1.95 Hz)</td></tr><tr><td>10b</td><td>125 ms (8 Hz)</td><td>4 s (0.244 Hz)</td></tr><tr><td>11b</td><td>1s (1 Hz)</td><td>32 s (0.031 Hz)</td></tr></tbody></table>   |            | For 32-kHz ILO         | For 1-kHz ILO | 00b        | 1.95 ms (512 Hz) | 64 ms (15.6 Hz) | 01b     | 15.6 ms (64 Hz) | 512 ms (1.95 Hz) | 10b      | 125 ms (8 Hz) | 4 s (0.244 Hz) | 11b   | 1s (1 Hz) | 32 s (0.031 Hz) |      |       |       |        |                        |      |       |        |        |          |      |         |         |         |           |      |           |         |         |           |      |          |          |           |            |      |          |          |          |            |
|      | For 32-kHz ILO   | For 1-kHz ILO   |            |                        |               |            |                  |                 |         |                 |                  |          |               |                |       |           |                 |      |       |       |        |                        |      |       |        |        |          |      |         |         |         |           |      |           |         |         |           |      |          |          |           |            |      |          |          |          |            |
| 00b  | 1.95 ms (512 Hz) | 64 ms (15.6 Hz)   |            |                        |               |            |                  |                 |         |                 |                  |          |               |                |       |           |                 |      |       |       |        |                        |      |       |        |        |          |      |         |         |         |           |      |           |         |         |           |      |          |          |           |            |      |          |          |          |            |
| 01b  | 15.6 ms (64 Hz)  | 512 ms (1.95 Hz)  |            |                        |               |            |                  |                 |         |                 |                  |          |               |                |       |           |                 |      |       |       |        |                        |      |       |        |        |          |      |         |         |         |           |      |           |         |         |           |      |          |          |           |            |      |          |          |          |            |
| 10b  | 125 ms (8 Hz)    | 4 s (0.244 Hz)  |            |                        |               |            |                  |                 |         |                 |                  |          |               |                |       |           |                 |      |       |       |        |                        |      |       |        |        |          |      |         |         |         |           |      |           |         |         |           |      |          |          |           |            |      |          |          |          |            |
| 11b  | 1s (1 Hz)        | 32 s (0.031 Hz)   |            |                        |               |            |                  |                 |         |                 |                  |          |               |                |       |           |                 |      |       |       |        |                        |      |       |        |        |          |      |         |         |         |           |      |           |         |         |           |      |          |          |           |            |      |          |          |          |            |
| 2:0  | CPU Speed[2:0]   | These bits set the CPU clock speed, based on the system clock (SYSCLK). SYSCLK is 12 MHz by default, but it can also be set to other frequencies (6 and 24 MHz), or driven from an external clock.<br><b>Note</b> During USB operation, the CPU speed can be set to any setting. Be aware that USB throughput decreases with a decrease in CPU speed. For maximum throughput, the CPU clock should be made equal to the system clock. The system clock must be 24 MHz for USB operation. <table><thead><tr><th></th><th>6-MHz IMO</th><th>12-MHz IMO</th><th>24-MHz IMO</th><th>External Clock</th></tr></thead><tbody><tr><td>000b</td><td>750 kHz</td><td>1.5 MHz</td><td>3 MHz</td><td>EXTCLK/8</td></tr><tr><td>001b</td><td>1.5 MHz</td><td>3 MHz</td><td>6 MHz</td><td>EXTCLK/4</td></tr><tr><td>010b</td><td>3 MHz</td><td>6 MHz</td><td>12 MHz</td><td>EXTCLK/2 (Reset State)</td></tr><tr><td>011b</td><td>6 MHz</td><td>12 MHz</td><td>24 MHz</td><td>EXTCLK/1</td></tr><tr><td>100b</td><td>375 kHz</td><td>750 kHz</td><td>1.5 MHz</td><td>EXTCLK/16</td></tr><tr><td>101b</td><td>187.5 kHz</td><td>375 kHz</td><td>750 kHz</td><td>EXTCLK/32</td></tr><tr><td>110b</td><td>46.9 kHz</td><td>93.7 kHz</td><td>187.5 kHz</td><td>EXTCLK/128</td></tr><tr><td>111b</td><td>23.4 kHz</td><td>46.8 kHz</td><td>93.7 kHz</td><td>EXTCLK/256</td></tr></tbody></table> |            | 6-MHz IMO              | 12-MHz IMO    | 24-MHz IMO | External Clock   | 000b            | 750 kHz | 1.5 MHz         | 3 MHz            | EXTCLK/8 | 001b          | 1.5 MHz        | 3 MHz | 6 MHz     | EXTCLK/4        | 010b | 3 MHz | 6 MHz | 12 MHz | EXTCLK/2 (Reset State) | 011b | 6 MHz | 12 MHz | 24 MHz | EXTCLK/1 | 100b | 375 kHz | 750 kHz | 1.5 MHz | EXTCLK/16 | 101b | 187.5 kHz | 375 kHz | 750 kHz | EXTCLK/32 | 110b | 46.9 kHz | 93.7 kHz | 187.5 kHz | EXTCLK/128 | 111b | 23.4 kHz | 46.8 kHz | 93.7 kHz | EXTCLK/256 |
|      | 6-MHz IMO        | 12-MHz IMO  | 24-MHz IMO | External Clock         |               |            |                  |                 |         |                 |                  |          |               |                |       |           |                 |      |       |       |        |                        |      |       |        |        |          |      |         |         |         |           |      |           |         |         |           |      |          |          |           |            |      |          |          |          |            |
| 000b | 750 kHz          | 1.5 MHz   | 3 MHz      | EXTCLK/8               |               |            |                  |                 |         |                 |                  |          |               |                |       |           |                 |      |       |       |        |                        |      |       |        |        |          |      |         |         |         |           |      |           |         |         |           |      |          |          |           |            |      |          |          |          |            |
| 001b | 1.5 MHz          | 3 MHz   | 6 MHz      | EXTCLK/4               |               |            |                  |                 |         |                 |                  |          |               |                |       |           |                 |      |       |       |        |                        |      |       |        |        |          |      |         |         |         |           |      |           |         |         |           |      |          |          |           |            |      |          |          |          |            |
| 010b | 3 MHz            | 6 MHz   | 12 MHz     | EXTCLK/2 (Reset State) |               |            |                  |                 |         |                 |                  |          |               |                |       |           |                 |      |       |       |        |                        |      |       |        |        |          |      |         |         |         |           |      |           |         |         |           |      |          |          |           |            |      |          |          |          |            |
| 011b | 6 MHz            | 12 MHz  | 24 MHz     | EXTCLK/1               |               |            |                  |                 |         |                 |                  |          |               |                |       |           |                 |      |       |       |        |                        |      |       |        |        |          |      |         |         |         |           |      |           |         |         |           |      |          |          |           |            |      |          |          |          |            |
| 100b | 375 kHz          | 750 kHz   | 1.5 MHz    | EXTCLK/16              |               |            |                  |                 |         |                 |                  |          |               |                |       |           |                 |      |       |       |        |                        |      |       |        |        |          |      |         |         |         |           |      |           |         |         |           |      |          |          |           |            |      |          |          |          |            |
| 101b | 187.5 kHz        | 375 kHz   | 750 kHz    | EXTCLK/32              |               |            |                  |                 |         |                 |                  |          |               |                |       |           |                 |      |       |       |        |                        |      |       |        |        |          |      |         |         |         |           |      |           |         |         |           |      |          |          |           |            |      |          |          |          |            |
| 110b | 46.9 kHz         | 93.7 kHz  | 187.5 kHz  | EXTCLK/128             |               |            |                  |                 |         |                 |                  |          |               |                |       |           |                 |      |       |       |        |                        |      |       |        |        |          |      |         |         |         |           |      |           |         |         |           |      |          |          |           |            |      |          |          |          |            |
| 111b | 23.4 kHz         | 46.8 kHz  | 93.7 kHz   | EXTCLK/256             |               |            |                  |                 |         |                 |                  |          |               |                |       |           |                 |      |       |       |        |                        |      |       |        |        |          |      |         |         |         |           |      |           |         |         |           |      |          |          |           |            |      |          |          |          |            |

## 22.4.18 ECO\_CFG

### External Oscillator Trim Configuration Register

#### Individual Register Names and Addresses:

ECO\_CFG : 1,E1h

|              | 7 | 6 | 5 | 4 | 3 | 2       | 1       | 0      |
|--------------|---|---|---|---|---|---------|---------|--------|
| Access : POR |   |   |   |   |   | RW : 0  | RW : 0  | RW : 0 |
| Bit Name     |   |   |   |   |   | ECO_LPM | ECO_EXW | ECO_EX |

This register provides ECO status and control information.

In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [ECO\\_CFG Register on page 75](#) in the External Crystal Oscillator chapter.

| Bits | Name    | Description  |
|------|---------|--|
| 2    | ECO_LPM | This bit enables the ECO lower power mode.   |
| 1    | ECO_EXW | This is a status bit that indicates that the ECO_EX bit was previously written to.<br>When this bit is a '1', this indicates that the ECO_CONFIG register was written to and is now locked.<br>When this bit is a '0', the register was not written to since the last reset event.   |
| 0    | ECO_EX  | The ECO Exists bit is a flag to the hardware indicating that an external crystal oscillator exists in the system.If the bit is '0', a switch-over to the ECO is locked out by hardware. If the bit is '1', hardware allows the firmware to freely switch between the ECO and ILO. It must be written as early as possible after a power-on-reset (POR) or external reset (XRES) event. |

## 22.4.19 OSC\_CR2

### Oscillator Control Register 2

#### Individual Register Names and Addresses:

OSC\_CR2 : 1,E2h

|              | 7 | 6 | 5 | 4        | 3 | 2        | 1      | 0 |
|--------------|---|---|---|----------|---|----------|--------|---|
| Access : POR |   |   |   | RW : 0   |   | RW : 0   | RW : 0 |   |
| Bit Name     |   |   |   | CLK48MEN |   | EXTCLKEN | RSVD   |   |

This register is used to configure various features of internal clock sources and clock nets.

In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 106](#) in the Digital Clocks chapter.

| Bit | Name     | Description   |
|-----|----------|---|
| 4   | CLK48MEN | This is the 48-MHz clock enable bit.<br>0 Disables the 48-MHz clock.<br>1 Enables the 48-MHz clock.   |
| 2   | EXTCLKEN | External Clock Mode Enable.<br>0 Disabled. Operate from internal main oscillator.<br>1 Enabled. Operate from the clock supplied at P1[4] or P1[1] based upon the TSYNC bit in CPU_SCR1. |
| 1   | RSVD     | This is a reserved bit. It should always be 0.  |

## 22.4.20 VLT\_CR

### Voltage Monitor Control Register

#### Individual Register Names and Addresses:

VLT\_CR: 1,E3h

|              | 7 | 6 | 5 | 4           | 3       | 2      | 1       | 0      |
|--------------|---|---|---|-------------|---------|--------|---------|--------|
| Access : POR |   |   |   |             | RW : 0  | RW : 0 |         | RW : 0 |
| Bit Name     |   |   |   | PORLEV[1:0] | LVDTBEN |        | VM[2:0] |        |

This register is used to set the trip points for POR and LVD.

In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 136](#) in the POR chapter.

| Bit | Name        | Description  |
|-----|-------------|--|
| 5:4 | PORLEV[1:0] | Sets the POR level according to the DC Electrical Specifications in the PSoC device datasheet.   |
| 3   | LVDTBEN     | Enables reset of the CPU speed register by LVD comparator output.  |
| 2:0 | VM[2:0]     | Sets the LVD levels per the DC Electrical Specifications in the PSoC device datasheet, for those devices with this feature.<br>000b Lowest voltage setting.<br>001b<br>010b<br>011b<br>100b<br>101b<br>110b<br>111b Highest voltage setting. |

## 22.4.21 VLT\_CMP

### Voltage Monitor Comparators Register

#### Individual Register Names and Addresses:

1,E4h

VLT\_CMP : 1,E4h

|              | 7 | 6 | 5 | 4 | 3 | 2 | 1     | 0 |
|--------------|---|---|---|---|---|---|-------|---|
| Access : POR |   |   |   |   |   |   | R : 0 |   |
| Bit Name     |   |   |   |   |   |   | LVD   |   |

This register reads the state of the internal supply voltage monitors.

In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 136](#) in the POR chapter.

| Bit | Name | Description  |
|-----|------|--|
| 1   | LVD  | <p>This bit reads the state of the LVD comparator.</p> <p>0 Vdd is above LVD trip point.</p> <p>1 Vdd is below LVD trip point.</p> |

## 22.4.22 IMO\_TR

### Internal Main Oscillator Trim Register

#### Individual Register Names and Addresses:

IMO\_TR : 1,E8h

|              | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------------|---|---|---|---|---|---|---|---|
| Access : POR |   |   |   |   |   |   |   |   |
| Bit Name     |   |   |   |   |   |   |   |   |

This register is used to manually center the Internal Main Oscillator's (IMO) output to a target frequency.

***It is strongly recommended that you do not alter this register's values except to load factory trim settings when changing IMO range.***

When changing ranges, the new trim value for this range must be read from flash using a Table Read operation. The new value must be written at the lower frequency range. That is, when moving to a higher frequency range, change the IMO\_TR value and then change the range (SLIMO[1:0] in CPU\_SCR1). When moving to a lower frequency, change the range first and then update IMO\_TR.

For additional information, refer to the [Register Definitions on page 68](#) in the Internal Main Oscillator chapter.

| Bit | Name      | Description   |
|-----|-----------|---|
| 7:0 | Trim[7:0] | The value of this register is used to trim the Internal Main Oscillator. Its value is set to the best value for the device during boot. |

## 22.4.23 ILO\_TR

### Internal Low-speed Oscillator Trim Register

#### Individual Register Names and Addresses:

ILO\_TR : 1,E9h

|              | 7 | 6       | 5       | 4 | 3 | 2 | 1 | 0              |
|--------------|---|---------|---------|---|---|---|---|----------------|
| Access : POR |   | RW : 0  | RW : 0  |   |   |   |   | RW : 08        |
| Bit Name     |   | PD_MODE | ILOFREQ |   |   |   |   | Freq Trim[3:0] |

This register sets the adjustment for the Internal Low-speed Oscillator (ILO).

***It is strongly recommended that you do not alter this register's Freq Trim[3:0] values.*** The trim bits are set to factory specifications and must not be changed.

In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Always write reserved bits with a value of '0'. For additional information, refer to the [Register Definitions on page 72](#) in the Internal Low-speed Oscillator chapter.

| Bit | Name           | Description   |
|-----|----------------|---|
| 6   | PD_MODE        | This bit selects power down mode. Setting this bit high disables oscillator and current bias, which results in slower startup time.<br>Power down mode:<br>0 Partial oscillator power down for faster startup (100 nA nominal).<br>1 Full oscillator power down for lower power (0 nA nominal). |
| 5   | ILOFREQ        | Selects oscillator nominal frequency.<br>0 32 kHz<br>1 1 kHz  |
| 3:0 | Freq Trim[3:0] | These bits trim the oscillator frequency.   |



## 22.4.24 SLP\_CFG

### Sleep Configuration Register

#### Individual Register Names and Addresses:

SLP\_CFG : 1,EBh

|              |            |   |   |   |   |   |   |   |
|--------------|------------|---|---|---|---|---|---|---|
|              | 7          | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access : POR | RW : 0     |   |   |   |   |   |   |   |
| Bit Name     | PSSDC[1:0] |   |   |   |   |   |   |   |

This register sets up the sleep duty cycle.

In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 81](#) in the Sleep and Watchdog chapter.

| Bit | Name       | Description  |
|-----|------------|--|
| 7:6 | PSSDC[1:0] | <p>Sleep Duty Cycle. Controls the ratios (in numbers of 32.768-kHz clock periods) of "on" time versus "off" time for PORLVD, bandgap reference, and pspump.</p> <p>00b 1 / 256 (8 ms).</p> <p>01b 1 / 1024 (31.2 ms).</p> <p>10b 1 / 64 (2 ms).</p> <p>11b 1 / 16 (500 <math>\mu</math>s).</p> |

**Note** The buzz rate for lsb1 spec in the datasheet is with 01 setting in the ALT\_Buzz bits of the [SLP\\_CFG2](#) register.

## 22.4.25 SLP\_CFG2

### Sleep Configuration Register 2

#### Individual Register Names and Addresses:

SLP\_CFG2 : 1,ECh

|              | 7 | 6 | 5 | 4 | 3             | 2      | 1       | 0      |
|--------------|---|---|---|---|---------------|--------|---------|--------|
| Access : POR |   |   |   |   |               | RW : 0 | RW : 0  | RW : 0 |
| Bit Name     |   |   |   |   | ALT_Buzz[1:0] | I2C_ON | LSO_OFF |        |

This register holds the configuration for I2C sleep, deep sleep, and buzz.

In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 81](#) in the Sleep and Watchdog chapter.

| Bit | Name          | Description   |
|-----|---------------|---|
| 3:2 | ALT_Buzz[1:0] | These bits control additional selections for POR/LVD buzz rates.<br>00 Compatibility mode, buzz rate is determined by PSSDC bits.<br>01 Duty cycle is 1/32768.<br>10 Duty cycle is 1/8192.<br>11 Reserved.              |
| 1   | I2C_ON        | This bit enables the standby regulator in I2C sleep mode at a level sufficient to supply the I2C circuitry to detect I2C address in the bus and also to ensure data retention in 32-byte I2C buffer during sleep state. |
| 0   | LSO_OFF       | This bit disables the LSO oscillator when in sleep state.   |

**Note** The buzz rate for lsb1 spec in the datasheet is with 01 setting in the ALT\_Buzz bits.

## 22.4.26 SLP\_CFG3

### Sleep Configuration Register 3

#### Individual Register Names and Addresses:

SLP\_CFG3 : 1,EDh

|              | 7 | 6        | 5          | 4          | 3          | 2       | 1       | 0       |
|--------------|---|----------|------------|------------|------------|---------|---------|---------|
| Access : POR |   | RW : 1   | RW : 11    | RW : 11    | RW : 11    | RW : 11 | RW : 11 | RW : 11 |
| Bit Name     |   | DBL_TAPS | T2TAP[1:0] | T1TAP[1:0] | T0TAP[1:0] |         |         |         |

This register holds the configuration of the wakeup sequence taps.

**It is strongly recommended to not alter this register setting.**

In the table, note that the reserved bit is a grayed table cell and is not described in the bit description section. Reserved bits must always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 81](#) in the Sleep and Watchdog chapter.

| Bit | Name       | Description   |
|-----|------------|---|
| 6   | DBL_TAPS   | When this bit is set all the tap values (T0, T1, and T2) are doubled for the wakeup sequence.   |
| 5:4 | T2TAP[1:0] | These bits control the duration of the T2-T4 sequence (see <a href="#">Figure 11-2 on page 79</a> ) by selecting a tap from the WakeupTimer. <b>Note</b> The T2 delay is only valid for the wakeup sequence. It is not used for the buzz sequence.<br>00 1 $\mu$ s<br>01 2 $\mu$ s<br>10 5 $\mu$ s<br>11 10 $\mu$ s |
| 3:2 | T1TAP[1:0] | These bits control the duration of the T1-T2 sequence (see <a href="#">Figure 11-2 on page 79</a> ) by selecting a tap from the Wakeup Timer.<br>00 3 $\mu$ s<br>01 4 $\mu$ s<br>10 5 $\mu$ s<br>11 10 $\mu$ s  |
| 1:0 | T0TAP[1:0] | These bits control the duration of the T0-T1 sequence (see <a href="#">Figure 11-2 on page 79</a> ) by selecting a tap from the Wakeup Timer.<br>00 10 $\mu$ s<br>01 14 $\mu$ s<br>10 20 $\mu$ s<br>11 30 $\mu$ s   |

## 22.4.27 IMO\_TR1

### Internal Main Oscillator Trim Register 1

#### Individual Register Names and Addresses:

IMO\_TR1 : 1,FAh

|              | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0             |
|--------------|---|---|---|---|---|---|---|---------------|
| Access : POR |   |   |   |   |   |   |   | W : 0         |
| Bit Name     |   |   |   |   |   |   |   | FineTrim[2:0] |

This register is used to fine tune the IMO frequency.

***It is strongly recommended that the user not alter this register's values.***

In the table, note that reserved bits are grayed table cells and are not described in the bit description section. Reserved bits should always be written with a value of '0'. For additional information, refer to the [Register Definitions on page 68](#) in the Internal Main Oscillator chapter.

| Bit | Name          | Description  |
|-----|---------------|--|
| 7:0 | FineTrim[2:0] | These bits provide ability to fine tune the IMO frequency.<br>These values are normally only changed by the oscillator-locking function. These are the lower 3 bits of the 11-bit oscillator trim. IMO_TR holds the MSb. |

# Section F: Glossary



The Glossary section explains the terminology used in this technical reference manual. Glossary terms are characterized in ***bold, italic font*** throughout the text of this manual.

---

## A

|                                       |   |
|---------------------------------------|---|
| <b><i>accumulator</i></b>             | In a CPU, a register in which intermediate results are stored. Without an accumulator, it is necessary to write the result of each calculation (addition, subtraction, shift, and so on) to main memory and read them back. Access to main memory is slower than access to the accumulator, which usually has direct paths to and from the arithmetic and logic unit (ALU). |
| <b><i>active high</i></b>             | <ol style="list-style-type: none"><li>1. A logic signal having its asserted state as the logic 1 state.</li><li>2. A logic signal having the logic 1 state as the higher voltage of the two states.</li></ol>   |
| <b><i>active low</i></b>              | <ol style="list-style-type: none"><li>1. A logic signal having its asserted state as the logic 0 state.</li><li>2. A logic signal having its logic 1 state as the lower voltage of the two states: inverted logic.</li></ol>  |
| <b><i>address</i></b>                 | The label or number identifying the memory location (RAM, ROM, or register) where a unit of information is stored.  |
| <b><i>algorithm</i></b>               | A procedure for solving a mathematical problem in a finite number of steps that frequently involve repetition of an operation.  |
| <b><i>ambient temperature</i></b>     | The temperature of the air in a designated area, particularly the area surrounding the PSoC device.   |
| <b><i>analog</i></b>                  | As opposed to digital, signals that are on or off or '1' or '0'. Analog signals vary in a continuous manner. See also <b><i>analog signals</i></b> .  |
| <b><i>analog blocks</i></b>           | The basic programmable opamp circuits. These are SC (switched capacitor) and CT (continuous time) blocks. These blocks can be interconnected to provide ADCs, DACs, multi-pole filters, gain stages, and much more.   |
| <b><i>analog output</i></b>           | An output that is capable of driving any voltage between the supply rails, instead of just a logic 1 or logic 0.  |
| <b><i>analog signals</i></b>          | A signal represented in a continuous form with respect to continuous times, as contrasted with a digital signal represented in a discrete (discontinuous) form in a sequence of time.   |
| <b><i>analog-to-digital (ADC)</i></b> | A device that changes an analog signal to a digital signal of corresponding magnitude. Typically, an ADC converts a voltage to a digital number. The <b><i>digital-to-analog (DAC)</i></b> converter performs the reverse operation.  |
| <b><i>AND</i></b>                     | See <b><i>Boolean Algebra</i></b> .   |

|  |  |
|--|--|
| <b>API (Application Programming Interface)</b> | A series of software routines that comprise an interface between a computer application and lower-level services and functions (for example, user modules and libraries). APIs serve as building blocks for programmers that create software applications.   |
| <b>array</b>                                   | An array, also known as a vector or list, is one of the simplest data structures in computer programming. Arrays hold a fixed number of equally-sized data elements, generally of the same data type. Individual elements are accessed by index using a consecutive range of integers, as opposed to an associative array. Most high level programming languages have arrays as a built-in data type. Some arrays are multi-dimensional, meaning they are indexed by a fixed number of integers; for example, by a group of two integers. One- and two-dimensional arrays are the most common. Also, an array can be a group of capacitors or resistors connected in some common form. |
| <b>assembly</b>                                | A symbolic representation of the machine language of a specific processor. Assembly language is converted to machine code by an assembler. Usually, each line of assembly code produces one machine instruction, though the use of macros is common. Assembly languages are considered low level languages; where as C is considered a high level language.  |
| <b>asynchronous</b>                            | A signal whose data is acknowledged or acted upon immediately, irrespective of any clock signal.   |
| <b>attenuation</b>                             | The decrease in intensity of a signal as a result of absorption of energy and of scattering out of the path to the detector, but not including the reduction due to geometric spreading. Attenuation is usually expressed in dB.   |
| <b>B</b>                                       |  |
| <b>bandgap reference</b>                       | A stable voltage reference design that matches the positive temperature coefficient of $V_T$ with the negative temperature coefficient of $V_{BE}$ , to produce a zero temperature coefficient (ideally) reference.  |
| <b>bandwidth</b>                               | <ol style="list-style-type: none"> <li>1. The frequency range of a message or information processing system measured in hertz.</li> <li>2. The width of the spectral region over which an amplifier (or absorber) has substantial gain (or loss). It is sometimes represented more specifically as, for example, full width at half maximum.</li> </ol>  |
| <b>bias</b>                                    | <ol style="list-style-type: none"> <li>1. A systematic deviation of a value from a reference value.</li> <li>2. The amount by which the average of a set of values departs from a reference value.</li> <li>3. The electrical, mechanical, magnetic, or other force (field) applied to a device to establish a reference level to operate the device.</li> </ol>   |
| <b>bias current</b>                            | The constant low level DC current that is used to produce a stable operation in amplifiers. This current can sometimes be changed to alter the bandwidth of an amplifier.  |
| <b>binary</b>                                  | The name for the base 2 numbering system. The most common numbering system is the base 10 numbering system. The base of a numbering system indicates the number of values that may exist for a particular positioning within a number for that system. For example, in base 2, binary, each position may have one of two values (0 or 1). In the base 10, decimal, each position may have one of ten values (0, 1, 2, 3, 4, 5, 6, 7, 8, and 9).  |
| <b>bit</b>                                     | A single digit of a binary number. Therefore, a bit may only have a value of '0' or '1'. A group of 8 bits is called a byte. Because the PSoC M8C is an 8-bit microcontroller, the PSoC native data chunk size is a byte.  |

|                          |  |
|--------------------------|--|
| <b>bit rate (BR)</b>     | The number of bits occurring per unit of time in a bit stream, usually expressed in bits per second (bps).   |
| <b>block</b>             | <ol style="list-style-type: none"> <li>1. A functional unit that performs a single function, such as an oscillator.</li> <li>2. A functional unit that may be configured to perform one of several functions, such as a digital block or an analog block.</li> </ol>   |
| <b>Boolean Algebra</b>   | <p>In mathematics and computer science, Boolean algebras or Boolean lattices, are algebraic structures which “capture the essence” of the logical operations AND, OR and NOT as well as set the theoretic operations union, intersection, and complement. Boolean algebra also defines a set of theorems that describe how Boolean equations can be manipulated. For example, these theorems are used to simplify Boolean equations which reduces the number of logic elements needed to implement the equation.</p> <p>The operators of Boolean algebra may be represented in various ways. Often they are simply written as AND, OR, and NOT. In describing circuits, NAND (NOT AND), NOR (NOT OR), XNOR (exclusive NOT OR), and XOR (exclusive OR) may also be used. Mathematicians often use + (for example, <math>A+B</math>) for OR and <math>\cdot</math> for AND (for example, <math>A \cdot B</math>) (because in some ways those operations are analogous to addition and multiplication in other algebraic structures) and represent NOT by a line drawn above the expression being negated (for example, <math>\sim A</math>, <math>A_{\sim}</math>, <math>!A</math>).</p> |
| <b>break-before-make</b> | The elements involved go through a disconnected state entering (“break”) before the new connected state (“make”).  |
| <b>broadcast net</b>     | A signal that is routed throughout the microcontroller and is accessible by many blocks or systems.  |
| <b>buffer</b>            | <ol style="list-style-type: none"> <li>1. A storage area for data that is used to compensate for a speed difference, when transferring data from one device to another. Usually refers to an area reserved for I/O operations into which data is read or from which data is written.</li> <li>2. A portion of memory set aside to store data, often before it is sent to an external device or as it is received from an external device.</li> <li>3. An amplifier used to lower the output impedance of a system.</li> </ol>  |
| <b>bus</b>               | <ol style="list-style-type: none"> <li>1. A named connection of nets. Bundling nets together in a bus makes it easier to route nets with similar routing patterns.</li> <li>2. A set of signals performing a common function and carrying similar data. Typically represented using vector notation; for example, address[7:0].</li> <li>3. One or more conductors that serve as a common connection for a group of related devices.</li> </ol>  |
| <b>byte</b>              | A digital storage unit consisting of 8 bits.   |
| <b>C</b>                 |  |
| <b>C</b>                 | A high level programming language.   |
| <b>capacitance</b>       | A measure of the ability of two adjacent conductors, separated by an insulator, to hold a charge when a voltage differential is applied between them. Capacitance is measured in units of Farads.  |
| <b>capture</b>           | To extract information automatically through the use of software or hardware, as opposed to hand-entering of data into a computer file.  |

|                                      |   |
|--------------------------------------|---|
| <b>chaining</b>                      | Connecting two or more 8-bit digital blocks to form 16-, 24-, and even 32-bit functions. Chaining allows certain signals such as Compare, Carry, Enable, Capture, and Gate to be produced from one block to another.                            |
| <b>checksum</b>                      | The checksum of a set of data is generated by adding the value of each data word to a sum. The actual checksum can simply be the result sum or a value that must be added to the sum to generate a pre-determined value.                        |
| <b>chip</b>                          | A single monolithic Integrated Circuit (IC). See also <b>integrated circuit (IC)</b> .  |
| <b>clear</b>                         | To force a bit/register to a value of logic 0.  |
| <b>clock</b>                         | The device that generates a periodic signal with a fixed frequency and duty cycle. A clock is sometimes used to synchronize different logic blocks.   |
| <b>clock generator</b>               | A circuit that is used to generate a clock signal.  |
| <b>CMOS</b>                          | The logic gates constructed using <b>MOS</b> transistors connected in a complementary manner. CMOS is an acronym for complementary metal-oxide semiconductor.   |
| <b>comparator</b>                    | An electronic circuit that produces an output voltage or current whenever two input levels simultaneously satisfy pre-determined amplitude requirements.  |
| <b>compiler</b>                      | A program that translates a high level language, such as C, into machine language.  |
| <b>configuration</b>                 | In a computer system, an arrangement of functional units according to their nature, number, and chief characteristics. Configuration pertains to hardware, software, firmware, and documentation. The configuration affects system performance. |
| <b>configuration space</b>           | In PSoC devices, the register space accessed when the XIO bit in the CPU_F register is set to '1'.  |
| <b>crowbar</b>                       | A type of over-voltage protection that rapidly places a low resistance shunt (typically an SCR) from the signal to one of the power supply rails, when the output voltage exceeds a pre-determined value.                                       |
| <b>crystal oscillator</b>            | An oscillator in which the frequency is controlled by a piezoelectric crystal. Typically a piezoelectric crystal is less sensitive to ambient temperature than other circuit components.  |
| <b>CSP</b>                           | Chip scale package.   |
| <b>cyclic redundancy check (CRC)</b> | A calculation used to detect errors in data communications, typically performed using a linear feedback shift register. Similar calculations may be used for a variety of other purposes such as data compression.                              |

## D

|                    |   |
|--------------------|---|
| <b>data bus</b>    | A bidirectional set of signals used by a computer to convey information from a memory location to the central processing unit and vice versa. More generally, a set of signals used to convey data between digital functions. |
| <b>data stream</b> | A sequence of digitally encoded signals used to represent information in transmission.  |



|                                |  |
|--------------------------------|--|
| <b>data transmission</b>       | The sending of data from one place to another by means of signals over a channel.  |
| <b>debugger</b>                | A hardware and software system that allows the user to analyze the operation of the system under development. A debugger usually allows the developer to step through the firmware one step at a time, set break points, and analyze memory. |
| <b>dead band</b>               | A period of time when neither of two or more signals are in their active state or in transition.   |
| <b>decimal</b>                 | A base 10 numbering system, which uses the symbols 0, 1, 2, 3, 4, 5, 6, 7, 8 and 9 (called digits) together with the decimal point and the sign symbols + (plus) and - (minus) to represent numbers.   |
| <b>default value</b>           | Pertaining to the pre-defined initial, original, or specific setting, condition, value, or action a system assumes, uses, or takes in the absence of instructions from the user.   |
| <b>device</b>                  | The device referred to in this manual is the PSoC chip, unless otherwise specified.  |
| <b>die</b>                     | An unpackaged Integrated Circuit (IC), normally cut from a wafer.  |
| <b>digital</b>                 | A signal or function, the amplitude of which is characterized by one of two discrete values: '0' or '1'.   |
| <b>digital blocks</b>          | The 8-bit logic blocks that can act as a counter, timer, serial receiver, serial transmitter, CRC generator, pseudo-random number generator, or SPI.   |
| <b>digital logic</b>           | A methodology for dealing with expressions containing two-state variables that describe the behavior of a circuit or system.   |
| <b>digital-to-analog (DAC)</b> | A device that changes a digital signal to an analog signal of corresponding magnitude. The <b>analog-to-digital (ADC)</b> converter performs the reverse operation.  |
| <b>direct access</b>           | The capability to obtain data from a storage device, or to enter data into a storage device, in a sequence independent of their relative positions by means of addresses that indicate the physical location of the data.                    |
| <b>duty cycle</b>              | The relationship of a clock period <b>high time</b> to its <b>low time</b> , expressed as a percent.   |

## E

|                              |   |
|------------------------------|---|
| <b>emulator</b>              | Duplicates (provides an emulation of) the functions of one system with a different system, so that the second system appears to behave similar to the first system. |
| <b>External Reset (XRES)</b> | An active high signal that is driven into the PSoC device. It causes all operation of the CPU and blocks to stop and return to a pre-defined state.                 |

## F

|                     |   |
|---------------------|---|
| <b>falling edge</b> | A transition from a logic 1 to a logic 0. Also known as a negative edge.  |
| <b>feedback</b>     | The return of a portion of the output, or processed portion of the output, of a (usually active) device to the input. |

|                    |   |
|--------------------|---|
| <b>filter</b>      | A device or process by which certain frequency components of a signal are attenuated.   |
| <b>firmware</b>    | The software that is embedded in a hardware device and executed by the CPU. The software may be executed by the end user but it may not be modified.  |
| <b>flag</b>        | Any of various types of indicators used for identification of a condition or event (for example, a character that signals the termination of a transmission).   |
| <b>Flash</b>       | An electrically programmable and erasable, non <b>volatile</b> technology that provides users with the programmability and data storage of EPROMs, plus in-system erasability. Nonvolatile means that the data is retained when power is off.                             |
| <b>Flash bank</b>  | A group of flash ROM blocks where flash block numbers always begin with '0' in an individual flash bank. A flash bank also has its own block level protection information.  |
| <b>Flash block</b> | The smallest amount of flash ROM space that may be programmed at one time and the smallest amount of flash space that may be protected. A flash block holds 64 bytes.   |
| <b>flip-flop</b>   | A device having two stable states and two input terminals (or types of input signals) each of which corresponds with one of the two states. The circuit remains in either state until it is made to change to the other state by application of the corresponding signal. |
| <b>frequency</b>   | The number of cycles or events per unit of time, for a periodic function.   |

## G

|               |  |
|---------------|--|
| <b>gain</b>   | The ratio of output current, voltage, or power to input current, voltage, or power, respectively. Gain is usually expressed in dB.   |
| <b>ground</b> | <ol style="list-style-type: none"> <li>1. The electrical neutral line having the same potential as the surrounding earth.</li> <li>2. The negative side of DC power supply.</li> <li>3. The reference point for an electrical system.</li> <li>4. The conducting paths between an electric circuit or equipment and the earth, or some conducting body serving in place of the earth.</li> </ol> |

## H

|                       |  |
|-----------------------|--|
| <b>hardware</b>       | A comprehensive term for all of the physical parts of a computer or embedded system, as distinguished from the data it contains or operates on, and the software that provides instructions for the hardware to accomplish tasks.  |
| <b>hardware reset</b> | A reset that is caused by a circuit, such as a POR, watchdog reset, or external reset. A hardware reset restores the state of the device as it was when it was first powered up. Therefore, all registers are set to the POR value as indicated in register tables throughout this manual. |

### **hexadecimal**

A base 16 numeral system (often abbreviated and called hex), usually written using the symbols 0-9 and A-F. It is a useful system in computers because there is an easy mapping from four bits to a single hex digit. Thus, one can represent every byte as two consecutive hexadecimal digits. Compare the binary, hex, and decimal representations:

| <b>bin</b> | <b>=</b> | <b>hex</b> | <b>=</b> | <b>dec</b> |
|------------|----------|------------|----------|------------|
| 0000b      | =        | 0x0        | =        | 0          |
| 0001b      | =        | 0x1        | =        | 1          |
| 0010b      | =        | 0x2        | =        | 2          |
| ...        |          |            |          |            |
| 1001b      | =        | 0x9        | =        | 9          |
| 1010b      | =        | 0xA        | =        | 10         |
| 1011b      | =        | 0xB        | =        | 11         |
| ...        |          |            |          |            |
| 1111b      | =        | 0xF        | =        | 15         |

So the decimal numeral 79 whose binary representation is 0100 1111b can be written as 4Fh in hexadecimal (0x4F).

### **high time**

The amount of time the signal has a value of '1' in one period, for a periodic digital signal.

I

### **I2C**

A two-wire serial computer bus by Philips Semiconductors (now NXP Semiconductors). I2C is an inter-integrated circuit. It is used to connect low-speed peripherals in an embedded system. The original system was created in the early 1980s as a battery control interface, but it was later used as a simple internal bus system for building control electronics. I2C uses only two bidirectional pins, clock and data, both running at +5 V and pulled high with resistors. The bus operates at 100 kbps in standard mode and 400 kbps in fast mode.

### **ICE**

The in-circuit emulator that allows users to test the project in a hardware environment, while viewing the debugging device activity in a software environment (PSoC Designer™).

### **idle state**

A condition that exists whenever user messages are not being transmitted, but the service is immediately available for use.

### **impedance**

1. The resistance to the flow of current caused by resistive, capacitive, or inductive devices in a circuit.
2. The total passive opposition offered to the flow of electric current. Note the impedance is determined by the particular combination of resistance, inductive reactance, and capacitive reactance in a given circuit.

### **input**

A point that accepts data in a device, process, or channel.

### **input/output (I/O)**

A device that introduces data into or extracts data from a system.

### **instruction**

An expression that specifies one operation and identifies its operands, if any, in a programming language such as C or assembly.

### **integrated circuit (IC)**

A device in which components such as resistors, capacitors, diodes, and **transistors** are formed on the surface of a single piece of semiconductor.

### **interface**

The means by which two systems or devices are connected and interact with each other.

|  |  |
|--|--|
| <b>interrupt</b>                             | A suspension of a process, such as the execution of a computer program, caused by an event external to that process and performed in such a way that the process can be resumed.   |
| <b>interrupt service routine (ISR)</b>       | A block of code that normal code execution is diverted to when the M8C receives a hardware interrupt. Many interrupt sources may each exist with its own priority and individual ISR code block. Each ISR code block ends with the RETI instruction, returning the device to the point in the program where it left normal program execution.  |
| <b>J</b>                                     |  |
| <b>jitter</b>                                | <ol style="list-style-type: none"> <li>1. A misplacement of the timing of a transition from its ideal position. A typical form of corruption that occurs on serial data streams.</li> <li>2. The abrupt and unwanted variations of one or more signal characteristics, such as the interval between successive pulses, the amplitude of successive cycles, or the frequency or phase of successive cycles.</li> </ol>                |
| <b>K</b>                                     |  |
| <b>keeper</b>                                | A circuit that holds a signal to the last driven value, even when the signal becomes un-driven.  |
| <b>L</b>                                     |  |
| <b>latency</b>                               | The time or delay that it takes for a signal to pass-through a given circuit or network.   |
| <b>least significant bit (LSb)</b>           | The binary digit, or bit, in a binary number that represents the least significant value (typically the right-hand bit). The bit versus byte distinction is made by using a lower case "b" for bit in LSb.   |
| <b>least significant byte (LSB)</b>          | The byte in a multi-byte word that represents the least significant value (typically the right-hand byte). The byte versus bit distinction is made by using an upper case "B" for byte in LSB.   |
| <b>Linear Feedback Shift Register (LFSR)</b> | A shift register whose data input is generated as an <b>XOR</b> of two or more elements in the register chain.   |
| <b>load</b>                                  | The electrical demand of a process expressed as power (watts), current (amps), or resistance (ohms).   |
| <b>logic function</b>                        | A mathematical function that performs a digital operation on digital data and returns a digital value.   |
| <b>lookup table (LUT)</b>                    | A logic block that implements several logic functions. The logic function is selected by means of select lines and is applied to the inputs of the block. For example: A 2 input LUT with 4 select lines can be used to perform any one of 16 logic functions on the two inputs resulting in a single logic output. The LUT is a combinational device; therefore, the input/output relationship is continuous, that is, not sampled. |
| <b>low time</b>                              | The amount of time the signal has a value of '0' in one period, for a periodic digital signal.   |
| <b>low-voltage detect (LVD)</b>              | A circuit that senses Vdd and provides an interrupt to the system when Vdd falls below a selected threshold.   |

## M

|                                    |  |
|------------------------------------|--|
| <b>M8C</b>                         | An 8-bit Harvard Architecture microprocessor. The microprocessor coordinates all activity inside the PSoC device by interfacing to the flash, SRAM, and register space.  |
| <b>macro</b>                       | A programming language macro is an abstraction whereby a certain textual pattern is replaced according to a defined set of rules. The interpreter or compiler automatically replaces the macro instance with the macro contents when an instance of the macro is encountered. Therefore, if a macro is used 5 times and the macro definition required 10 bytes of code space, 50 bytes of code space are needed in total.  |
| <b>mask</b>                        | <ol style="list-style-type: none"> <li>1. To obscure, hide, or otherwise prevent information from being derived from a signal. It is usually the result of interaction with another signal, such as noise, static, jamming, or other forms of interference.</li> <li>2. A pattern of bits that can be used to retain or suppress segments of another pattern of bits in computing and data processing systems.</li> </ol>  |
| <b>master device</b>               | A device that controls the timing for data exchanges between two devices. Or when devices are cascaded in width, the master device is the one that controls the timing for data exchanges between the cascaded devices and an external interface. The controlled device is called the <b>slave device</b> .  |
| <b>microcontroller</b>             | An integrated circuit <b>chip</b> that is designed primarily for control systems and products. In addition to a CPU, a microcontroller typically includes memory, timing circuits, and I/O circuitry. The reason for this is to permit the realization of a controller with a minimal quantity of chips, thus achieving maximal possible miniaturization. This, in turn, reduces the volume and the cost of the controller. The microcontroller is normally not used for general-purpose computation as is a microprocessor. |
| <b>mixed signal</b>                | The reference to a circuit containing both analog and digital techniques and components.   |
| <b>mnemonic</b>                    | <ol style="list-style-type: none"> <li>1. A tool intended to assist the memory. Mnemonics rely on not only repetition to remember facts, but also on creating associations between easy-to-remember constructs and lists of data.</li> <li>2. A two to four character string representing a microprocessor instruction.</li> </ol>   |
| <b>mode</b>                        | A distinct method of operation for software or hardware. For example, the digital block may be in either counter mode or timer mode.   |
| <b>modulation</b>                  | A range of techniques for encoding information on a carrier signal, typically a sine-wave signal. A device that performs modulation is known as a modulator.   |
| <b>Modulator</b>                   | A device that imposes a signal on a carrier.   |
| <b>MOS</b>                         | An acronym for metal-oxide semiconductor.  |
| <b>most significant bit (MSb)</b>  | The binary digit, or bit, in a binary number that represents the most significant value (typically the left-hand bit). The bit versus byte distinction is made by using a lower case "b" for bit in MSb.   |
| <b>most significant byte (MSB)</b> | The byte in a multi-byte word that represents the most significant value (typically the left-hand byte). The byte versus bit distinction is made by using an upper case "B" for byte in MSB.   |

**multiplexer (mux)**

1. A logic function that uses a binary value, or address, to select between a number of inputs and conveys the data from the selected input to the output.
2. A technique which allows different input (or output) signals to use the same lines at different times, controlled by an external signal. Multiplexing is used to save on wiring and I/O ports.

## N

**NAND** See **Boolean Algebra**.

**negative edge** A transition from a logic 1 to a logic 0. Also known as a falling edge.

**net** The routing between devices.

**nibble** A group of four bits, which is one-half of a byte.

**noise**

1. A disturbance that affects a signal and that may distort the information carried by the signal.
2. The random variations of one or more characteristics of any entity such as voltage, current, or data.

**NOR** See **Boolean Algebra**.

**NOT** See **Boolean Algebra**.

## O

**OR** See **Boolean Algebra**.

**oscillator** A circuit that may be crystal controlled and is used to generate a clock frequency.

**output** The electrical signal or signals which are produced by an analog or digital block.

## P

**parallel** The means of communication in which digital data is sent multiple bits at a time, with each simultaneous bit being sent over a separate line.

**parameter** Characteristics for a given block that have either been characterized or may be defined by the designer.

**parameter block** A location in memory where parameters for the SSC instruction are placed prior to execution.

**parity** A technique for testing transmitting data. Typically, a binary digit is added to the data to make the sum of all the digits of the binary data either always even (even parity) or always odd (odd parity).

**path**

1. The logical sequence of instructions executed by a computer.
2. The flow of an electrical signal through a circuit.

**pending interrupts** An interrupt that is triggered but is not serviced, either because the processor is busy servicing another interrupt or global interrupts are disabled.

|                                    |  |
|------------------------------------|--|
| <b>phase</b>                       | The relationship between two signals, usually the same frequency, that determines the delay between them. This delay between signals is either measured by time or angle (degrees).  |
| <b>Phase-Locked Loop (PLL)</b>     | An electronic circuit that controls an <b>oscillator</b> so that it maintains a constant phase angle relative to a reference signal.   |
| <b>pin</b>                         | A terminal on a hardware component. Also called lead.  |
| <b>pinouts</b>                     | The pin number assignment: the relation between the logical inputs and outputs of the PSoC device and their physical counterparts in the printed circuit board (PCB) package. Pinouts involve pin numbers as a link between schematic and PCB design (both being computer generated files) and may also involve pin names.                 |
| <b>port</b>                        | A group of pins, usually eight.  |
| <b>positive edge</b>               | A transition from a logic 0 to a logic 1. Also known as a rising edge.   |
| <b>posted interrupts</b>           | An interrupt that has been detected by the hardware but may or may not be enabled by its mask bit. Posted interrupts that are not masked become pending interrupts.  |
| <b>Power-on-Reset (POR)</b>        | A circuit that forces the PSoC device to reset when the voltage is below a pre-set level. This is one type of <b>hardware reset</b> .  |
| <b>program counter</b>             | The instruction pointer (also called the program counter) is a register in a computer processor that indicates where in memory the CPU is executing instructions. Depending on the details of the particular machine, it holds either the address of the instruction being executed or the address of the next instruction to be executed. |
| <b>protocol</b>                    | A set of rules. Particularly the rules that govern networked communications.   |
| <b>PSoC®</b>                       | Cypress Semiconductor's Programmable System-on-Chip (PSoC) mixed-signal array. PSoC® is a trademark of Cypress.  |
| <b>PSoC blocks</b>                 | See <b>analog blocks</b> and <b>digital blocks</b> .   |
| <b>PSoC Designer™</b>              | The software for Cypress' Programmable System-on-Chip technology.  |
| <b>pulse</b>                       | A rapid change in some characteristic of a signal (for example, phase or frequency) from a baseline value to a higher or lower value, followed by a rapid return to the baseline value.  |
| <b>pulse width modulator (PWM)</b> | An output in the form of duty cycle which varies as a function of the applied measure.   |

## R

|                   |  |
|-------------------|--|
| <b>RAM</b>        | An acronym for random access memory. A data-storage device from which data can be read out and new data can be written in. |
| <b>register</b>   | A storage device with a specific capacity, such as a bit or byte.  |
| <b>reset</b>      | A means of bringing a system back to a known state. See <b>hardware reset</b> and <b>software reset</b> .                  |
| <b>resistance</b> | The resistance to the flow of electric current measured in ohms for a conductor.   |

|                       |  |
|-----------------------|--|
| <b>revision ID</b>    | A unique identifier of the PSoC device.  |
| <b>ripple divider</b> | An asynchronous ripple counter constructed of flip-flops. The clock is fed to the first stage of the counter. An n-bit binary counter consisting of n flip-flops that can count in binary from 0 to $2^n - 1$ .  |
| <b>rising edge</b>    | See <b>positive edge</b> .   |
| <b>ROM</b>            | An acronym for read-only memory. A data-storage device from which data can be read out, but new data cannot be written in.   |
| <b>routine</b>        | A block of code, called by another block of code, that may have some general or frequent use.  |
| <b>routing</b>        | Physically connecting objects in a design according to design rules set in the reference library.  |
| <b>runt pulses</b>    | In digital circuits, narrow pulses that, due to non-zero rise and fall times of the signal, do not reach a valid high or low level. For example, a runt pulse may occur when switching between asynchronous clocks or as the result of a race condition in which a signal takes two separate paths through a circuit. These race conditions may have different delays and are then recombined to form a glitch or when the output of a flip-flop becomes metastable. |
| <b>S</b>              |  |
| <b>sampling</b>       | The process of converting an analog signal into a series of digital values or reversed.  |
| <b>schematic</b>      | A diagram, drawing, or sketch that details the elements of a system, such as the elements of an electrical circuit or the elements of a logic diagram for a computer.  |
| <b>seed value</b>     | An initial value loaded into a linear feedback shift register or random number generator.  |
| <b>serial</b>         | <ol style="list-style-type: none"> <li>1. Pertaining to a process in which all events occur one after the other.</li> <li>2. Pertaining to the sequential or consecutive occurrence of two or more related activities in a single device or channel.</li> </ol>  |
| <b>set</b>            | To force a bit/register to a value of logic 1.   |
| <b>settling time</b>  | The time it takes for an output signal or value to stabilize after the input has changed from one value to another.  |
| <b>shift</b>          | The movement of each bit in a word, one position to either the left or right. For example, if the hex value 0x24 is shifted one place to the left, it becomes 0x48. If the hex value 0x24 is shifted one place to the right, it becomes 0x12.  |
| <b>shift register</b> | A memory storage device that sequentially shifts a word either left or right to output a stream of serial data.  |
| <b>sign bit</b>       | The most significant binary digit, or bit, of a signed binary number. If set to a logic 1, this bit represents a negative quantity.  |
| <b>signal</b>         | A detectable transmitted energy that can be used to carry information. As applied to electronics, any transmitted electrical impulse.  |
| <b>silicon ID</b>     | A unique identifier of the PSoC silicon.   |



|                       |  |
|-----------------------|--|
| <b>skew</b>           | The difference in arrival time of bits transmitted at the same time, in parallel transmission.   |
| <b>slave device</b>   | A device that allows another device to control the timing for data exchanges between two devices. Or when devices are cascaded in width, the slave device is the one that allows another device to control the timing of data exchanges between the cascaded devices and an external interface. The controlling device is called the master device.  |
| <b>software</b>       | A set of computer programs, procedures, and associated documentation concerned with the operation of a data processing system (for example, compilers, library routines, manuals, and circuit diagrams). Software is often written first as source code and then converted to a binary format that is specific to the device on which the code is executed.  |
| <b>software reset</b> | A partial reset executed by software to bring part of the system back to a known state. A software reset restores the M8C to a known state but not blocks, systems, peripherals, or registers. For a software reset, the CPU registers (CPU_A, CPU_F, CPU_PC, CPU_SP, and CPU_X) are set to 0x00. Therefore, code execution begins at flash address 0x0000.  |
| <b>SRAM</b>           | An acronym for static random access memory. A memory device allowing users to store and retrieve data at a high rate of speed. The term static is used because, after a value is loaded into an SRAM cell, it remains unchanged until it is explicitly altered or until power is removed from the device.  |
| <b>SROM</b>           | An acronym for supervisory read-only memory. The SROM holds code that is used to boot the device, calibrate circuitry, and perform flash operations. The functions of the SROM may be accessed in normal user code, operating from flash.  |
| <b>stack</b>          | A stack is a data structure that works on the principle of Last In First Out (LIFO). This means that the last item put on the stack is the first item that can be taken off.   |
| <b>stack pointer</b>  | A stack may be represented in a computer's inside blocks of memory cells, with the bottom at a fixed location and a variable stack pointer to the current top cell.  |
| <b>state machine</b>  | The actual implementation (in hardware or software) of a function that can be considered to consist of a set of states through which it sequences.   |
| <b>sticky</b>         | A bit in a register that maintains its value past the time of the event that caused its transition has passed.   |
| <b>stop bit</b>       | A signal following a character or block that prepares the receiving device to receive the next character or block.   |
| <b>switching</b>      | The controlling or routing of signals in circuits to execute logical or arithmetic operations, or to transmit data between specific points in a network.   |
| <b>switch phasing</b> | The clock that controls a given switch, PHI1 or PHI2, in respect to the switched capacitor (SC) blocks. The SC blocks have two groups of switches. One group of these switches is normally closed during PHI1 and open during PHI2. The other group is open during PHI1 and closed during PHI2. These switches can be controlled in the normal operation, or in reverse mode if the PHI1 and PHI2 clocks are reversed. |
| <b>synchronous</b>    | <ol style="list-style-type: none"> <li>1. A signal whose data is not acknowledged or acted upon until the next active edge of a clock signal.</li> <li>2. A system whose operation is synchronized by a clock signal.</li> </ol>   |

## T

|                       |  |
|-----------------------|--|
| <b>tap</b>            | The connection between two blocks of a device created by connecting several blocks/components in a series, such as a shift register or resistive voltage divider.  |
| <b>terminal count</b> | The state at which a counter is counted down to zero.  |
| <b>threshold</b>      | The minimum value of a signal that can be detected by the system or sensor under consideration.  |
| <b>transistors</b>    | The transistor is a solid-state semiconductor device used for amplification and switching, and has three terminals. A small current or voltage applied to one terminal controls the current through the other two. It is the key component in all modern electronics. In digital circuits, transistors are used as very fast electrical switches, and arrangements of transistors can function as logic gates, RAM-type memory, and other devices. In analog circuits, transistors are essentially used as amplifiers. |
| <b>tri-state</b>      | A function whose output can adopt three states: 0, 1, and Z (high-impedance). The function does not drive any value in the Z state and, in many respects, may be considered to be disconnected from the rest of the circuit, allowing another output to drive the same <b>net</b> .  |

## U

|                     |   |
|---------------------|---|
| <b>UART</b>         | A UART or universal asynchronous receiver-transmitter translates between parallel bits of data and serial bits.   |
| <b>user</b>         | The person using the PSoC device and reading this manual.   |
| <b>user modules</b> | Pre-build, pre-tested hardware/firmware peripheral functions that take care of managing and configuring the lower level analog and digital blocks. User modules also provide high level <b>API (Application Programming Interface)</b> for the peripheral function.         |
| <b>user space</b>   | The bank 0 space of the register map. The registers in this bank are more likely to be modified during normal program execution and not just during initialization. Registers in bank 1 are most likely to be modified only during the initialization phase of the program. |

## V

|                 |  |
|-----------------|--|
| <b>Vdd</b>      | A name for a power net meaning “voltage drain.” The most positive power supply signal. Usually 5 or 3.3 volts. |
| <b>volatile</b> | Not guaranteed to stay the same value or level when not in scope.  |
| <b>Vss</b>      | A name for a power net meaning “voltage source.” The most negative power supply signal.                        |

## W

|                              |   |
|------------------------------|---|
| <b><i>watchdog timer</i></b> | A timer that must be serviced periodically. If it is not serviced, the CPU resets after a specified period of time. |
| <b><i>waveform</i></b>       | The representation of a signal as a plot of amplitude versus time.  |
| <b><i>WLCSP</i></b>          | Wafer level chip scale package.   |

## X

|                   |                                     |
|-------------------|-------------------------------------|
| <b><i>XOR</i></b> | See <b><i>Boolean Algebra</i></b> . |
|-------------------|-------------------------------------|



# Index



## Numerics

32 kHz clock selection 71  
48-pin OCD part pinout 25

## A

ACK bit 222  
acronyms 19  
Address bits  
    in I2C\_SCR register 222  
address spaces, CPU core 31  
Analog bit  
    in INT\_CLR0 register 225  
    in INT\_MSK0 register 232  
analog input, GPIO 58  
architecture  
    CapSense system 87  
    PSoC core 27  
    system resources 97  
    top level 14

## B

bank 0 registers 178  
    register mapping table 174  
bank 1 registers 241  
    register mapping table 175  
basic paging in RAM paging 43  
Bias Trim bits in ILO\_TR register 264  
Bus Error bit 222  
Bypass bit 243  
Byte Complete bit 222

## C

Calibrate0 function in SROM 41  
Calibrate1 function in SROM 41  
CapSense module  
    architecture 89  
    register definitions 90  
    timing diagram 90  
CapSense system  
    architecture 87  
    overview 14, 87  
    register summary 88  
Carry bit 236  
CDSx bits 197

Checksum function in SROM 41  
CIN\_EN bit 200  
CINTx bits 197  
CIP\_EN bit 200  
Clock Phase bit in SPI\_CR 182  
Clock Polarity bit 182  
Clock Rate bits 221  
Clock Sel bit 243  
clock, external digital 104  
    switch operation 104  
clocks digital, See digital clocks  
CMP\_CR0 register 96, 196  
CMP\_CR1 register 96, 197  
CMP\_LUT register 96, 199  
CMP\_MUX register 95, 195  
CMP\_RDC register 95, 194  
CMP0D bit 194  
CMP0L bit 194  
CMP1D bit 194  
CMP1L bit 194  
CMPxEN bits 196  
comparators 93  
    architecture 93  
    register definitions 95  
configuration register in SPI  
    SPI\_CFG register 142  
control register in SPI  
    SPI\_CR register 141  
conventions, documentation  
    acronyms 19  
    numeric naming 18  
    register conventions 173  
core, See PSoC core  
CPINx bits 197  
CPU core 31  
    instruction formats 34  
    instruction set summary 32–33  
    overview 31  
    register definitions 36  
CPU Speed bits 258  
CPU\_F register 36, 236  
CPU\_SCR0 register 130, 240  
CPU\_SCR1 register 69, 239  
CRSTx bits 197  
CS\_CR0 register 200  
CS\_CR2 register 90, 200  
CS\_CR3 register 90, 201  
CUR\_PP register 46, 216

current page pointer in RAM paging 44

## D

DATA 203, 204

DATA bits

in PT\_DATA0 register 203, 204

Data bits

in I2C\_DR register 215, 223

in PRTxDR register 61, 178

in SPI\_RXR register 140, 181

in SPI\_TXR register 139, 180

in TMP\_DRx register 46, 248

data bypass in GPIO 60

data registers in SPI 139

development kits 16

digital clocks 103

architecture 103

internal low speed oscillator 103

internal main oscillator 103

register definitions 106

system clocking signals 103

digital IO, GPIO 58

documentation

history 17

overview 13

Drive Mode 0 bits 241

Drive Mode 1 bits 242

## E

Enable bit 221

ENABLE bits

in MUX\_CRx registers 253

in SPI\_CR register 182

ENSWINT bit 55, 233

EP0\_CNT register 164, 189

EP0\_CR register 163, 167

EP0\_DRx register 164, 190

EPx\_CNT1 register 165, 166

EraseAll function in SROM 40

EraseBlock function in SROM 40

EXTCLKEN bit 260

external digital clock 104

external reset 131

## F

Flash

memory organization 39

Freq Trim bits for ILO\_TR 264

full-speed USB 155

architecture 155

memory arbiter 156

register definitions 161

suspend mode 159

USB SIE 155

USB SRAM 156

## G

general purpose IO 57

analog and digital input 58

architecture 57

block interrupts 59

data bypass 60

digital IO 58

drive modes 62

interrupt modes 59

port 1 distinctions 58

register definitions 61

GIE bit 237

GIES bit 240

GPIO bit

in INT\_CLR0 register 224

in INT\_MSK0 register 232

GPIO block interrupts 59

GPIO, See general purpose IO

## H

help, getting

development kits 16

support 16

upgrades 16

## I

I2C bit

in INT\_CLR0 register 224

in INT\_MSK0 register 232

I2C slave 111

application overview 113

architecture 111

basic data transfer 112

basic IO timing 123

clock generation timing 123

operation 113

register definitions 114

stall timing 125

status timing 124

I2C\_CFG register 119, 221

I2C\_DR register 122, 223

I2C\_SCR register 121, 222

IDAC\_D register 90, 238

IDACDATA bits 238

IDACEN bit 200

IDX\_PP register 47, 218

ILO, See internal low speed oscillator

IMO\_TR register 263

IMO\_TR1 register 172

IMO, See internal main oscillator

index memory page pointer in RAM paging 45

INNx bits 195

INPx bits 195

instruction formats

1-byte instructions 34

2-byte instructions 34

3-byte instructions 35

instruction set summary 32–33  
 Int Sel bit 243  
 INT\_CLR0 register 51, 52, 53, 75, 224, 226, 227  
 INT\_MSK0 register 54, 55, 230, 231, 232  
 INT\_SW\_EN register 55, 233  
 INT\_VC register 56, 234  
 internal low speed oscillator 71  
   32 kHz clock selection 71  
   architecture 71  
   in digital clocks 103  
   register definitions 72  
 internal M8C registers 31  
 internal main oscillator 67  
   architecture 67  
   in digital clocks 103  
   register definitions 68  
 interrupt controller 49  
   application overview 50  
   architecture 49  
   interrupt table 50  
   latency and priority 50  
   posted vs pending interrupts 50  
   register definitions 51  
 Interrupt Enables bits 179  
 interrupt modes in GPIO 59  
 interrupt table 50  
 interrupts in RAM paging 44  
 IO analog multiplexer 91  
   architecture 91  
   register definitions 92  
 IO\_CFG register 63, 254  
 IRAMDIS bit 239  
 IRANGE bit 200  
 IRESS bit 239

## L

low voltage detect (LVD)  
   See POR and LVD  
 LRB bit 222  
 LSb First bit 182  
 LUTx bits 199  
 LVD bit 262  
 LVDTBEN bits 261

## M

M8C, See CPU core  
 mapping tables, registers 173  
 master function for SPI 138  
 measurement units 18  
 memory arbiter in USB 156  
 MUX\_CRx register 92, 252, 253, 259  
 MVI instructions in RAM paging 44  
 MVR\_PP register 47, 219  
 MVW\_PP register 48, 220

## N

No Buzz bit 258  
 numeric naming conventions 18

## O

One Shot bit 202, 205, 206  
 OSC\_CR0 register 258  
 OSC\_CR2 register 69, 260  
 OUT\_P1 register 106, 107, 255, 256  
 Overrun bit 182  
 overviews  
   CapSense system 87  
   PSoC core 27  
   register tables 173  
   system resources 97

## P

P10D bit 256  
 P10EN bit 256  
 P12D bit 255  
 P12EN bit 255  
 P14D bit 255  
 P14EN bit 255  
 P16D bit 255  
 P16EN bit 255  
 Page bits  
   in CUR\_PP register 216  
   in IDX\_PP register 218  
   in MVR\_PP register 219  
   in MVW\_PP register 220  
   in STK\_PP register 217  
 Pending Interrupt bits 234  
 PgMode bits 236  
 pin behavior during reset 127  
 pin information, See pinouts  
 pinouts  
   48-pin OCD part 25  
 PMAx\_CUR register 170  
 POR and LVD 135  
   architecture 135  
   register definitions 136  
 PORLEV bits 261  
 PORS bit 240  
 power modes  
   system resets 133  
 power on reset (POR)  
   See POR and LVD  
 power on reset in system resets 131  
 product upgrades 16  
 programmable timer 151  
   architecture 151  
   register definitions 153  
 ProtectBlock function in SROM 40  
 protocol function for SPI 137  
 PRTxDM0 register 62, 241  
 PRTxDM1 register 62, 242

PRTxDR register 61, 178  
 PRTxIE register 61, 179  
 PSelect bit 221  
 PSoC core  
     architecture 27  
     overview 14  
     register summary 28  
     *See also* CPU core  
 PSSDC bits 265, 266, 267  
 PT\_CFG register 153, 154, 202  
 PT\_DATA1 register 154  
 PTx\_DATA0 register 154, 204  
 PTx\_DATA1 register 154, 203  
 PXD\_EN bit 200

## R

RAM paging 43  
     architecture 43  
     basic paging 43  
     current page pointer 44  
     index memory page pointer 45  
     interrupts 44  
     MVI instructions 44  
     register definitions 46  
     stack operations 43  
 ReadBlock function in SROM 39  
 reference of all registers 177  
 register conventions 18, 177  
 register definitions  
     CapSense module 90  
     comparators 95  
     CPU core 36  
     digital clocks 106  
     general purpose IO 61  
     I2C slave 114  
     internal low speed oscillator 72  
     internal main oscillator 68  
     interrupt controller 51  
     IO analog multiplexer 92  
     POR and LVD 136  
     programmable timer 153  
     RAM paging 46  
     sleep and watchdog 81  
     SPI 139  
     supervisory ROM 42  
     system resets 129  
     USB, full-speed 161  
 register mapping tables  
     bank 0 registers 174  
     bank 1 registers 175  
 registers  
     bank 0 registers 178  
     bank 1 registers 241  
     CapSense register summary 88  
     core register summary 28  
     internal M8C registers 31  
     maneuvering around 177  
     mapping tables 173  
     reference of all registers 177  
     system resources register summary 98

regulated IO  
     application overview 74  
     architecture 73  
 RES\_WDT register 81, 235  
 RX Reg Full bit 182

## S

serial peripheral interconnect, *See* SPI  
 Slave bit 243  
 slave function for SPI 138  
 slave operation, I2C 113  
 sleep and watchdog 77  
     application overview 80  
     architecture 77  
     bandgap refresh 84  
     register definitions 81  
     sleep sequence 83  
     sleep timer 80  
     timing diagrams 83  
     wake up sequence 84  
     watchdog timer 85  
 Sleep bit  
     in CPU\_SCR0 register 240  
     in INT\_CLR0 register 224  
     in INT\_MSK0 register 232  
 Sleep bits 258  
 sleep timer 80  
 SLIMO bit 239  
 SLP\_CFG register 81, 265, 266, 267  
 SPC, *See* system performance controller  
 SPI 137  
     architecture 137  
     configuration register 142  
     control register 141  
     data registers 139  
     master data register definitions 140  
     master function 138  
     protocol function 137  
     register definitions 139  
     slave data register definitions 140  
     slave function 138  
     timing diagrams 143  
 SPI bit  
     in INT\_CLR0 register 224  
     in INT\_MSK0 register 232  
 SPI Complete bit 182  
 SPI timing diagrams  
     SPI mode timing 143  
     SPIM timing 144  
     SPIS timing 148  
 SPI\_CFG register 142, 243  
 SPI\_CR register 141, 182  
 SPI\_RXR register 140, 181  
 SPI\_TXR register 139, 180  
 SRAM with USB 156  
 SROM, *See* supervisory ROM  
 SS\_bit 243  
 SS\_EN\_bit 243  
 stack operations in RAM paging 43



START bit 202, 205, 206  
 start, how to 16  
 STK\_PP register 47, 217  
 STOP bit 240  
 Stop IE bit 221  
 Stop Status bit 222  
 summary of registers  
     CapSense system 88  
     mapping tables 173  
     PSoC core 28  
     system resources 98  
 supervisory ROM  
     architecture 37  
     Calibrate0 function 41  
     Calibrate1 function 41  
     EraseAll function 40  
     EraseBlock function 40  
     function descriptions 38  
     ProtectBlock function 40  
     ReadBlock function 39  
     SWBootReset function 38  
     TableRead function 40  
     WriteBlock function 39  
 SWBootReset function in SRAM 38  
 switch operation in digital clocks 104  
 system performance controller 65  
     application overview 65  
     architecture 65  
 system resets 127  
     architecture 127  
     external reset 131  
     functional details 133  
     pin behavior 127  
     power modes 133  
     power on reset 131  
     register definitions 129  
     timing diagrams 131  
     watchdog timer reset 131  
 system resources  
     architecture 97  
     overview 14, 97  
     register summary 98

## T

TableRead function in SRAM 40  
 technical support 16  
 Timer1/0 bits  
     in INT\_CLR0 register 225  
     in INT\_MSK0 register 232  
 timing diagrams  
     I2C slave 123  
     sleep and watchdog 83  
     SPI 143  
     system resets 131  
 TMP\_DRx register 46, 194  
 Transmit bit 222  
 Trim bits in IMO\_TR register 263, 268  
 TX Reg Empty bit 182

## U

units of measure 18  
 upgrades 16  
 USB\_CR0 185  
 USB\_CR0 register 161, 185  
 USB\_CR1 register 171, 244  
 USB\_SOFx register 161, 183  
 USB, *See* full-speed USB  
 USBIO\_CR0 register 162, 186  
 USBIO\_CR1 register 162, 187

## V

V Monitor bit  
     in INT\_CLR0 register 225, 227  
     in INT\_MSK0 register 232  
 VLT\_CMP register 136, 262  
 VLT\_CR register 136, 261  
 VM bits 261

## W

watchdog timer reset 131  
 WDRS bit 240  
 WDSL\_Clear bits 235  
 WriteAndVerify function in SRAM 41  
 WriteBlock function in SRAM 39

## X

XIO bit 236  
 XRES reset 131

## Z

Zero bit 237

