

XENSIV™ PAS CO2 12 V sensor based on photo acoustic spectroscopy principle

Features

- **Operating range:** 0 ppm to 32000 ppm
- **Accuracy:** ± 30 ppm $\pm 3\%$ of reading between 400 ppm and 5000 ppm
- **Lifetime:** 10 years for indoor mission profile
- **Interface:** I²C, UART, and PWM
- **Package dimension:** $13.8 \times 14 \times 7.5$ mm³
- **Maintenance:** Maintenance-free when using ABOC feature (automatic baseline offset correction)

Potential applications

High accuracy, compact size, and SMD capability make the XENSIV™ PAS CO2 sensor ideal for indoor air quality monitoring solutions in the market with numerous potential applications.

- HVAC (heating, ventilation, air conditioning)
- Home appliances
- Smart home IoT devices
- In-cabin air quality monitoring unit
- Agriculture/greenhouses

Description

Infineon has leveraged its knowledge in sensors and MEMS technologies to develop a disruptive gas sensor for CO₂ sensing. The XENSIV™ PAS CO2 is a real CO₂ sensor combining NDIR technology with Infineon's high SNR MEMS microphones, allowing for state-of-the-art accuracy in an exceptionally small form factor.

The sensor is based on the photoacoustic spectroscopy (PAS) principle, where CO₂ molecules within the sensor cavity absorb infrared light, generating small pressure changes that are detected by an acoustic detector. CO₂ concentration is then delivered in the form of a direct ppm readout, thanks to the integrated microcontroller. Highly accurate CO₂ readings are guaranteed.



RoHS



Halogen-free

OPN number	Package	SP number
PASCO2V01AUMA3	LG-MLGA-14-1	SP006037335

Table of contents

	Features	1
	Potential applications	1
	Description	1
	Table of contents	2
1	Block diagram	4
2	Pin-out diagram	5
3	Typical sensor response to CO₂ concentration change	6
4	Characteristics and parameters	7
4.1	Specification	7
4.1.1	Operating range	7
4.1.2	Storage conditions	7
4.1.3	Timing characteristics	8
4.1.4	Absolute maximum ratings	10
4.1.5	Current rating and power consumption	10
4.1.6	CO ₂ transfer function	11
4.2	Digital interfaces	11
4.2.1	I ² C interface	11
4.2.1.1	I ² C transaction format	12
4.2.1.2	I ² C timing characteristics	12
4.2.2	UART interface	14
4.3	Application circuit examples	15
4.3.1	I ² C application circuit example	15
4.3.2	UART application circuit example	15
4.3.3	PWM application circuit example	16
4.4	Functional description	16
4.4.1	Operating modes	16
4.4.2	Data post-processing	17
4.4.2.1	Pressure compensation	17
4.4.2.2	Automatic baseline offset correction	17
4.4.2.3	Forced compensation	17
4.4.2.4	Alarm threshold	18
4.5	Monitoring mechanism as advanced functionality	18
5	Register map	19
5.1	Register map access method	19
5.2	Register map bitfields	20
5.3	Product and revision ID register (PROD_ID)	21
5.4	Sensor status register (SENS_STS)	21

5.5	Measurement period configuration registers (MEAS_RATE_H)	23
5.6	Measurement period configuration registers (MEAS_RATE_L)	23
5.7	Measurement mode configuration register (MEAS_CFG)	24
5.8	CO ₂ concentration result register (CO2PPM_H)	25
5.9	CO ₂ concentration result register (CO2PPM_L)	26
5.10	Measurement status register (MEAS_STS)	26
5.11	Interrupt pin configuration register (INT_CFG)	27
5.12	Alarm threshold register (ALARM_TH_H)	28
5.13	Alarm threshold register (ALARM_TH_L)	29
5.14	Pressure compensation registers (PRES_REF_H)	29
5.15	Pressure compensation registers (PRES_REF_L)	30
5.16	Automatic baseline offset compensation reference (CALIB_REF_H)	30
5.17	Automatic baseline offset compensation reference (CALIB_REF_L)	31
5.18	Scratch pad register (SCRATCH_PAD)	31
5.19	Soft reset register (SENS_RST)	32
6	Assembly instruction	33
7	Package dimensions and footprint	34
8	Packing for shipment	35
	Revision history	36
	Disclaimer	37

1 Block diagram

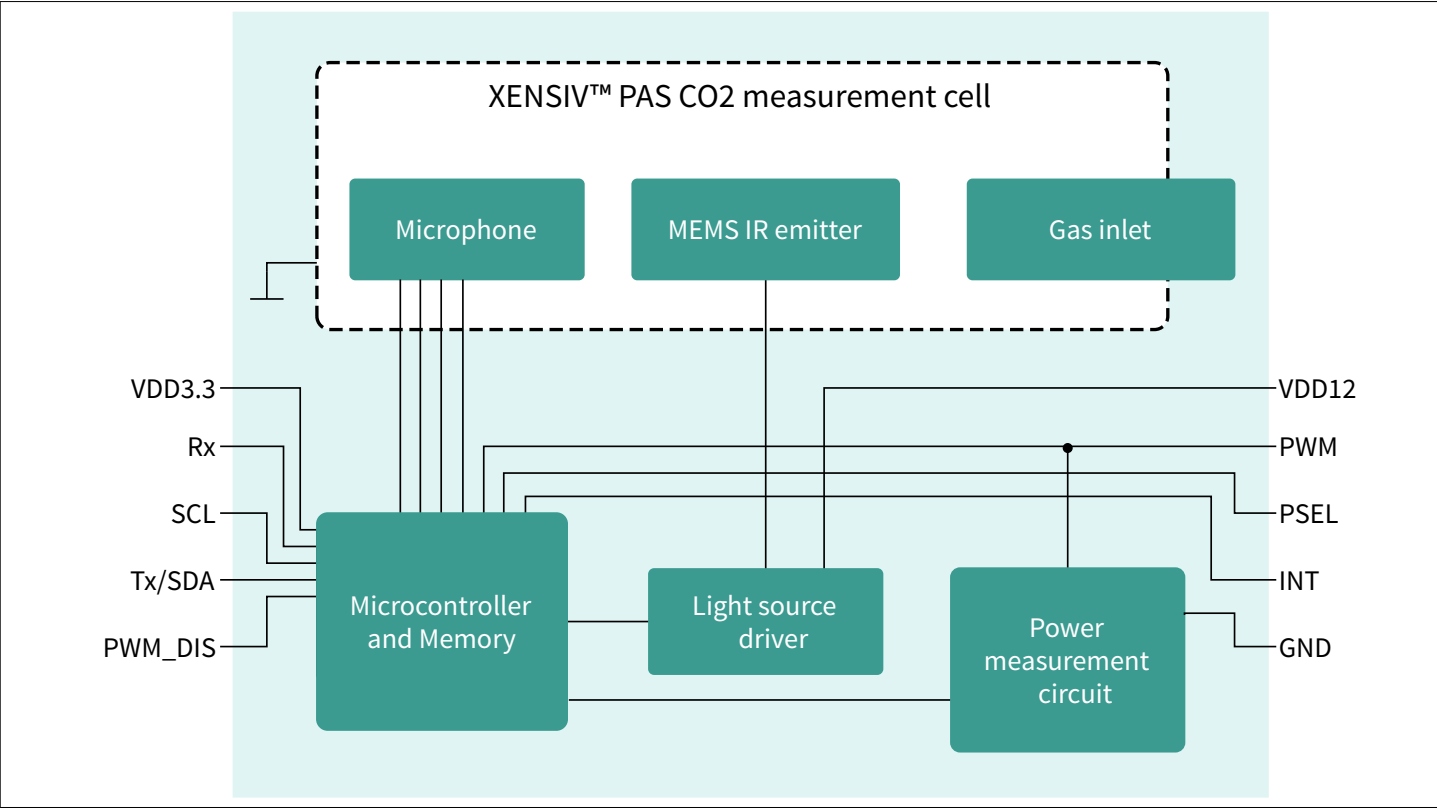


Figure 1 Block diagram of XENSIV™ PAS CO2

2 Pin-out diagram

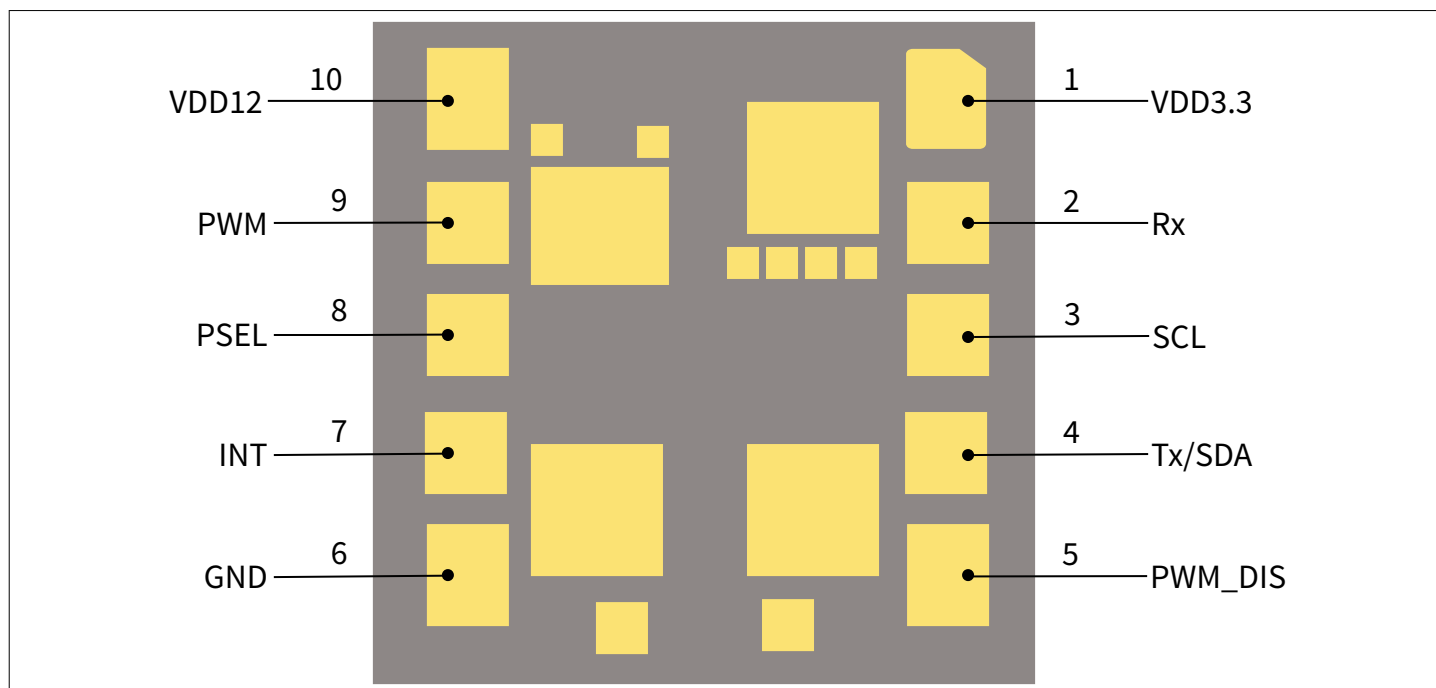


Figure 2 Pin-out diagram (bottom view)

Table 1 Pin description

PIN	Symbol	Type	Description
1	VDD3.3	Power supply (3.3 V)	3.3 V digital power supply
2	Rx	Input/output	UART receiver pin (3.3 V domain)
3	SCL	Input/output	I ² C clock pin (3.3 V domain)
4	Tx/SDA	Output	UART transmitter pin (3.3 V domain)/I ² C data pin (3.3 V domain)
5	PWM_DIS	Input	PWM disable input pin (3.3 V domain)
6	GND	Ground	Ground
7	INT	Output	Interrupt output pin (3.3 V domain)
8	PSEL	Input	Communication interface select input pin (3.3 V domain)
9	PWM	Output	PWM output pin (3.3 V domain)
10	VDD12	Power supply (12 V)	12 V power supply for the IR emitter

3 Typical sensor response to CO₂ concentration change

Measurement condition: VDD12 = 12.0 V, VDD3.3 = 3.3 V, $T_{\text{amb}} = 25^{\circ}\text{C}$, $p = 1013 \text{ hPa}$ and % r.H. = 30%

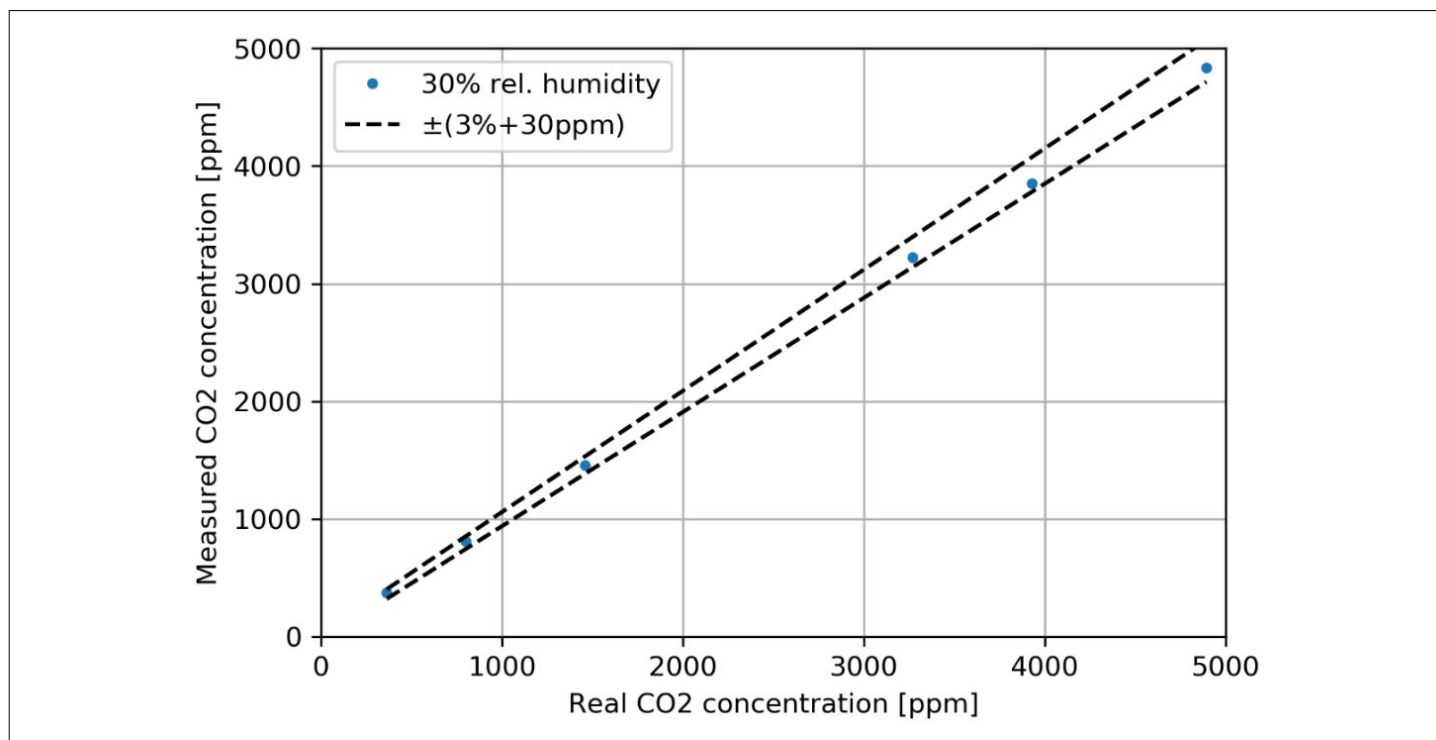


Figure 3 Typical sensor response to CO₂ concentration change

4 Characteristics and parameters

4.1 Specification

4.1.1 Operating range

To ensure proper operation of the sensor, the following operating conditions must not be exceeded. All parameters specified in the subsequent sections refer to these operating conditions unless otherwise specified.

Table 2 Operating range

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
CO ₂ measurement range ¹⁾	C _{CO2}	0		32000	ppm	Functional measurement range
Ambient temperature ¹⁾	T _{amb}	0		50	°C	
Relative humidity ¹⁾	rH	0		85	%	Non-condensing
Pressure ¹⁾	p	750	1013	1150	hPa	
Supply voltage ¹⁾	VDD3.3	3	3.3	3.6	V	
	VDD12	10.8	12	13.2	V	
Lifetime ¹⁾	t _{life}		10		Year	Depends on mission profile

1) Not subject to production test. This parameter is verified by design/characterization.

4.1.2 Storage conditions

Storage condition refers to dry pack: packed, non-evacuated, desiccant¹⁾, humidity indicator card (HIC) sealed moisture barrier bag.

Table 3 Storage condition

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Storage temperature ¹⁾	T _{storage}	5		40	°C	<90% r.H. ²⁾
Storage time ¹⁾	t _{storage}			3	Year	
Storage temperature during transport ¹⁾	T _{storage_transport}	-20		60	°C	
Storage time during transport ¹⁾	t _{storage_transport}			10	Day	

1) Not subject to production test. This parameter is verified by design/characterization.

2) Condensation and bedewing shall be avoided.

¹⁾ Number of desiccant units to be calculated according to JEDEC Standard 033.

4.1.3 Timing characteristics

Table 4 Timing characteristics

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Sampling time ¹⁾	t_{sampling}	10	60	4095	s	Sensor accuracy may be affected when sampling rates exceed 1 meas/min
Time to sensor ready ¹⁾	$t_{\text{sensor_rdy}}$			1	s	
Time to early notification ^{1) 2)}	$t_{\text{early_noti}}$		2		s	
I ² C clock frequency ¹⁾	f_{I2C}		100		kHz	
			400			
PWM frequency ¹⁾	f_{pwm}		80		Hz	
UART baud rate ¹⁾	f_{baud}		9.6		kbps	

1) Not subject to production test. This parameter is verified by design/characterization.

2) Relevant for continuous mode of operation.

Typical measurement timing sequence for I²C and UART is presented in Figure 4.

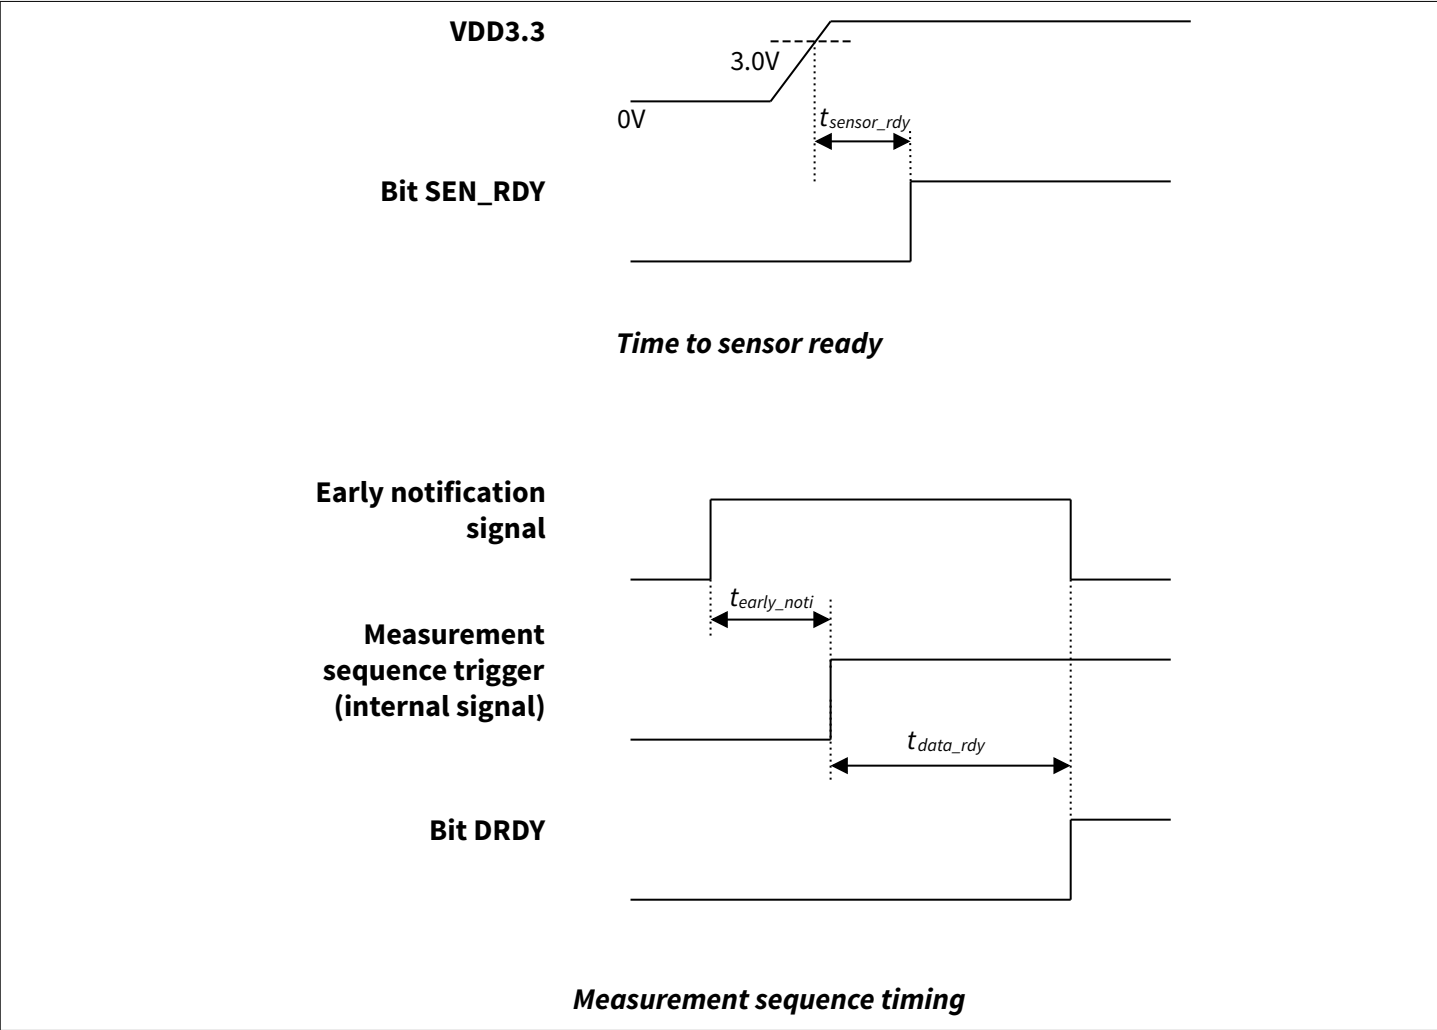


Figure 4 Illustration of the timing characteristic parameters

4.1.4 Absolute maximum ratings

Table 5 Absolute maximum ratings

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
MSL level	MSL		3			
Maximum ambient temperature	T_{amb_max}	-10		60	°C	
Maximum relative humidity	rH_{max}	0		95	%	
12 V supply voltage	V_{VDD12}	9.6		14.4	V	
3.3 V supply voltage	$V_{VDD3.3}$	3.0		3.6	V	
Reflow temperature	T_r			245	°C	JEDEC J-STD-020E
ESD human body model	V_{ESD_HBM}	-2		2	kV	HBM (JS001)
ESD charge discharge model	V_{ESD_CDM}			500	V	CDM (JS002)

Note: Stresses above the values listed as "Absolute Maximum Ratings" may cause permanent damage to the devices. Exposure to absolute maximum rating conditions for extended period of time may affect device reliability.

4.1.5 Current rating and power consumption

All parameters specified in Table 5 refer to the following operating conditions unless otherwise specified: $V_{DD3.3} = 3.3$ V, $V_{DD12} = 12.0$ V, $T_{amb} = 25^{\circ}\text{C}$, % r.H. = 30%, $p = 1013$ hPa.

Table 6 Current rating

Parameter	Symbol	Pin	Values			Unit	Note or test condition
			Min.	Typ.	Max.		
Peak current ¹⁾	$I_{peak\ 5}$	VDD12		130	150	mA	
Peak current ¹⁾	$I_{peak\ 3.3}$	VDD3.3		10		mA	
Average current ¹⁾	$I_{avg\ 5}$	VDD12		0.8		mA	At 1 meas/min
Average current ¹⁾	$I_{avg\ 3.3}$	VDD3.3		6.1		mA	At 1 meas/min
Average power ¹⁾	P_{avg}			30		mW	At 1 meas/min

1) Not subject to production test. This parameter is verified by design/characterization.

4.1.6 CO₂ transfer function

All parameters specified in the following sections refer to the operating conditions unless otherwise specified:
VDD3.3 = 3.3 V, VDD12 = 12.0 V, $T_{amb} = 25^{\circ}\text{C}$, % r.H. = 30%, $p = 1013 \text{ hPa}$, and $t_{sampling} = 1 \text{ meas/min}$.

Table 7 CO₂ transfer function

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Accuracy ¹⁾	Acc	-30 ppm -3% of reading		+30 ppm +3% of reading	ppm	C _{CO2} : 400-3000 ppm
			±30 ppm +3% of reading			C _{CO2} : 3001-5000 ppm
Response time ²⁾	t_{63}		90		s	
Resolution ²⁾	Res		1		ppm	
Repeatability ^{2) 3)}	R			10	ppm	3 times standard deviation at fixed C _{CO2} : 1000 ppm
Pressure stability ²⁾	p_{error}		0		%/hPa	With pressure compensation feature enabled
Acoustic stability ²⁾	SPL_{error}	3	6	15	ppm	Up to 95 dB for pink noise from 100 Hz to 10 kHz

- 1) Accuracy verified using certified calibration gas mixtures and high-precision reference sensors. Uncertainty in calibration gas mixtures of ±2% needs to be considered. Temporary deviations in accuracy caused by assembly, rough handling or harsh environmental conditions can be compensated using forced compensation scheme (FCS) or automatic baseline offset correction (ABOC).
- 2) Not subject to production test. This parameter is verified by design/characterization.
- 3) Stepwise Reaction IIR filter is enabled.

4.2 Digital interfaces

The XENSIV™ PAS CO2 supports I²C, UART, and PWM. The I²C and UART interfaces are described in detail in the following chapters.

4.2.1 I²C interface

The device complies with the I²C protocol. When I²C is selected as a serial communication interface, the device acts as an I²C slave. The main characteristics of the interface are described below:

- Slave mode only
- I²C clock frequency: 100 kHz and 400 kHz
- 7-bit slave address: 0×28
- No CRC
- The device supports clock stretching
- 8-bit addressing mode supported (7-bit address + RW)
- Bulk read and write supported (device auto-increments automatically the address)
- Address 0×00 not supported

Further details of the protocol are covered in the separate application note.

4.2.1.1 I²C transaction format

The I²C transaction has the following structure: a start condition followed by four bytes followed a stop condition.

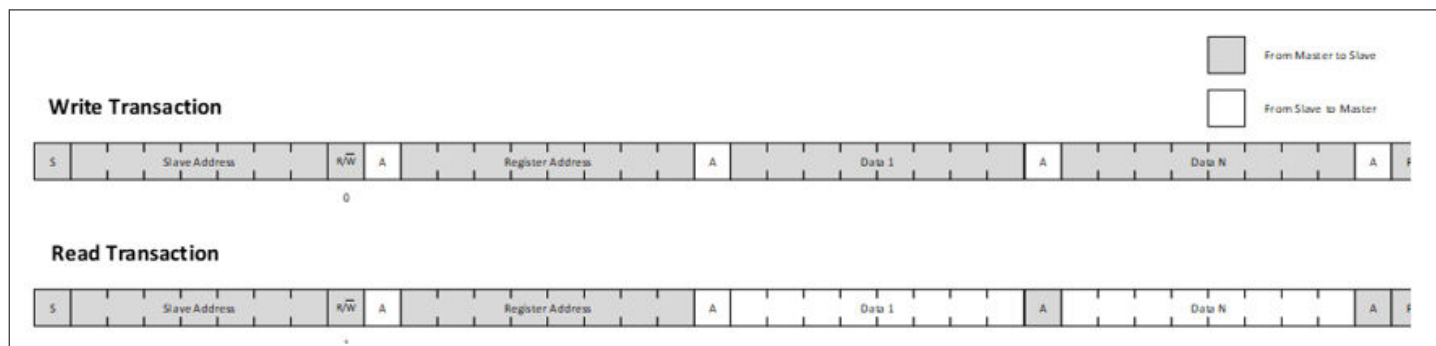


Figure 5 I²C write and read transaction

Table 8 I²C transaction

Byte	Description	Value	Comments
	Start condition		
1	Header	(Slave address << 1) R/W	
2	First data-byte	As per user request/register value	Read: data provided by the slave Write: data provided by the user
N+2	Data byte N	As per user request/register value	Read: data provided by the slave Write: data provided by the user
	End condition		

4.2.1.2 I²C timing characteristics

Due to the wired-AND configuration of an I²C bus system, the port drivers on the SCL and SDA signal lines need to operate in open-drain mode. The high level of these lines must be held by an external pull-up device, approximately 10 kOhm for operation at 100 kbits/s, approximately 2 kOhm for operation at 400 kbits/s.

Table 9 I²C standard mode timing

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Fall time of both SDA and SCL	t1			300	ns	
Rise time of both SDA and SCL	t2			1000	ns	
Data hold time	t3	0			μs	
Data set-up time	t4	250			ns	
LOW period of SCL clock	t5	4.7			μs	
HIGH period of SCL clock	t6	4.0			μs	
Hold time for a (repeated) START condition	t7	4.0			μs	
Set-up time for (repeated) START condition	t8	4.7			μs	

(table continues...)

Table 9 (continued) I²C standard mode timing

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Set-up time for STOP condition	t ₉	4.0			μs	
Bus free time between a STOP and START condition	t ₁₀	4.7			μs	
Capacitive load for each bus line	C _b			400	pF	

Table 10 I²C fast mode timing

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Fall time of both SDA and SCL	t ₁	20 + 0.1·C _b		300	ns	C _b refers to the total capacitance of one bus line in pF
Rise time of both SDA and SCL	t ₂	20 + 0.1·C _b		300	ns	C _b refers to the total capacitance of one bus line in pF
Data hold time	t ₃	0			μs	
Data set-up time	t ₄	100			ns	
LOW period of SCL clock	t ₅	1.3			μs	
HIGH period of SCL clock	t ₆	0.6			μs	
Hold time for a (repeated) START condition	t ₇	0.6			μs	
Set-up time for (repeated) START condition	t ₈	0.6			μs	
Set-up time for STOP condition	t ₉	0.6			μs	
Bus free time between a STOP and START condition	t ₁₀	1.3			μs	
Capacitive load for each bus line	C _b			400	pF	

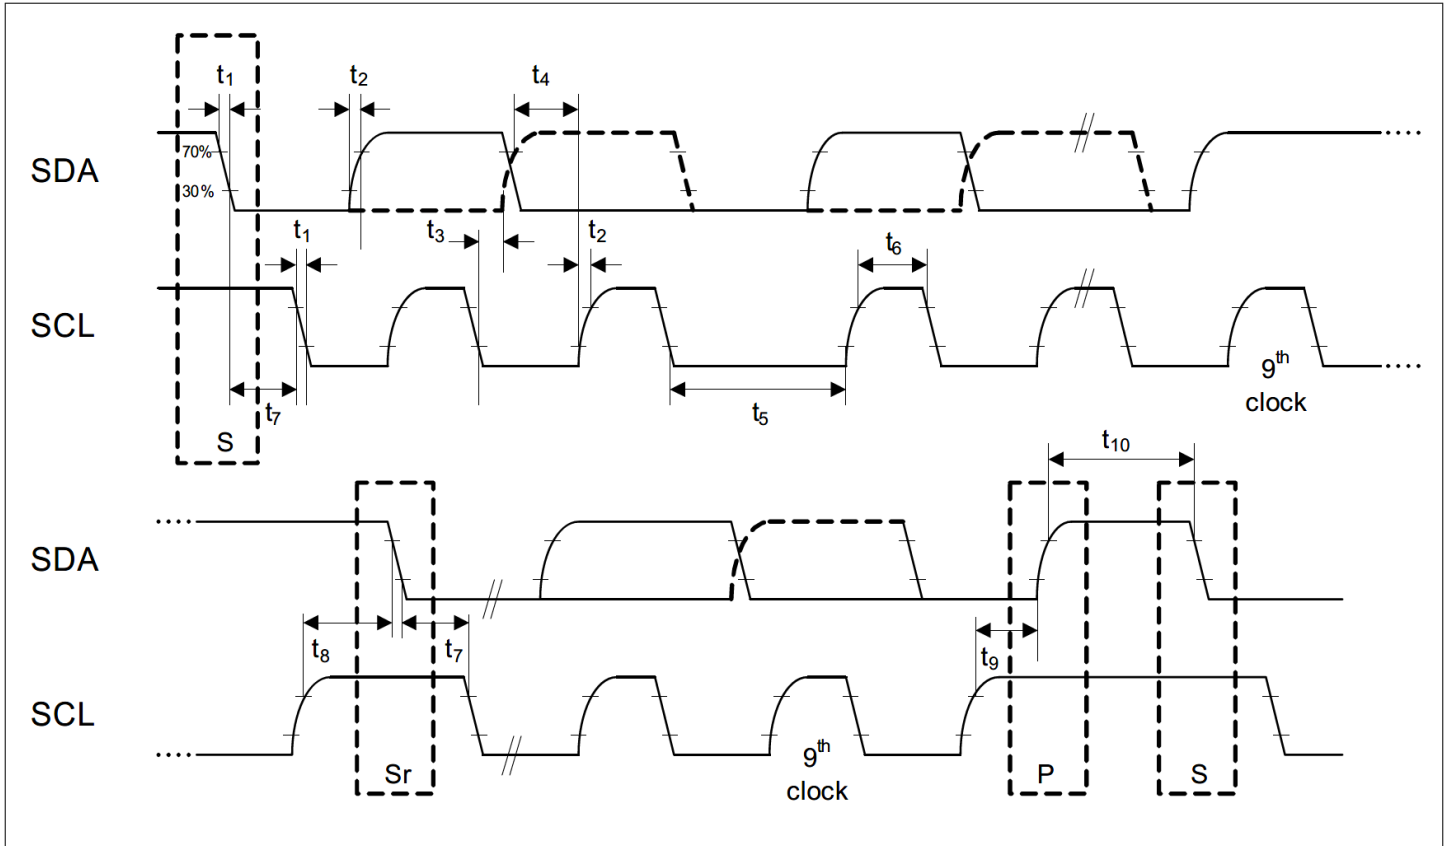


Figure 6 I²C standard and fast mode timing

4.2.2 UART interface

When UART is selected as a serial communication interface, the device acts as a UART slave. The device operates via UART for point-to-point communication. Bus operation is not supported. As a result, it is recommended that the master uses a time-out mechanism. The basic format of a valid UART frame is 1 start bit, 8 data bits, no parity bit, and 1 stop bit. The master combines several UART frames into a message (read or write). The combination of master request and slave answer defines a transaction. The main characteristics of the interface are described below:

- Point to point operation – no bus support
- Slave operation only
- UART clock frequency = 9.6 kHz
- Format: 1 start bit, 8 data bits, no parity bit, 1 stop bit. Supports direct connection with a terminal program

4.3 Application circuit examples

4.3.1 I²C application circuit example

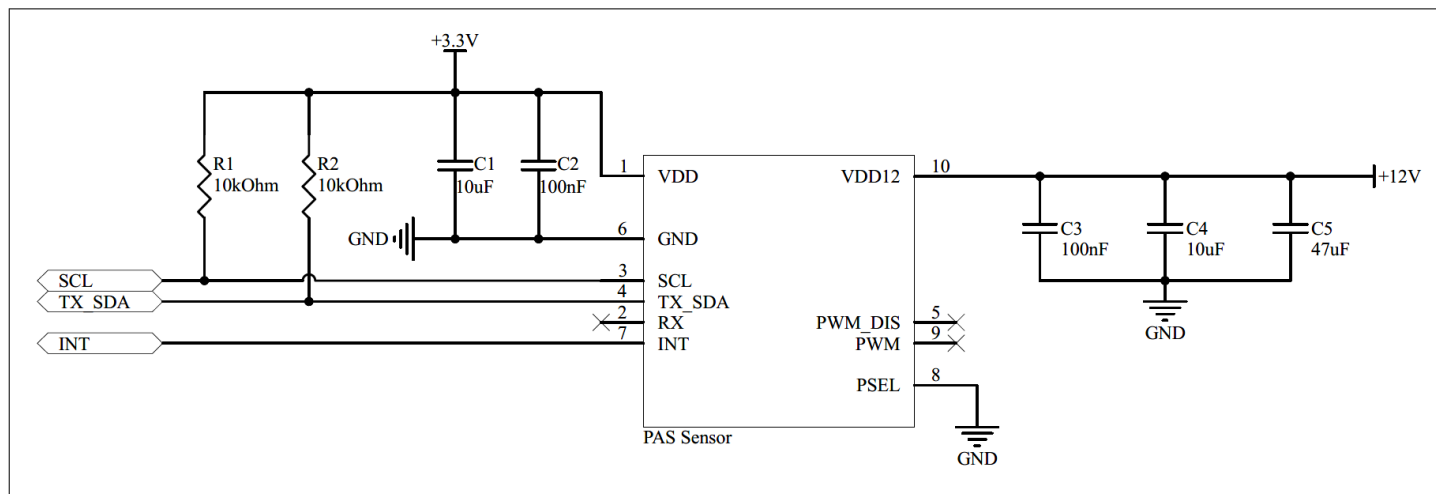


Figure 7 Application circuit example for I²C

With this configuration, the device will start in Idle mode of operation. Internal pull up is present on PWM_DIS pin.

4.3.2 UART application circuit example

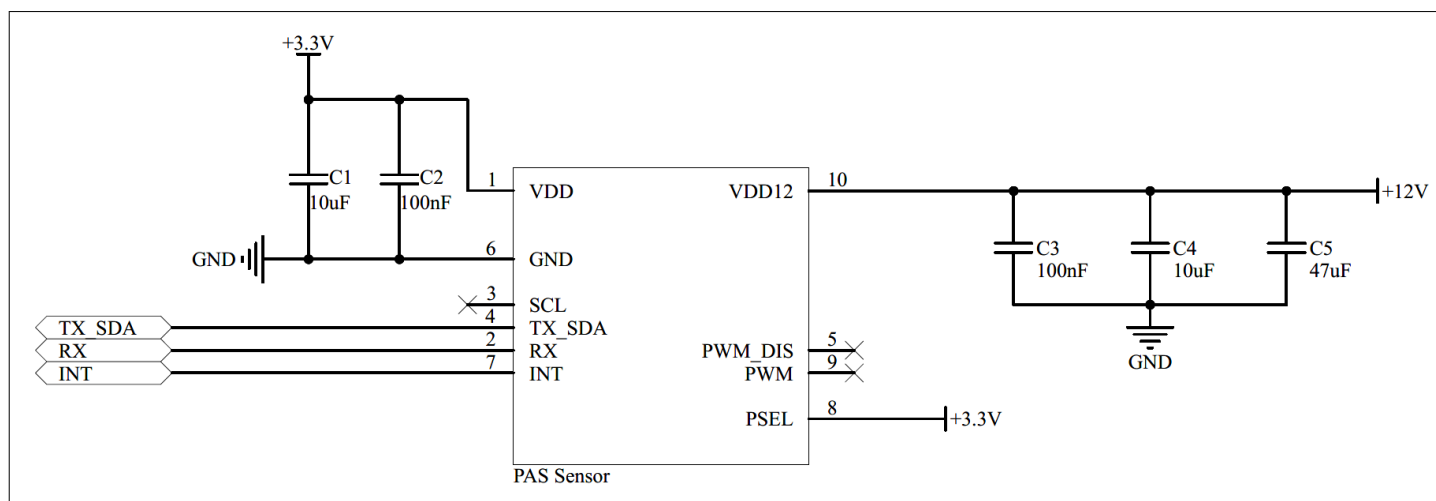


Figure 8 Application circuit example for UART

With this configuration, the device will start in Idle mode of operation. Internal pull up is present on PWM_DIS pin.

4.3.3 PWM application circuit example

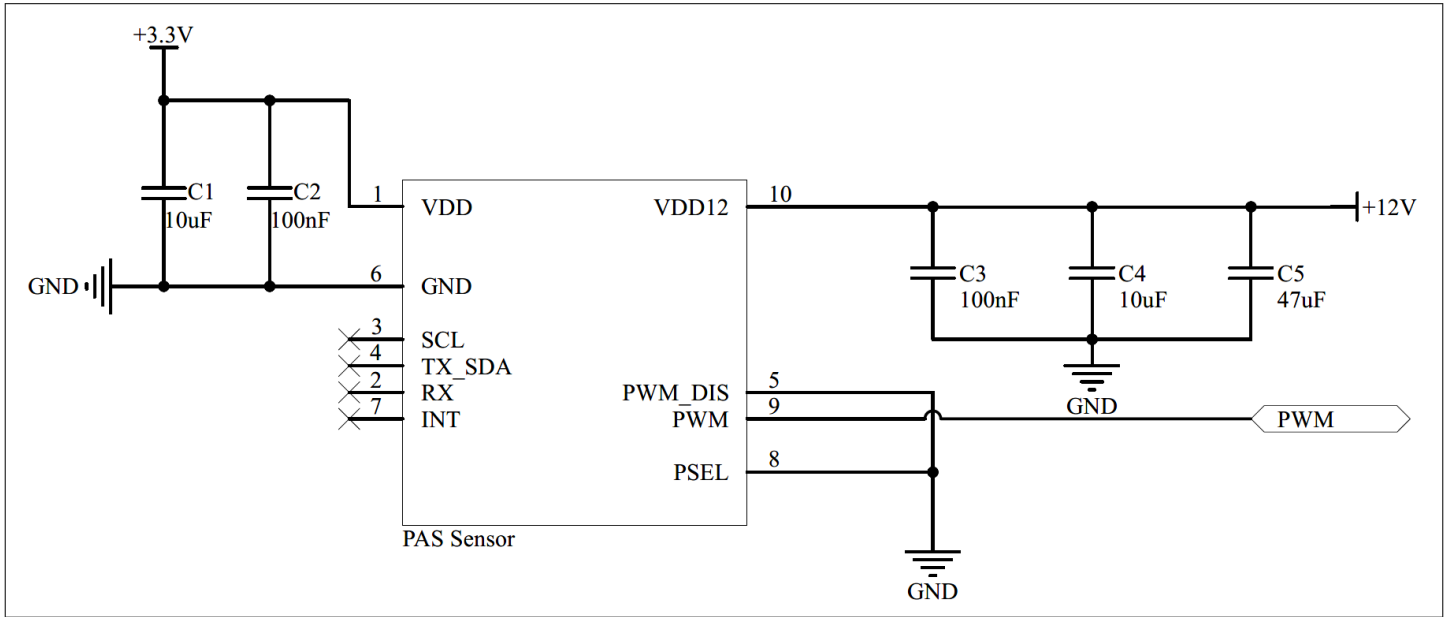


Figure 9 Application circuit example for PWM

With this configuration, the device will start in continuous mode of operation with sampling time of 1 meas/min.

4.4 Functional description

This section describes the operation of the sensor while measuring CO₂ concentrations. At any moment, the device can be in one out of two different states: active and inactive. At active state, the CPU controlling the device is operating and can perform tasks, such as: running a measurement sequence, serving an interrupt, and so on. When the device has no specific task to perform, it goes to an inactive state. A transition from active to inactive state may occur at the end of a measurement sequence. Several events can wake up the device: the reception of a message on the serial communication interface, a falling edge on pin **PWM_DIS**, the internal generation of a measurement request in continuous measurement mode.

4.4.1 Operating modes

The operating mode can be programmed via the serial communication interface by using the bit field **MEAS_CFG.OP_MODE**.

The sensor module supports three operating modes:

- **Idle mode:** The device does not perform any CO₂ concentration measurement. The device remains inactive until it becomes active shortly to serve interrupts before going back to an inactive state
- **Continuous mode:** In this mode, the device periodically triggers a CO₂ concentration measurement sequence. Once a measurement sequence is completed, the device goes back to an inactive state and wakes up automatically for the next measurement sequence. The measurement period is programmable from 5 s to 4095 s
- **Single-shot mode:** In this mode, the device triggers a single measurement sequence. At the end of the measurement sequence, the device goes back automatically to idle mode

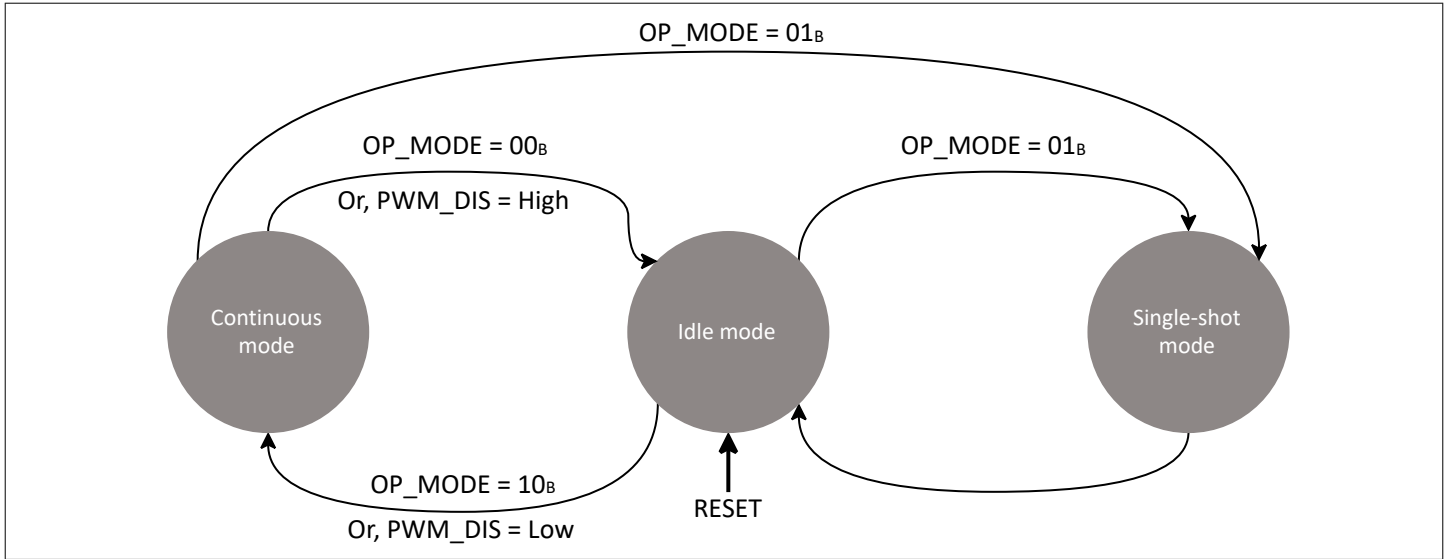


Figure 10 Operating mode transition

4.4.2 Data post-processing

Once the CO₂ concentration data has been acquired, several post-processing schemes can be applied to utilize different functionality.

4.4.2.1 Pressure compensation

The CO₂ concentration value acquired by the sensor is dependent on the external atmospheric pressure. To compensate for this effect, the application system can provide the value of the atmospheric pressure by writing into the specific registers, that is, **PRES_REF_H** and **PRES_REF_L**. At the end of a measurement sequence, the device reads the pressure value and applies for compensation on the CO₂ concentration value before storing it into the result registers.

4.4.2.2 Automatic baseline offset correction

To correct slow drifts caused by aging during operation, the device supports automatic baseline offset compensation. Every week of operation, the device computes an offset to correct the baseline of the device. The device must be in contact with the reference concentration (for example, fresh air at 400 ppm of CO₂ concentration) at least 30 minutes per operating week to make sure proper baseline compensation. The device supports different configurations for compensation. The ABOC set point may only be set between 350 and 1500 ppm.

4.4.2.3 Forced compensation

Forced compensation provides a means to speed up the offset compensation process. Before forced compensation is enabled, the device shall be physically exposed to the reference CO₂ concentration. The device will use the next three measurements to calculate the compensation offset. The user shall ensure constant exposure to the reference CO₂ concentration during that time. It is recommended to operate at one measurement per 10 seconds while implementing the forced compensation scheme. When three measurement sequences are completed, the device automatically reconfigures itself with the newly computed offset applied to the subsequent CO₂ concentration measurement results. The forced compensation offset can be stored to the non-volatile memory by using the corresponding command (`SENS_RST = 0xCF`).

4.4.2.4 Alarm threshold

The device can be configured via interrupt to perform an alarm threshold check each time a new CO₂ concentration data is acquired. At the end of each measurement sequence, the computed CO₂ value (after all applicable offset compensations) is compared to the concatenated value in **ALARM_TH_H** and **ALARM_TH_L**. In case of a threshold violation, the sticky bit **MEAS_STS.ALARM** is set. This also sets pin **INT** to active level due to configuration as alarm. Bit **MEAS_STS.ALARM** is cleared by reading register **MEAS_STS.ALARM_CLR**.

4.5 Monitoring mechanism as advanced functionality

The device supports several mechanisms to monitor the correct operation of the sensor.

Table 11 **Functionality description**

Mechanism	Description
Sensor ready status	After each power-on reset, bit SENS_STS.SEN_RDY is set to confirm that the sensor has initialized correctly
Scratchpad register	<p>To check the integrity of the communication layer of the serial communication interface, register SCRATCH_PAD can be used. This register can use this memory field to write any value and verify that the data received by the device is correct.</p> <p>It can also be used to verify that a soft reset has been executed, using the following sequence:</p> <ol style="list-style-type: none"> 1. The user writes a non-default value to register SCRATCH_PAD 2. The user reads back register SCRATCH_PAD to verify the writ commend has been correctly executed 3. The user writes register SENS_RST to trigger a soft reset 4. The user reads register SCRATCH_PAD to verify that it has been reset to its default value
VDD12V verification	At power-up and the beginning of each measurement sequence, the device automatically measures the voltage at VDD12 . If the measured voltage exceeds the specified operating range of the device, bit SENS_STS.ORVS is set. The measurement sequence is, however, completed normally. Bit SENS_STS.ORVS can be cleared by setting bit SENS_STS.ORVS_CLR
Internal temperature verification	At the beginning of each measurement sequence, the device automatically measures its internal temperature. If the measured temperature exceeds the specified operating ranged of the device, sticky bit SENS_STS.ORTMP is set. The measurement sequence is, however, completed normally. Bit SENS_STS.ORTMP can be cleared by setting bit SENS_STS.ORTMP_CLR

5 Register map

5.1 Register map access method

The registers that can be accessed by the user's application via the communication interfaces are covered here. Registers need to be addressed byte-wise.

Table 12 Bit access terminology

Mode	Symbol	Description
Read/Write	rw	This bit or bitfield can be written or read
Read	r	This bit or bitfield is read-only
Write	w	This bit or bitfield is write-only (read as 0 _H)
Read/Write hardware or firmware affected	rwh	As rw, but bit or bitfield can also be modified by hardware or firmware
Read hardware or firmware affected	rh	As r, but bit or bitfield can also be modified by hardware or firmware
Sticky	s	Bits with this attribute are "sticky" in one direction. If their reset value is overwritten once they can be switched again into their reset state only by a reset operation. Software and internal logic (except reset-like functions) cannot switch this type of bit into its reset state by writing directly to the register. The sticky attribute can be combined with other functions (for example, "rh")
Reserved/not implemented	0	Bitfields named "0" indicate functions not implemented. They have the following behavior: <ul style="list-style-type: none"> Reading these bitfields returns 0_H Writing these bitfields has no effect These bitfields are reserved. When writing, software should always set such bitfields to 0 _H to preserve compatibility with future products
Reserved/not defined	Res	Certain bitfields or bit combinations in a bitfield can be marked as "Reserved", indicating that the behavior of the device is undefined for that combination of bits. Setting the register to such an undefined value may lead to unpredictable results. When writing, the software must always set such bitfields to legal values

5.2 Register map bitfields

Table 13 Register map

Name	Address	7	6	5	4	3	2	1	0	Reset
PROD_ID	0x00	PROD			REV					0x4F 0x60*
SENS_STS	0x01	SEN_RDY	PWM_DISS_ST	ORTMP	ORVS	ICCER	ORTMP_CLR	ORVS_CLR	ICCER_CLR	0xC0
MEAS_RATE_H	0x02	0				VAL				0x00
MEAS_RATE_L	0x03	VAL								0x3C
MEAS_CFG	0x04	Reserved		PWM_OUTEN	PWM_MODE	BOC_CFG		OP_MODE		0x24
CO2PPM_H	0x05	VAL								0x00
CO2PPM_L	0x06	VAL								0x00
MEAS_STS	0x07	0		Reserved	DRDY	INT_STS	ALARM	INT_STS_CLR	ALARM_CLR	0x00
INT_CFG	0x08	0			INT_TYP	INT_FUNC			ALARM_TYP	0x11
ALARM_TH_H	0x09	VAL								0x00
ALARM_TH_L	0x0A	VAL								0x00
PRES_RE_F_H	0x0B	VAL								0x03
PRES_RE_F_L	0x0C	VAL								0xF7
CALIB_RE_F_H	0x0D	VAL								0x01
CALIB_RE_F_L	0x0E	VAL								0x90
SCRATCH_PAD	0x0F	VAL								0x00
SENS_RST	0x10	SRTRG								0x00

- Note:**
- Registers with addresses 0x11 to 0x14 are reserved and must not be accessed. Any read or write operation to these registers will result in a communication error.
 - Registers with addresses 0x15 to 0xFF are reserved and must not be accessed. Any read or write operation to these registers will result in a non-acknowledge error.

5.3 Product and revision ID register (PROD_ID)

This register displays the device's product and version ID. Write accesses to this register are ignored.

PROD_ID **Address:** 0x00_H
Product and revision ID register **Reset value:** 0x4F/0x60_H

7	6	5	4	3	2	1	0
PROD				REV			
r				r			

Field	Bits	Type	Description
PROD	7:5	r	Product ID This bitfield indicates the product type. 001 _B : Reserved 010 _B : PASCO2V01 011 _B : PASCO2V15
REV	4:0	r	Revision ID This bitfield indicates the product and firmware revision. 0001 _B : Revision 1. 0010 _B : Revision 2. 0011 _B : Revision 3. ...

5.4 Sensor status register (SENS_STS)

This register displays and controls the status of the sensor. Write accesses to the read-only bits of this register are ignored.

SENS_STS **Address:** 0x01_H
Sensor status register **Reset value:** 0xC0_H

7	6	5	4	3	2	1	0
SEN_RDY	PWM_DIS_S T	ORTMP	ORVS	ICCER	ORTMP_CLR	ORVS_CLR	ICCER_CLR
rh	rh	rhs	rhs	rhs	w	w	w

Field	Bits	Type	Description
SEN_RDY	7	rh	Sensor ready bit This bit indicates if the initialization of the sensor after power-on reset has been performed correctly. 0 _B : The sensor has not been initialized correctly. 1 _B : The sensor has been initialized correctly.

(table continues...)

(continued)

Field	Bits	Type	Description
PWM_DIS_ST	6	rh	PWM_DIS pin status This bit indicates the level read at pin PWM_DIS . 0 _B : A low level is read at pin PWM_DIS . 1 _B : A high level is read at pin PWM_DIS . Note: This bit is updated at every transition at pin PWM_DIS .
ORTMP	5	rhs	Out-of-range temperature error bit (sticky bit) This bit indicates if a condition where the temperature has been outside the specified valid range has been detected. 0 _B : No error has occurred. 1 _B : An error has occurred. This bit is cleared by setting SENS_STS.ORTMP_CLR .
ORVS	4	rhs	Out-of-range VDD12V error bit (sticky bit) This bit indicates if a condition where VDD12V has been outside the specified valid range has been detected. 0 _B : No error has occurred. 1 _B : An error has occurred. This bit is cleared by setting bit SENS_STS.ORVS_CLR .
ICCER	3	rhs	Communication error notification bit (sticky bit) This bit indicates if a non-valid command has been received by the serial communication interface. 0 _B : No invalid command received. 1 _B : An invalid command has been received. This bit is cleared by setting SENS_STS.ICCER_CLR .
ORTMP_CLR	2	w	Out-of-range temperature error clear bit Writing this bit with 1 _B clears the sticky bit SENS_STS.ORTMP . This bit is read back as 0 _B .
ORVS_CLR	1	w	Out-of-range VDD12V error clear bit Writing this bit with 1 _B clears the sticky bit SENS_STS.ORVS . This bit is read back as 0 _B .
ICCER_CLR	0	w	Communication error clear bit Writing this bit with 1 _B clears the sticky bit SENS_STS.ICCER . This bit is read back as 0 _B .

5.5 Measurement period configuration registers (MEAS_RATE_H)

Registers **MEAS_RATE_H** and **MEAS_RATE_L** define the measurement period used in continuous mode. The concatenation of **MEAS_RATE_H** (MSB) and **MEAS_RATE_L** (LSB) define the period. The concatenated value is coded as a two's complement signed short integer (1 bit = 1 s).

Values above 0FFF_H are treated as being equal to FFF_H (4095 s). Values below 0005_H are treated as being equal to 0005_H (5 s).

Writing a non-valid value to this field generates a communication error (bit **SENS_STS.ICCER** set).

Note: When writing to **MEAS_RATE_H** and **MEAS_RATE_L**, the new value is not immediately considered by the device. It is internally latched at the next transition from idle to continuous mode.

MEAS_RATE_H Address: 0x02_H
Measurement period configuration registers Reset value: 0x00_H

7	6	5	4	3	2	1	0
0				VAL			
rw				rwh			

Field	Bits	Type	Description
0	7:4	rw	Reserved This bitfield shall be written with 0 _H .
VAL	3:0	rwh	MSB of the measurement period in continuous mode The concatenation of this value with bitfield MEAS_RATE_L defines the measurement period in continuous mode. Note: Values above 0F _H reserved. Writing a non-valid value to this field generates a communication error (bit SENS_STS.ICCER set) and sets the bitfield to 0F _H .

5.6 Measurement period configuration registers (MEAS_RATE_L)

Registers **MEAS_RATE_H** and **MEAS_RATE_L** define the measurement period used in continuous mode. The concatenation of **MEAS_RATE_H** (MSB) and **MEAS_RATE_L** (LSB) define the period. The concatenated value is coded as a two's complement signed short integer (1 bit = 1 s).

Values above 0FFF_H are treated as being equal to FFF_H (4095 s). Values below 0005_H are treated as being equal to 0005_H (5 s).

Writing a non-valid value to this field generates a communication error (bit **SENS_STS.ICCER** set).

Note: When writing to **MEAS_RATE_H** and **MEAS_RATE_L**, the new value is not immediately considered by the device. It is internally latched at the next transition from idle to continuous mode.

MEAS_RATE_L Address: 0x03_H
Measurement period configuration registers Reset value: 0x3C_H

7	6	5	4	3	2	1	0
VAL							
rwh							

Field	Bits	Type	Description
VAL	7:0	rwh	LSB of the measurement period in continuous mode The concatenation of this value with bitfield MEAS_RATE_H.VAL defines the measurement period in continuous mode. Note: Values 00 _H to 04 _H are reserved. Writing a non-valid value to this field generates a communication error (bit SENS_STS.ICCER set) and sets the bitfield to 05 _H .

5.7 Measurement mode configuration register (MEAS_CFG)

This register defines the operation settings of the device.

MEAS_CFG	Address:	0x04 _H
Measurement mode configuration register	Reset value:	0x24 _H

7	6	5	4	3	2	1	0
Res	PWM_OUTEN	PWM_MODE	BOC_CFG	OP_MODE			
rwh	rwh	rw	rwh	rwh			

Field	Bits	Type	Description
Res	7:6	rwh	Reserved This bitfield shall be written with 00 _B .
PWM_OUTEN	5	rwh	PWM output software enable bit 0 _B : PWM output is disabled by software. 1 _B : PWM output is enabled by software. Notes: <ol style="list-style-type: none"> The actual state of pin PWM depends on both MEAS_CFG.PWM_OUTEN and pin PWM_DIS. This bit is automatically set at a high to low transition at pin PWM_DIS.
PWM_MODE	4	rw	PWM mode configuration 0 _B : PWM single-pulse mode. 1 _B : PWM pulse-train mode.

(table continues...)

(continued)

Field	Bits	Type	Description
BOC_CFG	3:2	rwh	Baseline offset compensation configuration 00 _B : Automatic baseline offset compensation (ABOC) disabled. 01 _B : ABOC enabled. The offset is periodically updated at each BOC computation. <i>Note: With firmware version 2.18 an extended ABOC functionality has been introduced, including support for single shot mode.</i> 10 _B : Forced compensation. <i>Note: After the forced compensation is done, device automatically reconfigures itself into ABOC (MEAS_CFG.BOC_CFG = 01_B).</i> 11 _B : Reserved.
OP_MODE	1:0	rwh	Sensor operating mode 00 _B : Idle mode. 01 _B : Single-shot mode enabled. Writing 01 _B to this field triggers a single measurement sequence. This field is reset by firmware automatically. 10 _B : Continuous mode enabled. 11 _B : Reserved (as 00 _B).

5.8 CO₂ concentration result register (CO2PPM_H)

Registers **CO2PPM_H** and **CO2PPM_L** are used to display the result of the last CO₂ concentration measurement. The concatenation of **CO2PPM_H** (MSB) and **CO2PPM_L** (LSB) define the CO₂ concentration value. The concatenated CO₂ concentration value is coded as a two's complement signed short integer (1 bit = 1 ppm). This field is updated at the end of each measurement sequence.

Reading register **CO2PPM_L** clears bit **MEAS_STS.DRDY**.

When reading the CO₂ concentration value, the user shall first read registers **CO2PPM_H** and then **CO2PPM_L**.

CO2PPM_H	Address:	0x05 _H
CO ₂ concentration result register	Reset value:	0x00 _H
<div style="display: flex; justify-content: space-between; padding: 0 10px;"> 76543210 </div> <div style="border: 1px solid black; height: 20px; margin: 5px 0; text-align: center;">VAL</div> <div style="text-align: center;">rh</div>		

Field	Bits	Type	Description
VAL	7:0	rh	MSB of the CO₂ concentration value The concatenation of this value with bitfield CO2PPM_L.VAL gives the CO ₂ concentration value.

5.9 CO₂ concentration result register (CO2PPM_L)

Registers **CO2PPM_H** and **CO2PPM_L** are used to display the result of the last CO₂ concentration measurement. The concatenation of **CO2PPM_H** (MSB) and **CO2PPM_L** (LSB) define the CO₂ concentration value. The concatenated CO₂ concentration value is coded as a two's complement signed short integer (1 bit = 1 ppm). This field is updated at the end of each measurement sequence.

Reading register **CO2PPM_L** clears bit **MEAS_STS.DRDY**.

When reading the CO₂ concentration value, the user shall first read registers **CO2PPM_H** and then **CO2PPM_L**.

CO2PPM_L **Address:** 0x06_H
CO₂ concentration result register **Reset value:** 0x00_H

7	6	5	4	3	2	1	0
VAL							
rh							

Field	Bits	Type	Description
VAL	7:0	rh	LSB of the CO₂ concentration value The concatenation of this value with bitfield CO2PPM_H.VAL gives the CO ₂ concentration value. Reading this bitfield clears bit MEAS_STS.DRDY .

5.10 Measurement status register (MEAS_STS)

This register displays the status information of the sensor. Write accesses to the read-only bits of this register are ignored.

MEAS_STS **Address:** 0x07_H
Measurement status register **Reset value:** 0x00_H

7	6	5	4	3	2	1	0
0	Res	DRDY	INT_STS	ALARM	INT_STS_CLR	ALARM_CLR	
rw	rh	rhs	rhs	rhs	w	w	

Field	Bits	Type	Description
0	7:6	rw	Reserved This bitfield is read as 00 _B .
Res	5	rh	Reserved This bit is reserved.
DRDY	4	rhs	Data ready bit (sticky bit) This bit indicates if new data are available in register CO2PPM_H and CO2PPM_L . 0 _B : No new data are available. 1 _B : Unread data are available. This bit is set at the end of every measurement sequence. This bit is cleared by reading CO2PPM_L .

(table continues...)

(continued)

Field	Bits	Type	Description
INT_STS	3	rhs	INT pin status bit This bit indicates if pin INT has been latched to active state (in case of alarm or data ready). 0 _B : Pin INT has not been latched to active state. 1 _B : Pin INT has been latched to active state. This bit is set at the end of every measurement sequence in case of a latching condition. This bit is cleared by setting bit MEAS_STS.INT_STS_CLR .
ALARM	2	rhs	Alarm notification (sticky bit) This bit indicates if a threshold violation occurred. 0 _B : No violation occurred. 1 _B : Violation occurred. This bit is set at the end of every measurement sequence in case of violation. This bit is cleared by setting bit MEAS_STS.ALARM_CLR .
INT_STS_CLR	1	w	INT pin status clear bit Writing this bit with 1 _B clears the sticky bit MEAS_STS.INT_STS and forces pin INT to inactive level. This bit is read back as 0 _B .
ALARM_CLR	0	w	Alarm notification clear bit Writing this bit with 1 _B clears the sticky bit MEAS_STS.ALARM . This bit is read back as 0 _B .

5.11 Interrupt pin configuration register (INT_CFG)

This register defines the configuration of pin **INT**.

INT_CFG	Address:	0x08 _H
Interrupt pin configuration register	Reset value:	0x11 _H

7	6	5	4	3	2	1	0
0			INT_TYP	INT_FUNC		ALARM_TYP	
rw			rw	rw		rw	

Field	Bits	Type	Description
0	7:5	rw	Reserved This bitfield shall be written with 00 _B .
INT_TYP	4	rw	Pin INT electrical configuration 0 _B : Pin INT is configured as push-pull and low active. 1 _B : Pin INT is configured as push-pull and high active. Note: Writing this bitfield forces pin INT to inactive state.

(table continues...)

(continued)

Field	Bits	Type	Description
INT_FUNC	3:1	rw	Pin INT function configuration 000 _B : Pin INT is inactive. 001 _B : Pin INT is configured as alarm threshold violation notification pin. 010 _B : Pin INT is configured as data ready notification pin. 011 _B : Pin INT is configured as sensor busy notification pin. 100 _B : Pin INT is configured as early measurement start notification pin (this function only is available in continuous mode with MEAS_CFG.OP_MODE = 10 _B , otherwise the pin is inactive). 101 _B : Reserved ... 111 _B : Reserved
ALARM_TYP	0	rw	Alarm type configuration bit This bitfield defines if an alarm is issued in case of lower or higher threshold violation. 0 _B : Crossing down – the concatenated value of register ALARM_TH_H and ALARM_TH_L is defined as a lower threshold register. 1 _B : Crossing up – the concatenated value of register ALARM_TH_H and ALARM_TH_L is defined as a higher threshold register.

5.12 Alarm threshold register (ALARM_TH_H)

Registers **ALARM_TH_H** and **ALARM_TH_L** define the value used as a threshold for the alarm violation. The concatenation of **ALARM_TH_H** (MSB) and **ALARM_TH_L** (LSB) define the threshold value that shall be considered by the device. The concatenated alarm threshold value is coded as a 2's complement signed short integer (1 bit = 1 ppm).

ALARM_TH_H	Address:	0x09 _H
Alarm threshold register	Reset value:	0x00 _H

7	6	5	4	3	2	1	0
VAL							

rw

Field	Bits	Type	Description
VAL	7:0	rw	MSB of the alarm threshold The concatenation of this value with bitfield ALARM_TH_L.VAL defines the threshold value.

5.13 Alarm threshold register (ALARM_TH_L)

Registers **ALARM_TH_H** and **ALARM_TH_L** define the value used as a threshold for the alarm violation. The concatenation of **ALARM_TH_H** (MSB) and **ALARM_TH_L** (LSB) define the threshold value that shall be considered by the device. The concatenated alarm threshold value is coded as a 2's complement signed short integer (1 bit = 1 ppm).

ALARM_TH_L **Address:** 0x0A_H
 Alarm threshold register **Reset value:** 0x00_H



Field	Bits	Type	Description
VAL	7:0	rw	LSB of the alarm threshold The concatenation of this value with bitfield ALARM_TH_H.VAL defines the threshold value.

5.14 Pressure compensation registers (PRES_REF_H)

Registers **PRES_REF_L** and **PRES_REF_H** are used to capture the atmospheric pressure to be compensated. The concatenation of **PRES_REF_H** (MSB) and **PRES_REF_L** (LSB) define the pressure value that shall be considered by the device. The concatenated pressure value is coded as an unsigned short integer (1 bit = 1 hPa). Since even small variations of the external pressure may lead to significant changes in the output provided by the sensor, it must be ensured that a coherent value is available for the sensor. For that purpose, **PRES_REF_H** and **PRES_REF_L** are associated with two internal shadow registers from which the device reads the pressure value to be used by the internal firmware. When writing to **PRES_REF_L**, the complete 16-bit pressure value is loaded into the shadow registers. When writing to **PRES_REF_H**, the shadow registers are not updated. Therefore, to update the pressure value, the user has to write first **PRES_REF_H** and then **PRES_REF_L**.

Pressure compensation is de facto deactivated if the default value is not updated.

For correct operation, the user shall ensure that pressure value programmed is within the specified pressure operating range of the device. The valid range of operation is 750 hPa to 1150 hPa.

Values below 750 hPa will be treated as 750 hPa (register automatically updated). Similarly, values above 1150 hPa will be treated at 1150 hPa (register automatically updated). If a value outside this range is written, bit **SENS_STS.ICCER** is set.

PRES_REF_H **Address:** 0x0B_H
 Pressure compensation registers **Reset value:** 0x03_H



Field	Bits	Type	Description
VAL	7:0	rwh	MSB of the pressure compensation value The concatenation of this value with bitfield PRES_REF_L.VAL gives the pressure compensation value.

5.15 Pressure compensation registers (PRES_REF_L)

Registers **PRES_REF_L** and **PRES_REF_H** are used to capture the atmospheric pressure to be compensated. The concatenation of **PRES_REF_H** (MSB) and **PRES_REF_L** (LSB) define the pressure value that shall be considered by the device. The concatenated pressure value is coded as an unsigned short integer (1 bit = 1 hPa). Since even small variations of the external pressure may lead to significant changes in the output provided by the sensor, it must be ensured that a coherent value is available for the sensor. For that purpose, **PRES_REF_H** and **PRES_REF_L** are associated with two internal shadow registers from which the device reads the pressure value to be used by the internal firmware. When writing to **PRES_REF_L**, the complete 16-bit pressure value is loaded into the shadow registers. When writing to **PRES_REF_H**, the shadow registers are not updated. Therefore, to update the pressure value, the user has to write first **PRES_REF_H** and then **PRES_REF_L**.

Pressure compensation is de facto deactivated if the default value is not updated.

For correct operation, the user shall ensure that pressure value programmed is within the specified pressure operating range of the device. The valid range of operation is 750 hPa to 1150 hPa.

Values below 750 hPa will be treated as 750 hPa (register automatically updated). Similarly, values above 1150 hPa will be treated at 1150 hPa (register automatically updated). If a value outside this range is written, bit **SENS_STS.ICCER** is set.

PRES_REF_L **Address:** 0x0C_H
Pressure compensation registers **Reset value:** 0xF7_H

7	6	5	4	3	2	1	0
VAL							
rwh							

Field	Bits	Type	Description
VAL	7:0	rwh	LSB of the pressure compensation value The concatenation of this value with bitfield PRESS_REF_H.VAL gives the pressure compensation value.

5.16 Automatic baseline offset compensation reference (CALIB_REF_H)

Registers **CALIB_REF_H** and **CALIB_REF_L** define the reference value used for the ABOC and the force calibration. The concatenation of **CALIB_REF_H** (MSB) and **CALIB_REF_L** (LSB) define the reference value. The concatenated offset value is coded as a two's complement signed short integer (1 bit = 1 ppm).

Values must be comprised between 350 ppm and 1500 ppm. Values below 350 ppm will be treated as 350 ppm (register automatically updated). Similarly, values above 1500 ppm will be treated at 1500 ppm (register automatically updated). If a value outside this range is written, bit **SENS_STS.ICCER** is set.

CALIB_REF_H **Address:** 0x0D_H
Automatic baseline offset compensation **Reset value:** 0x01_H
reference

7	6	5	4	3	2	1	0
VAL							
rwh							


Field	Bits	Type	Description
VAL	7:0	rwh	MSB of the ABOC The concatenation of this value with bitfield CALIB_REF_L.VAL gives the currently used reference value.

5.17 Automatic baseline offset compensation reference (CALIB_REF_L)

Registers **CALIB_REF_H** and **CALIB_REF_L** define the reference value used for the ABOC and the force calibration. The concatenation of **CALIB_REF_H** (MSB) and **CALIB_REF_L** (LSB) define the reference value. The concatenated offset value is coded as a two's complement signed short integer (1 bit = 1 ppm).

Values must be comprised between 350 ppm and 1500 ppm. Values below 350 ppm will be treated as 350 ppm (register automatically updated). Similarly, values above 1500 ppm will be treated at 1500 ppm (register automatically updated). If a value outside this range is written, bit **SENS_STS.ICCER** is set.

CALIB_REF_L	Address:	0x0E _H
Automatic baseline offset compensation reference	Reset value:	0x90 _H




Field	Bits	Type	Description
VAL	7:0	rwh	LSB of the ABOC The concatenation of this value with bitfield CALIB_REF_H.VAL gives the currently used reference value.

5.18 Scratch pad register (SCRATCH_PAD)

This register provides a readable and writable address space for data integrity test during runtime. This register is not associated with a specific hardware functionality.

SCRATCH_PAD	Address:	0x0F _H
Scratch pad register	Reset value:	0x00 _H



Field	Bits	Type	Description
VAL	7:0	rw	Read/Write value This bit field is “don’t care” for the device.

5.19 Soft reset register (SENS_RST)

This register is used to trigger a soft reset.
In case an invalid command is received, bit **SENS_STS.ICCER** is set.

SENS_RST	Address:	0x10 _H
Soft reset register	Reset value:	0x00 _H



Field	Bits	Type	Description
SRTRG	7:0	w	Soft reset trigger Writing A3 _H to this field triggers a soft reset event. Writing BC _H to this field resets the ABOC context. Writing CD _H to this field disables the advanced VDD compensation feature. Writing CF _H to this field saves the force calibration offset immediately in the internal non-volatile memory. Writing DF _H to this field disables the Stepwise Reactive IIR Filter. Writing FC _H to this field resets the forced compensation correction factor. Writing FE _H to this field enables the Stepwise Reactive IIR Filter (by default enabled). Other values are reserved. Writing a non-valid value to this field generates a communication error (bit SENS_STS.ICCER set). This bit is read back as 00 _H .

6 Assembly instruction

XENSIV™ PAS CO2 module is classified as moisture-sensitivity level 3 (MSL 3). The maximum reflow temperature during board assembly must not exceed 245°C according to IPC/JEDEC J-STD-020E. As shown in the [Figure 11](#), pad 1 to 14 need to be soldered. Pad 1 to 10 need to be assembled as per functionality ([Table 1](#)). Pad 11 and 13 need to be connected to the GND. Pad 12 and 14 are not internally connected but must be soldered to maintain mechanical stability. Pad 12 and 14 can be left open or connected to GND. Non-marked smaller pads should be kept open.

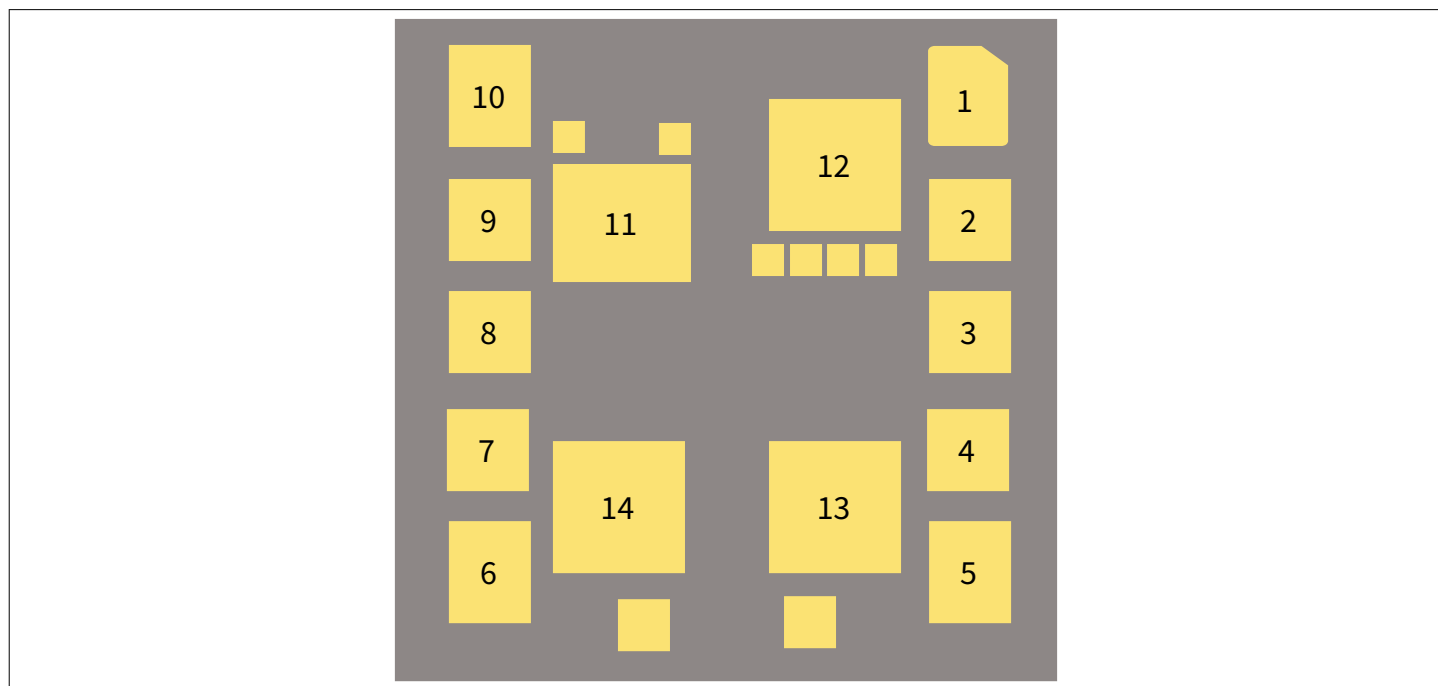


Figure 11 XENSIV™ PASCO2V01 pads need to be connected to an application board

Notes:

1. One-time reflow is permitted and after assembly rework is not recommended
2. Vapor phase soldering may damage the sensor irreversibly

For the customer, the allocated floor time (out of bag) is 168 hours (at ≤30°C and 60% r.H.) according to IPC/JEDEC J-STD-020. If floor time exceeds, then the parts (out of moisture barrier bag) need to be baked according to the following table:

Table 14 Baking condition of the XENSIV™ PASCO2V01

Package condition	Bake temperature	Bake time	Condition
Sensors outside of tape	125°C	24 hours	r.H. < 5%
Sensors within the tape	40°C	8 days	r.H. < 5%

7 Package dimensions and footprint

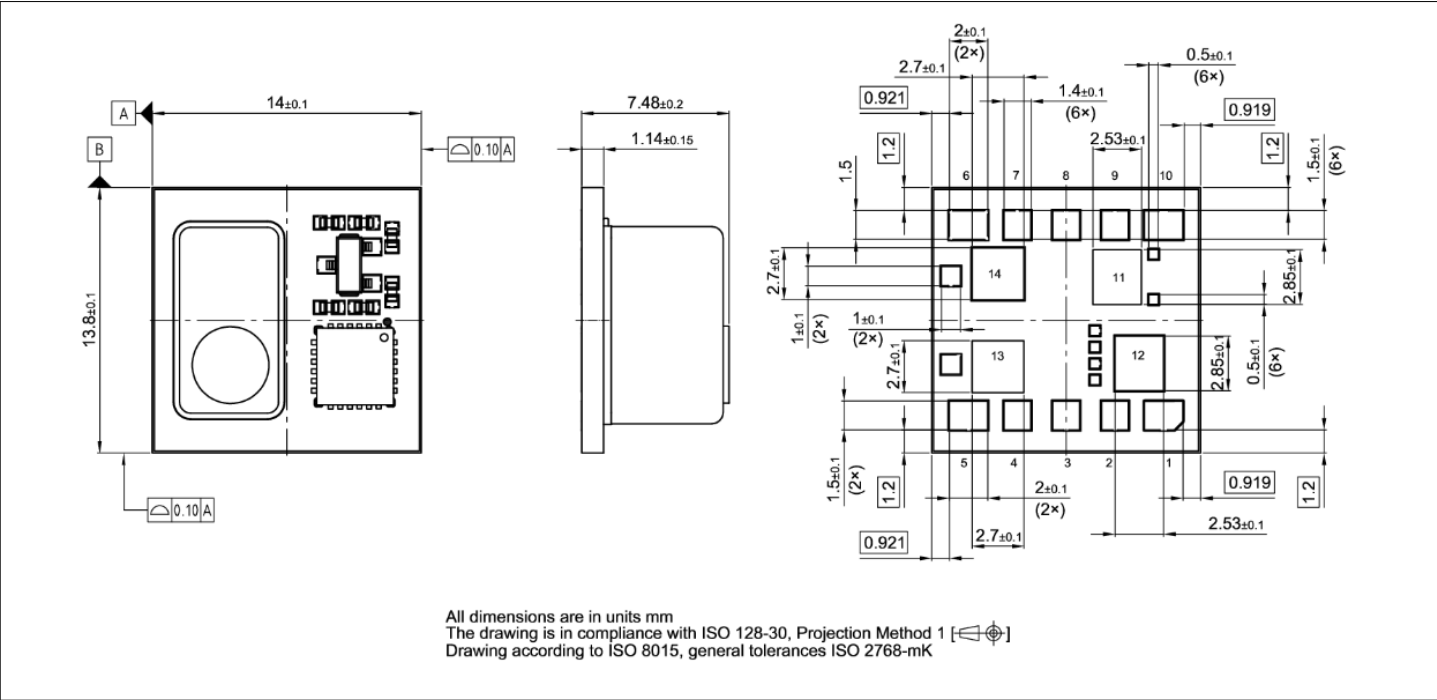


Figure 12 Package outline (top, side, and bottom view of LG-MLGA-14-1)

8 Packing for shipment

The device will be shipped in tape and reel. Each tape and reel consist of 300 parts.

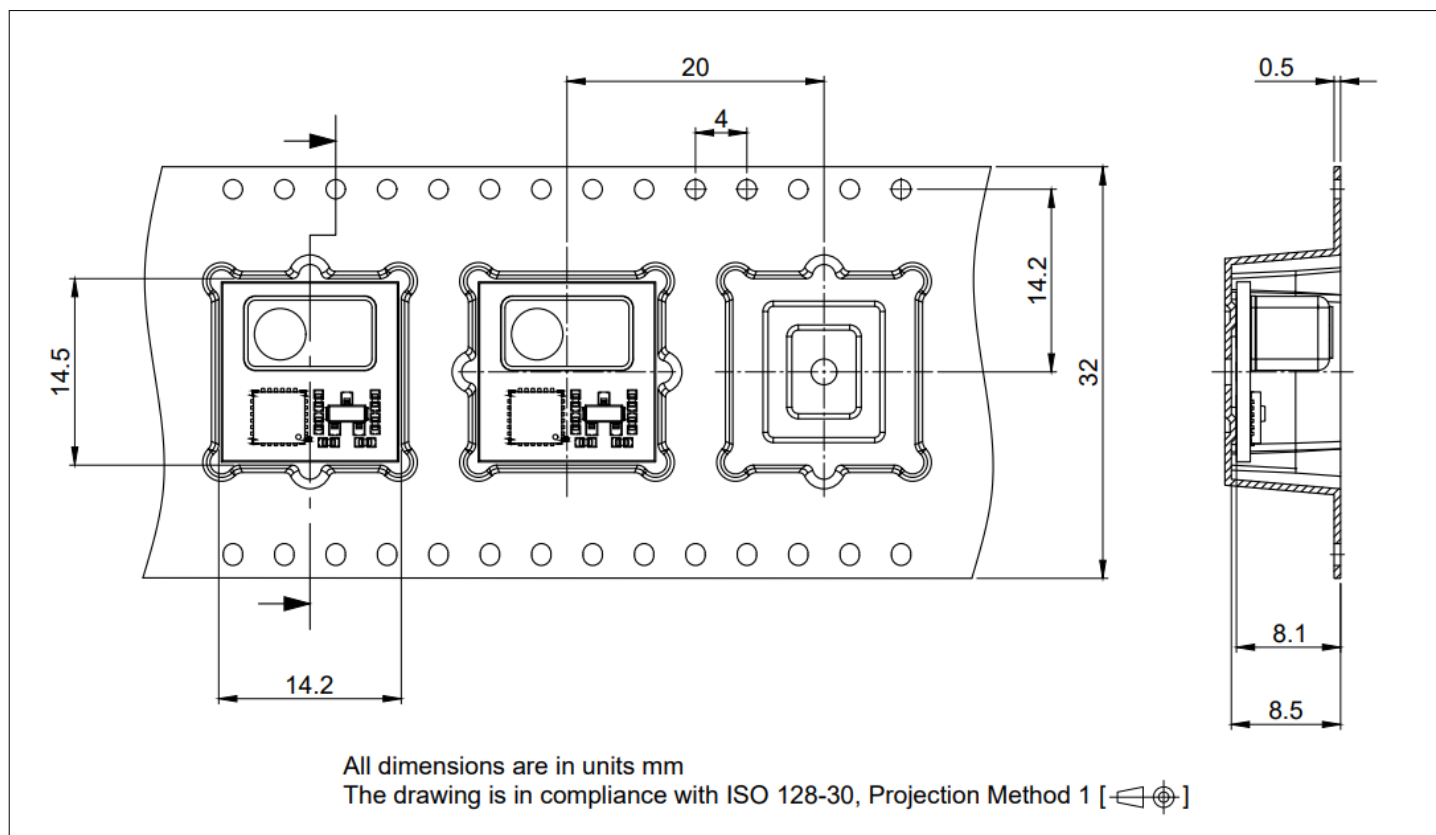


Figure 13 **Tape and reel packing of XENSIV™ PAS CO2**

Revision history

Document revision	Date	Description of changes
1.0	2022-01-17	Initial release
1.1	2022-06-13	Updated storage condition and assembly instruction sections
1.2	2022-09-21	Updated storage during transportation to resolve ambiguity before paragraph 4.1.5 Updated the baking time in assembly instruction
1.3	2022-11-21	Added note on typical sampling rate and sensor performance Added parameter resolution
1.4	2024-03-06	Updated Halogen-free and RoHS symbols and storage time
1.5	2024-04-09	Supported new OPN and SP number
1.6	2024-08-26	Typ. accuracy spec for high CO2 concentration introduced, features list updated, footnote on uncertainty of calibration gas mixtures added
1.7	2024-11-27	Added Sections 5 to 8 Updated datasheet template
1.8	2025-09-26	Updated storage condition section (used non-evacuated instead of evacuated dry-pack)

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2025-09-26

Published by

Infineon Technologies AG
81726 Munich, Germany

© 2025 Infineon Technologies AG
All Rights Reserved.

Do you have a question about any aspect of this document?

Email: erratum@infineon.com

Document reference
IFX-cmd1726744151864

Important notice

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenhheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

Warnings

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.