Please note that Cypress is an Infineon Technologies Company.
The document following this cover page is marked as “Cypress” document as this is the company that originally developed the product. Please note that Infineon will continue to offer the product to new and existing customers as part of the Infineon product portfolio.

Continuity of document content
The fact that Infineon offers the following product as part of the Infineon product portfolio does not lead to any changes to this document. Future revisions will occur when appropriate, and any changes will be set out on the document history page.

Continuity of ordering part numbers
Infineon continues to support existing part numbers. Please continue to use the ordering part numbers listed in the datasheet for ordering.

CE223001 - PSoC 6 MCU UART printf

Objective

This example demonstrates how to use the `printf` function with a Serial Communication Block (SCB) based UART in PSoC® 6 MCU.

Overview

This example is designed to redirect the `printf` function to use the UART API. Project is designed to print number of times, the kit button SW2 is pressed, on the terminal.

Requirements

Tool: PSoC Creator™ 4.2; Peripheral Driver Library (PDL) 3.0.1

Programming Language: C (Arm® GCC 5.4.1 and Arm MDK 5.22)

Associated Parts: All PSoC 6 MCU parts

Related Hardware: CY8CKIT-062-BLE PSoC 6 BLE Pioneer Kit

Hardware Setup

This example uses the kit's default configuration. See the kit guide to ensure the kit is configured correctly. If the settings are different from the default values, see the 'Selection Switches' table in the kit guide to reset to the default settings.

Table 2 lists the PSoC Creator pin connection settings required on the CY8CKIT-062-BLE Kit.

Software Setup

Set up a terminal emulator like Tera Term or PuTTY on your personal computer with baud rate and other settings shown in Figure 2.

Operation

1. Plug the CY8CKIT-062-BLE kit board into your computer's USB port.
2. Build the UART_printf project and program it into the PSoC 6 MCU device. Choose **Debug** > **Program**. For more information on device programming, see PSoC Creator Help. Flash for both CPUs is programmed in a single program operation.
3. Open a serial port communication program such as Tera Term and select the corresponding COM port. Configure the terminal with baud rate of 115200, data bits of 8, stop bits of 1, and with parity and flow control set to none.
4. Press the SW2 switch on the kit. The terminal will print the number of times the switch SW2 is pressed as shown in Figure 1.

Figure 1. Terminal Prints

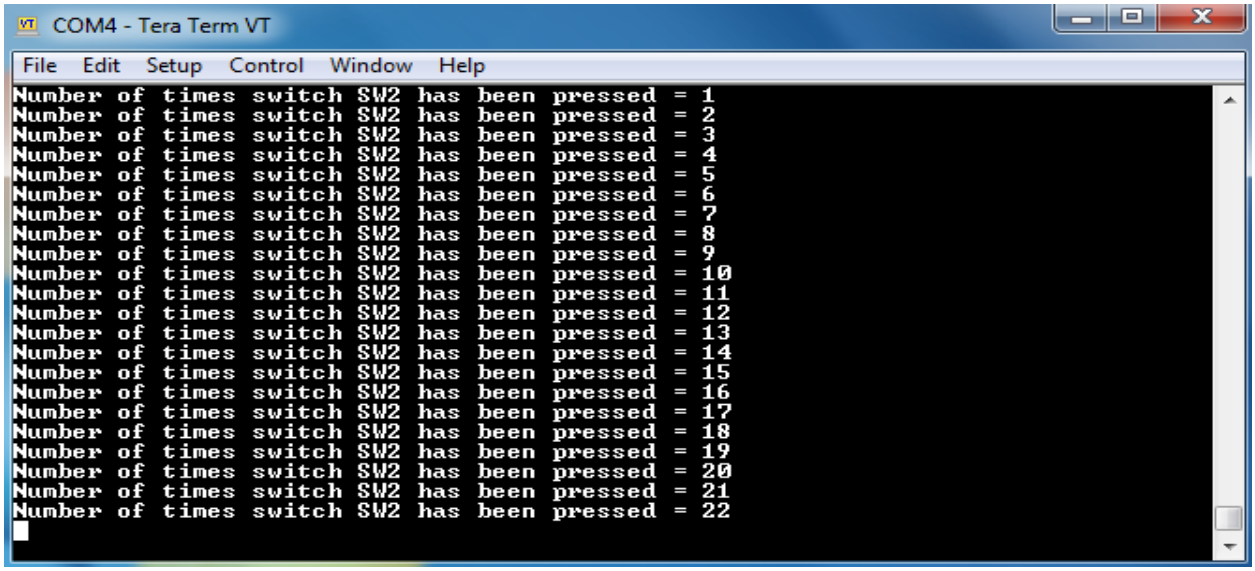

Design and Implementation

The design shown in Figure 2 has a UART (Uart_Printf) Component, Global Signal Reference (GlobalSignal) Component, System Interrupt Component (SysInt_Sw), and a GPIO (pin_switch) Component. UART is configured in TX mode to transmit data at baud rate of 115200. GlobalSignal is configured to connect a GPIO (pin_switch) interrupt signal to SysInt_Sw. SysInt_Sw increments the count when pin_switch (SW2 on kit) is pressed. Number of times the kit button SW2 is pressed is printed on the terminal using `printf` function. Count is reset when its value reaches 65535.

Figure 2. UART `printf` Example Schematic

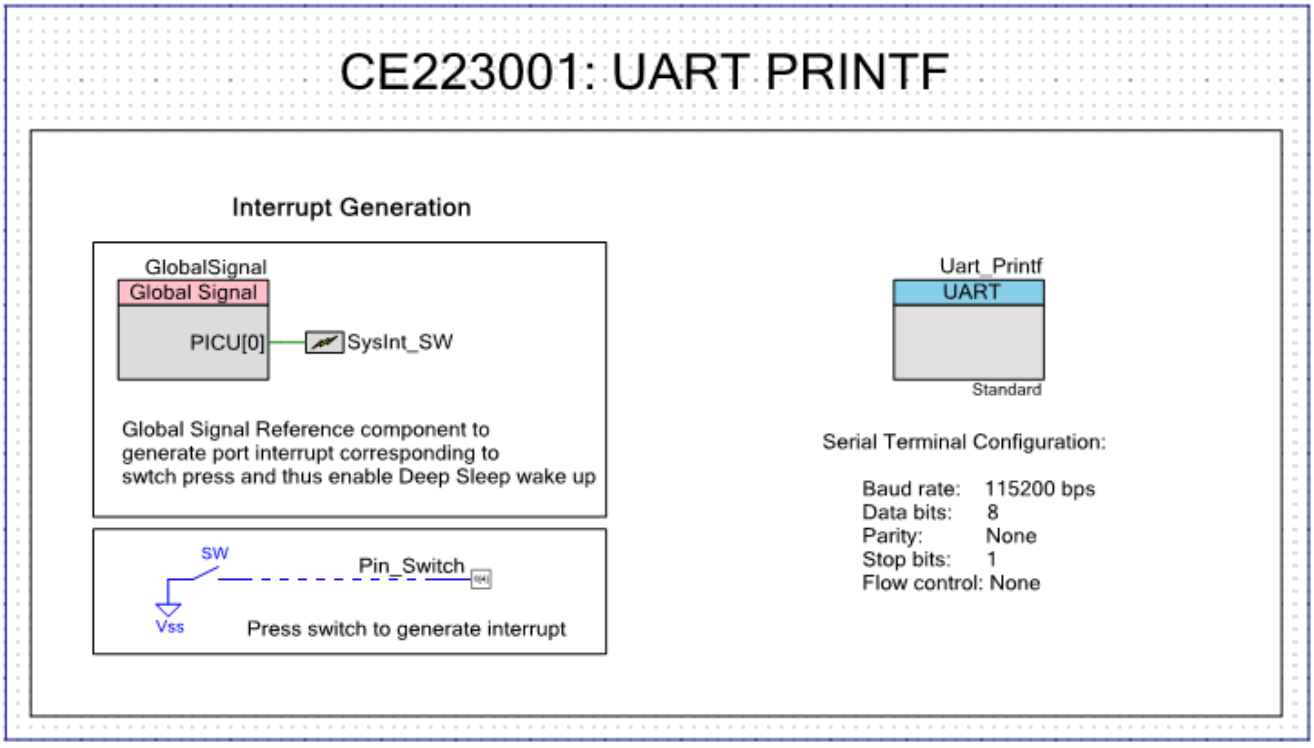

Components and Settings

Table 1 lists the PSoC Creator Components used in this example, how they are used in the design, and the hardware resources used by each Component. Non-default settings for each Component are listed in Table 1.

Table 1. PSoC Creator Components

Component	Instance Name	Purpose	Non-default Parameter Settings
UART(SCB_UART_PDL)	Uart_Printf	To handle UART serial communication	See Figure 3.
Global Signal Reference (GSRef)	GlobalSignal	To generate Interrupt	Tab Basic- Global Signal Name: Port Interrupt 0 (PICU[0]).
System Interrupt (SysInt)	SysInt_SW	To process Interrupt	Tab Basic- Check Box: Deep Sleep Capable.
General Purpose Input / Output (GPIO)	Pin_Switch	To Connect to switch	See Figure 4.

Figure 3. UART Parameter Settings

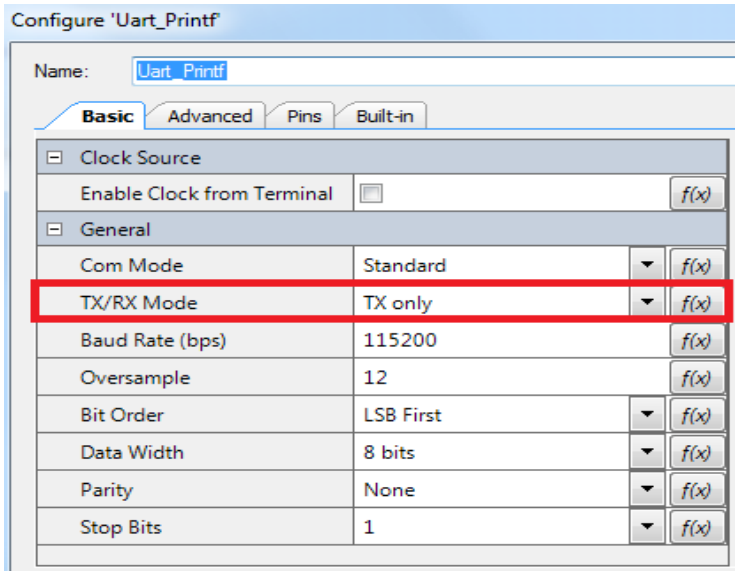

Figure 4.Pin_Switch GPIO Parameter Settings

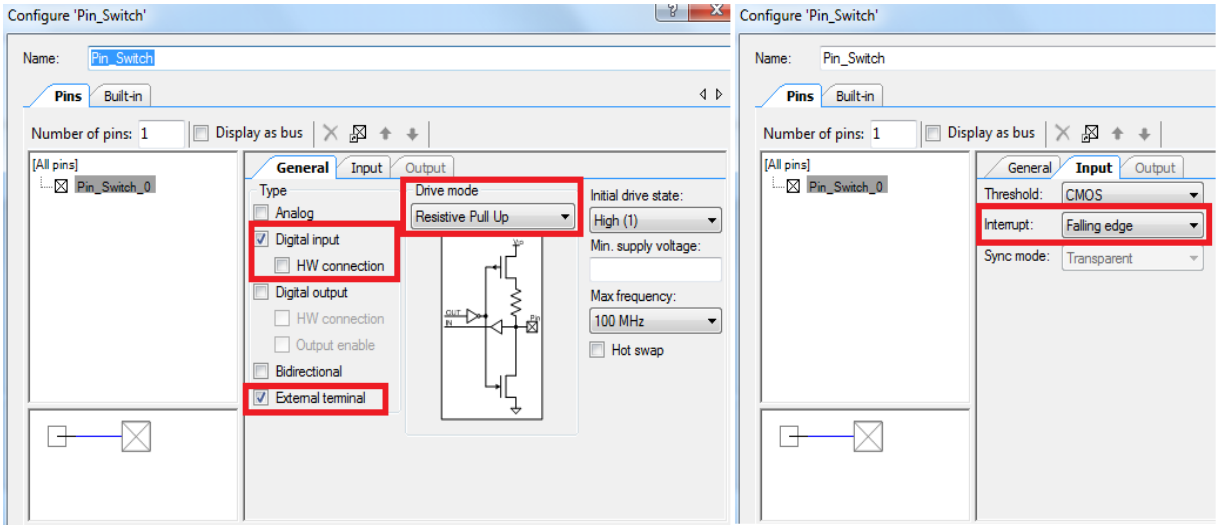

Design-Wide Resources

Table 2 shows the pin assignment for the code example.

Table 2. Pin Names and Location

Pin Name	Location
Uart_Printf:tx	P5[1]
Pin_Switch	P0[4]

Reusing This Example

This example is designed for the CY8CKIT-062-BLE pioneer kit. To port the design to a different PSoC 6 MCU device, kit, or both, change the target device using the Device Selector and update the pin assignments in the Design Wide Resources Pins settings as needed. For single-core PSoC 6 MCU devices, port the code from *main_cm4.c* to *main.c*.

In some cases, a resource used by a code example (for example, an IP block) may not be supported on another device. In those cases, the example will not work. If you build the code targeted at such a device, you will get errors. See the device datasheet for information on supported devices.

Related Documents

Application Notes	
AN210781 – Getting Started with PSoC 6 MCU with Bluetooth Low Energy (BLE) Connectivity	Describes PSoC 63 with Bluetooth Low Energy (BLE) Connectivity and how to build your first PSoC Creator project
PSoC Creator Component Datasheets	
Global Signal Reference	Connections to device global signals
System Interrupt	Interrupt vectoring and control
General Purpose Input / Output	Supports Analog, Digital I/O and Bidirectional signal types
UART	Supports UART communication
Device Documentation	
PSoC 6 MCU: PSoC 63 with BLE Datasheet	PSoC 6 MCU: PSoC 63 with BLE Architecture Technical Reference Manual
Development Kit (DVK) Documentation	
CY8CKIT-062-BLE PSoC 6 BLE Pioneer Kit	

Document History

Document Title: CE223001 – PSoC 6 MCU UART printf

Document Number: 002-23001

Revision	ECN	Orig. of Change	Submission Date	Description of Change
**	6104587	VJYA	03/23/2018	New Code Example

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at Cypress Locations.

Products

Arm® Cortex® Microcontrollers	cypress.com/arm
Automotive	cypress.com/automotive
Clocks & Buffers	cypress.com/clocks
Interface	cypress.com/interface
Internet of Things	cypress.com/iot
Memory	cypress.com/memory
Microcontrollers	cypress.com/mcu
PSoC	cypress.com/psoc
Power Management ICs	cypress.com/pmic
Touch Sensing	cypress.com/touch
USB Controllers	cypress.com/usb
Wireless Connectivity	cypress.com/wireless

PSoC® Solutions

PSoC 1 | PSoC 3 | PSoC 4 | PSoC 5LP | PSoC 6 MCU

Cypress Developer Community

Forums | WICED IOT Forums | Projects | Videos | Blogs | Training | Components

Technical Support

cypress.com/support

Cypress Semiconductor
198 Champion Court
San Jose, CA 95134-1709