

Ultra low quiescent current linear voltage regulator

Features

- Ultra low quiescent current of 5.5 μ A
- Wide input voltage range of 2.75 V to 42 V
- Output current capacity up to 100 mA
- Off mode current less than 1 μ A
- Low drop out voltage of typ. 250 mV @ 100 mA
- Output current limit protection
- Overtemperature shutdown
- Enable
- Available in PG-DSO-8 EP package
- Available in PG-TSON-10 package
- Wide temperature range
- Green Product (RoHS-compliant)
- AEC Qualified

Potential applications

- Applications with direct battery connection
- Automotive general ECUs
- On-board sensor supply
- Infotainment, alarm, dashboard
- RKE, immobilizer, gateway

Product validation

Qualified for automotive applications.
Product validation according to AEC-Q100.

Description

The TLS810B1 is a linear voltage regulator featuring wide input voltage range, low drop out voltage and ultra low quiescent current.

With an input voltage range of 2.75 V to 42 V and ultra low quiescent of only 5.5 μ A, the regulator is perfectly suitable for automotive or any other supply systems connected permanently to the battery.

The OPTIREG™ linear TLS810B1xxV33 is the fixed 3.3 V output version with an accuracy of 2% and output current capability up to 100 mA.

The new regulation concept implemented in TLS810B1 combines fast regulation and very good stability while requiring only a small ceramic capacitor of 1 μ F at the output.

The tracking region starts already at input voltages of 2.75 V (extended operating range). This makes the TLS810B1 also suitable to supply automotive systems that need to operate during cranking condition.

Internal protection features like output current limitation and overtemperature shutdown are implemented to protect the device against immediate damage due to failures like output short circuit to GND, overcurrent and overtemperature.

The device can be switched on and off by the Enable feature. When the device is switched off, the current consumption is typically less than 1 μ A.



Type	Package	Marking
TLS810B1EJV33	PG-DSO-8 EP	810B1V33
TLS810B1LDV33	PG-TSON-10	810B1V3

Table of contents

	Table of contents	2
1	Block diagram	3
2	Pin configuration	4
2.1	Pin assignment in PG-DSO-8 EP package	4
2.2	Pin definitions and functions	4
2.3	Pin assignment in PG-TSON-10 package	5
2.4	Pin definitions and functions	5
3	General product characteristics	6
3.1	Absolute maximum ratings	6
3.2	Functional range	7
3.3	Thermal resistance	8
4	Block description and electrical characteristics	9
4.1	Voltage regulation	9
4.2	Typical performance characteristics voltage regulation	11
4.3	Current consumption	14
4.4	Typical performance characteristics current consumption	15
4.5	Enable	16
4.6	Typical performance characteristics enable	17
5	Application information	18
5.1	Application diagram	18
5.2	Selection of external components	18
5.2.1	Input pin	18
5.2.2	Output pin	18
5.3	Thermal considerations	19
5.4	Reverse polarity protection	20
5.5	Further application information	20
6	Package outlines	21
7	Revision History	23
	Disclaimer	24

1 Block diagram

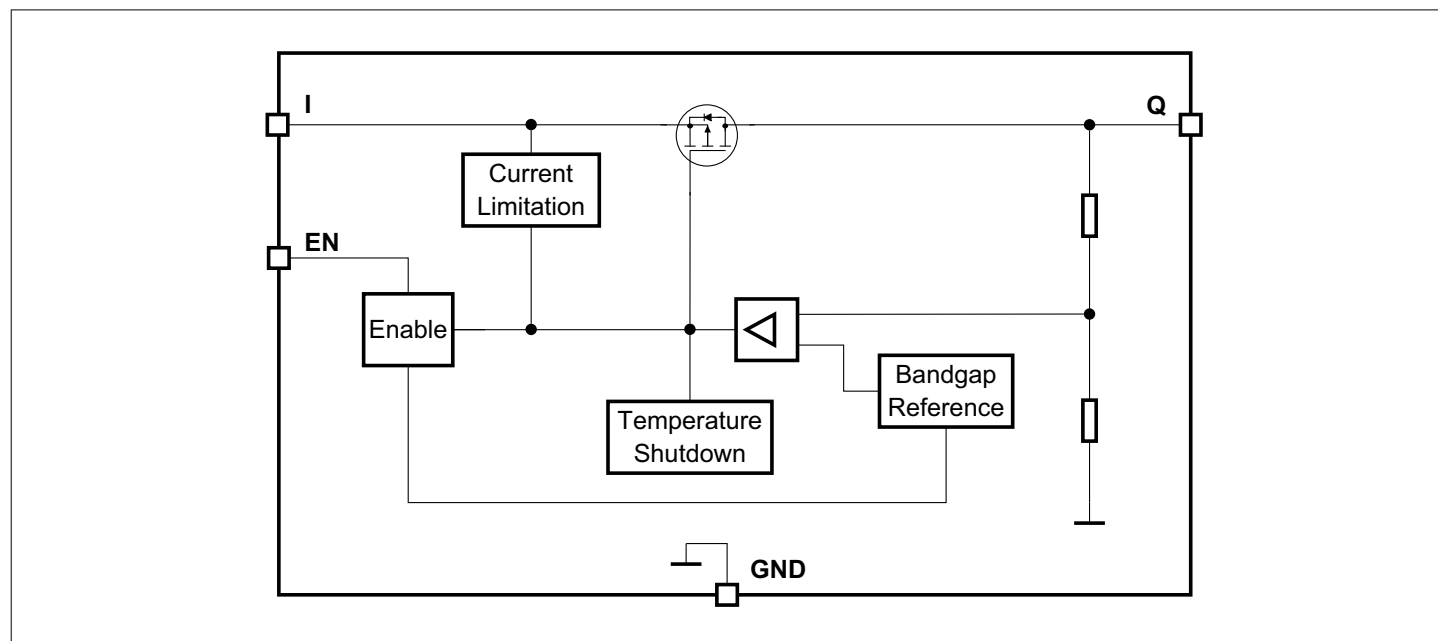


Figure 1 **Block diagram**

2 Pin configuration

2.1 Pin assignment in PG-DSO-8 EP package

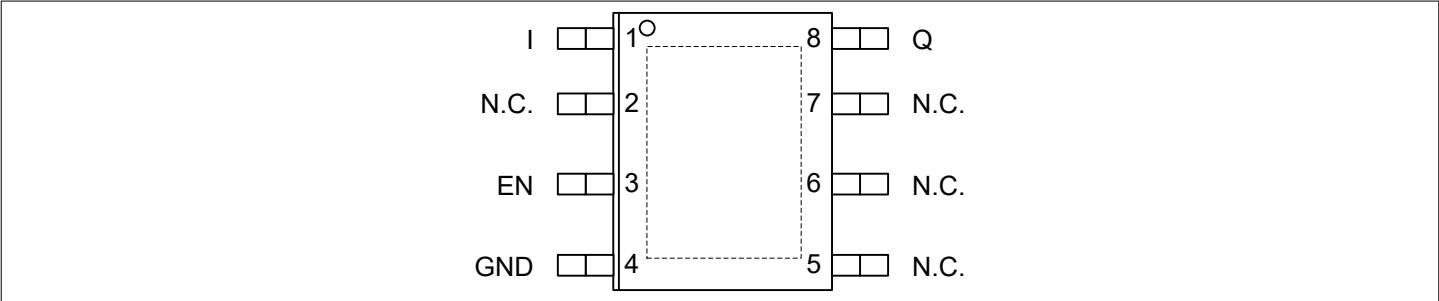


Figure 2 Pin configuration

2.2 Pin definitions and functions

Table 1 Pin definitions and functions

Pin	Symbol	Function
1	I	Input It is recommended to place a small ceramic capacitor (for example 100 nF) to GND, close to the IC terminals, in order to compensate line influences.
2	N.C.	Not connected
3	EN	Enable Integrated pull-down resistor. Enable the IC with high level input signal. Disable the IC with low level input signal.
4	GND	Ground
5	N.C.	Not connected
6	N.C.	Not connected
7	N.C.	Not connected
8	Q	Output Connect an output capacitor C_Q to GND close to the IC's terminals, respecting the values specified for its capacitance and ESR in Functional range .
Pad	–	Exposed pad Connect to heatsink area. Connect to GND.

2.3 Pin assignment in PG-TSON-10 package

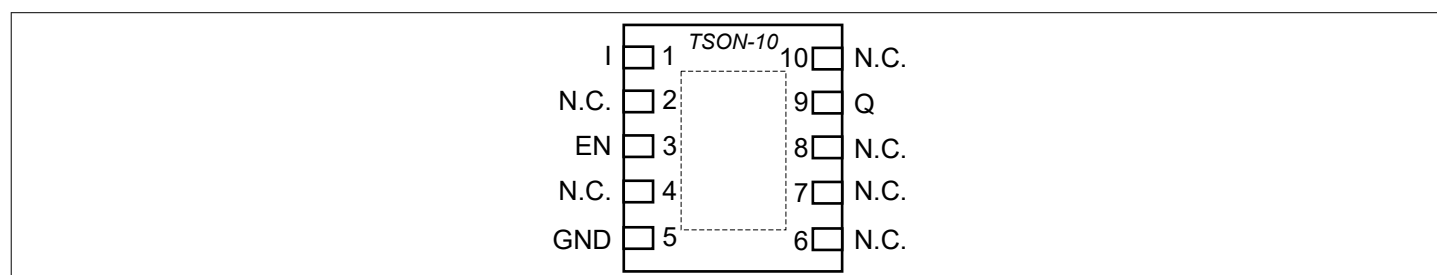


Figure 3 Pin configuration

2.4 Pin definitions and functions

Table 2 Pin definitions and functions

Pin	Symbol	Function
1	I	Input It is recommended to place a small ceramic capacitor (for example 100 nF) to GND, close to the IC terminals, in order to compensate line influences.
2	N.C.	Not connected
3	EN	Enable Integrated pull-down resistor. Enable the IC with high level input signal. Disable the IC with low level input signal.
4	N.C.	Not connected
5	GND	Ground
6	N.C.	Not connected
7	N.C.	Not connected
8	N.C.	Not connected
9	Q	Output Connect an output capacitor C_Q to GND close to the IC's terminals, respecting the values specified for its capacitance and ESR in Functional range .
10	N.C.	Not connected
Pad	–	Exposed pad Connect to heatsink area. Connect to GND.

3 General product characteristics

3.1 Absolute maximum ratings

Table 3 Absolute maximum ratings ¹⁾

$T_j = -40^{\circ}\text{C}$ to $+150^{\circ}\text{C}$; all voltages with respect to ground (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Voltage input I, Enable EN							
Voltage	V_I, V_{EN}	-0.3	–	45	V	–	P_4.1.1
Voltage output Q							
Voltage	V_Q	-0.3	–	7	V	–	P_4.1.2
Temperatures							
Junction temperature	T_j	-40	–	150	°C	–	P_4.1.3
Storage temperature	T_{stg}	-55	–	150	°C	–	P_4.1.4
ESD robustness							
ESD robustness all pins (HBM)	$V_{ESD,HBM}$	-2	–	2	kV	²⁾	P_4.1.5
ESD robustness all pins (CDM)	$V_{ESD,CDM}$	-750	–	750	V	³⁾ at all pins	P_4.1.6

1) Not subject to production test, specified by design.

2) ESD robustness, Human Body Model (HBM) according to ANSI/ESDA/JEDEC JS001 (1.5 k Ω , 100 pF)

3) ESD robustness, Charged Device Model (CDM) according JEDEC JESD22-C101

Notes:

1. Stresses above the ones listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.
2. Integrated protection functions are designed to prevent IC destruction under fault conditions described in the data sheet. Fault conditions are considered as “outside” normal operating range. Protection functions are not designed for continuous repetitive operation.

3.2 Functional range

Table 4 Functional range

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Input voltage range	V_I	$V_{Q,nom} + V_{dr}$	–	42	V	1)	P_4.2.1
Extended input voltage range	$V_{I,ext}$	2.75	–	42	V	2)	P_4.2.2
Enable voltage range	V_{EN}	0	–	42	V	–	P_4.2.3
Output capacitor	C_Q	1	–	–	μF	3) 4)	P_4.2.4
Output capacitor's ESR	$ESR(C_Q)$	–	–	100	Ω	4)	P_4.2.5
Junction temperature	T_j	-40	–	150	°C	–	P_4.2.6

1) Output current is limited internally and depends on the input voltage, see Electrical characteristics for more details.

2) When V_I is between $V_{I,ext,min}$ and $V_{Q,nom} + V_{dr}$, $V_Q = V_I - V_{dr}$. When V_I is below $V_{I,ext,min}$, V_Q can drop down to 0 V.

3) The minimum output capacitance requirement is applicable for a worst case capacitance tolerance of 30%.

4) Not subject to production testing, specified by design.

Note: Within the functional or operating range, the IC operates as described in the circuit description. The electrical characteristics are specified within the conditions given in the Electrical Characteristics table.

3.3 Thermal resistance

Note: This thermal data was generated in accordance with JEDEC JESD51 standards. For more information, go to www.jedec.org.

Table 5 Thermal resistance TLS810B1 in PG-DSO-8 EP package¹⁾

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Junction to case	R_{thJC}	–	19	–	K/W	–	P_4.3.1
Junction to ambient	R_{thJA}	–	51	–	K/W	²⁾ 2s2p board	P_4.3.2
Junction to ambient	R_{thJA}	–	167	–	K/W	³⁾ 1s0p board, footprint only	P_4.3.3
Junction to ambient	R_{thJA}	–	71	–	K/W	³⁾ 1s0p board, 300 mm ² heatsink area on PCB	P_4.3.4
Junction to ambient	R_{thJA}	–	60	–	K/W	³⁾ 1s0p board, 600 mm ² heatsink area on PCB	P_4.3.5

1) Not subject to production test, specified by design.

2) Specified R_{thJA} value is according to JEDEC JESD51-2,-5,-7 at natural convection on FR4 2s2p board. The product (chip and package) was simulated on a 76.2 × 114.3 × 1.5 mm³ board with 2 inner copper layers (2 × 70 μm Cu, 2 × 35 μm Cu). Where applicable a thermal via array under the exposed pad contacted the first inner copper layer.

3) Specified R_{thJA} value is according to JEDEC JESD 51-3 at natural convection on FR4 1s0p board. The product (chip and package) was simulated on a 76.2 × 114.3 × 1.5 mm³ board with 1 copper layer (1 × 70 μm Cu).

Table 6 Thermal resistance TLS810B1 in PG-TSON-10 package¹⁾

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Junction to case	R_{thJC}	–	13	–	K/W	–	P_4.3.6
Junction to ambient	R_{thJA}	–	60	–	K/W	²⁾ 2s2p board	P_4.3.7
Junction to ambient	R_{thJA}	–	184	–	K/W	³⁾ 1s0p board, footprint only	P_4.3.8
Junction to ambient	R_{thJA}	–	75	–	K/W	³⁾ 1s0p board, 300 mm ² heatsink area on PCB	P_4.3.9
Junction to ambient	R_{thJA}	–	64	–	K/W	³⁾ 1s0p board, 600 mm ² heatsink area on PCB	P_4.3.10

1) Not subject to production test, specified by design

2) Specified R_{thJA} value is according to JEDEC JESD51-2,-5,-7 at natural convection on FR4 2s2p board. The product (chip and package) was simulated on a 76.2 × 114.3 × 1.5 mm³ board with 2 inner copper layers (2 × 70 μm Cu, 2 × 35 μm Cu). Where applicable a thermal via array under the exposed pad contacted the first inner copper layer.

3) Specified R_{thJA} value is according to JEDEC JESD 51-3 at natural convection on FR4 1s0p board. The product (chip and package) was simulated on a 76.2 × 114.3 × 1.5 mm³ board with 1 copper layer (1 × 70 μm Cu).

4 Block description and electrical characteristics

4.1 Voltage regulation

The output voltage V_Q is divided by a resistor network. This fractional voltage is compared to an internal voltage reference and the pass transistor is driven accordingly.

The control loop stability depends on the output capacitor C_Q , the load current, the chip temperature and the internal circuit structure. To ensure stable operation, the output capacitor's capacitance and its equivalent series resistance ESR requirements given in [Functional range](#) have to be maintained. For details see the typical performance graph [Output capacitor equivalent series resistance ESR \(\$C_Q\$ \) versus output current \$I_Q\$](#) . Since the output capacitor is used to buffer load steps, it should be sized according to the application's needs.

An input capacitor C_I is not required for stability, but is recommended to compensate line fluctuations. An additional reverse polarity protection diode and a combination of several capacitors for filtering should be used, in case the input is connected directly to the battery line. Connect the capacitors close to the regulator terminals.

In order to prevent overshoots during start-up, a smooth ramping up function is implemented. This ensures almost no overshoots during start-up, mostly independent from load and output capacitance.

Whenever the load current exceeds the specified limit, for example in case of a short circuit, the output current is limited and the output voltage decreases.

The overtemperature shutdown circuit prevents the IC from immediate destruction under fault conditions (for example output continuously short-circuit) by switching off the power stage. After the chip has cooled down, the regulator restarts. This oscillatory thermal behavior causes the junction temperature to exceed the maximum rating of 150°C and can significantly reduce the IC's lifetime.

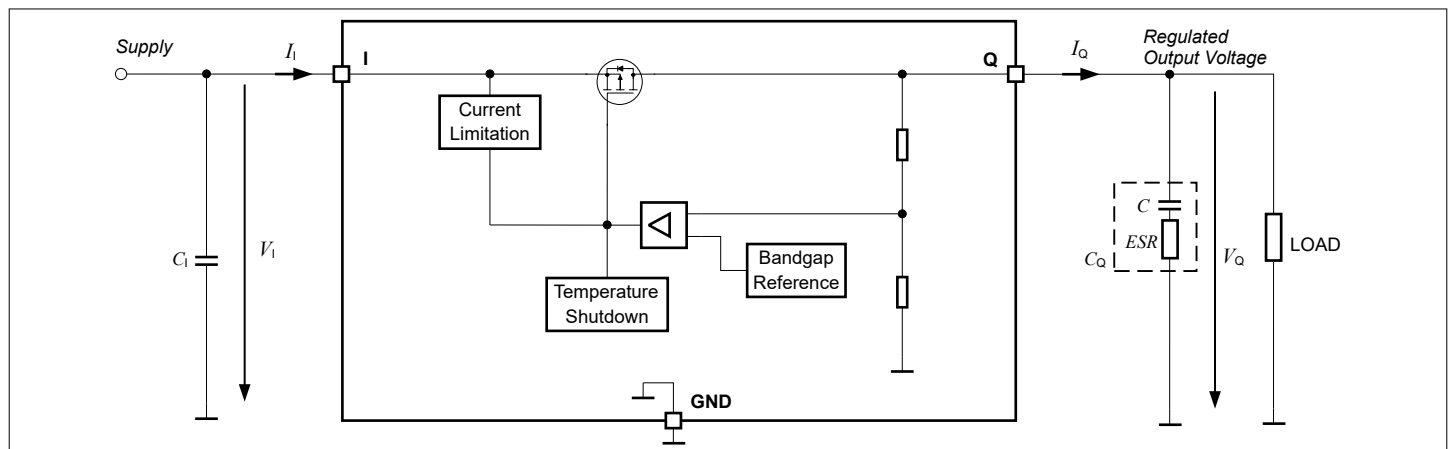


Figure 4 Block diagram voltage regulation

Table 7 Electrical characteristics

$T_j = -40^\circ\text{C}$ to $+150^\circ\text{C}$, $V_I = 13.5\text{ V}$, all voltages with respect to ground (unless otherwise specified).

Typical values are given at $T_j = 25^\circ\text{C}$, $V_I = 13.5\text{ V}$.


Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Output voltage precision	V_Q	3.23	3.30	3.37	V	$50\text{ }\mu\text{A} \leq I_Q \leq 100\text{ mA}$, $4\text{ V} \leq V_I \leq 28\text{ V}$	P_5.1.1
Output voltage precision	V_Q	3.23	3.30	3.37	V	$50\text{ }\mu\text{A} \leq I_Q \leq 50\text{ mA}$, $4\text{ V} \leq V_I \leq 42\text{ V}$	P_5.1.2
Output current limitation	$I_{Q,\text{lim}}$	110	190	260	mA	$0\text{ V} \leq V_Q \leq V_{Q,\text{nom}} - 0.1\text{ V}$	P_5.1.3
Line regulation steady-state	$\Delta V_{Q,\text{line}}$	–	1	20	mV	$I_Q = 1\text{ mA}$, $6\text{ V} \leq V_I \leq 32\text{ V}$	P_5.1.4
Load regulation steady-state	$\Delta V_{Q,\text{load}}$	-20	-1	–	mV	$V_I = 6\text{ V}$, $50\text{ }\mu\text{A} \leq I_Q \leq 100\text{ mA}$	P_5.1.5
Dropout voltage $V_{\text{dr}} = V_I - V_Q$	V_{dr}	–	250	650	mV	¹⁾ $I_Q = 100\text{ mA}$	P_5.1.6
Ripple rejection	$PSRR$	–	60	–	dB	²⁾ $I_Q = 50\text{ mA}$, $f_{\text{ripple}} = 100\text{ Hz}$, $V_{\text{ripple}} = 0.5\text{ V}_{\text{p-p}}$	P_5.1.7
Overtemperature shutdown threshold	$T_{j,\text{sd}}$	151	175	–	$^\circ\text{C}$	²⁾ T_j increasing	P_5.1.8
Overtemperature shutdown threshold hysteresis	$T_{j,\text{sdh}}$	–	10	–	K	²⁾ T_j decreasing	P_5.1.9

1) Measured when the output voltage V_Q has dropped 100 mV from the nominal value obtained at $V_I = 13.5\text{ V}$.


2) Not subject to production test, specified by design.

4.2 Typical performance characteristics voltage regulation


Output voltage V_Q versus
junction temperature T_j

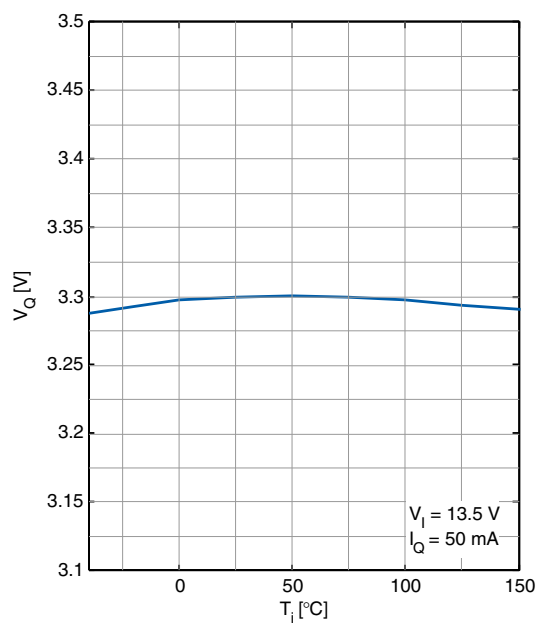


Output current I_Q versus
input voltage V_I

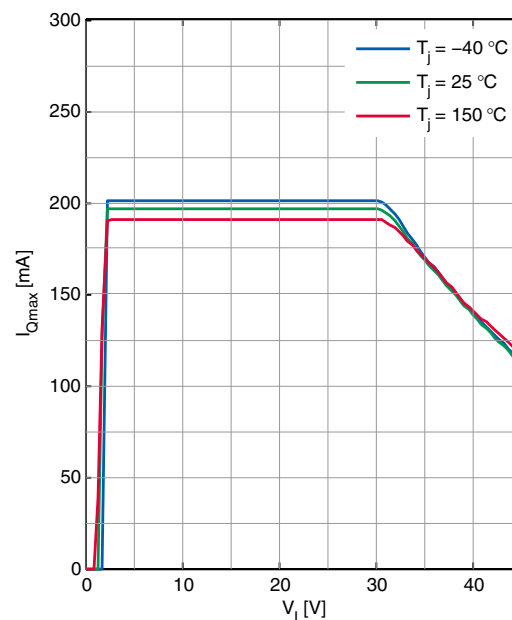

Dropout voltage V_{dr} versus
junction temperature T_j

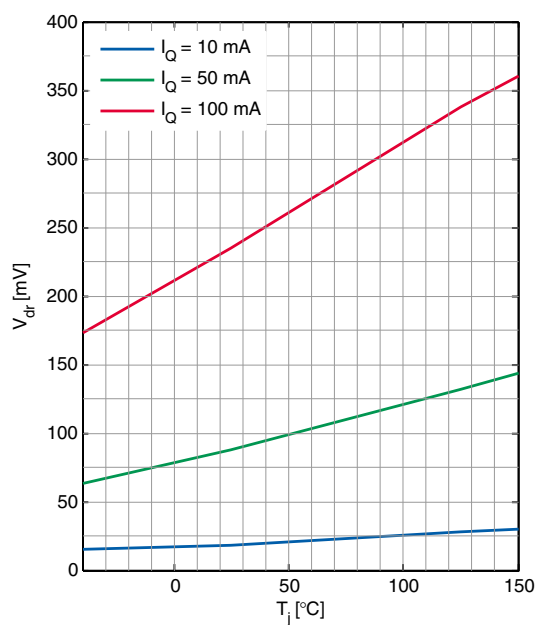


Dropout voltage V_{dr} versus
output current I_Q

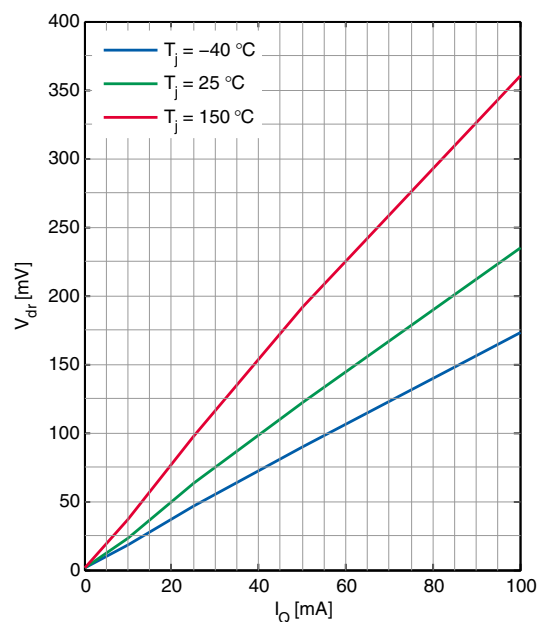


4 Block description and electrical characteristics


Load regulation $\Delta V_{Q,load}$ versus
output current I_Q

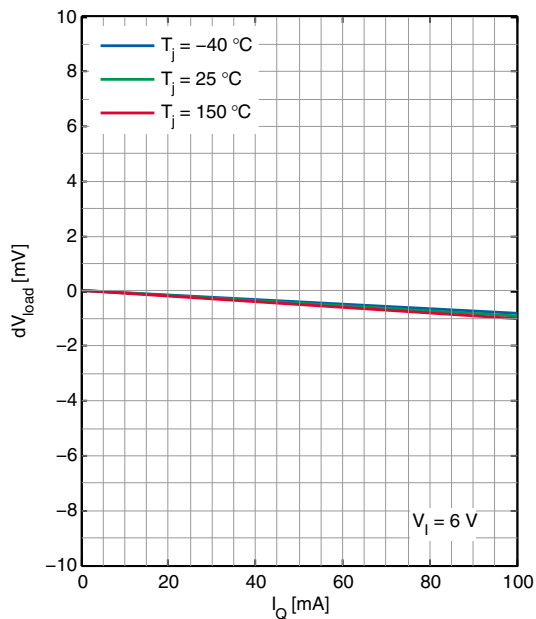


Line regulation $\Delta V_{Q,load}$ versus
input voltage V_I

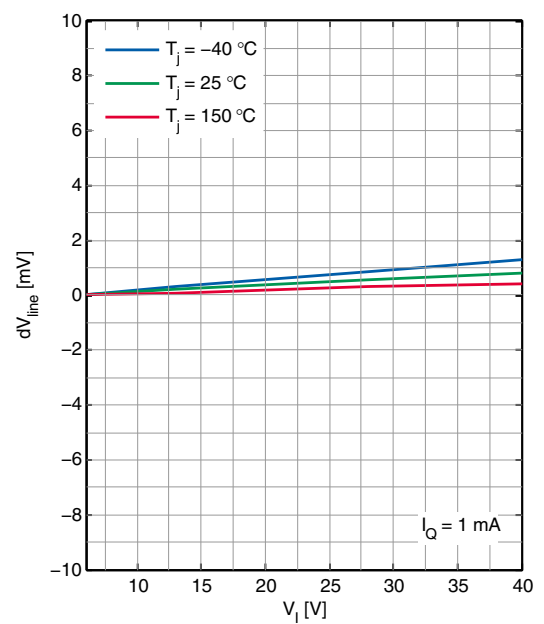

Output voltage V_Q versus
input voltage V_I

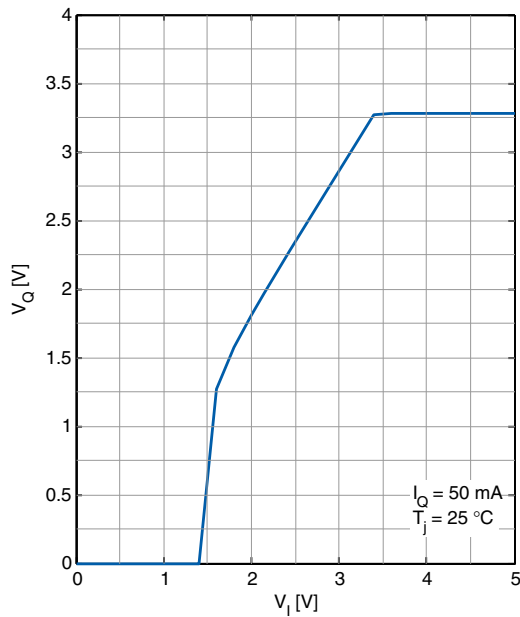


Power supply ripple rejection $PSRR$ versus
ripple frequency f_r

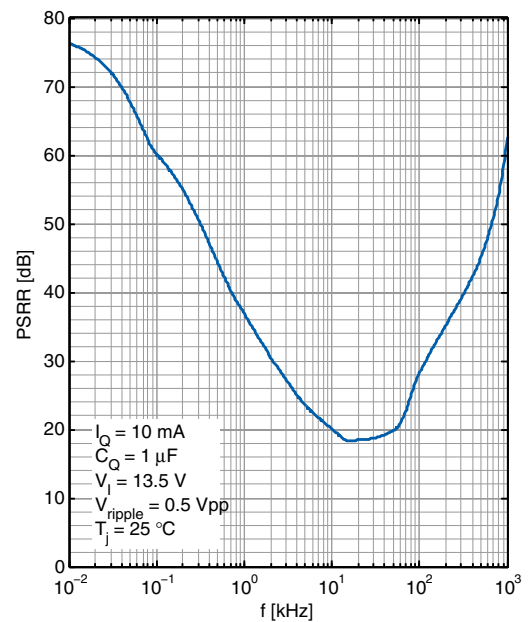

4 Block description and electrical characteristics

Output capacitor equivalent series resistance $ESR(C_Q)$
 versus
 output current I_Q

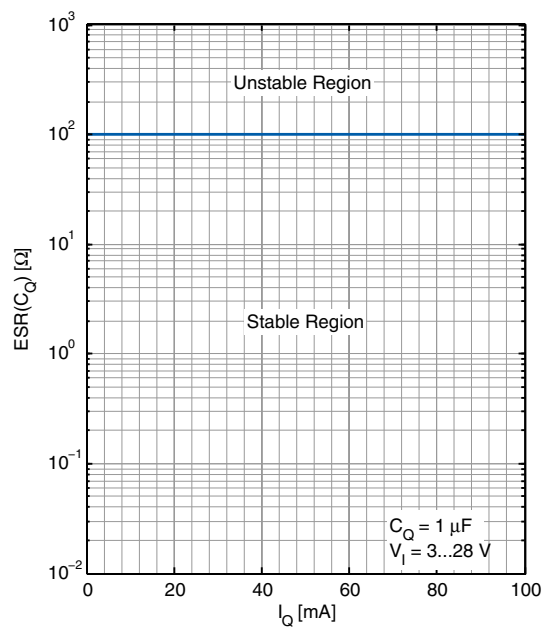

4.3 Current consumption


Table 8 Electrical characteristics current consumption

$T_j = -40^\circ\text{C}$ to $+150^\circ\text{C}$, $V_I = 13.5\text{ V}$ (unless otherwise specified).


Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Current consumption $I_q = I_I$	$I_{q,off}$	–	–	1	μA	$V_{EN} \leq 0.4\text{ V}$, $T_j < 105^\circ\text{C}$	P_5.3.1
Current consumption $I_q = I_I - I_Q$	I_q	–	5.5	8	μA	$I_Q = 50\text{ }\mu\text{A}$, $T_j = 25^\circ\text{C}$	P_5.3.2
Current consumption $I_q = I_I - I_Q$	I_q	–	6.5	11	μA	$I_Q = 50\text{ }\mu\text{A}$, $T_j < 105^\circ\text{C}$	P_5.3.3
Current consumption $I_q = I_I - I_Q$	I_q	–	7	12	μA	$I_Q = 50\text{ }\mu\text{A}$, $T_j < 125^\circ\text{C}$	P_5.3.4
Current consumption $I_q = I_I - I_Q$	I_q	–	7	12	μA	$I_Q = 100\text{ mA}$, $T_j < 125^\circ\text{C}$	P_5.3.5

4.4 Typical performance characteristics current consumption


Current consumption I_q versus
output current I_Q

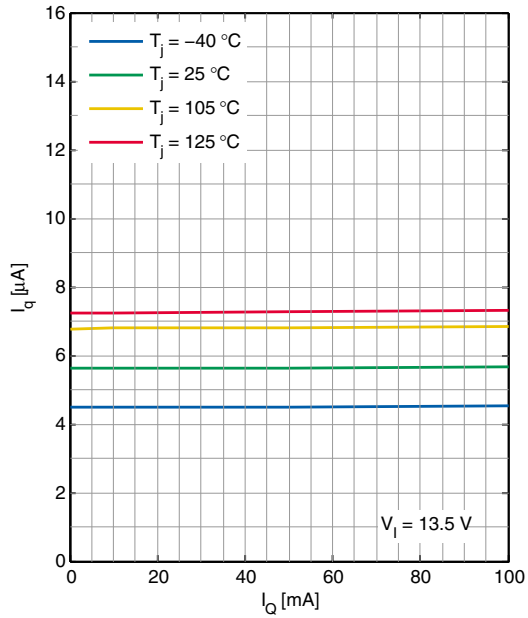


Current consumption I_q versus
input voltage V_I

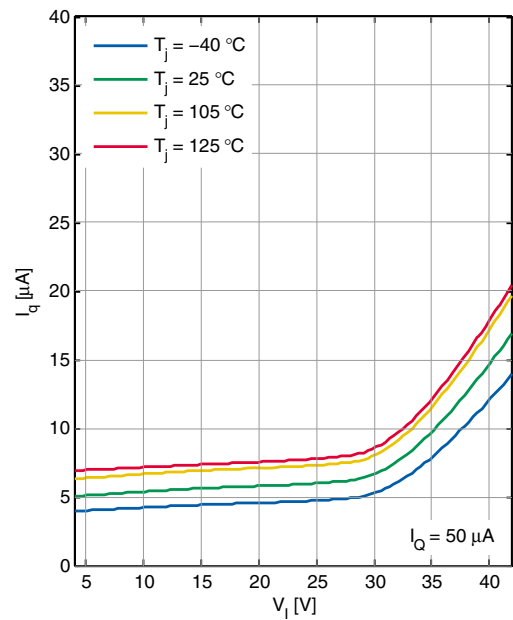

Current consumption I_q versus
junction temperature T_j

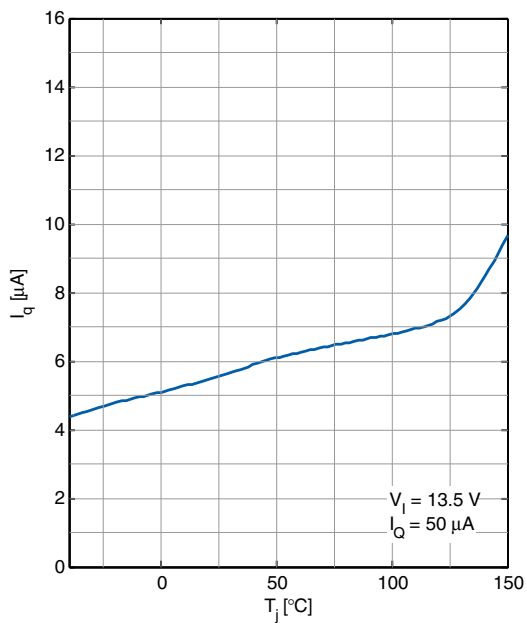

Current consumption in OFF mode $I_{q,off}$ versus
junction temperature T_j

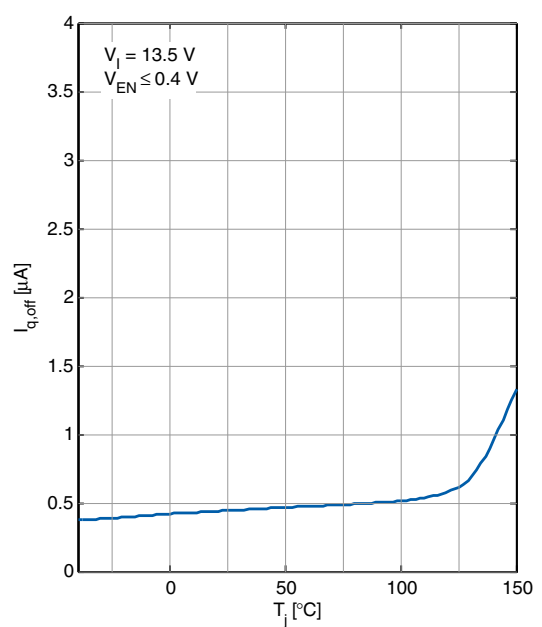

4.5 Enable

The device can be switched on and off by the Enable feature. Connect a HIGH level as specified below (for example the battery voltage) to pin EN to enable the device; connect a LOW level as specified below (for example GND) to switch it off. The Enable function has a build-in hysteresis to avoid toggling between ON/OFF state, if signals with slow slopes are applied to the EN input.

Table 9 Electrical characteristics enable


$T_j = -40^{\circ}\text{C}$ to $+150^{\circ}\text{C}$, $V_I = 13.5\text{ V}$, all voltages with respect to ground (unless otherwise specified).

Typical values are given at $T_j = 25^{\circ}\text{C}$, $V_I = 13.5\text{ V}$.

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Enable high level input voltage	$V_{\text{EN,H}}$	2	–	–	V	V_Q settled	P_5.5.1
Enable low level input voltage	$V_{\text{EN,L}}$	–	–	0.8	V	$V_Q \leq 0.1\text{ V}$	P_5.5.2
Enable high level input current	$I_{\text{EN,H}}$	–	–	4	μA	$V_{\text{EN}} = 5\text{ V}$	P_5.5.3
Enable internal pull-down resistor	R_{EN}	1.25	2	3.5	$\text{M}\Omega$	–	P_5.5.4

4.6 Typical performance characteristics enable

Enable input current I_{EN} versus
enable input voltage V_{EN}

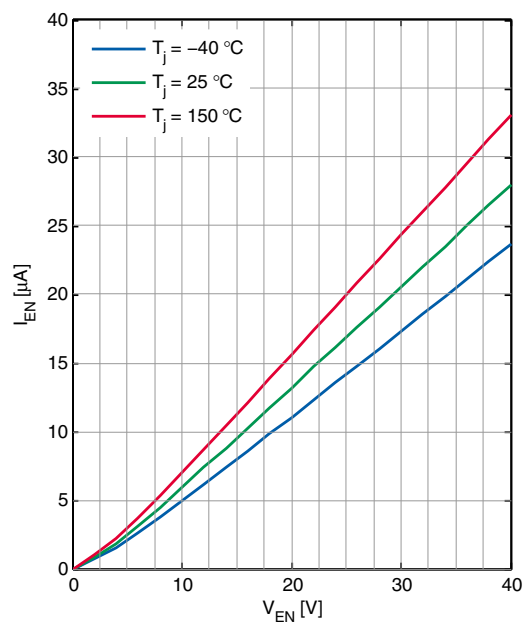

5 Application information

Note: The following information is given as a hint for the implementation of the device only and shall not be regarded as a description or warranty of a certain functionality, condition or quality of the device.

5.1 Application diagram

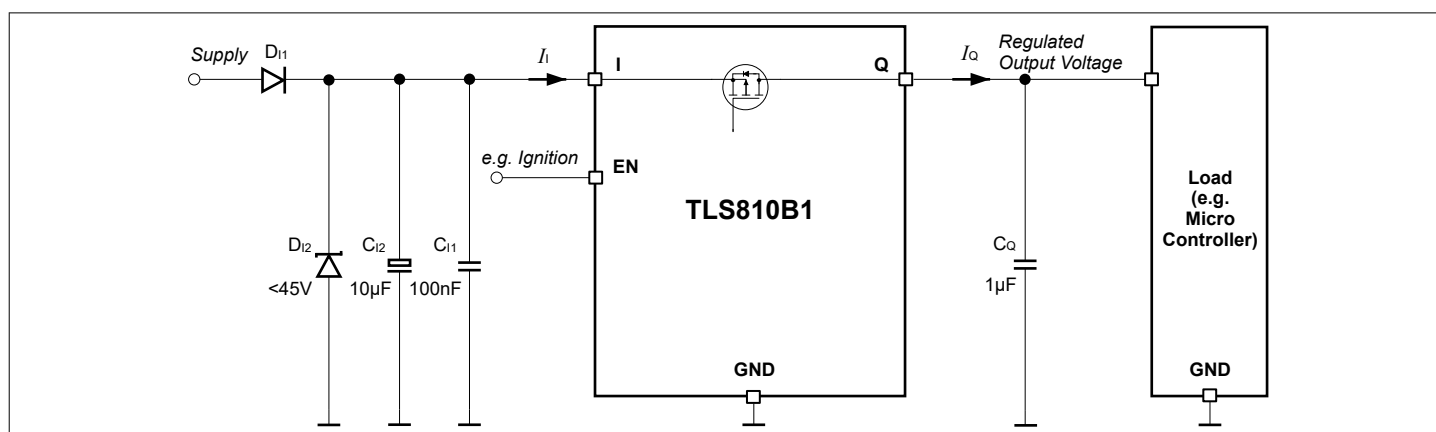


Figure 5 Application diagram

5.2 Selection of external components

5.2.1 Input pin

The typical input circuitry for a linear voltage regulator is shown in the application diagram above.

A ceramic capacitor at the input, in the range of 100 nF to 470 nF, is recommended to filter out the high frequency disturbances imposed by the line for example ISO pulses 3a/b. This capacitor must be placed very close to the input pin of the linear voltage regulator on the PCB.

An aluminum electrolytic capacitor in the range of 10 µF to 470 µF is recommended as an input buffer to smooth out high energy pulses, such as ISO pulse 2a. This capacitor should be placed close to the input pin of the linear voltage regulator on the PCB.

An overvoltage suppressor diode can be used to further suppress any high voltage beyond the maximum rating of the linear voltage regulator and protect the device against any damage due to overvoltage.

The external components at the input are not mandatory for the operation of the voltage regulator, but they are recommended in case of possible external disturbances.

5.2.2 Output pin

An output capacitor is mandatory for the stability of linear voltage regulators.

The requirement to the output capacitor is given in [Functional range](#). The graph, [Output capacitor equivalent series resistance ESR\(\$C_Q\$ \) versus output current \$I_Q\$](#) shows the stable operation range of the device.

TLS810B1 is designed to be stable with extremely low ESR capacitors. According to the automotive environment, ceramic capacitors with X5R or X7R dielectrics are recommended.

The output capacitor should be placed as close as possible to the regulator's output and GND pins and on the same side of the PCB as the regulator itself.

In case of rapid transients of input voltage or load current, the capacitance should be dimensioned in accordance and verified in the real application that the output stability requirements are fulfilled.

5.3 Thermal considerations

Knowing the input voltage, the output voltage and the load profile of the application, the total power dissipation can be calculated:

$$P_D = (V_I - V_Q) \times I_Q + V_I \times I_q \quad (1)$$

with

- P_D : continuous power dissipation
- V_I : input voltage
- V_Q : output voltage
- I_Q : output current
- I_q : quiescent current

The maximum acceptable thermal resistance R_{thJA} can then be calculated:

$$R_{thJA, \max} = \frac{T_{j, \max} - T_a}{P_D} \quad (2)$$

with

- $T_{j, \max}$: maximum allowed junction temperature
- T_a : ambient temperature

Based on the above calculation the proper PCB type and the necessary heat sink area can be determined with reference to the specification in [Thermal resistance](#).

Example

Application conditions:

$$V_I = 13.5 \text{ V}$$

$$V_Q = 3.3 \text{ V}$$

$$I_Q = 70 \text{ mA}$$

$$T_a = 105^\circ\text{C}$$

Calculation of $R_{thJA, \max}$:

$$P_D = (V_I - V_Q) \times I_Q + V_I \times I_q$$

$$= (13.5 \text{ V} - 3.3 \text{ V}) \times 70 \text{ mA} + 13.5 \text{ V} \times 0.012 \text{ mA}$$

$$= 0.714 \text{ W}$$

$$R_{thJA, \max} = (T_{j, \max} - T_a) / P_D$$

$$= (150^\circ\text{C} - 105^\circ\text{C}) / 0.714 \text{ W}$$

$$= 63.03 \text{ K/W}$$

As a result, the PCB design must ensure a thermal resistance R_{thJA} lower than 63.03 K/W. According to [Thermal resistance](#), for both package variants PG-DSO-8 EP and PG-TSON-10 the FR4 2s2p board can be used. Using the FR4 1s0p PCB with PG-DSO-8 EP at least 600 mm² heatsink is required.

5.4 Reverse polarity protection

TLS810B1 is not self protected against reverse polarity faults. To protect the device against negative supply voltage, an external reverse polarity diode is needed, as shown in [Figure 5](#). The absolute maximum ratings of the device as specified in [Chapter 3.1](#) must be respected.

5.5 Further application information

For further information you may contact <http://www.infineon.com>

6 Package outlines

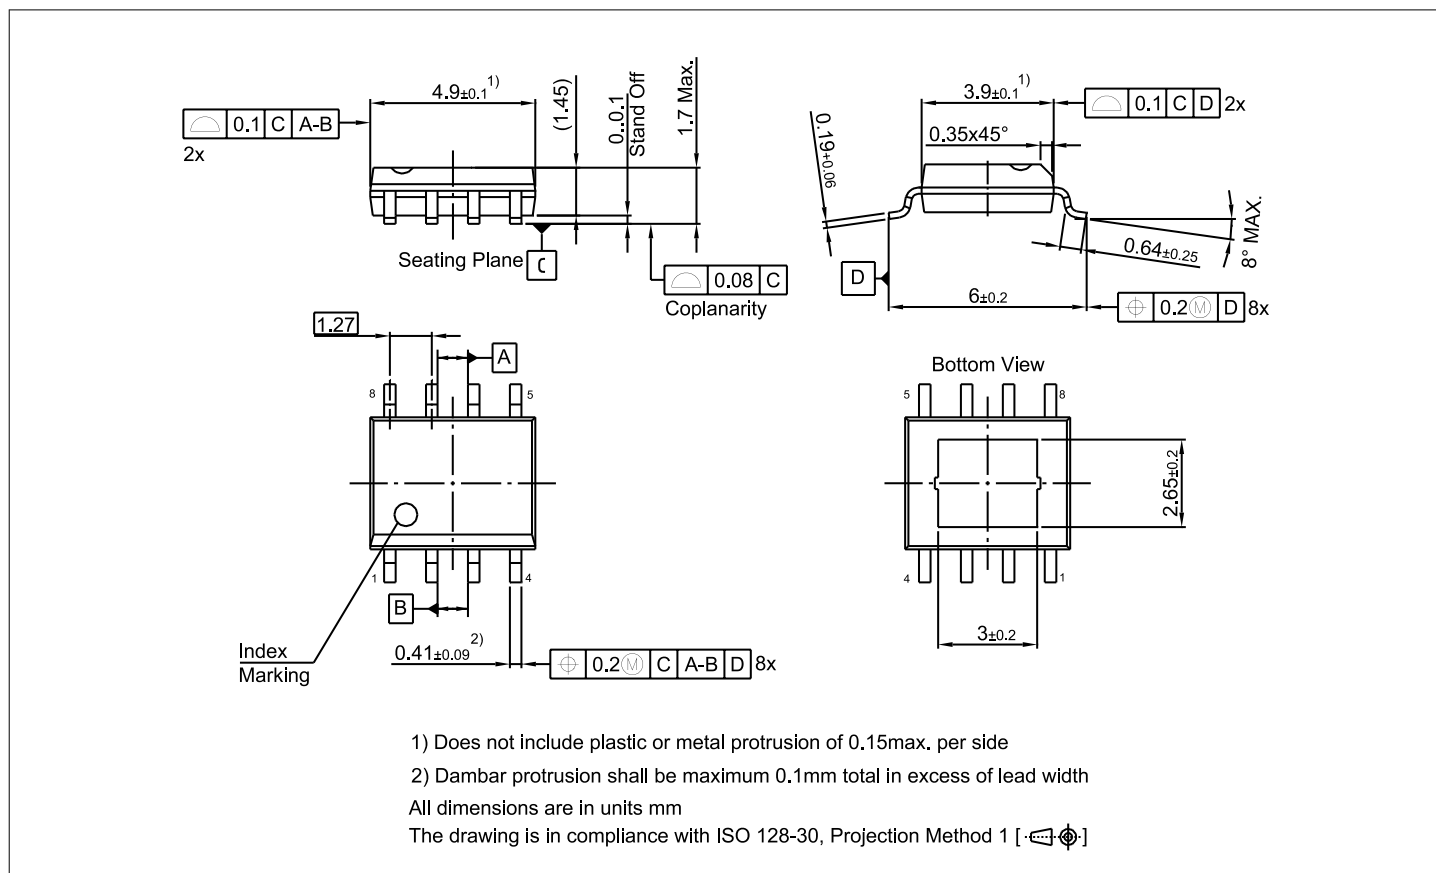


Figure 6 PG-DSO-8 EP

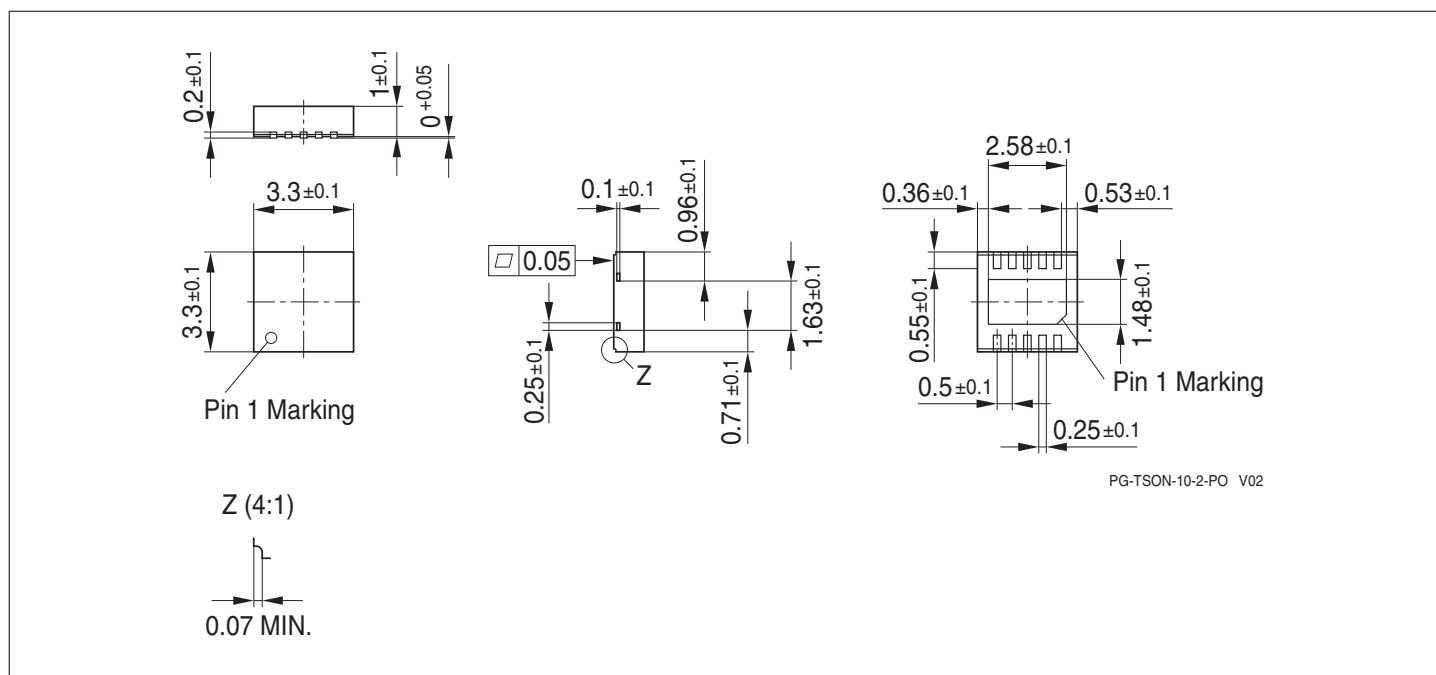


Figure 7 PG-TSON-10-2-PO ¹⁾

¹⁾ Dimensions in mm

Green product (RoHS-compliant)

To meet the world-wide customer requirements for environmentally friendly products and to be compliant with government regulations the device is available as a green product. Green products are RoHS-compliant (Pb-free finish on leads and suitable for Pb-free soldering according to IPC/JEDEC J-STD-020).

For further information on alternative packages, please visit our website: www.infineon.com/packages

7 Revision History

Revision	Date	Changes
1.21	2025-02-07	Editorial changes and template update
1.20	2016-12-20	Template updated
1.10	2016-10-05	New variant TLS810B1EJV33 in PG-DSO-8 EP added
1.00	2016-03-10	Datasheet - Initial version

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2025-02-07

Published by

Infineon Technologies AG
81726 Munich, Germany

© 2025 Infineon Technologies AG
All Rights Reserved.

Do you have a question about any aspect of this document?

Email: erratum@infineon.com

Document reference
IFX-wzl1718864663881
Z8F55038765

Important notice

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenhheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

Warnings

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.