

# PMA71xx/PMA51xx

SmartLEWIS™ MCU

RF Transmitter FSK/ASK 315/434/868/915 MHz  
Embedded 8051 Microcontroller with 10 bit ADC  
Embedded 125 kHz ASK LF Receiver

## Application Note

Protocol Examples for ISM Band Applications  
Revision 1.0, 2009-10-09

**Edition 2009-10-09**

**Published by  
Infineon Technologies AG  
81726 Munich, Germany**

**© 2009 Infineon Technologies AG  
All Rights Reserved.**

### **Legal Disclaimer**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

### **Information**

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

### **Warnings**

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

## Table of Contents

	<b>Table of Contents</b>	3
	<b>List of Figures</b>	5
<b>1</b>	<b>Introduction</b>	6
<b>2</b>	<b>Program flow</b>	6
<b>3</b>	<b>Detailed Description of RF Protocol Examples</b>	7
3.1	Protocol A: 5kBit ASK USA Pattern	7
3.2	Protocol B: 5kBit FSK EU Pattern	7
3.3	Protocol C: 10kBit FSK USA Pattern	8
3.4	Protocol D: 10kBit FSK EU Pattern	8
<b>4</b>	<b>Tooling</b>	9
4.1	Transmitter	9
4.1.1	How to download RF Protocol Examples to the PMA71xx/PMA51xx	9
4.1.2	PMA Evaluation Kit	10
4.1.3	PMA Starter Kit	11
4.1.3.1	Pin settings	11
4.2	Receiver	13
	<b>References</b>	14

**Revision History: 2009-10-09, Revision 1.0**

**Previous Revision:**

Page	Subjects (major changes since last revision)

### Trademarks of Infineon Technologies AG

APOXI™, BlueMoon™, COMNEON™, CONVERGATE™, COSIC™, C166™, CROSSAVE™, CanPAK™, CIPOS™, CoolMOS™, CoolSET™, CORECONTROL™, DAVE™, EasyPIM™, EconoBRIDGE™, EconoDUAL™, EconoPACK™, EconoPIM™, EiceDRIVER™, EUPEC™, FCOS™, FALC™, GEMINAX™, GOLDMOS™, HITFET™, HybridPACK™, ISAC™, ISOFACE™, IsoPACK™, my-d™, MIPAQ™, ModSTACK™, NovalithIC™, OmniTune™, OmniVia™, OPTIVERSE™, OptiMOS™, ORIGA™, PROFET™, PRO-SIL™, PrimePACK™, RASIC™, ReverSave™, SCEPTRE™, SEROCCO™, SICOFI™, SMARTi™, SMINT™, SOCRATES™, SatRIC™, SensoNor™, SINDRION™, SmartLEWIS™, SIEGET™, TrueNTRY™, TEMPFET™, TriCore™, thinQ!™, TRENCHSTOP™, VINAX™, VINETIC™, X-GOLD™, XMM™, X-PMU™, XPOSYS™, XWAY™.

### Other Trademarks

AMBA™, ARM™, MULTI-ICE™, PRIMECELL™, REALVIEW™, THUMB™ of ARM Limited, UK. AUTOSAR™ is licensed by AUTOSAR development partnership. Bluetooth™ of Bluetooth SIG Inc. CAT-iq™ of DECT Forum. COLOSSUS™, FirstGPS™ of Trimble Navigation Ltd. EMV™ of EMVCo, LLC (Visa Holdings Inc.). EPCOS™ of Epcos AG. FLEXGO™ of Microsoft Corporation. FlexRay™ is licensed by FlexRay Consortium. HYPERTERMINAL™ of Hilgraeve Incorporated. IEC™ of Commission Electrotechnique Internationale. IrDA™ of Infrared Data Association Corporation. ISO™ of INTERNATIONAL ORGANIZATION FOR STANDARDIZATION. MATLAB™ of MathWorks, Inc. MAXIM™ of Maxim Integrated Products, Inc. MICROTEC™, NUCLEUS™ of Mentor Graphics Corporation. Mifare™ of NXP. MIPI™ of MIPI Alliance, Inc. MIPS™ of MIPS Technologies, Inc., USA. muRata™ of MURATA MANUFACTURING CO. OmniVision™ of OmniVision Technologies, Inc. Openwave™ Openwave Systems Inc. RED HAT™ Red Hat, Inc. RFMD™ RF Micro Devices, Inc. SIRIUS™ of Sirius Sattelite Radio Inc. SOLARIS™ of Sun Microsystems, Inc. SPANSION™ of Spansion LLC Ltd. Symbian™ of Symbian Software Limited. TAIYO YUDEN™ of Taiyo Yuden Co. TEAKLITE™ of CEVA, Inc. TEKTRONIX™ of Tektronix Inc. TOKO™ of TOKO KABUSHIKI KAISHA TA. UNIX™ of X/Open Company Limited. VERILOG™, PALLADIUM™ of Cadence Design Systems, Inc. VLYNQ™ of Texas Instruments Incorporated. VXWORKS™, WIND RIVER™ of WIND RIVER SYSTEMS, INC. ZETEX™ of Diodes Zetex Limited, KEIL™.

Last Trademarks Update 2009-05-27

## List of Figures

Figure 1	State diagram of the software implementation of RF protocol examples for PMA71xx/PMA51xx	6
Figure 2	5kBit ASK USA Pattern	7
Figure 3	5kBit FSK EU Pattern	7
Figure 4	10kBit FSK USA Pattern	8
Figure 5	10kBit FSK EU Pattern	8
Figure 6	PMA RF Protocol Examples Installer	9
Figure 7	Development Board selection in KEIL $\mu$ Vision	10
Figure 8	PMA Evaluation Kit	10
Figure 9	PMA Starter Kit	11
Figure 10	TDA523x Eval Board	13
Figure 11	TDA523x Explorer in configuration and run mode	13

## 1 Introduction

This document is a description of the software implementation of RF protocol examples for ISM band applications on PMA71xx/PMA51xx. The protocol examples are designed to be compatible with Infineon SmartLEWIS™ Receiver TDA5230. The configuration of Infineon SmartLEWIS™ Receiver TDA5230 to receive this protocol examples is shown in detail in [1] and can be downloaded from <http://www.infineon.com/TDA5230>.

In the following chapters the program flow, the protocol examples and the tooling are described. This application note is compatible to source code revision 1.0.


## 2 Program flow

**Figure 1 on Page 6** shows a state diagram of the software implementation of RF protocol examples for PMA71xx/PMA51xx.

First of all the Interval Timer is set to a wake-up time of approx. 500ms and PMA71xx/PMA51xx is set into Power Down Mode. Every 500ms four different pin connections are checked. If a pin connection is set, the appropriate protocol is sent. Protocol A and C are examples for protocols usable in the USA and have a break between WUP (Wake-up Pattern) and TSI (Telegram Start Identifier) + data. The reason for this break is a legislative restriction in the USA. Find more information about legislative restrictions in [1].

The priority of the pin connection check is as following:

1. Protocol A: PP4 & PP5
2. Protocol B: PP2 & PP3
3. Protocol C: PP4 & PP2
4. Protocol D: PP5 & PP3

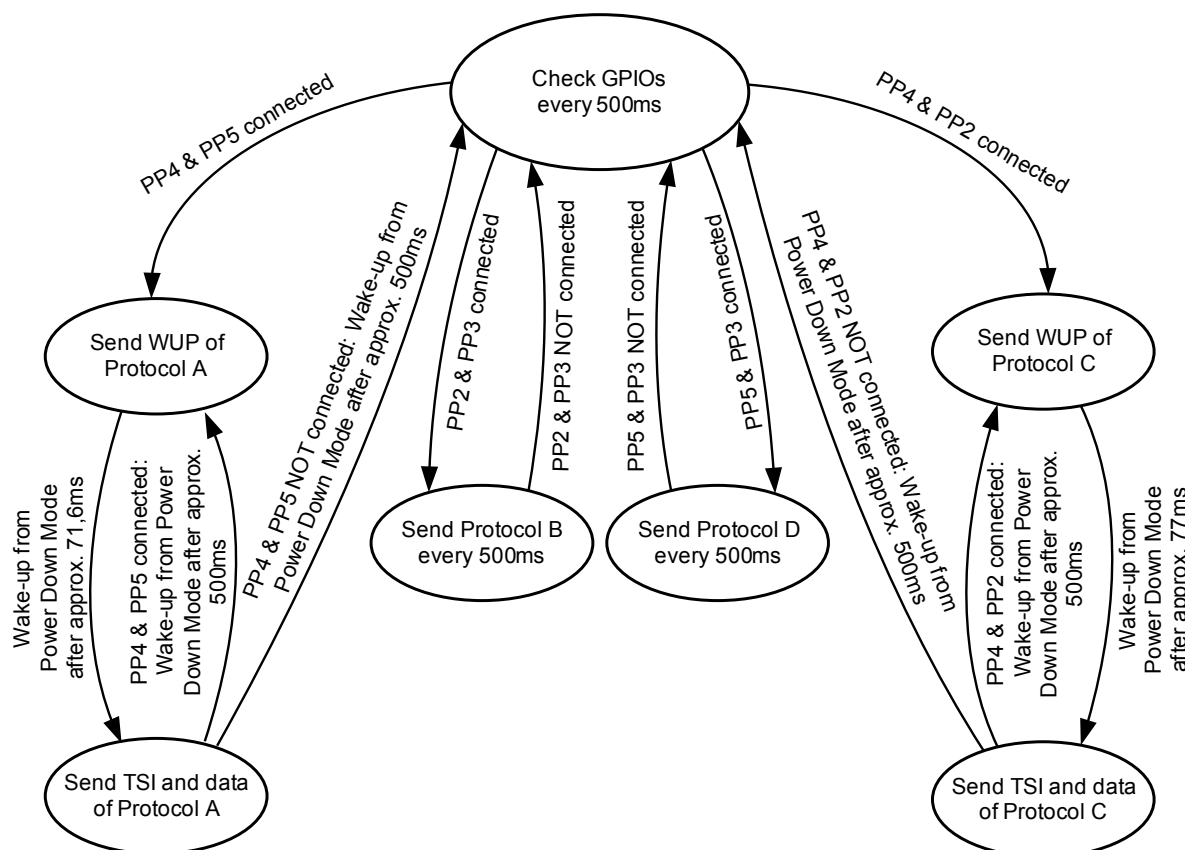


**Figure 1** State diagram of the software implementation of RF protocol examples for PMA71xx/PMA51xx

### 3 Detailed Description of RF Protocol Examples

PMA71xx/PMA51xx supports four different frequency bands: 315MHz, 434MHz, 868MHz and 915MHz. The protocol examples of this application note only cover 315MHz and 434MHz because they are designed to be used with Infineon TDA5230 receiver.

#### 3.1 Protocol A: 5kBit ASK USA Pattern

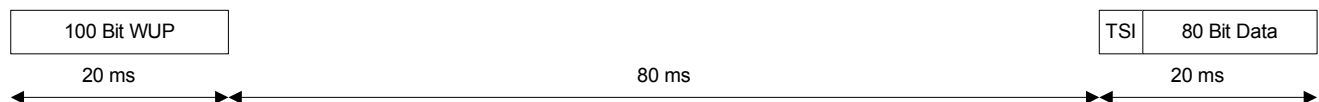


**Figure 2 5kBit ASK USA Pattern**

**Table 1 Detailed description of Protocol A**

<b>Frequency band:</b>	315MHz
<b>Modulation:</b>	ASK
<b>Data Rate:</b>	5kBit
<b>Coding:</b>	Manchester
<b>WUP Data:</b>	100Bit -> all 0
<b>SYNC Data:</b>	6Bit -> all 0
<b>TSI Data:</b>	14Bit -> 00110011110100
<b>Payload:</b>	10Byte data (could be modified for different applications)

#### 3.2 Protocol B: 5kBit FSK EU Pattern




**Figure 3 5kBit FSK EU Pattern**

**Table 2 Detailed description of Protocol B**

<b>Frequency band:</b>	434MHz
<b>Modulation:</b>	FSK
<b>Data Rate:</b>	5kBit
<b>FSK Deviation:</b>	35kHz
<b>Coding:</b>	Manchester
<b>WUP Data:</b>	100Bit -> all 0
<b>SYNC Data:</b>	6Bit -> all 0
<b>TSI Data:</b>	14Bit -> 00110011110100
<b>Payload:</b>	10Byte data (could be modified for different applications)

### 3.3 Protocol C: 10kBit FSK USA Pattern




**Figure 4 10kBit FSK USA Pattern**

**Table 3 Detailed description of Protocol C**

<b>Frequency band:</b>	315MHz
<b>Modulation:</b>	FSK
<b>Data Rate:</b>	10kBit
<b>FSK Deviation:</b>	50kHz
<b>Coding:</b>	Manchester
<b>WUP Data:</b>	144Bit -> all 0
<b>SYNC Data:</b>	6Bit -> all 0
<b>TSI Data:</b>	10Bit -> 0011110100
<b>Payload:</b>	16Byte data (could be modified for different applications)

### 3.4 Protocol D: 10kBit FSK EU Pattern



**Figure 5 10kBit FSK EU Pattern**

**Table 4 Detailed description of Protocol D**

<b>Frequency band:</b>	434MHz
<b>Modulation:</b>	FSK
<b>Data Rate:</b>	10kBit
<b>FSK Deviation:</b>	50kHz
<b>Coding:</b>	Manchester
<b>WUP Data:</b>	200Bit -> all 0
<b>SYNC Data:</b>	6Bit -> all 0
<b>TSI Data:</b>	10Bit -> 0011110100
<b>Payload:</b>	16Byte data (could be modified for different applications)

## 4 Tooling

To get the defined protocols properly running, Infineon provides a toolset which helps the developer to verify his work and that both transmitter and receiver are correctly configured. The provided quick start guides will give more details and also the steps to get the tools and boards running.

- Transmitter - PMA71xx/PMA51xx (Download more information from [http://www.infineon.com/PMA\\_tooling](http://www.infineon.com/PMA_tooling))
- Receiver - TDA523x (Download more information from <http://www.infineon.com/TDA5230>)


### 4.1 Transmitter

The source code is designed to be usable with both development boards, the PMA Evaluation Kit and the PMA Starter Kit.

*Note: Please ensure that the matching network of the transmitter board corresponds to the selected protocol example frequency.*

#### 4.1.1 How to download RF Protocol Examples to the PMA71xx/PMA51xx


- 1) Download and unzip PMA\_RF\_Protocol\_Examples\_Vx.x.zip from <http://www.infineon.com/PMA>.
- 2) Install PMA\_RF\_Protocol\_Examples\_V1.0.msi to your preferred location on your hard or network drive.

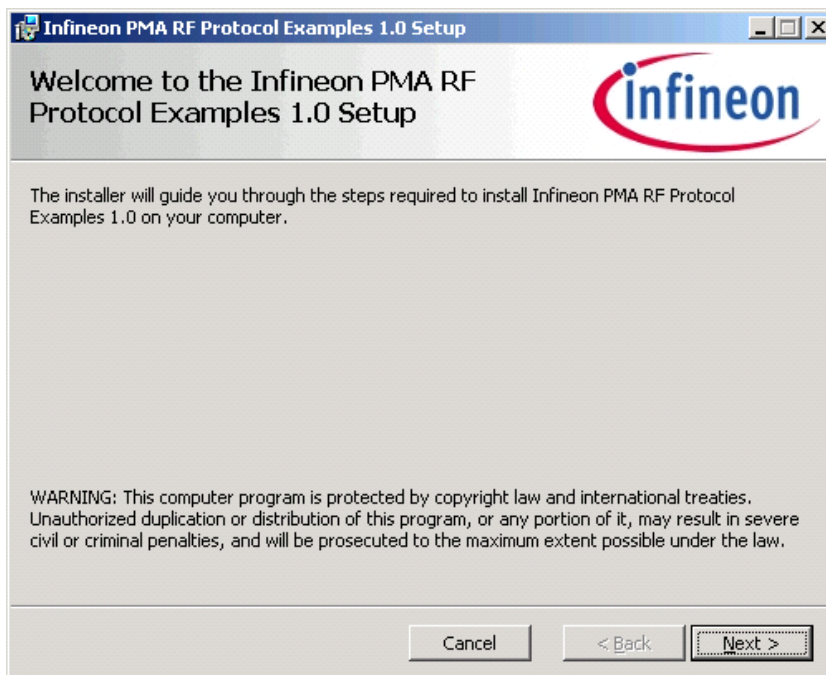

**Figure 6 PMA RF Protocol Examples Installer**

- 3) Connect PMA Starter Kit or PMA Evaluation Kit to the PC or Notebook (ensure that you have installed the software environment for your development boards)
- 4) Start KEIL  $\mu$ Vision
- 5) Compile the PMA\_RF\_Protocol\_Examples\_Vx.x project

6) Choose your development environment (PMA Starter Kit or PMA Evaluation Kit)

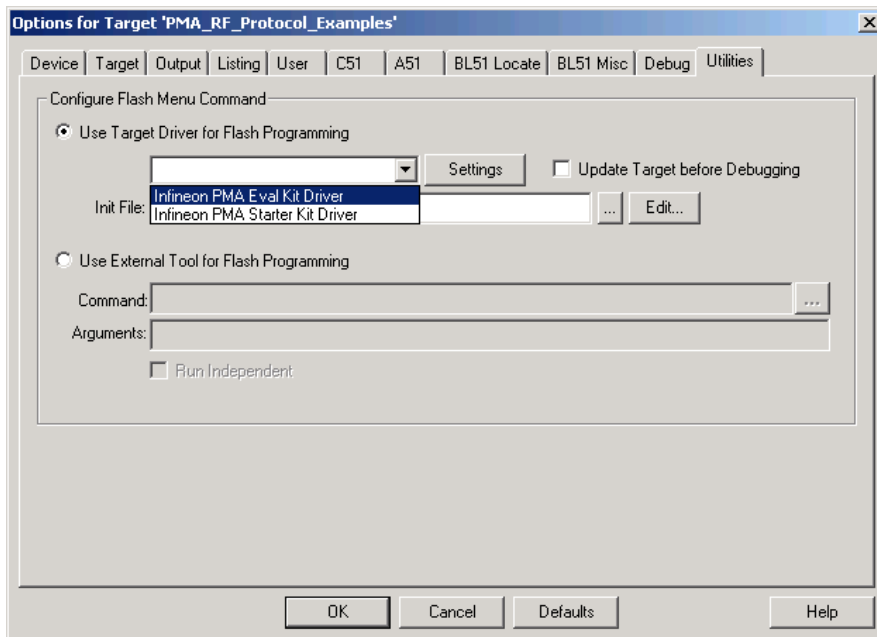

**Figure 7 Development Board selection in KEIL μVision**


7) Download the .hex file to your development board

8) To start a transmission connect the appropriate PPx on your development board

### 4.1.2 PMA Evaluation Kit

The PMA Evaluation Kit consists of a PMA RF Evaluation Board. This kit is tailored for concrete application development based on PMA giving the developer highest flexibility and design freedom. Furthermore, the evaluation kit is required if the PMA LF receiver or ADC shall be used in the application.

The PMA RF Evaluation Board may be operated in two alternative options: The connection to the PC may be established by the PMA RF USB Stick (see PMA Starter Kit) or by the advanced SmartLEWIS™ System Interface Board (SIB) which is optionally available.

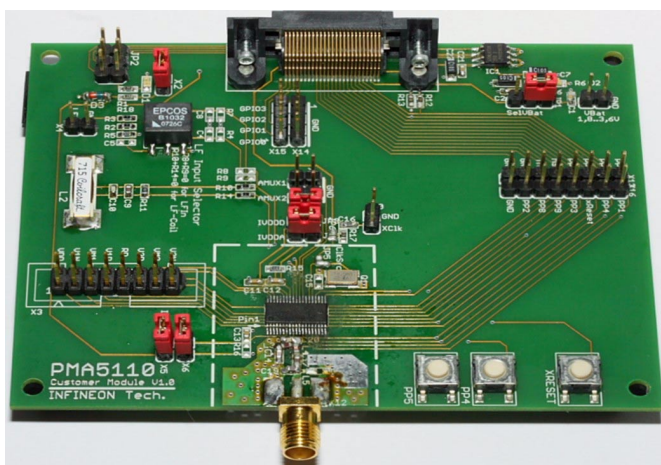

**Figure 8 PMA Evaluation Kit**

### 4.1.3 PMA Starter Kit

The PMA Starter Kit is an easy to use development tool coming along in a small form factor size, which can be directly connected to the PC via the USB interface.

This kit is tailored for first evaluation and software programming covering all products of the PMA71xx/51xx family.

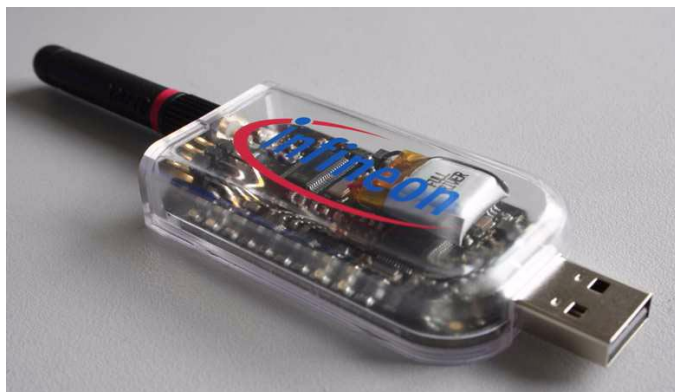





Figure 9 PMA Starter Kit

#### 4.1.3.1 Pin settings




**Table 5** shows which pin settings are used to select one of the implemented protocol examples.

*Note: Please ensure that only one connection is set at the same time!*

**Table 5** Implemented pin connections for RF protocol examples on PMA Starter Kit

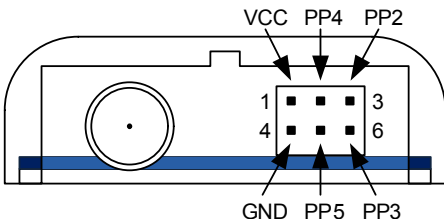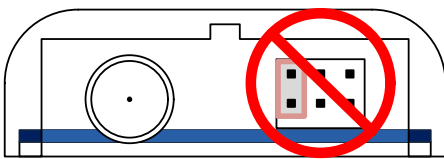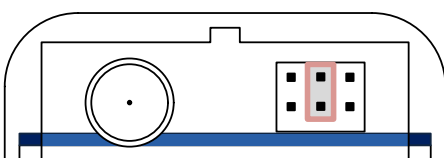Pin setting	Description
	This is the pin out of the PMA Starter Kit.
	Never connect VCC (Pin 1) and GND (Pin 4)!
	PP4 & PP5 are connected: <b>Protocol A - 5kBit ASK USA Pattern</b> is transmitted every approx. 500ms.

**Table 5** Implemented pin connections for RF protocol examples on PMA Starter Kit

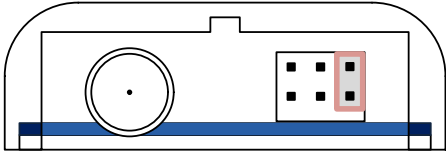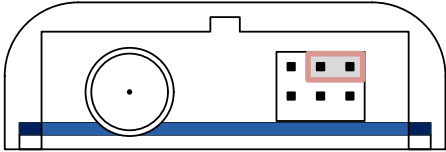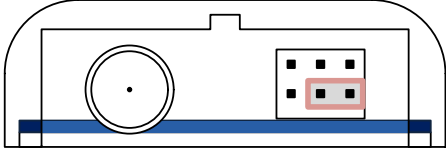Pin setting	Description
	PP2 & PP3 are connected: <b>Protocol B - 5kBit FSK EU Pattern</b> is transmitted every approx. 500ms.
	PP4 & PP2 are connected: <b>Protocol C - 10kBit FSK USA Pattern</b> is transmitted every approx. 500ms.
	PP5 & PP3 are connected: <b>Protocol D - 10kBit FSK EU Pattern</b> is transmitted every approx. 500ms.

## 4.2 Receiver

Infineon TDA5230 is used as receiver. The TDA523x Eval Board is shown in [Figure 10](#). For the configuration of the TDA523x Eval Board and the visualisation of the received user data the TDA523x Explorer is used (see [Figure 11](#)). More information about the configuration of TDA5230 and the handling of the TDA523x Explorer can be found in [\[1\]](#).



Figure 10 TDA523x Eval Board

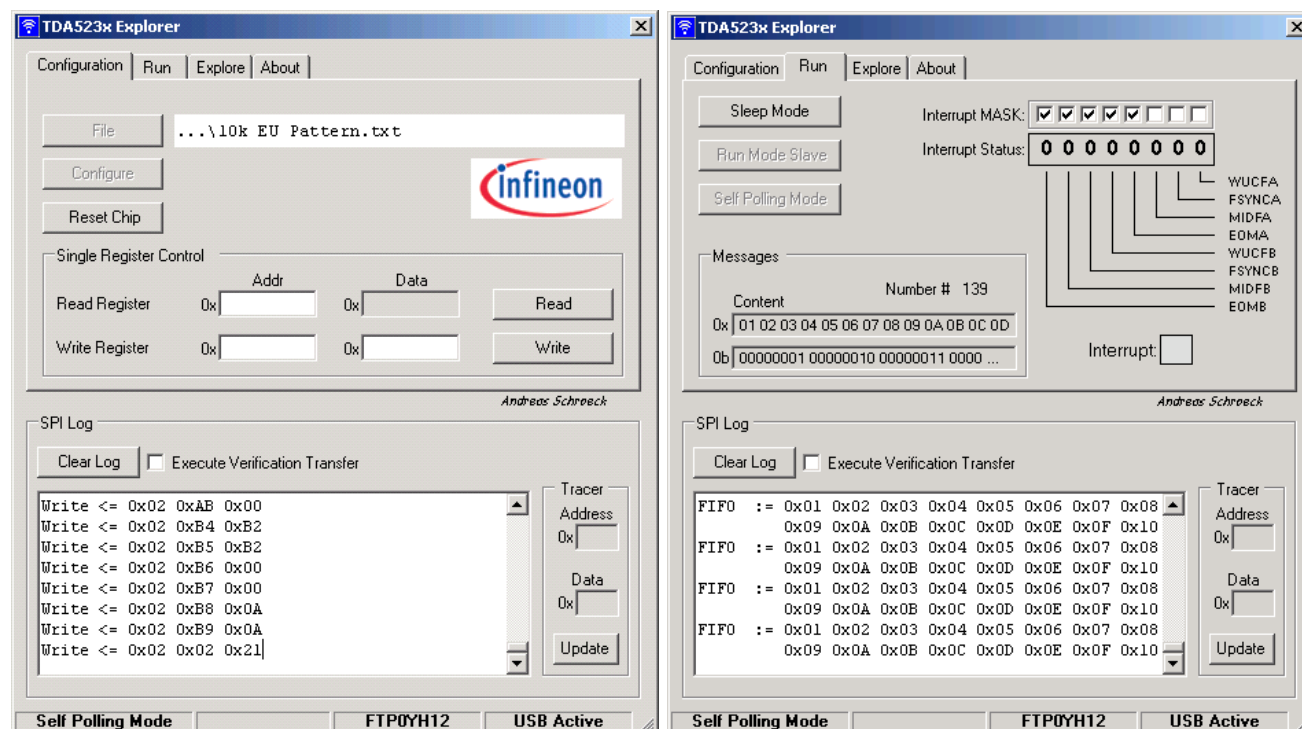


Figure 11 TDA523x Explorer in configuration and run mode

## References

- [1] TDA523x - Protocol Examples for ISM Band Applications

[www.infineon.com](http://www.infineon.com)