

Please note that Cypress is an Infineon Technologies Company.

The document following this cover page is marked as “Cypress” document as this is the company that originally developed the product. Please note that Infineon will continue to offer the product to new and existing customers as part of the Infineon product portfolio.

Continuity of document content

The fact that Infineon offers the following product as part of the Infineon product portfolio does not lead to any changes to this document. Future revisions will occur when appropriate, and any changes will be set out on the document history page.

Continuity of ordering part numbers

Infineon continues to support existing part numbers. Please continue to use the ordering part numbers listed in the datasheet for ordering.



AN INFINEON TECHNOLOGIES COMPANY

THIS SPEC IS OBSOLETE

Spec No: 001-80792


Spec Title: CY8CKIT-016 PSOC(R) 1 THERMAL MANAGEMENT
KIT QUICK START GUIDE

Replaced by: NONE

CY8CKIT-016 PSoC® 1 THERMAL MANAGEMENT KIT QUICK START GUIDE

Prerequisites for CY8CKIT-016

CY8CKIT-001



CY8CKIT-001 Board with
CY8C28 Family Processor Module



USB Cable




MiniProg3



Connecting Wires

CY8CKIT-036



CY8CKIT-036 Board



Power Adapter


1



Download the *CY8CKIT-016 Kit Setup* executable file from <http://www.cypress.com/go/CY8CKIT-016>. If you already have PSoC Designer and PSoC Programmer installed, download *CY8CKIT-016 Kit Only*. Run the executable file to start the installation process.

During the installation process, continue with the hardware setup.

2

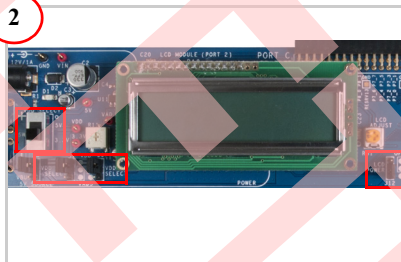


Set VDD DIG and VDD ANLG to 3.3 V using SW3, J7, and J6 on the CY8CKIT-001.

Attach the LCD included with the PSoC DVK and set the LCD power jumper (J12) to ON.

CY8CKIT-016 PSoC® 1 THERMAL MANAGEMENT KIT QUICK START GUIDE


3

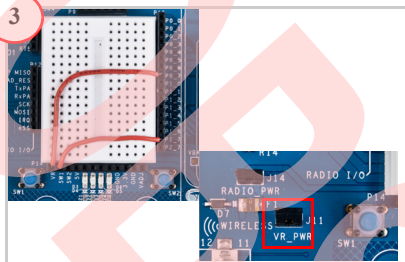

Connect VR to P0_7 and SW1 to P1_7 on the CY8CKIT-001; set J11 with a jumper.

Plug the CY8C28 family processor module into CY8CKIT-001.

5

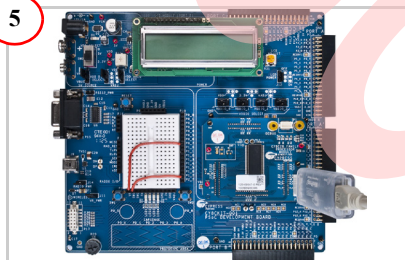


Connect the MiniProg3 to the CY8C28 family processor module.

Launch PSoC Programmer; load *CY8CKIT_016_Example_Project.hex*, located at C:\Program Files\Cypress\CY8CKIT-016\1.0\Firmware\Hex_File.

In PSoC Programmer, use the following settings: Programming Mode: **Power Cycle**, Auto Detection: **ON**, Protocol: **ISSP**, Voltage: **5.0**.


Click on **Program** to program the device.

4

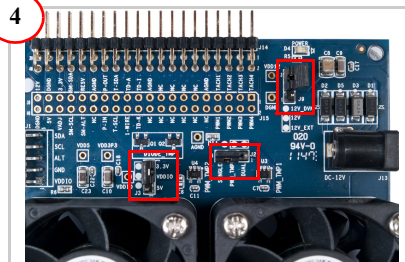

On the CY8CKIT-036, set jumpers as follows: J2 to SINGLE, J3 to 3.3 V, and J9 to 12V_DVK.

6

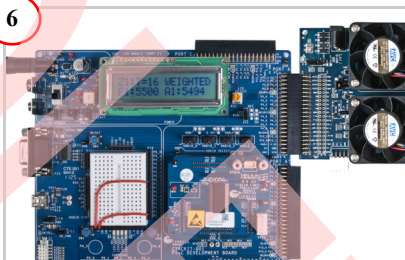

After programming, remove MiniProg3 and insert the CY8CKIT-036 into Port A of the CY8CKIT-001; power the CY8CKIT-001.

The LCD will display Zone 1 temperature, set fan speed, and actual fan speed

Pressing SW1 will display the same for Zone 2. Pressing SW1 again will display Zone temperature and individual temperature sensor readings.

See the example project in the kit guide for details.

For the latest information about this kit, visit
<http://www.cypress.com/go/CY8CKIT-016>