


# Virtual Mux

## 1.0

## Features

- Selects 1 of up to 16 inputs
- Selection is static
- Configurable number of inputs



## General Description

Virtual mux components are similar to conventional muxes in that they connect a selected input to an output. For a conventional mux, the input selection can be dynamically controlled by a control signal. For a virtual mux, the input selection is determined by an expression that evaluates to a constant when used within a design. The purpose of the virtual mux is to pick one input at build time.

There are two separate virtual mux components: one analog and one digital.

## When to Use a Virtual Mux

A virtual mux is commonly used as an internal to a schematic-based component. For example, it can be used by PSoC Creator to select the clock from a set of clock sources.

## Input/Output Connections

The virtual mux has a number of inputs and a single output. The inputs and the outputs all share the same signal width.

### in\_k – Input


There are N inputs, indexed from 0 to N – 1. There is a minimum of two inputs, in\_0 and in\_1, for digital virtual mux. There is a minimum of one input, in\_0, for analog virtual mux.

### selected\_out – Output

The output terminal is named selected\_out.

## Component Parameters

Drag a virtual mux onto your component schematic canvas and double-click it to open the **Configure** dialog.

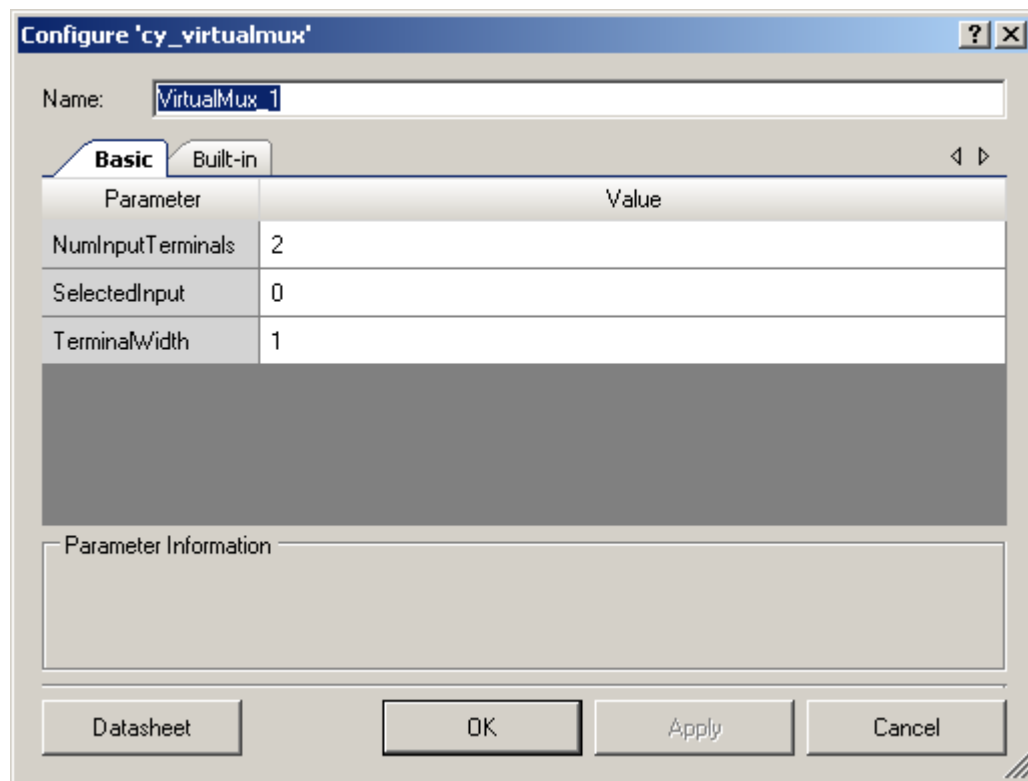

The virtual mux provides the following parameters:

### **NumInputTerminals**

Specifies the number of input terminals; the default is **2**.

### **SelectedInput**

Specifies which input (numbered from the default **0**) should be connected to the output.

### **TerminalWidth**

Determines the common width of all the input and output terminals; default is **1**.

## Functional Description

Virtual muxes, in general, consume no chip resources. In effect, they short the selected input to the output connection.

## Component Changes

This section lists the major changes in the component from the previous version.

Version	Description of Changes
1.0.f	Minor datasheet edits.
1.0.e	Minor datasheet edits.
1.0.d	Minor datasheet edits.
1.0.c	Minor datasheet edits.
1.0.b	Datasheet corrections
1.0.a	Minor datasheet edits and updates

© Cypress Semiconductor Corporation, 2009-2017. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, WICED, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit [cypress.com](http://cypress.com). Other names and brands may be claimed as property of their respective owners.

