AN205403

Inverter Platform Rotor Position For PMSM Motors

This application note explains the process of estimating commutation angle (θ) and motor speed (ω). Motor position and speed are estimated based on measured currents and calculated voltages.

Contents

1 Introduction....1
2 Base technology....1
2.1 Overview....1
2.2 Motor Formula....1
2.3 Constant....1
2.4 Current (is)....2
2.5 Back-EMF (es)....2
3 Position estimate....3
4 Speed estimate....3
5 LPF Theory....5
6 Document History....6

1 Introduction

This application note describes rotor position have three part:

1. Base technology.
2. Position estimate.
3. Speed estimate.

2 Base technology

Base technology about sensor less field oriented control for PMSM motors

2.1 Overview

This application note part use to explain the process of estimating commutation angle (θ) and motor speed (ω).Motor position and speed are estimated based on measured currents and calculated voltages.

2.2 Motor Formula

Well-known, the PMSM Motor can using a DC-motor represent, the formula:

$$\mathbf{v_s} = \boldsymbol{R}\mathbf{i_s} + \mathbf{L}\frac{\mathbf{d}}{\mathbf{dt}}\mathbf{i_s} + \mathbf{e_s}$$

Solving for is:

$$\mathbf{i_s}(\boldsymbol{n}+\mathbf{1}) = \boldsymbol{F} * \mathbf{i_s}(\mathbf{n}) + \mathbf{G} * (\mathbf{v_s}(\mathbf{n}) - \mathbf{e_s}(\mathbf{n}))$$

F:$\mathbf{1} - \mathbf{T_s}\frac{\mathbf{R}}{\mathbf{L}}$G: $\frac{\mathbf{T_s}}{\mathbf{L}}$

2.3 Constant

In this formula we can know the parameters about F and G calculate from motor, they can be deemed to as constant. For example, a motor running at 10kHz control frequency, and at the motor nameplate line to line resistance measured is 4.0Ω, and line to line inductance is 8 mH, then the motor model parameters are:

$$\mathrm{F} = 1 - \mathrm{T_s}\frac{\mathrm{R}}{\mathrm{L}} = 1 - \left(\frac{1}{10\mathrm{kHz}}\right) * \frac{4\Omega/2}{8\mathrm{mH}/2} = 0.95$$


$$\mathrm{G} = \frac{\mathrm{T_s}}{\mathrm{L}} = \frac{(1/10\mathrm{kHz})/2}{8\mathrm{mH}/2} = 0.0125$$

2.4 Current (is)

Here have two parts, one is the measured current(hardware),another is the estimated current(software) , in order to match measured current and estimated current, the digitized motor model needs to be corrected using the closed loop. Show in Figure 1

The same input (vs) fed into both systems, and matching the measured current (is) with estimated current (is*) from the model.

Figure 1

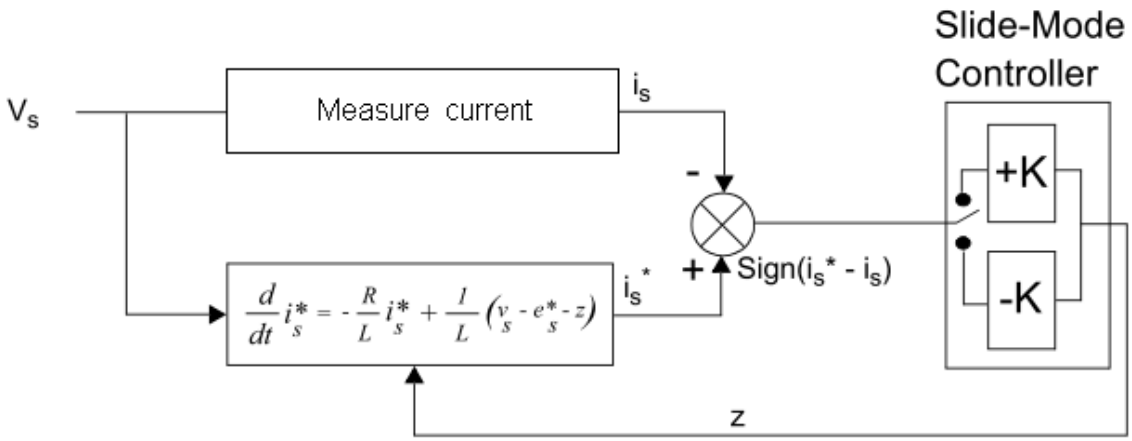


2.5 Back-EMF (es)

In a PMSM, the rotor flux is locked to the rotor position, it can also be measured indirectly from the motor back-EMF sine this is a function of the rotor position and speed.

The back-EMF estimation (es*) is fed back to the model to update the variable es* after every control cycle. Values eα and eβ (vector components of es) are used for the estimated theta calculation.

Figure 2.

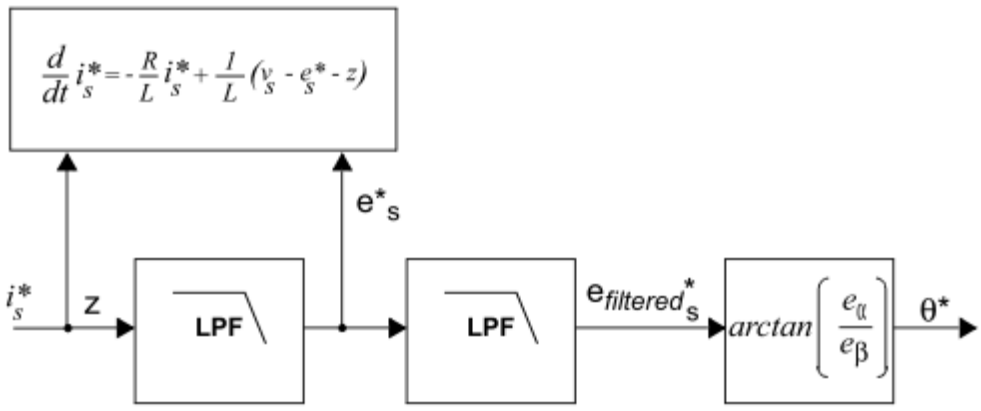

Through the back-EMF filter, we can output smoother signal.

The output of the first filter is used in two blocks. The first block is the model itself, used to calculate the next estimated current (is*), and also to calculate the estimated theta (θ∗). A second, first-order filter is used to calculate a smoother signal coming out of the motor model.

3 Position estimate

Relationship between Back-EMF and Rotor Position

In the Figure 2 ,the theta is calculated use the formula:

$$\boldsymbol{\theta = arctan\,(e_\alpha, e_\beta)}$$


The relationship between es and θ can be explained based on the formula. The vector of the back-EMF es can be analyse into eα , eβ, and rotor angle (θ). Arctangent is computed on the back EMF vector components to calculate theta.

4 Speed estimate

After calculated the θ, some phase compensation is needed before the calculated angle is used to energize the motor windings. The amount of theta compensation depends on the rate of change of theta, or speed of the motor. So calculated need:

1. the speed of the motor is calculated based on the uncompensated theta calculation.
2. the calculated speed is filtered and used to calculate the amount of compensation, as shown in Figure 3

Figure 3

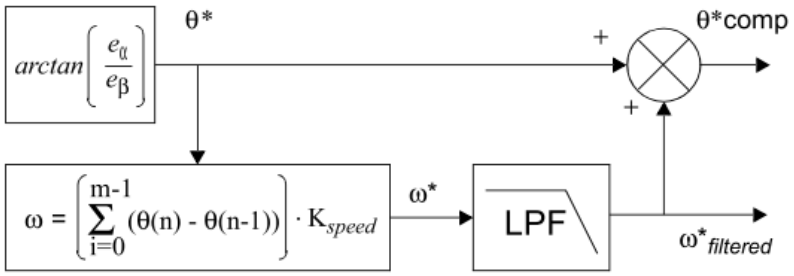

Speed is calculated by accumulating theta values over samples and then multiplying the accumulated theta by a constant.

$$\boldsymbol{\omega} = \sum_{\boldsymbol{i=0}}^{\boldsymbol{m}} (\boldsymbol{\theta_n} - \boldsymbol{\theta_{n-1}}) * \boldsymbol{K}$$

Omega (ω) = Angular velocity of the motor

Theta (θ_n) = Current Theta value


Prev Theta (θ_{n-1}) = Previous Theta value

K = Amplification factor for desired speed range

m = Number of accumulated Theta deltas

5 LPF Theory

In slide mode controller algorithm, we use LPF (low pass filter) technology to get angle of rotor. Below is the principle of LPF.

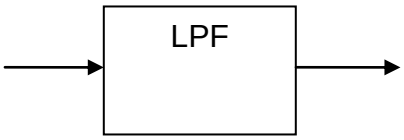

Where,

X is the input of low pass filter

Y is the output of low pass filter

$Y(n) = Y(n-1) + T*2\pi f_c * (X(n) - Y(n-1))$ (6)

In our actual system, we will get:

$e(n) = e(n-1) + T*2\pi f_c * (z(n) - e(n-1))$ (7)

Where,

e (n) is next time BEMF,

e (n-1) is last time BEMF

f_c is the cutoff frequency

Z (n) is the unfiltered BEMF

6 Document History

Document Title: AN205403 - Inverter Platform Rotor Position for PMSM Motors

Document Number: 002-05403

Revision	ECN	Orig. of Change	Submission Date	Description of Change
**	—	CBZH	03/16/2010	Initial release
			04/10/2010	Added LPF function
*A	5043107	CBZH	12/17/2015	Converted Spansion Application Note “MCU-AN-510119-E-20” to Cypress format
*B	5717937	AESATP12	04/28/2017	Updated logo and copyright.

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at Cypress Locations.

Products

ARM® Cortex® Microcontrollers	cypress.com/arm
Automotive	cypress.com/automotive
Clocks & Buffers	cypress.com/clocks
Interface	cypress.com/interface
Internet of Things	cypress.com/iot
Memory	cypress.com/memory
Microcontrollers	cypress.com/mcu
PSoC	cypress.com/psoc
Power Management ICs	cypress.com/pmic
Touch Sensing	cypress.com/touch
USB Controllers	cypress.com/usb
Wireless Connectivity	cypress.com/wireless

PSoC® Solutions

PSoC 1 | PSoC 3 | PSoC 4 | PSoC 5LP | PSoC 6

Cypress Developer Community

Forums | WICED IOT Forums | Projects | Videos | Blogs | Training | Components

Technical Support

cypress.com/support

All other trademarks or registered trademarks referenced herein are the property of their respective owners.

Cypress Semiconductor
198 Champion Court
San Jose, CA 95134-1709

© Cypress Semiconductor Corporation, 2010-2017. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.
TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.
Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, WICED, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit cypress.com. Other names and brands may be claimed as property of their respective owners.