

BFP760

High Gain and High Linearity Low  
Noise Amplifier for 2.4 GHz WLAN  
with On-off Mode Delta Gain 28 dB

Application Note AN324

Revision: Rev.1.0  
2013-03-06

**Edition 2013-03-06**

**Published by  
Infineon Technologies AG  
81726 Munich, Germany**

**© 2013 Infineon Technologies AG  
All Rights Reserved.**

#### **Legal Disclaimer**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

#### **Information**

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

#### **Warnings**

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

**Application Note AN324**

Revision History: 2013-03-06

**Previous Revision:**

Page	Subjects (major changes since last revision)

**Trademarks of Infineon Technologies AG**

AURIX™, C166™, CanPAK™, CIPOS™, CIPURSE™, EconoPACK™, CoolMOS™, CoolSET™, CORECONTROL™, CROSSAVE™, DAVE™, DI-POL™, EasyPIM™, EconoBRIDGE™, EconoDUAL™, EconoPIM™, EconoPACK™, EiceDRIVER™, eupec™, FCOS™, HITFET™, HybridPACK™, I<sup>2</sup>RF™, ISOFACE™, IsoPACK™, MIPAQ™, ModSTACK™, my-d™, NovalithIC™, OptiMOS™, ORIGA™, POWERCODE™, PRIMARION™, PrimePACK™, PrimeSTACK™, PRO-SIL™, PROFET™, RASIC™, ReverSave™, SatRIC™, SIEGET™, SINDRION™, SIPMOS™, SmartLEWIS™, SOLID FLASH™, TEMPFET™, thinQ!™, TRENCHSTOP™, TriCore™.

**Other Trademarks**

Advance Design System™ (ADS) of Agilent Technologies, AMBA™, ARM™, MULTI-ICE™, KEIL™, PRIMECELL™, REALVIEW™, THUMB™, μVision™ of ARM Limited, UK. AUTOSAR™ is licensed by AUTOSAR development partnership. Bluetooth™ of Bluetooth SIG Inc. CAT-iq™ of DECT Forum. COLOSSUS™, FirstGPS™ of Trimble Navigation Ltd. EMV™ of EMVCo, LLC (Visa Holdings Inc.). EPCOS™ of Epcos AG. FLEXGO™ of Microsoft Corporation. FlexRay™ is licensed by FlexRay Consortium. HYPERTERMINAL™ of Hilgraeve Incorporated. IEC™ of Commission Electrotechnique Internationale. IrDA™ of Infrared Data Association Corporation. ISO™ of INTERNATIONAL ORGANIZATION FOR STANDARDIZATION. MATLAB™ of MathWorks, Inc. MAXIM™ of Maxim Integrated Products, Inc. MICROTEC™, NUCLEUS™ of Mentor Graphics Corporation. MIPI™ of MIPI Alliance, Inc. MIPS™ of MIPS Technologies, Inc., USA. muRata™ of MURATA MANUFACTURING CO., MICROWAVE OFFICE™ (MWO) of Applied Wave Research Inc., OmniVision™ of OmniVision Technologies, Inc. Openwave™ Openwave Systems Inc. RED HAT™ Red Hat, Inc. RFMD™ RF Micro Devices, Inc. SIRIUS™ of Sirius Satellite Radio Inc. SOLARIS™ of Sun Microsystems, Inc. SPANSION™ of Spansion LLC Ltd. Symbian™ of Symbian Software Limited. TAIYO YUDEN™ of Taiyo Yuden Co. TEAKLITE™ of CEVA, Inc. TEKTRONIX™ of Tektronix Inc. TOKO™ of TOKO KABUSHIKI KAISHA TA. UNIX™ of X/Open Company Limited. VERILOG™, PALLADIUM™ of Cadence Design Systems, Inc. VLYNQ™ of Texas Instruments Incorporated. VXWORKS™, WIND RIVER™ of WIND RIVER SYSTEMS, INC. ZETEX™ of Diodes Zetex Limited.

Last Trademarks Update 2011-11-11

## Table of Content

<b>1</b>	<b>About Wireless Fidelity (Wi-Fi®) / Wireless LAN (WLAN)</b> .....	<b>5</b>
<b>2</b>	<b>BFP760 Overview</b> .....	<b>7</b>
2.1	Features .....	7
2.2	Key Applications of BFP760.....	7
2.3	Description .....	8
<b>3</b>	<b>Application Circuit and Performance Overview</b> .....	<b>9</b>
3.1	Summary of Measurement Results.....	9
3.2	BFP760 as Low Noise Amplifier for 2.4 GHz WLAN.....	11
3.3	Schematics and Bill-of-Materials.....	12
	Measurement Graphs.....	13
<b>4</b>	<b>Evaluation Board and Layout Information</b> .....	<b>22</b>
<b>5</b>	<b>Authors</b> .....	<b>24</b>
<b>6</b>	<b>Remark</b> .....	<b>24</b>

## List of Figures


Figure 1	2.4 GHz Wi-Fi® Wireless LAN (WLAN, IEEE802.11b/g/n/a/c/ac) Front-End .....	5
Figure 2	BFP760 in SOT343 .....	7
Figure 3	Package and pin definations of BFP760 .....	8
Figure 4	Schematics of the BFP760 Application Circuit.....	12
Figure 5	Insertion Power Gain of the 2.4 GHz WLAN LNA with BFP760 .....	13
Figure 6	Wideband Insertion Power Gain of the 2.4 GHz WLAN LNA with BFP760 .....	13
Figure 7	Noise Figure of BFP760 LNA for 2.4 - 2.5 GHz .....	14
Figure 8	Reverse Isolation of the 2.4 GHz WLAN LNA with BFP760 .....	14
Figure 9	Input Matching of the 2.4 GHz WLAN LNA with BFP760 .....	15
Figure 10	Input Matching of 2.4 GHz WLAN LNA with BFP760 (Smith Chart) .....	15
Figure 11	Output Matching of the 2.4 GHz WLAN LNA with BFP760 .....	16
Figure 12	Output Matching of the 2.4 GHz WLAN LNA with BFP760 (Smith Chart) .....	16
Figure 13	Wideband Stability k Factor of the 2.4 GHz WLAN LNA with BFP760 .....	17
Figure 14	Wideband Stability Mu Factor of the 2.4 GHz WLAN LNA with BFP760.....	17
Figure 15	Input 1dB Compression Point of the BFP760 Circuit.....	18
Figure 16	Output 3 <sup>rd</sup> Order Intercept Point of BFP760 at 2440 MHz .....	18
Figure 17	Off mode Insertion Power Gain of the 2.4 GHz WLAN LNA with BFP760 .....	19
Figure 18	Off mode Input Matching of the 2.4 GHz WLAN LNA with BFP760 .....	19
Figure 19	Off mode input matching of 2.4 GHz WLAN LNA with BFP760 (Smith Chart) .....	20
Figure 20	Off mode Output Matching of the 2.4 GHz WLAN LNA with BFP760.....	20
Figure 21	Off mode output Matching of 2.4 GHz WLAN LNA with BFP760 (Smith Chart) .....	21
Figure 22	Off mode input 1dB compression point of the 2.4 GHz WLAN LNA with BFP760 .....	21
Figure 23	Photo Picture of Evaluation Board (overview) <PCB Marking Myymmdd Rev. x.x> .....	22
Figure 24	Photo Picture of Evaluation Board (detailed view) .....	22
Figure 25	Layout Proposal for RF Grounding of the 2.4 GHz WLAN LNA with BFP760.....	23
Figure 26	PCB Layer Information.....	23

## List of Tables

Table 1	Pin Assignment of BFP760 .....	8
Table 2	On-Mode Electrical Characteristics (at room temperature).....	9
Table 3	Off-Mode Electrical Characteristics (at room temperature).....	10
Table 4	Bill-of-Materials.....	12

## 1 About Wireless Fidelity (Wi-Fi®) / Wireless LAN (WLAN)

Wireless Fidelity (Wi-Fi®) or well-known as wireless LAN (WLAN) plays a major role in today's communications by enabling constant connection in the 2.4 GHz and broadband Internet access for users with laptops or devices equipped with wireless network interface while roaming within the range of fixed access points (AP) or a public hotspot. Different applications like home entertainment with wireless high-quality multimedia signal transmission, home networking notebooks, mass data storages and printers implement 2.4 GHz into their system for wireless connectivity. For this kind of high-speed high data rate wireless communication standards it is essential to ensure the quality of the link path. Major performance criteria of these equipments have to be fulfilled: sensitivity, strong signal capability and interference immunity. Below a general application diagram of a WLAN system is shown.

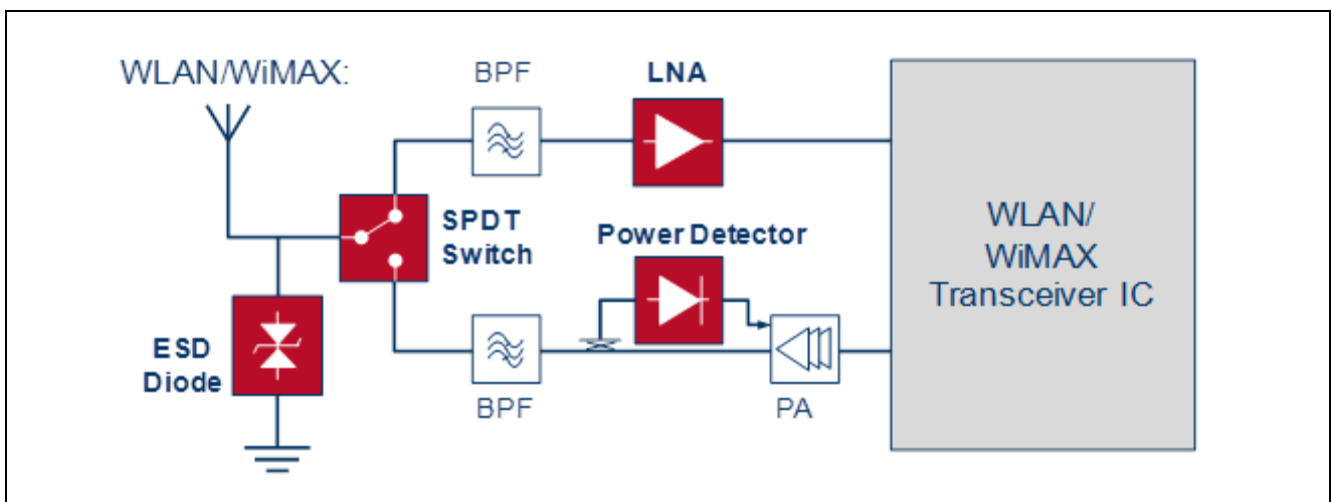

**Figure 1 2.4 GHz Wi-Fi® Wireless LAN (WLAN, IEEE802.11b/g/n/a/c/ac) Front-End**

In order to increase the system sensitivity, an excellent low noise amplifier (LNA) in front of the receiver is mandatory, especially in an environment with very weak signal strength and because of the insertion loss of the single-pole-double-throw (SPDT) switch and the Bandpass Filter (BPF) or diplexer. The typical allowed receiver chain Noise Figure (NF) of approx. 2 dB can only be achieved by using a high-gain low noise amplifier (LNA).

In addition, strong signal environment can exist when the equipment is next to a transmitter. In that case, the LNA must be linear enough, i.e. have high 1dB compression point. This avoids saturation, degradation of the gain and increased noise figure.


This application note is focusing on the LNA block, but Infineon does also support with RF-switches, TVS-diodes for ESD protection and RF Schottky diodes for power detection.

-

## 2 BFP760 Overview

### 2.1 Features

- Very low noise amplifier based on Infineon's reliable, high volume SiGe:C technology.
- High linearity  $OIP3 = 27 \text{ dBm @ } 5.5 \text{ GHz, } 3 \text{ V, } 30 \text{ mA}$ .
- High transition frequency  $f_T = 45 \text{ GHz @ } 1 \text{ GHz, } 3 \text{ V, } 35 \text{ mA}$ .
- $NF_{\text{min}} = 0.95 \text{ dB @ } 5.5 \text{ GHz, } 3 \text{ V, } 10 \text{ mA}$ ,
- Transducer gain  $|S_{21}|_2 = 16 \text{ dB @ } 3.5 \text{ GHz, } 3 \text{ V, } 10 \text{ mA}$ .
- Low power consumption, ideal for mobile applications.
- Easy to use Pb-free (RoHS compliant) and halogen-free standard package with visible leads
- Qualification report according to AEC-Q101 available.

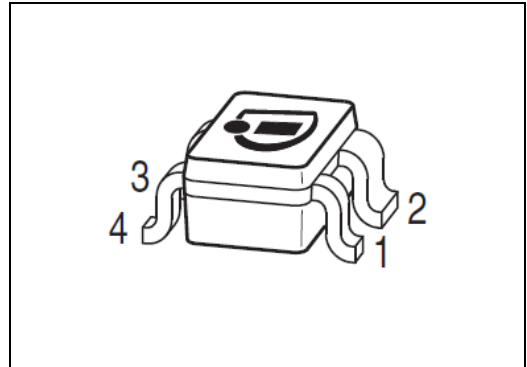

**Figure 2 BFP760 in SOT343**




### 2.2 Key Applications of BFP760

- As Low Noise Amplifier (LNA) in
  - Mobile and fixed connectivity applications: WLAN 802.11a/b/c/g/n, WiMAX 2.5/3.5 GHz, Bluetooth
  - Satellite communication systems: Navigation systems (GPS, Glonass), satellite radio (SDARs, DAB) and C-band LNB
  - Multimedia applications such as mobile/portable TV, CATV, FM Radio
  - UMTS/LTE mobile phone applications
  - ISM applications like RKE, AMR and Zigbee, as well as for emerging wireless applications
- As discrete active mixer, buffer amplifier in VCOs

## 2.3 Description

The BFP760 is a linear low noise wideband NPN bipolar RF transistor. The device is based on Infineon's reliable high volume silicon germanium carbon (SiGe:C) heterojunction bipolar technology. The collector design supports voltages up to  $V_{CE0} = 4.0$  V and currents up to  $I_C = 70$  mA. With its high linearity at currents as low as 10 mA the device supports energy efficient designs. The typical transit frequency is approximately 45 GHz. The device is housed in an easy to use plastic SOT-343 package with visible leads.

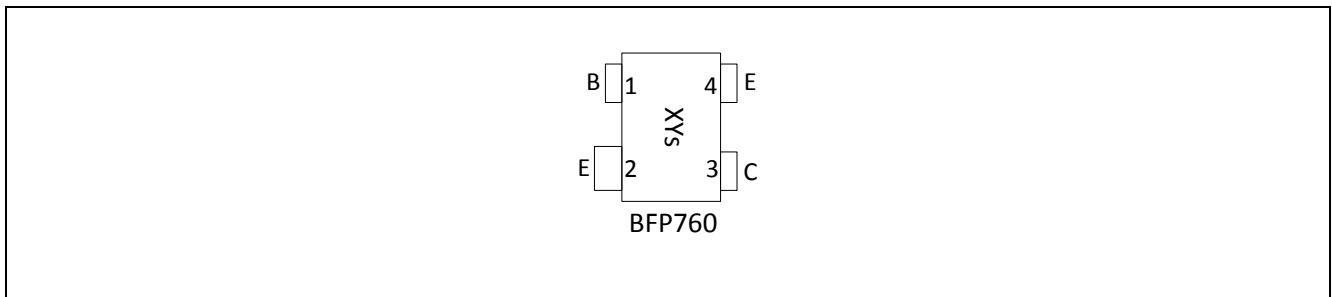

**Figure 3** Package and pin definitions of BFP760

**Table 1** Pin Assignment of BFP760

Pin No.	Symbol	Function
1	B	Transistor base
2	E	Transistor emitter
3	C	Transistor collector
4	E	Transistor emitter



### 3 Application Circuit and Performance Overview

**Device:** BFP760  
**Application:** Low Noise Amplifier for 2.4 GHz WLAN with bypass  
**PCB Marking:** M130125 V1.4e

#### 3.1 Summary of Measurement Results

**Table 2 On-Mode Electrical Characteristics (at room temperature)**

Parameter	Symbol	Value	Unit	Comment/Test Condition
Frequency Range	Freq	2.4-2.5	GHz	
DC Voltage	Vcc	3.0	V	
DC Current	Icc	14.6	mA	
Gain (on mode)	G <sub>on</sub>	16.8	dB	
Noise Figure	NF	0.93	dB	SMA and PCB losses (~0.1 dB) are subtracted
Input Return Loss	RLin	14	dB	
Output Return Loss	RLout	13	dB	
Reverse Isolation	IRev	24.4	dB	
Input P1dB (On mode)	IP1dB <sub>on</sub>	-10.1	dBm	
Output P1dB(On mode)	OP1dB <sub>on</sub>	5.7	dBm	
Input IP3	IIP3	0.9	dBm	Power @ Input: -30 dBm f <sub>1</sub> = 2440 MHz, f <sub>2</sub> = 2441 MHz
Output IP3	OIP3	17	dBm	Power @ Input: -30 dBm f <sub>1</sub> = 2440 MHz, f <sub>2</sub> = 2441 MHz
Stability	k	≥ 1.0	--	Stability measured from 10MHz to 15GHz

**Table 3 Off-Mode Electrical Characteristics (at room temperature)**

Parameter	Symbol	Value	Unit	Comment/Test Condition
Frequency Range	Freq	2.4-2.5	GHz	
DC Voltage	Vcc	3.0	V	
DC Current	Icc	60	uA	
Gain (on mode)	G <sub>on</sub>	-11.5	dB	
Noise Figure	NF	11.5	dB	SMA and PCB losses (~0.1 dB) are subtracted
Input Return Loss	RLin	19	dB	
Output Return Loss	RLout	6.8	dB	
Reverse Isolation	IRev	11.5	dB	
Input P1dB (Off mode)	IP1dB <sub>off</sub>	>10	dBm	
Stability	k		--	Stability measured from 10MHz to 15GHz

### **3.2 BFP760 as Low Noise Amplifier for 2.4 GHz WLAN**


This application note presents the high gain low noise amplifier with novel bypass solution, using BFP760 for 2.4 GHz WLAN applications.

The circuit requires only ten 0402 passive components. It has in band gain of 16.8dB. The circuit achieves an input and output return loss more than 13 dB. The noise figure is about 0.93 dB (SMA and PCB losses are subtracted) for the whole frequency band. Furthermore, the circuit is unconditionally stable till 15 GHz.

At 2440 MHz, using two tones spacing of 1 MHz, the output third order intercept point OIP3 reaches 16.5 dBm. Input 1dB compression point IP1dB of -10.1 dBm. The off mode gain is about -11.5 dB. The input P1dB compression in the off-mode for the whole frequency range is more than 10 dBm.

In Off-mode this circuit shows good performance with On-Off mode delta gain 28dB. This circuit has an input matching of 19dB and output matching of 6.8dB in off mode condition. Input P1dB is more than 10dBm for the whole frequency band in off mode condition.

### 3.3 Schematics and Bill-of-Materials

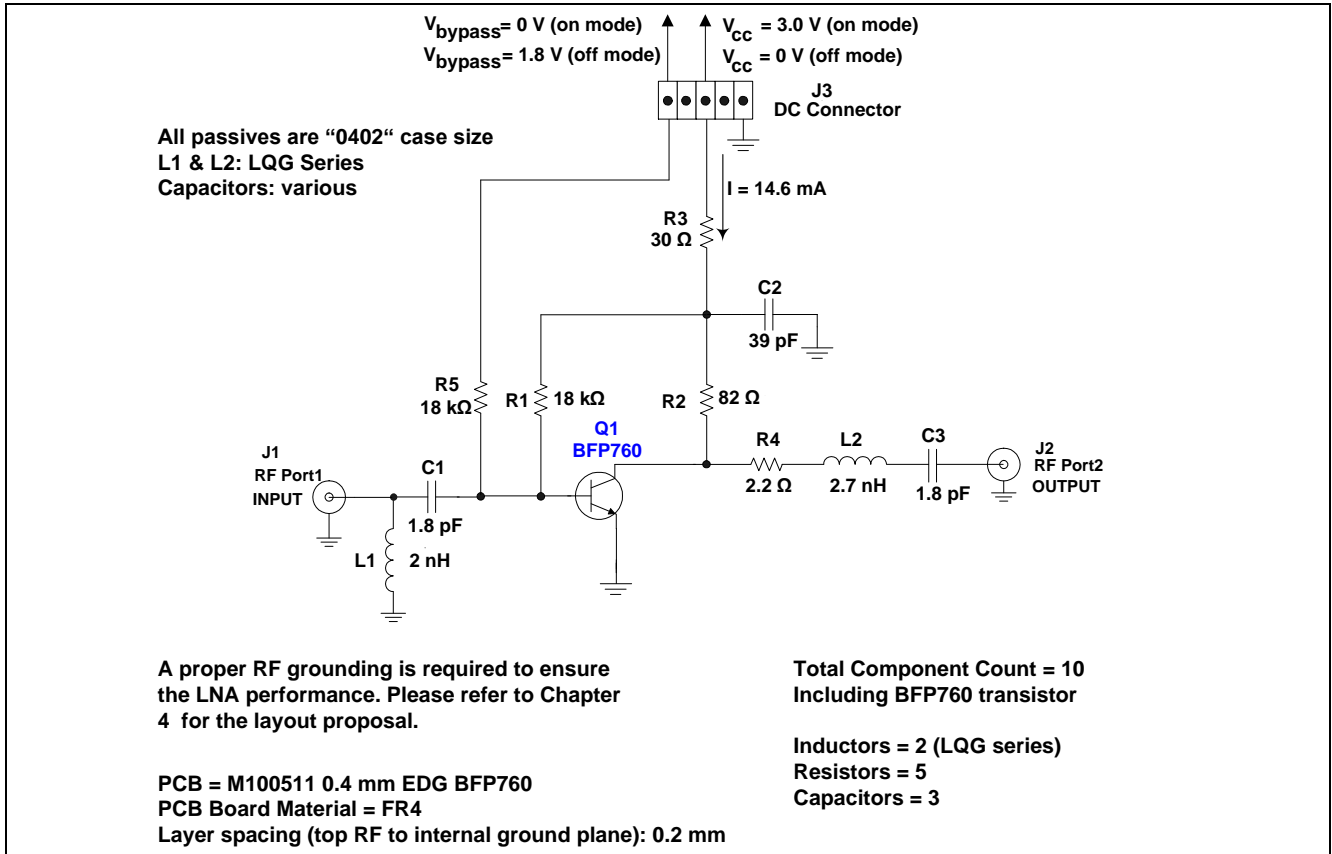


**Figure 4 Schematics of the BFP760 Application Circuit**


**Table 4 Bill-of-Materials**

Symbol	Value	Unit	Size	Manufacturer	Comment
C1	1.8	pF	0402	Various	Input DC block & input matching
C2	39	pF	0402	Various	RF decoupling / blocking cap
C3	1.8	pF	0402	Various	Output DC block & output matching
L1	2	nH	0402	Murata LQG series	Input matching
L2	2.7	nH	0402	Murata LQG series	Output matching
R1	33	kΩ	0402	Various	DC biasing
R2	82	Ω	0402	Various	Stability improvement
R3	30	Ω	0402	Various	DC biasing (provides DC negative feedback to stabilize DC operating point over temperature variation, transistor $h_{FE}$ variation, etc.)
R4	2.2	Ω	0402	Various	Stability improvement and output matching
R4	18	kΩ	0402	Various	Bypass mode DC biasing
Q1			SOT343	Infineon Technologies	BFP760 SiGe: C Heterojunction Bipolar RF Transistor

**Measurement Graphs**

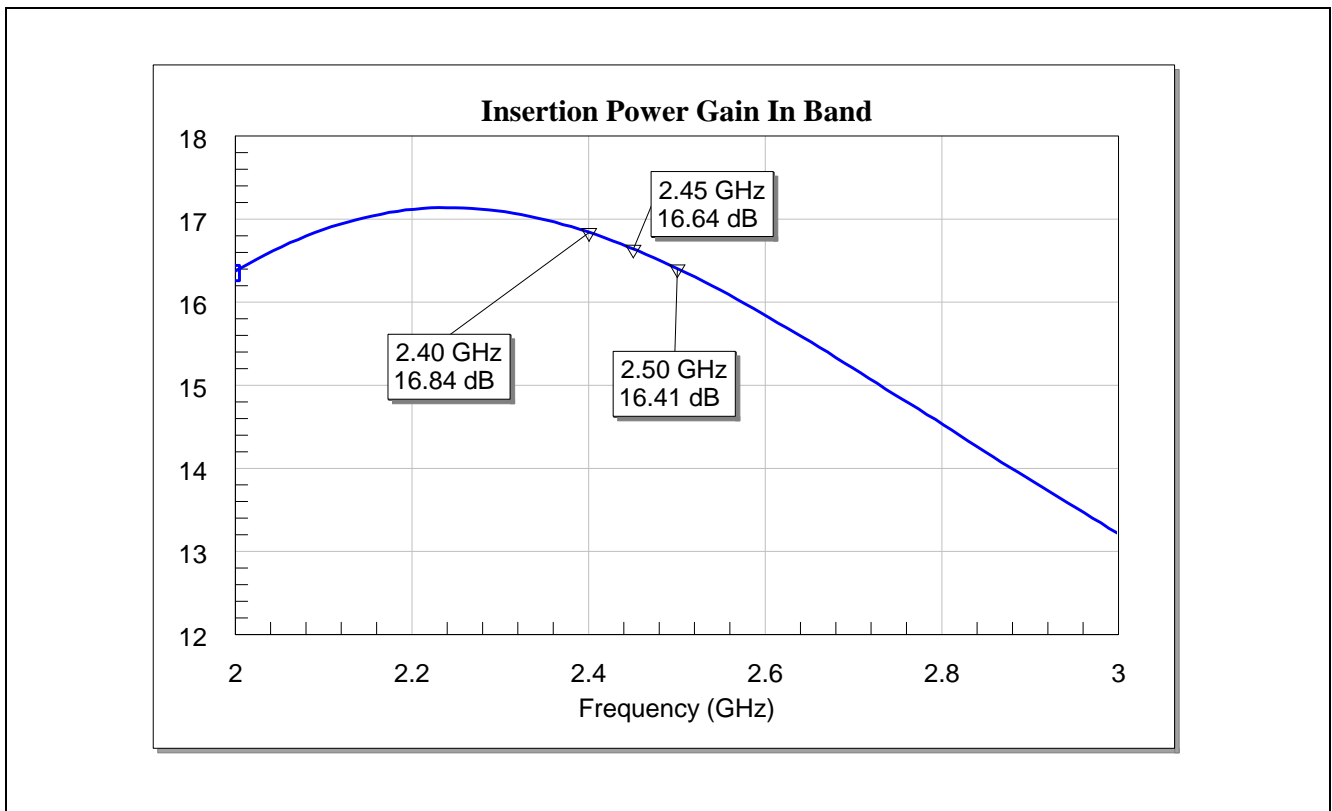

**Figure 5 Insertion Power Gain of the 2.4 GHz WLAN LNA with BFP760**

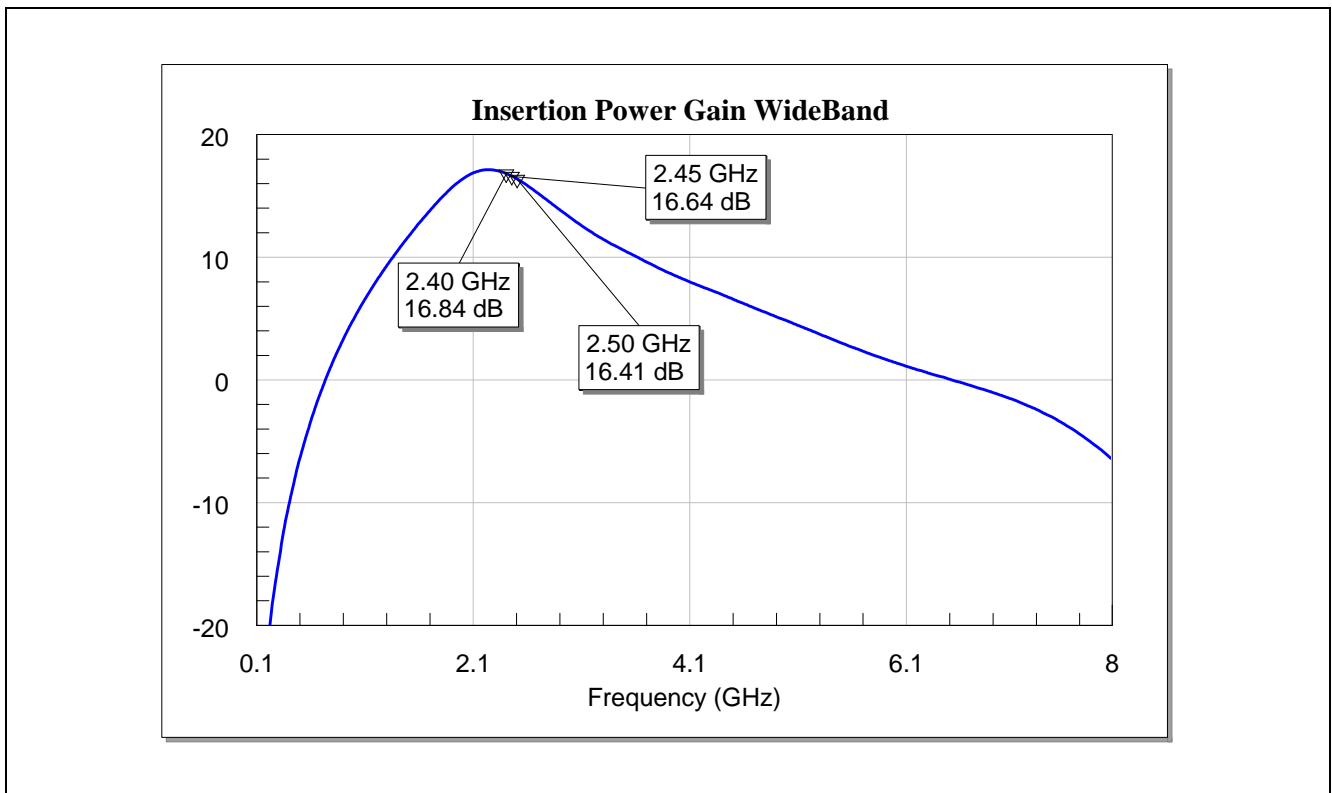

**Figure 6 Wideband Insertion Power Gain of the 2.4 GHz WLAN LNA with BFP760**

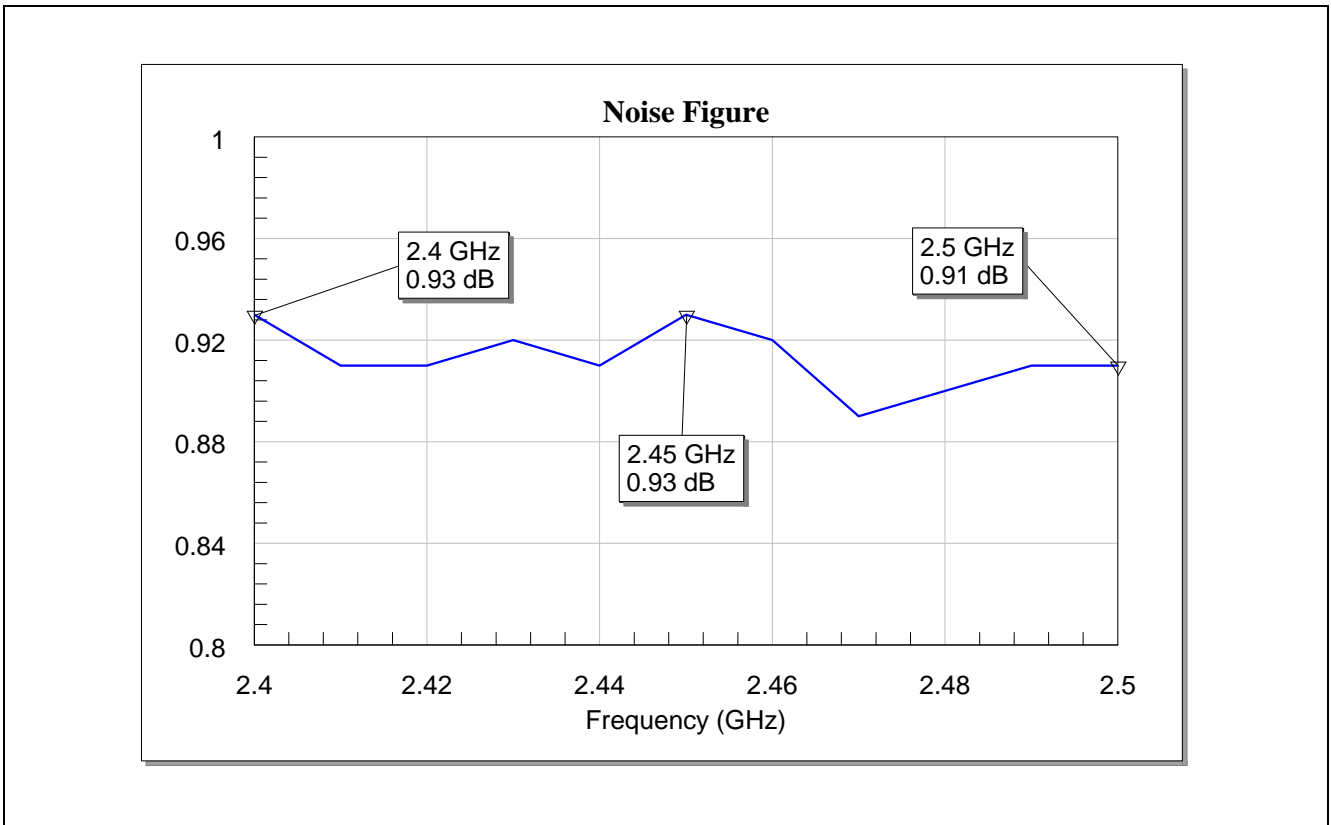


Figure 7 Noise Figure of BFP760 LNA for 2.4 - 2.5 GHz

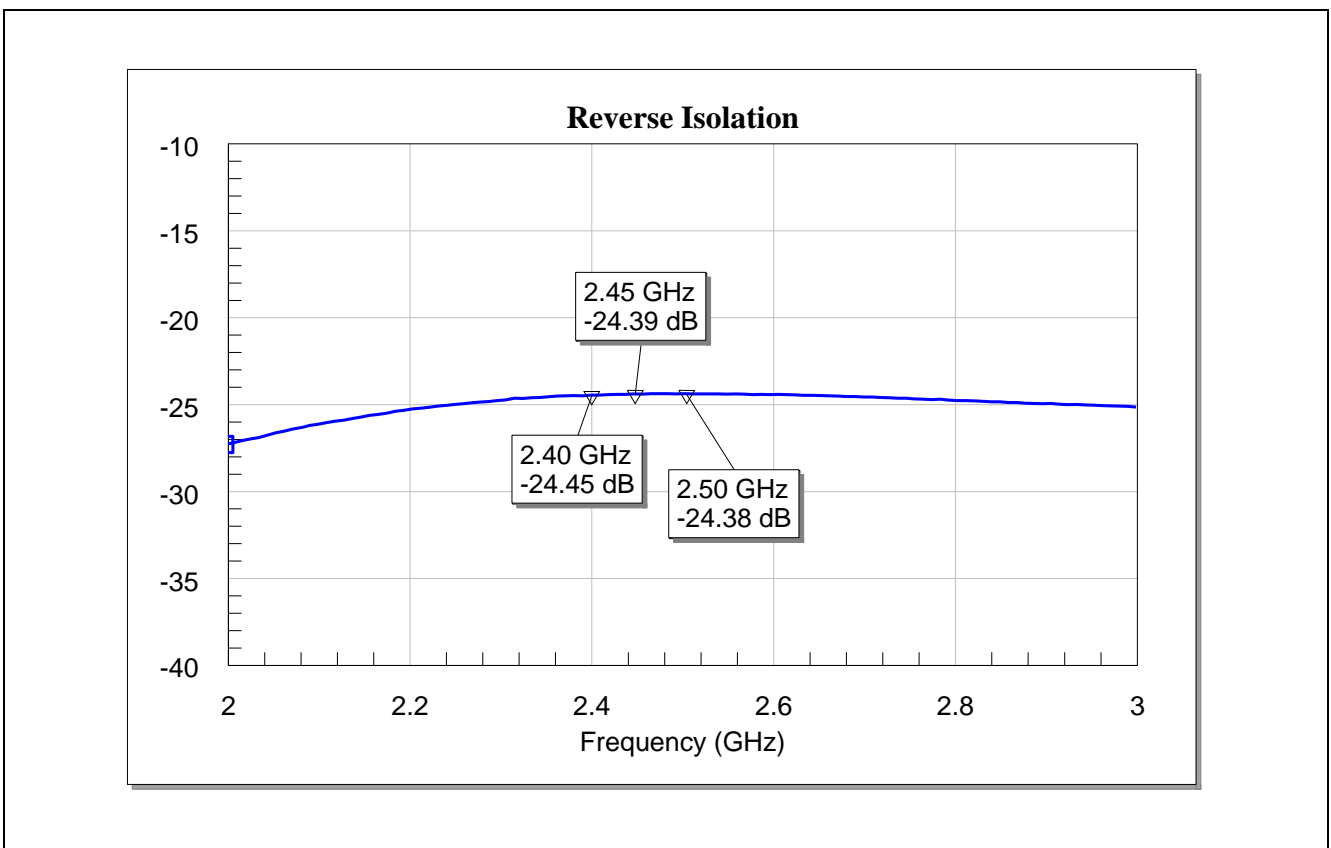


Figure 8 Reverse Isolation of the 2.4 GHz WLAN LNA with BFP760

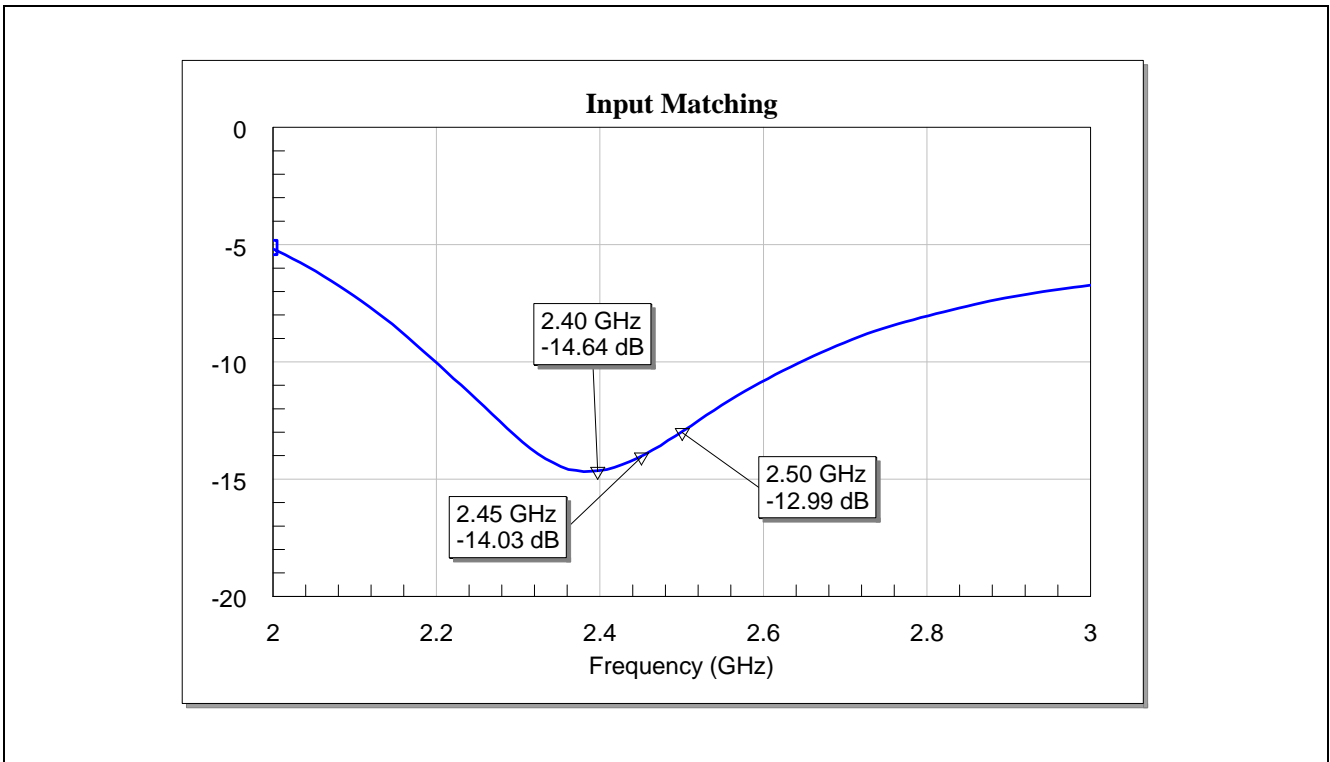


Figure 9 Input Matching of the 2.4 GHz WLAN LNA with BFP760



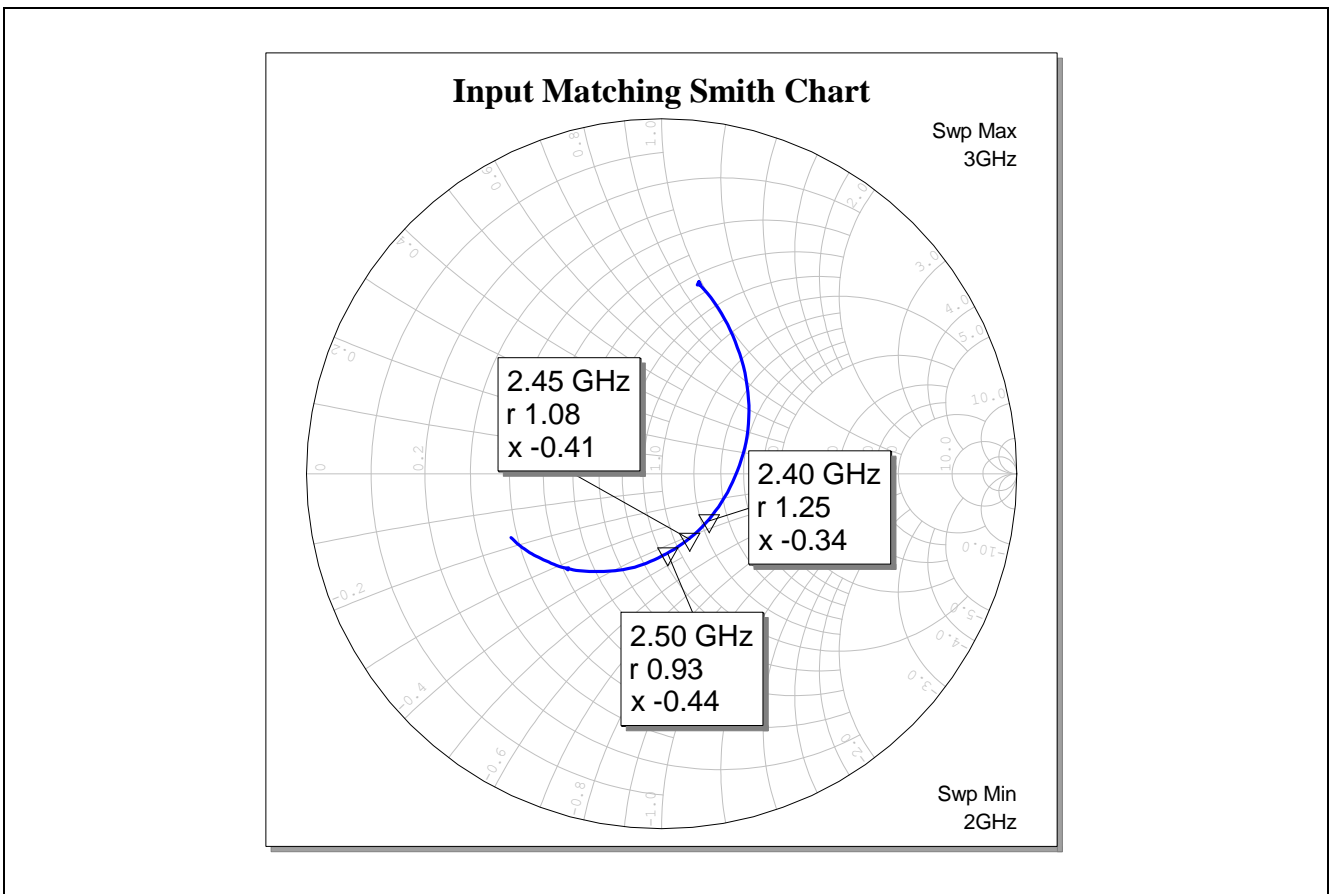


Figure 10 Input Matching of 2.4 GHz WLAN LNA with BFP760 (Smith Chart)

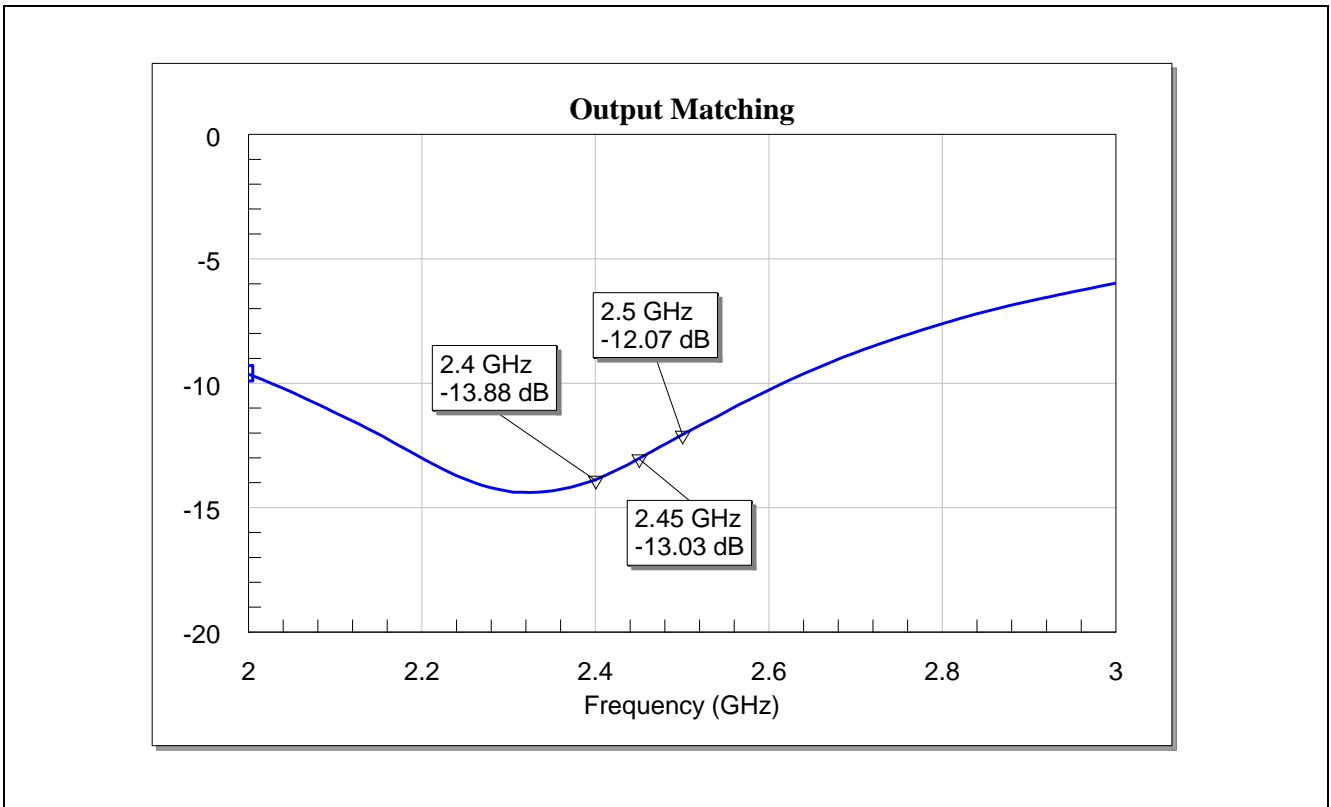


**Figure 11 Output Matching of the 2.4 GHz WLAN LNA with BFP760**

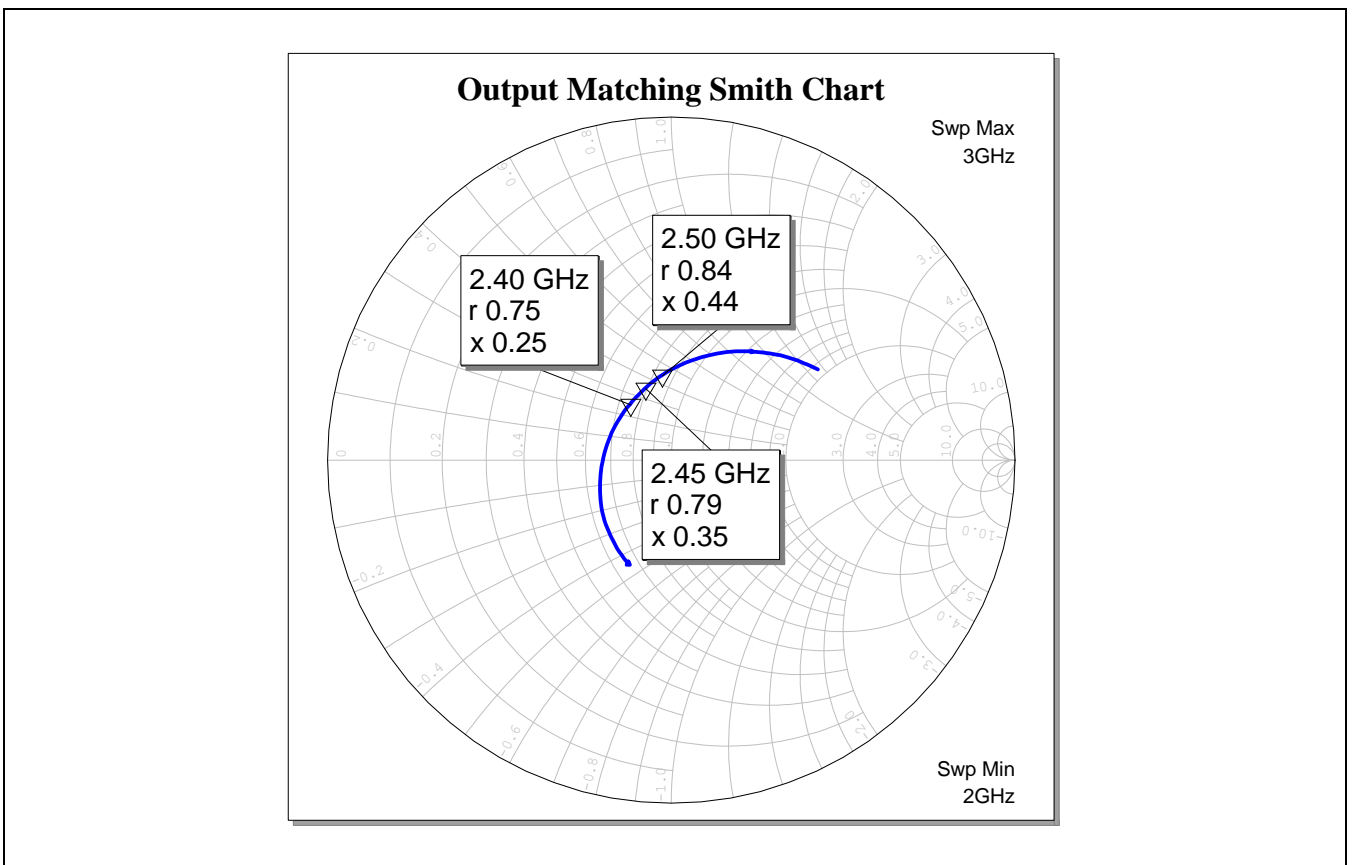


**Figure 12 Output Matching of the 2.4 GHz WLAN LNA with BFP760 (Smith Chart)**




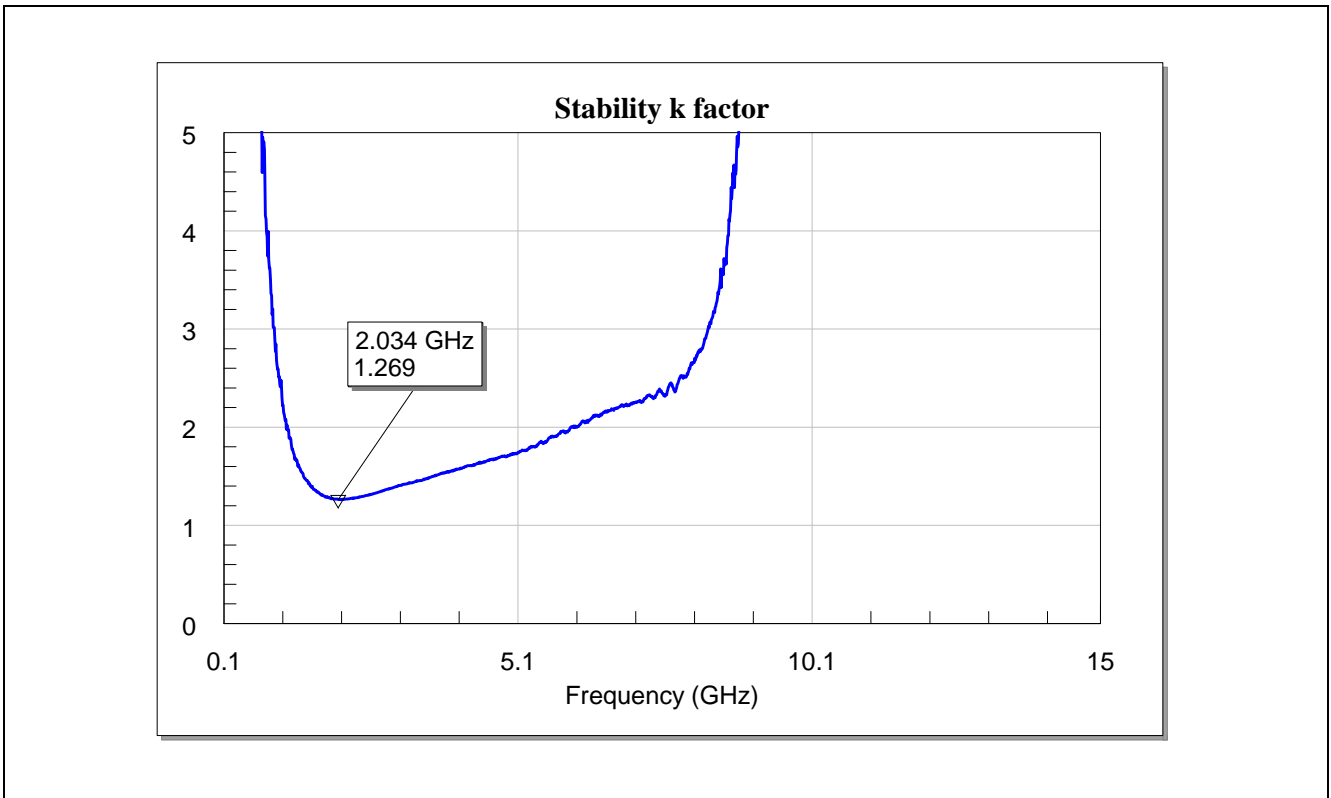


**Figure 13 Wideband Stability k Factor of the 2.4 GHz WLAN LNA with BFP760**

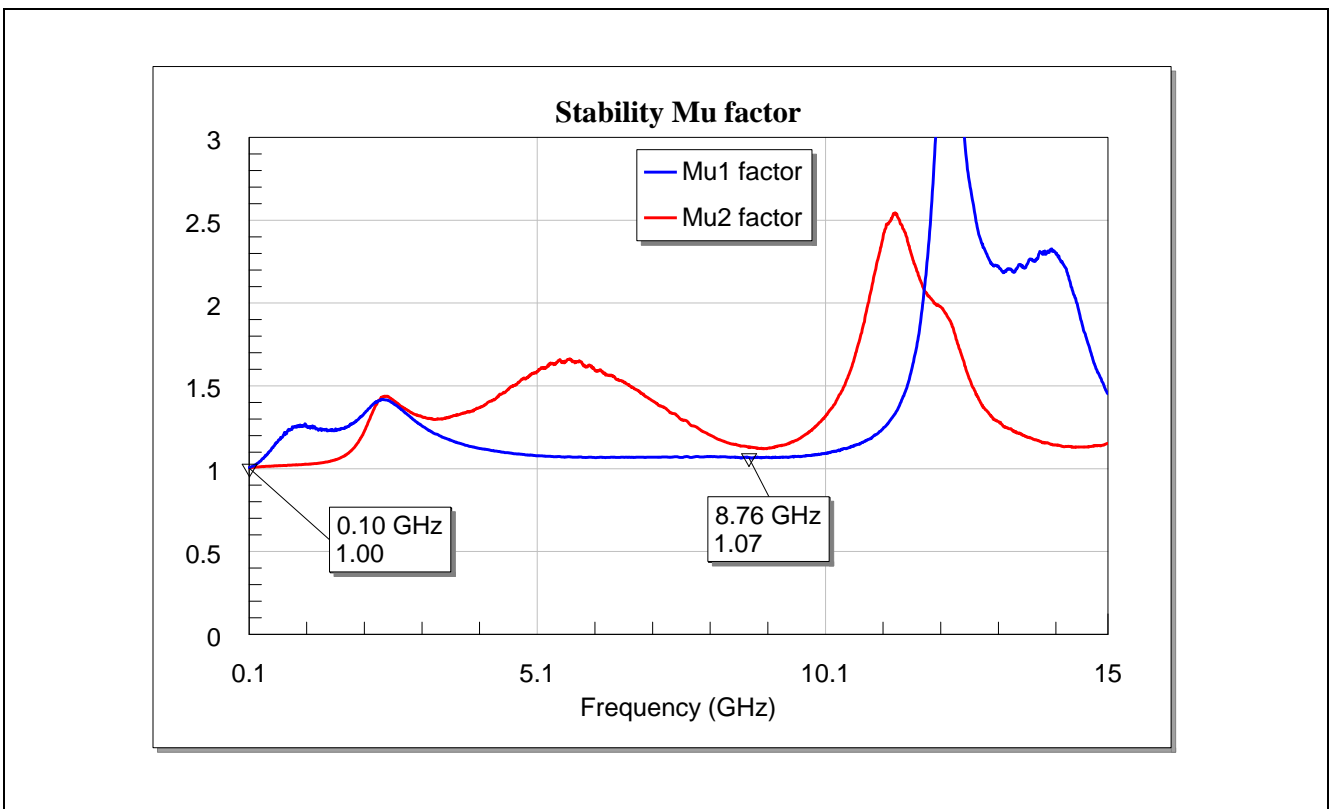

**Figure 14 Wideband Stability Mu Factor of the 2.4 GHz WLAN LNA with BFP760**

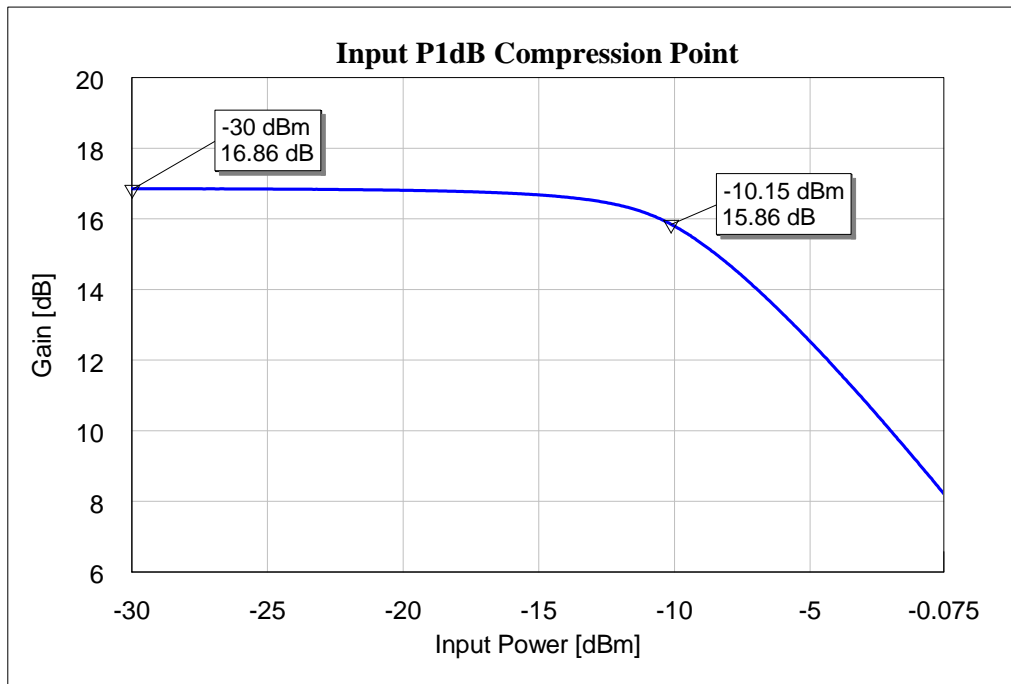

**Figure 15** Input 1dB Compression Point of the BFP760 Circuit

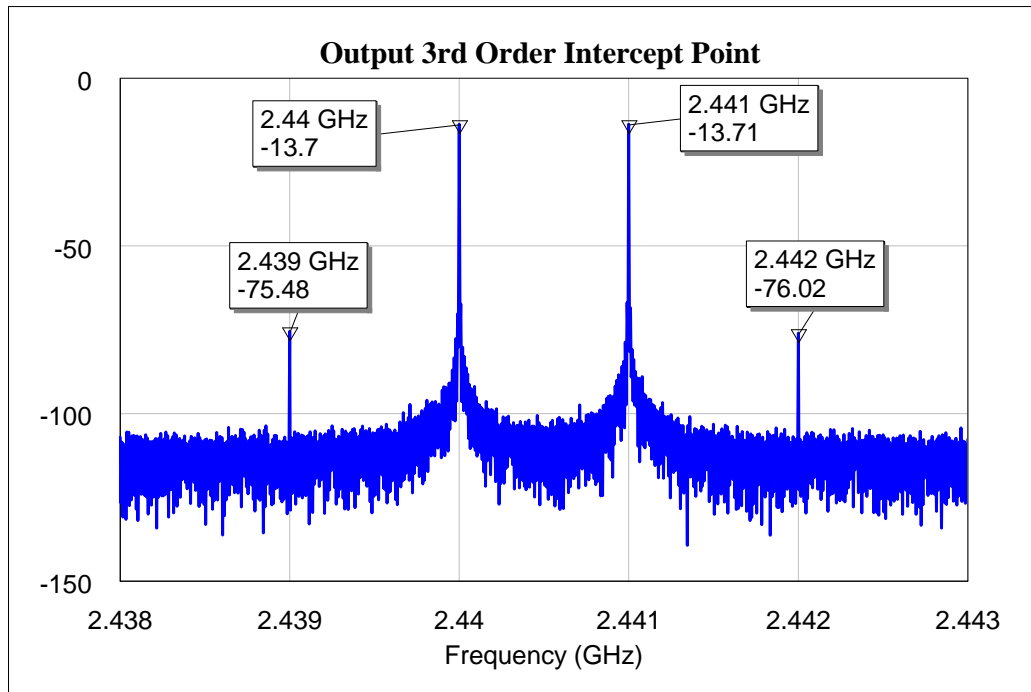

**Figure 16** Output 3<sup>rd</sup> Order Intercept Point of BFP760 at 2440 MHz

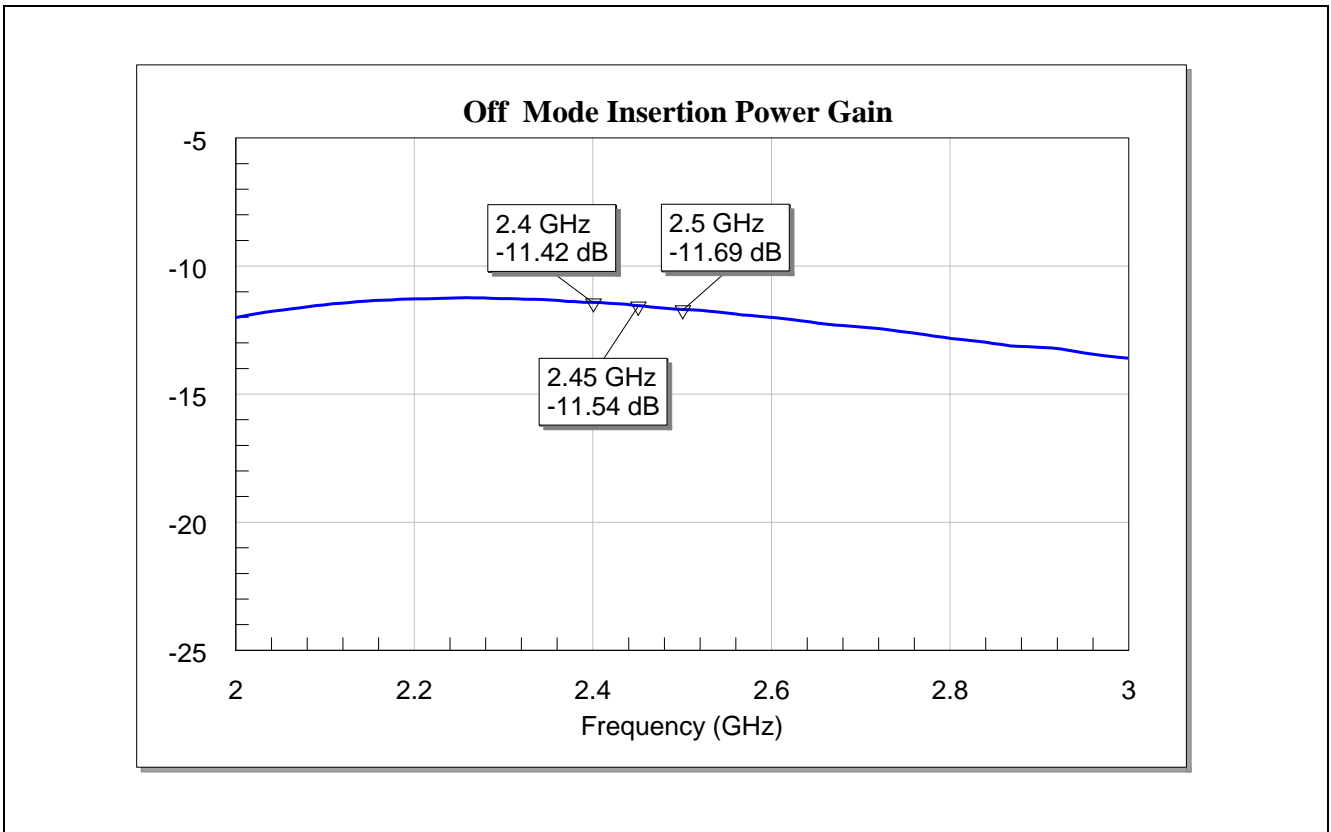


Figure 17 Off mode Insertion Power Gain of the 2.4 GHz WLAN LNA with BFP760

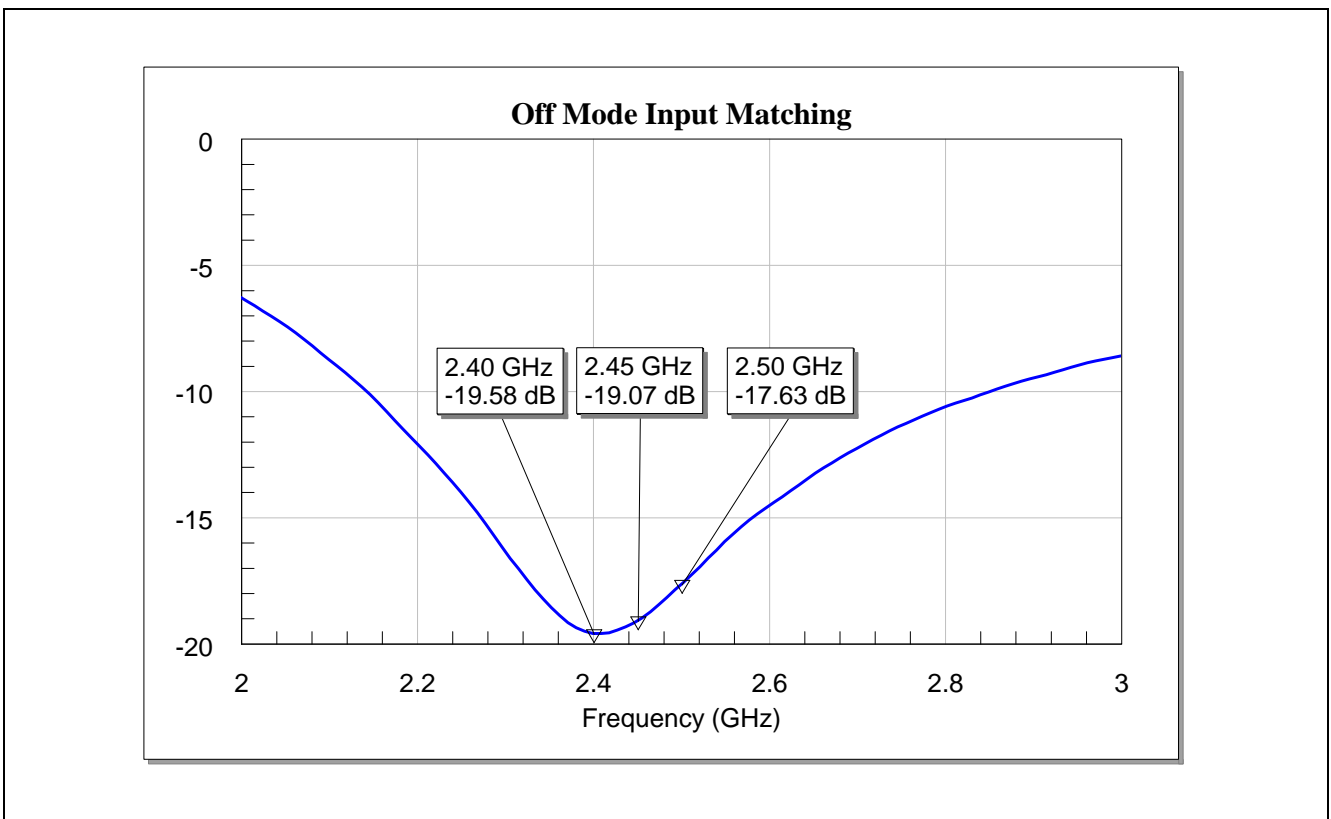


Figure 18 Off mode Input Matching of the 2.4 GHz WLAN LNA with BFP760

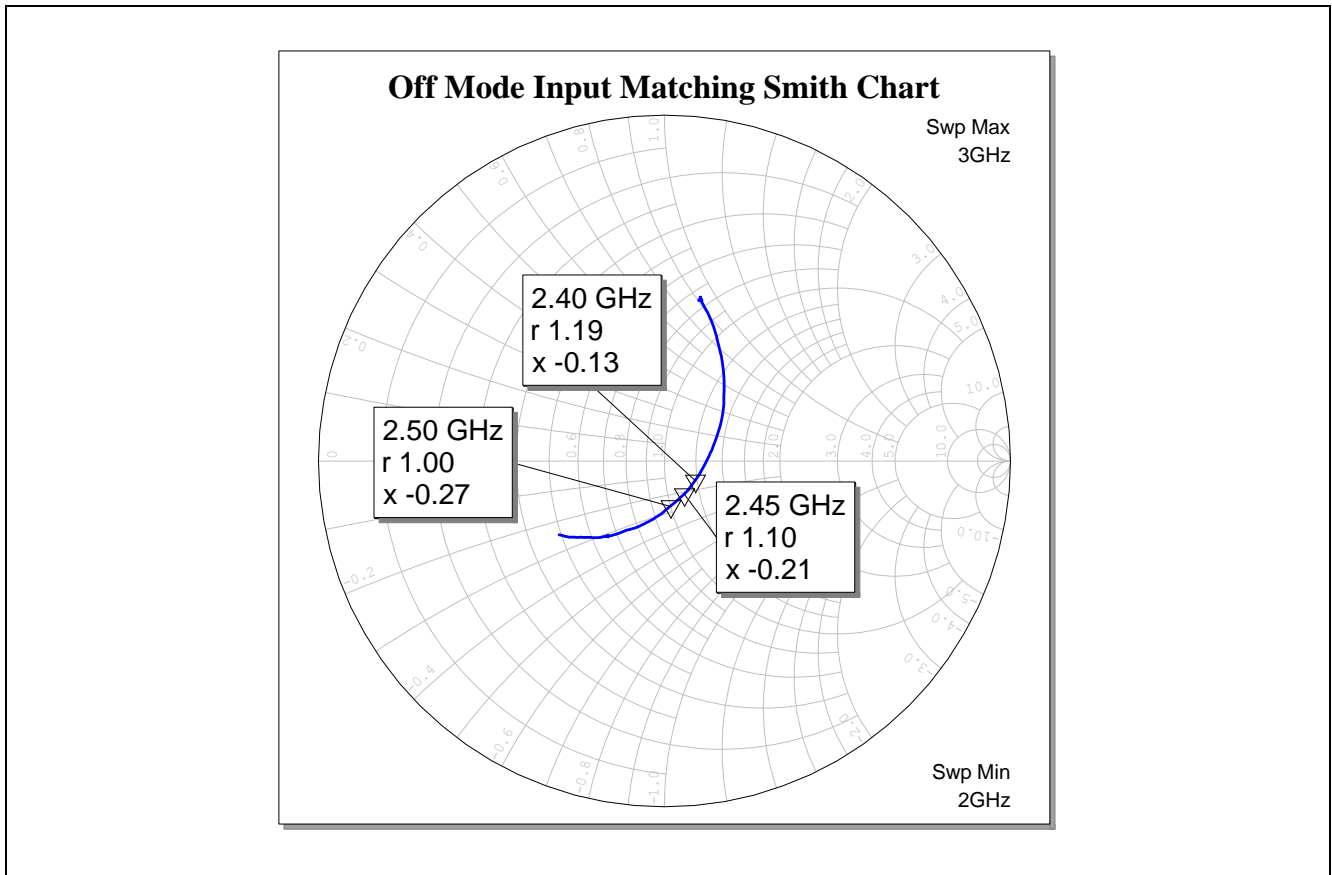


Figure 19 Off mode input matching of 2.4 GHz WLAN LNA with BFP760 (Smith Chart)



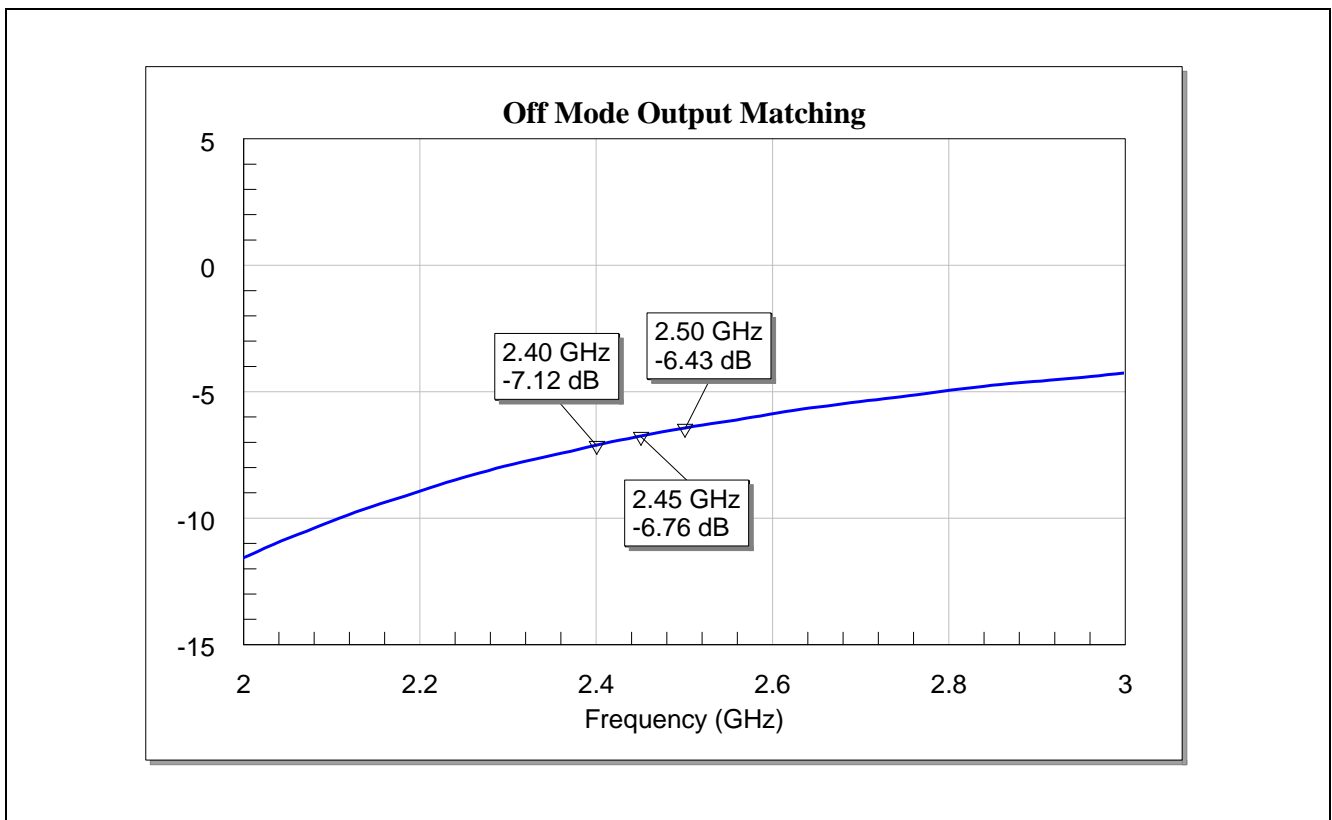


Figure 20 Off mode Output Matching of the 2.4 GHz WLAN LNA with BFP760

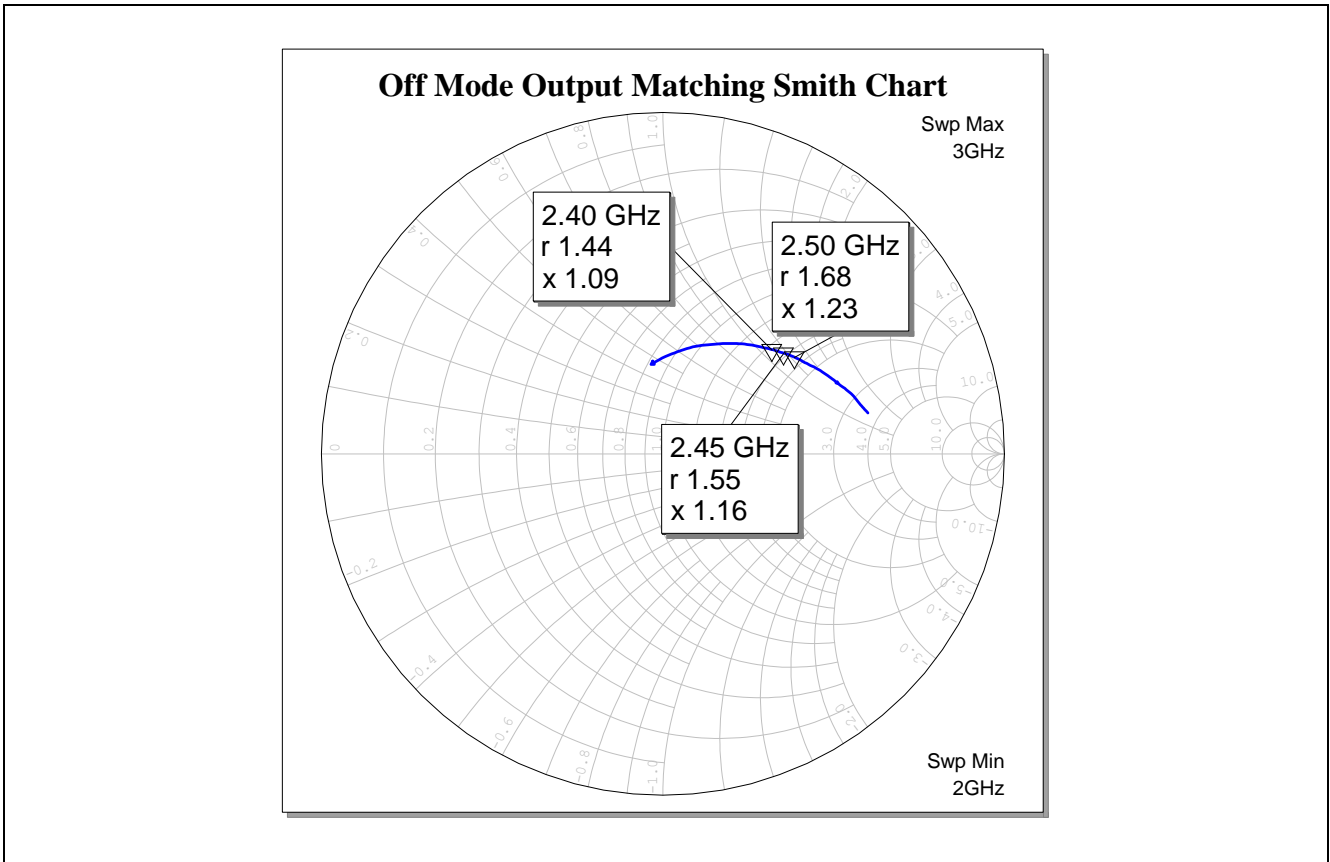

**Figure 21** Off mode output Matching of 2.4 GHz WLAN LNA with BFP760 (Smith Chart)

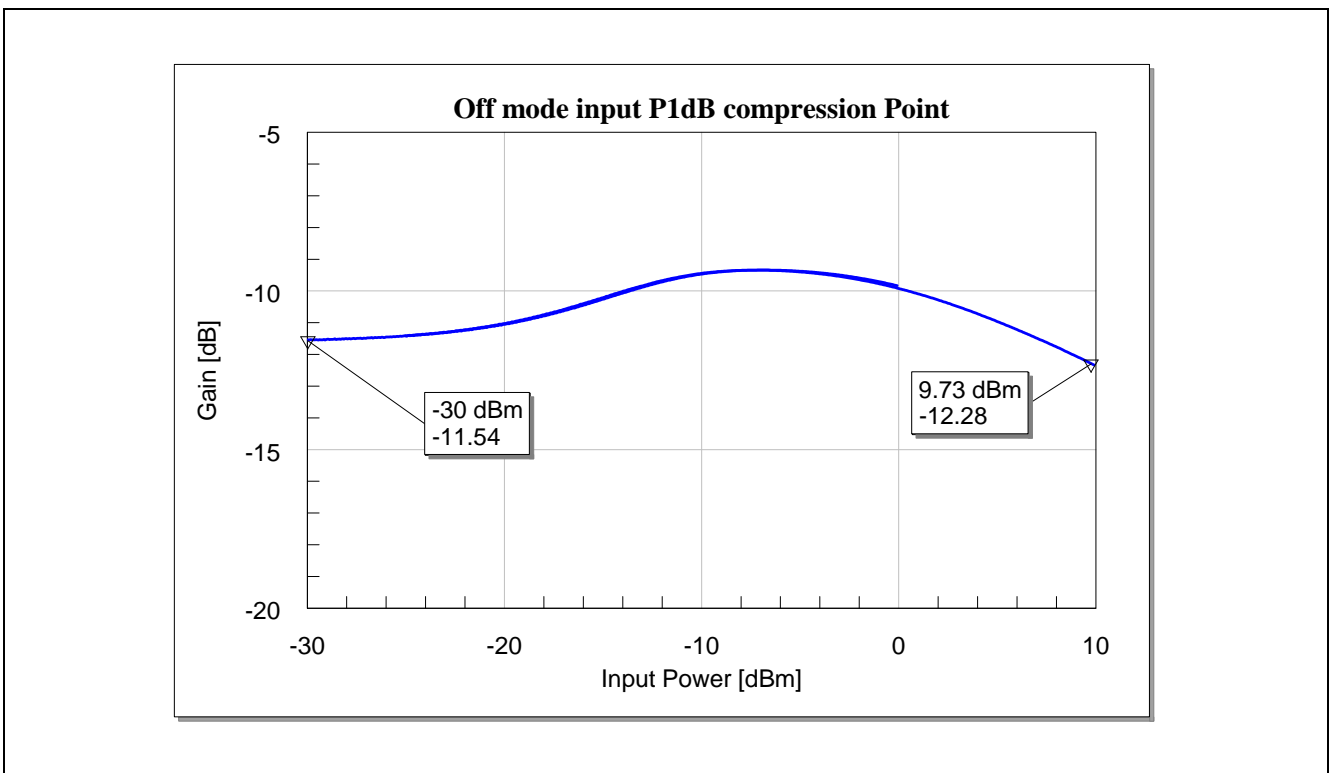

**Figure 22** Off mode input 1dB compression point of the 2.4 GHz WLAN LNA with BFP760

## 4 Evaluation Board and Layout Information

In this application note, the following PCB is used:

PCB Marking: M130125 V1.4e

PCB material: FR4

$\epsilon_r$  of PCB material: 4.3 (FR4)

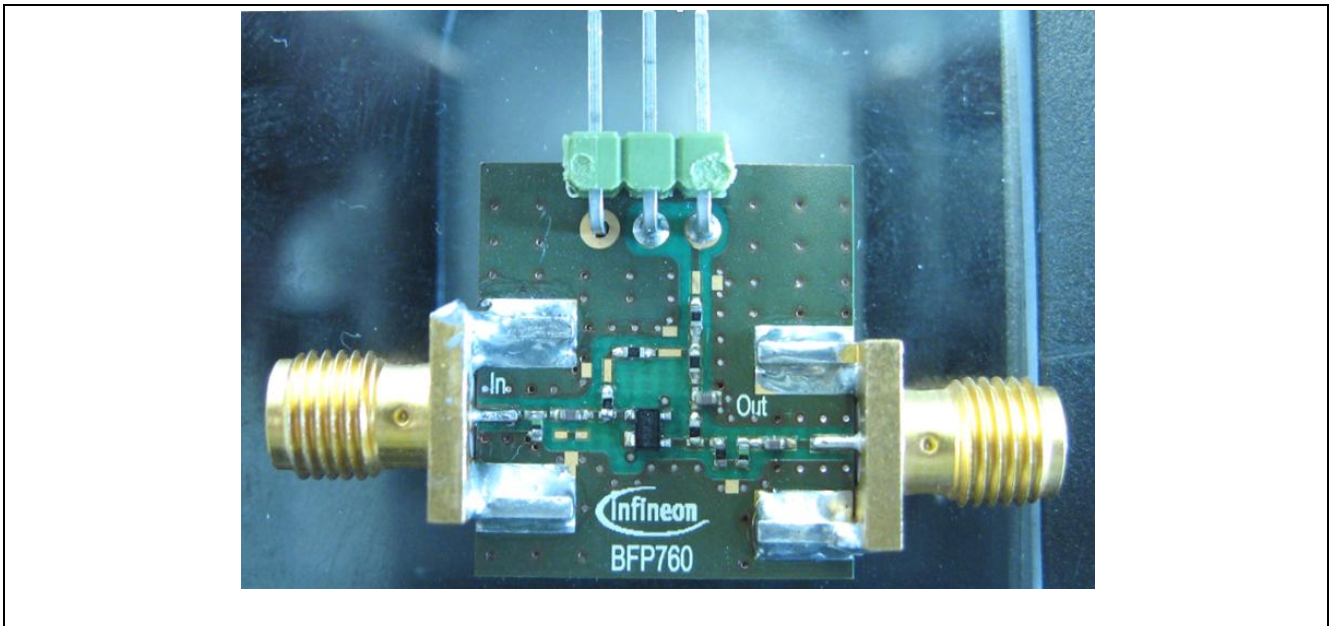


Figure 23 Photo Picture of Evaluation Board (overview) <PCB Marking Myymmdd Rev. x.x>



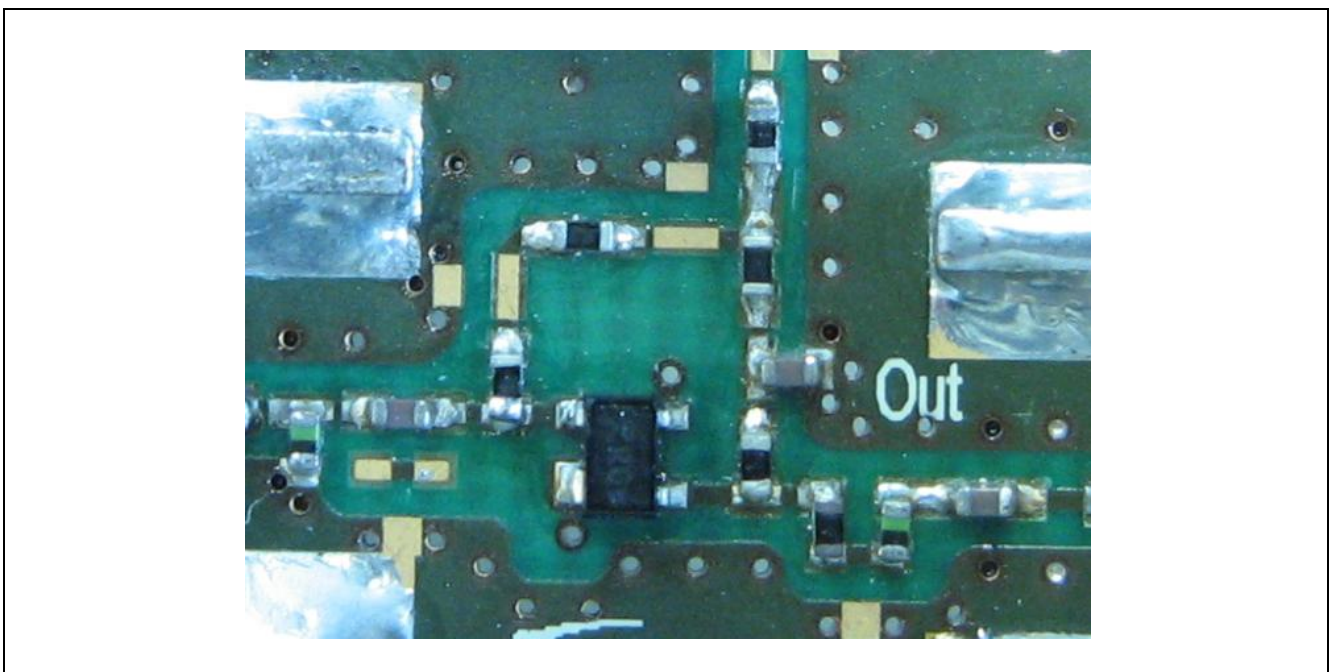


Figure 24 Photo Picture of Evaluation Board (detailed view)

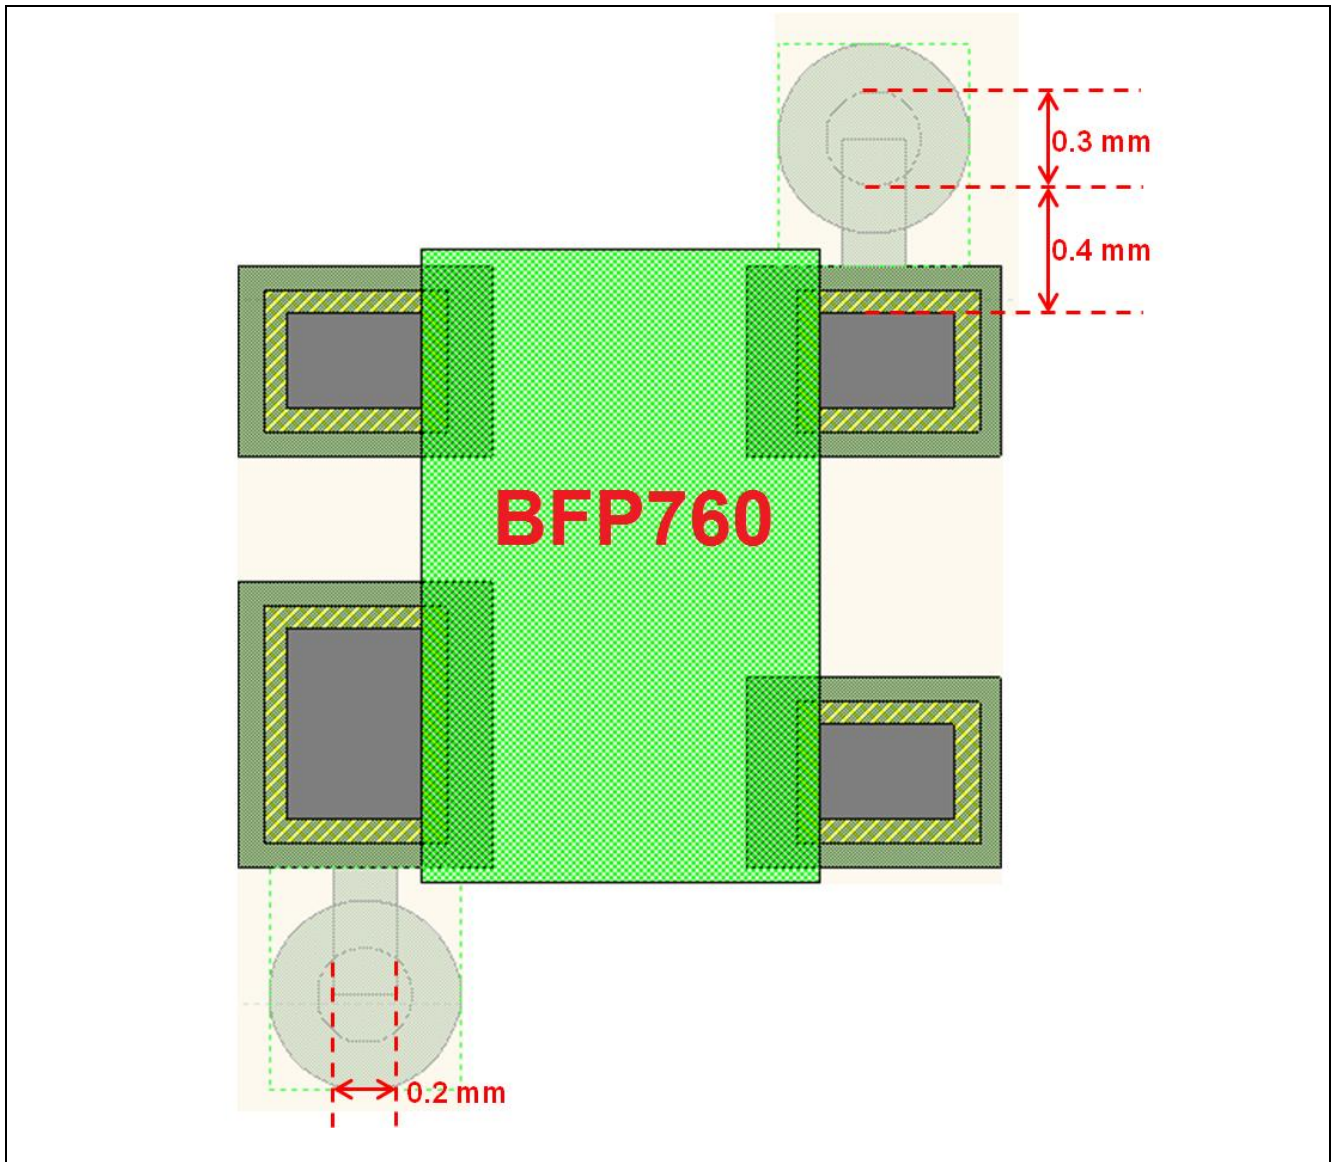

**Figure 25** Layout Proposal for RF Grounding of the 2.4 GHz WLAN LNA with BFP760

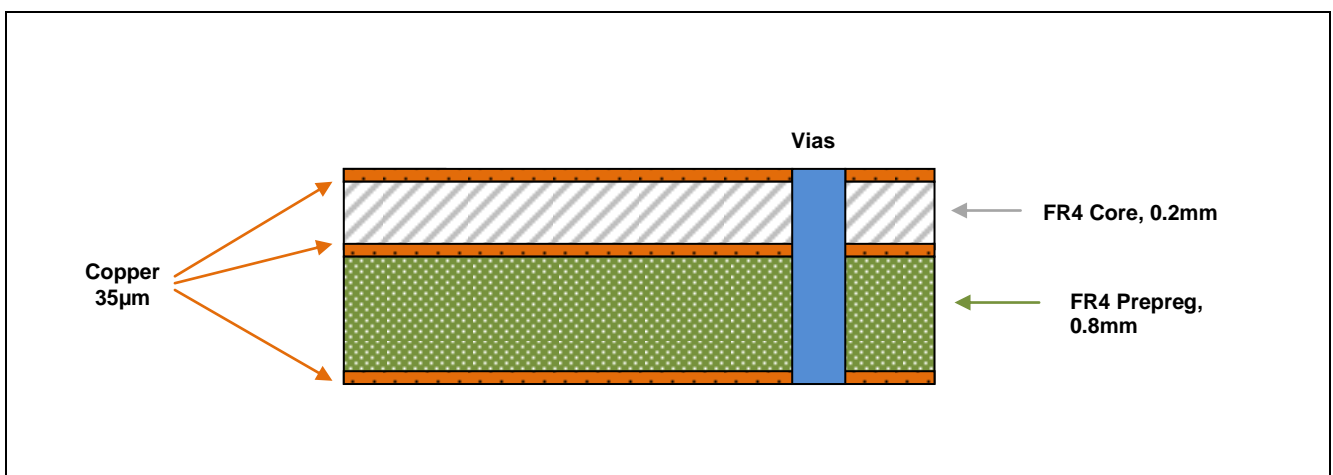

**Figure 26** PCB Layer Information



## **5 Authors**

Moakhkhurul Islam, Application Engineer, Technical Marketing RF of Business Unit “RF and Protection Devices”

Dr. Chih-I Lin, Senior Staff Engineer, Technical Marketing RF of Business Unit “RF and Protection Devices”

## **6 Remark**

The graphs are generated with the simulation program AWR Microwave Office®.



[www.infineon.com](http://www.infineon.com)