



**Please note that Cypress is an Infineon Technologies Company.**

The document following this cover page is marked as “Cypress” document as this is the company that originally developed the product. Please note that Infineon will continue to offer the product to new and existing customers as part of the Infineon product portfolio.

**Continuity of document content**

The fact that Infineon offers the following product as part of the Infineon product portfolio does not lead to any changes to this document. Future revisions will occur when appropriate, and any changes will be set out on the document history page.

**Continuity of ordering part numbers**

Infineon continues to support existing part numbers. Please continue to use the ordering part numbers listed in the datasheet for ordering.



**THIS SPEC IS OBSOLETE**

Spec No: 002-04445

Spec Title: AN204445 - FM0+, S6E1A1 Fan Motor EV Board

Replaced by: None

## FM0+, S6E1A1 Fan Motor EV Board

This application note describes the SK-FM0-LQFP48-S6E1A1-FAN evaluation board and it provides description of the hardware elements.

### 1 Introduction

#### 1.1 Purpose

This application note describes the SK-FM0-LQFP48-S6E1A1-FAN evaluation board and it provides description of the hardware elements.

#### 1.2 Definitions, Acronyms, and Abbreviations

EVB evaluation board

IPM Intelligent Power Module

SPSM Switch Power Supply Module

#### 1.3 Document Overview

The rest of document is organized like this:

Chapter 2 is Overview and Features.

Chapter 3 is Getting Started

Chapter 4 is Hardware


Chapter 5 is Additional Information

## 2 Overview and Features

### 2.1 Overview

This board is intended to aid the user in evaluation and development of a wide variety of motor control applications based on Cypress ARM® Cortex®-M0+ microcontroller. This board is targeted to control low power (<50Watt) Brushless DC (BLDC) motors, Permanent Magnet Synchronous Motors (PMSM), and AC Induction Motors (ACIM) in sensor-less operation.

Figure 1. Board Overview

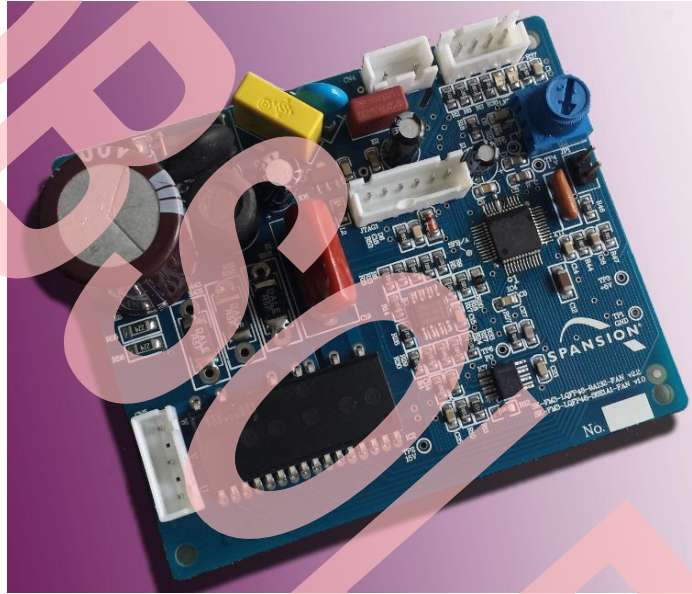

### 2.2 Features

- Cypress fm0+ S6E1A1 series microcontroller
- Input : 185V~256V AC or 260V~365V DC
- Transformer less SMSP (15V/300mA)
- 600V/1.5A Intelligent Power Module (IPM)
- Three shunt resistors
- On-board potentiometer for speed setting
- UART
- 6-pin JTAG interface

## 2.3 Specifications

The specifications are shown in the table as below.


Table 1. Specifications

Specifications	Value	Remark
AC voltage input	220V±15%	50~60Hz
DC voltage input	310V±15%	
On-board 15V	15V±5%	
On-board 5V	5V±5%	
IPM max phase current	1.5A(Tc= 25°C) ; 1.1A (Tc=80°C)	continuous current
Over-Current protection	1.66A	shunt resister 0.56Ω

## 2.4 System Block Diagram

Figure 2 helps on fast review and understanding the system.

Figure 2. System Block Diagram

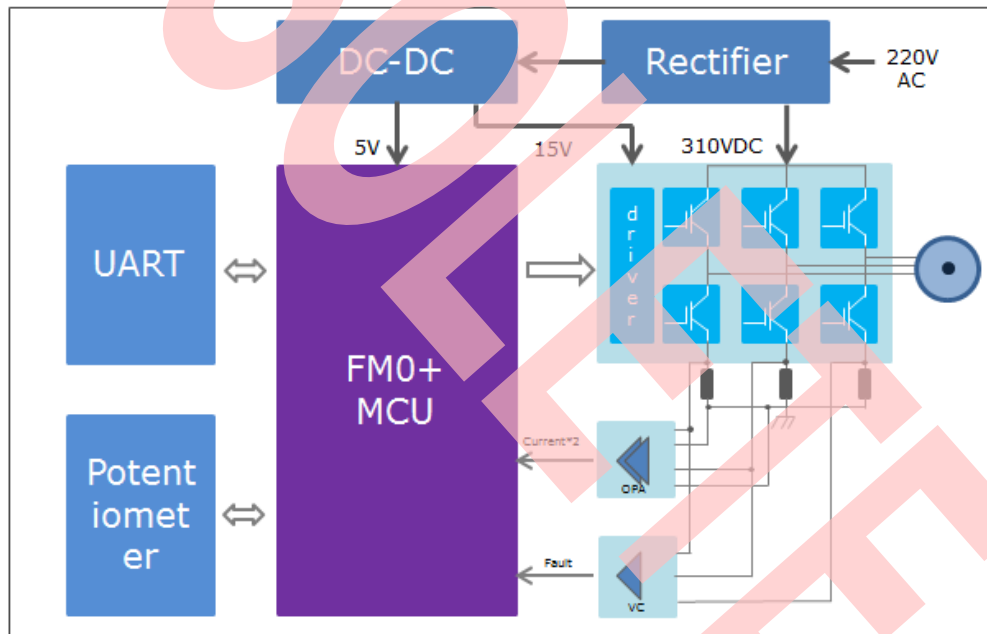

This board employs Cypress fm0+ S6E1A1 series microcontroller. The operation frequency of this MCU is up to 40MHz, up to 56Kbytes flash and 48K SRAM. It has a Multi-Function Timer which is able to generate three-phase SVPWM signals. Additionally, 12bit ADC have 1MHz sample rate.

The system has a three-phase power module device that contains the motor inverter and the gate driver's circuitry. The circuit drives a BLDC, PMSM, or ACIM motor using different control techniques without requiring any additional hardware. The rated continuous current of this module is 1.5A (RMS). This allows up to approximately 50Watt output when running from a 208V to 230V single-phase input voltage without heat-sink.

Three shunt resistors and a differential amplifier are used to measure the currents that flow through the motor phase. A voltage comparator is used to implement over-current protection.

The UART interface enables the communication with other board and flash programming.

A Potentiometer is used to set the speed; the range of the resistance is from 0 to 10K.

### 3 Getting Started

#### 3.1 Components Layout

Figure 3. Components Layout

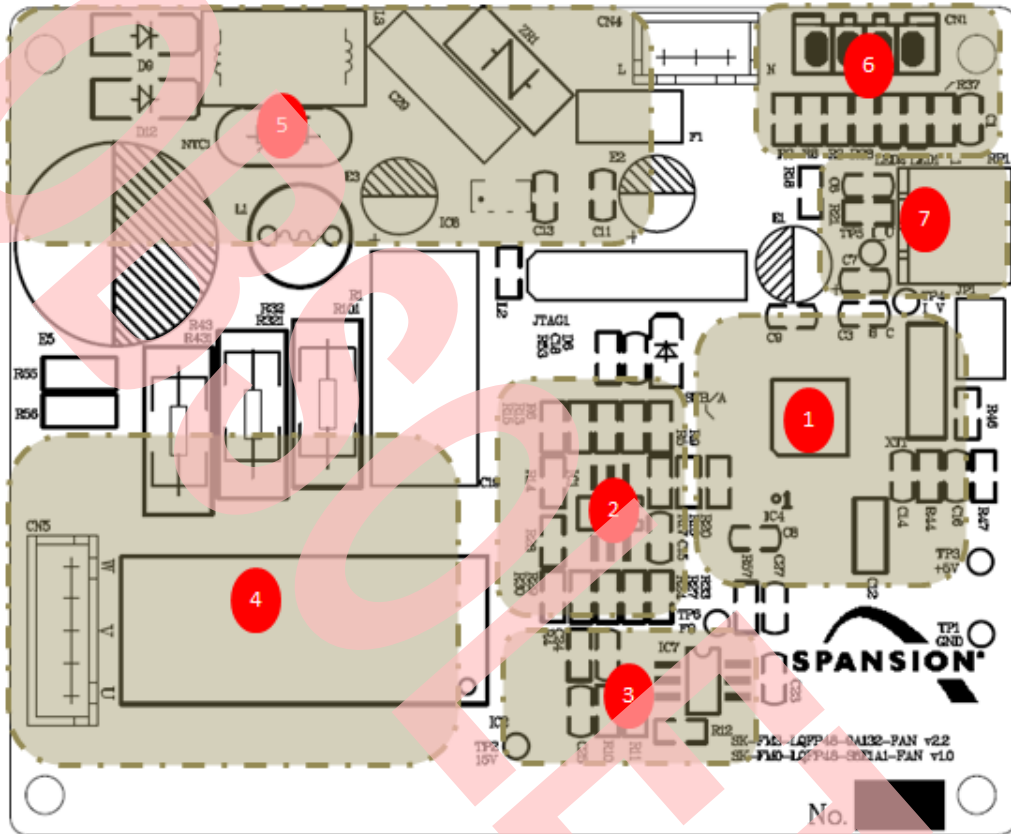



Table lists the main modules of this board

Table 2. Main Modules

No.	Modules	Description
1	MCU unit	S6E1A11C0A, fm0+ MCU, LQFP48, up to 40MHz
2	Current sampling circuit	LM358, offset output voltage 2.5V
3	Over current protection circuit	LM339, output "L" when OC, threshold 1.66A
4	IPM circuit	FSB50450A(600V/1.5A), shunt resistor 0.5Ω/1W
5	AC supply input and SPSM	Rectifier, EMI filter and in-rush limiter, SPSM
6	UART0	Data transmission and flash programming
7	Potentiometer	ADC input for speed setting

### 3.2 Connectors Description

Figure 4. Connectors

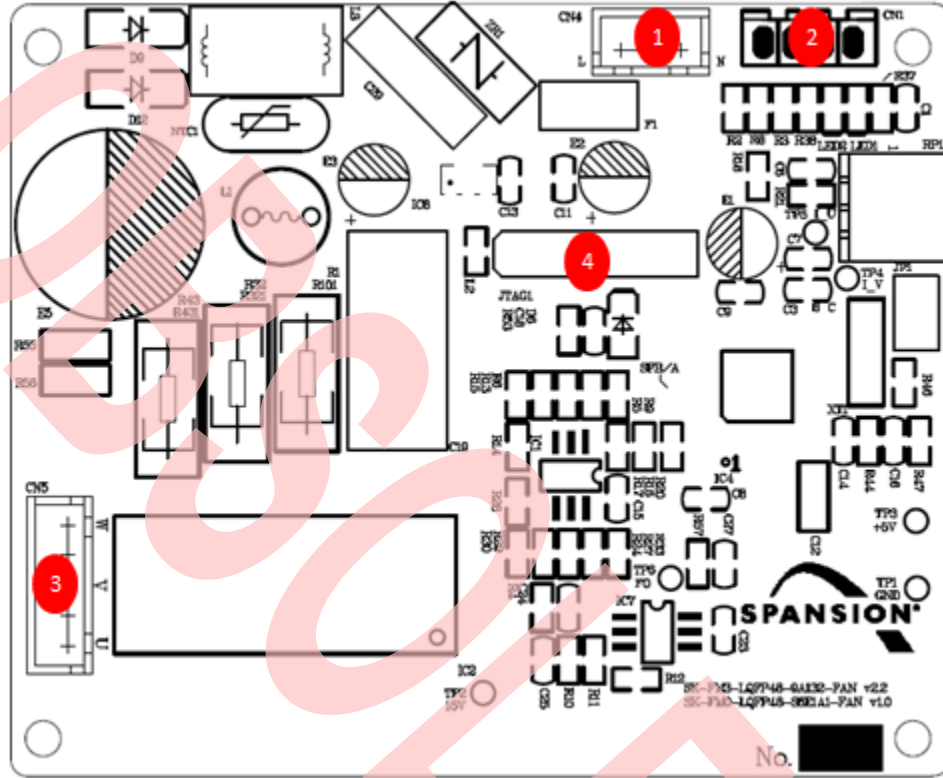

The connectors are listed in the Table 3.

Table 3. Connectors Description


Number	Name	Descriptions
1	CN4	AC/DC voltage input
2	CN1	UART0
3	CN5	U,V,W phase
4	JTAG1	6-pin JTAG interface

## 4 Hardware

### 4.1 Amplifier Circuit

The differential amplifier circuit is applied in on this board to measure the motor phase current. The two channels amplifier LM358 is adapted in this system to condition the voltage between the shunt resistors. Firstly, the amplifier circuit amplifies the voltage to the range that has proper precision. Secondly, the amplifier circuit provides a static 2.5V output when the input is 0V. This enables the possibility to sample the negative current between the shunt resistors.

Figure 5. amplifier circuit

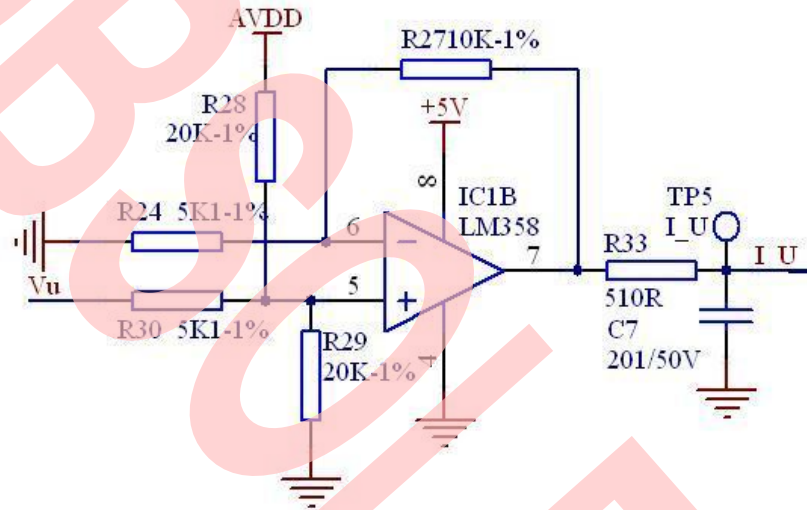

Equation:

$$V_{out_u} = \frac{AVDD}{2} + \left(\frac{R27}{R24}\right) * V_{in_u}$$

Where:

$V_{out_u}$ : Output of amplifier

$V_{in_u}$ : Input of amplifier

$$R28 = R29 = 2 * R27$$


There are three shunt resistors, while two of them are used on phase current sampling, because the third phase current can be calculated by the other two current values. In this system, the U, V currents are sampled.



### 4.2 Over-current Protection Circuit

There is over-current protection circuit to prevent IPM and motor damaged by the current surge that flowing through the phases. The over-current protection circuit is consisted of a voltage comparator LM393, resistors and capacitors. Figure 6 shows the details.

Figure 6. Over-current protection circuit

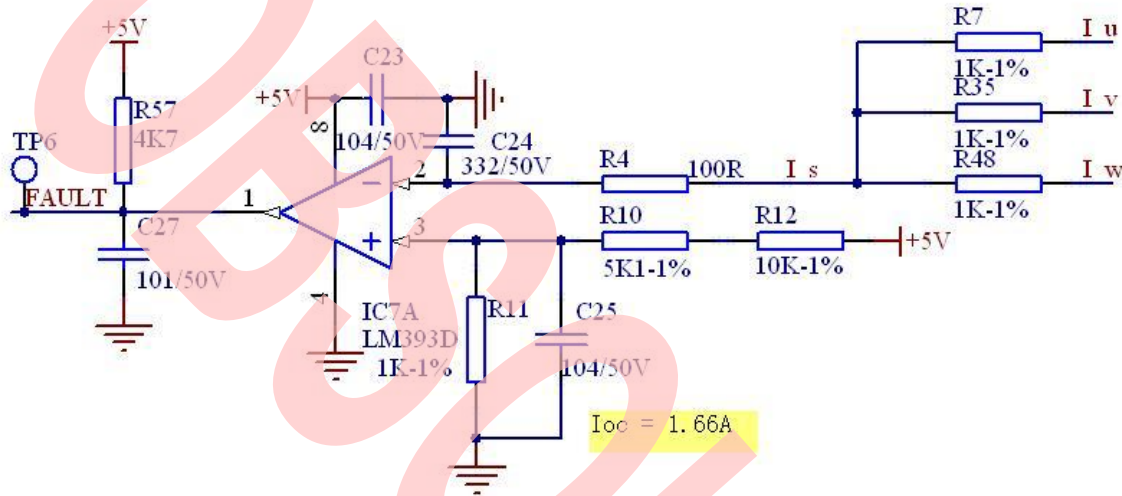

Equation:

$$I_{oc} = \frac{R_{11}}{R_{11} + R_{12} + R_{13}} * 5V * \frac{3}{R_{shunt}}$$

Where:

$I_{oc}$ : Threshold value of protection

$R_{shunt}$ : Value of shunt resistor

$R_7 = R_{35} = R_{48}$

### 5 Additional Information

For more Information on Cypress semiconductor products, visit the following website:

<http://www.cypress.com/cypress-microcontrollers>

## 6 Document History

Document Title: AN204445 - FM0+, S6E1A1 Fan Motor EV Board

Document Number: 002-04445

Revision	ECN	Orig. of Change	Submission Date	Description of Change
**	-	CBZH	02/01/2015	Initial release
*A	5100344	CBZH	07/08/2016	Migrated Spansion Application Note FM0+_AN706-00098-1v0-E to Cypress format. This application note is for obsolete because product is not available and there is no web link to get this hardware for customer.

## Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

### Products

ARM® Cortex® Microcontrollers	<a href="http://cypress.com/arm">cypress.com/arm</a>
Automotive	<a href="http://cypress.com/automotive">cypress.com/automotive</a>
Clocks & Buffers	<a href="http://cypress.com/clocks">cypress.com/clocks</a>
Interface	<a href="http://cypress.com/interface">cypress.com/interface</a>
Lighting & Power Control	<a href="http://cypress.com/powerpsoc">cypress.com/powerpsoc</a>
Memory	<a href="http://cypress.com/memory">cypress.com/memory</a>
PSoC	<a href="http://cypress.com/psoc">cypress.com/psoc</a>
Touch Sensing	<a href="http://cypress.com/touch">cypress.com/touch</a>
USB Controllers	<a href="http://cypress.com/usb">cypress.com/usb</a>
Wireless/RF	<a href="http://cypress.com/wireless">cypress.com/wireless</a>

### PSoC® Solutions

[PSoC 1](#) | [PSoC 3](#) | [PSoC 4](#) | [PSoC 5LP](#)

### Cypress Developer Community

[Forums](#) | [Projects](#) | [Videos](#) | [Blogs](#) | [Training](#) | [Components](#)

### Technical Support

[cypress.com/support](http://cypress.com/support)

PSoC is a registered trademark and PSoC Creator is a trademark of Cypress Semiconductor Corporation. All other trademarks or registered trademarks referenced herein are the property of their respective owners.



Cypress Semiconductor      Phone : 408-943-2600  
198 Champion Court      Fax : 408-943-4730  
San Jose, CA 95134-1709      Website : [www.cypress.com](http://www.cypress.com)

© Cypress Semiconductor Corporation, 2015-2016. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit [cypress.com](http://cypress.com). Other names and brands may be claimed as property of their respective owners.