


How to measure motor parameters





EVAL_100W_DRIVE_CFD2

September 2017

Fundamental parameters are: R, L, pole pairs, BEMF constant



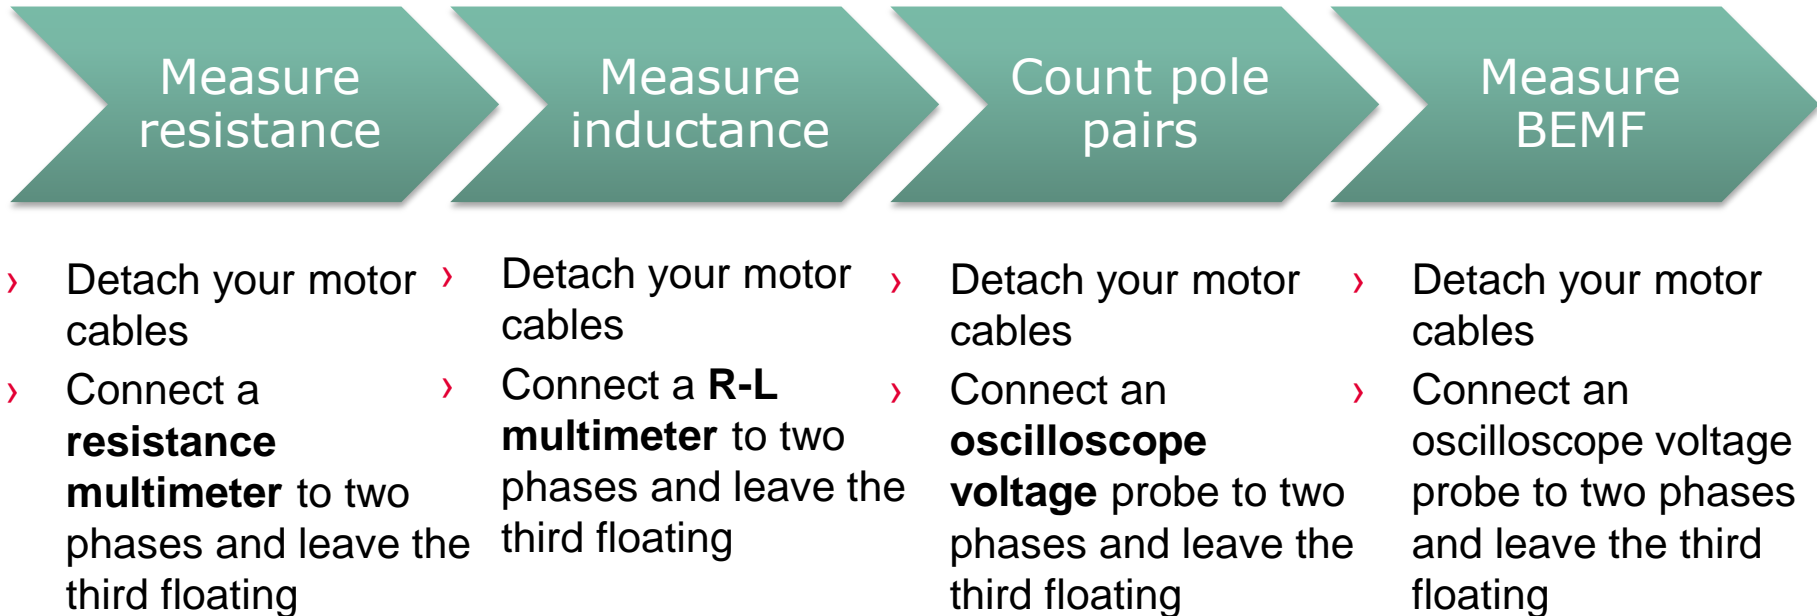


Measure phase-to-phase resistance

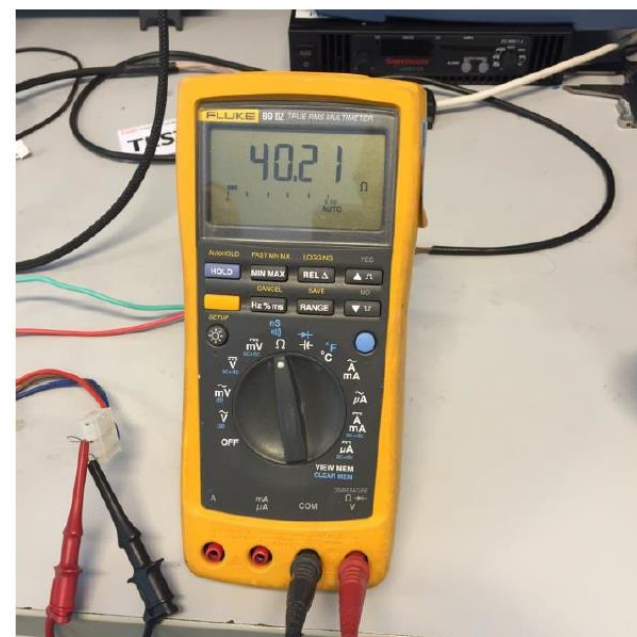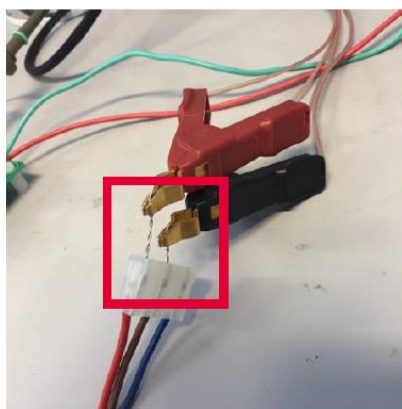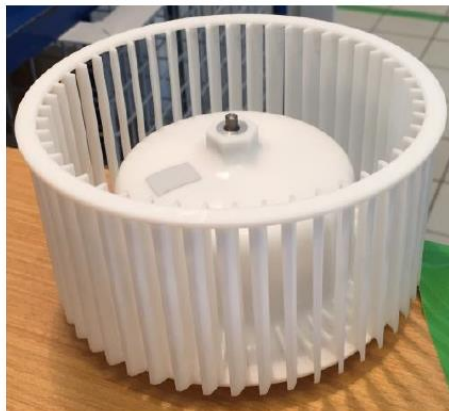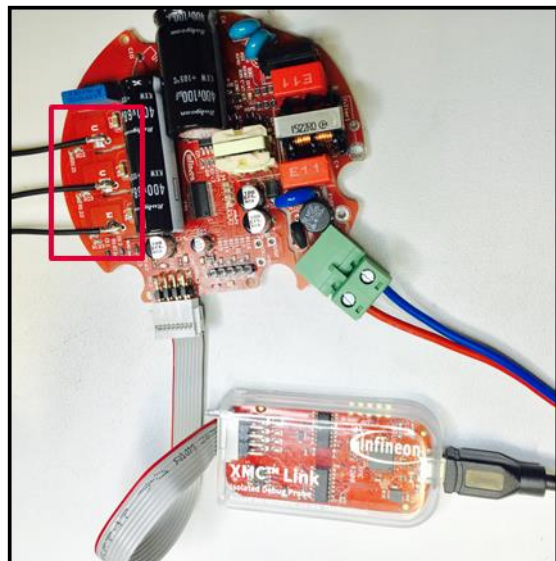





- › Detach motor cables
- › Connect two phases to Ohm-meter
- › Leave third phase open
- › Write down the phase-to-phase resistance value

Measure phase to phase inductance

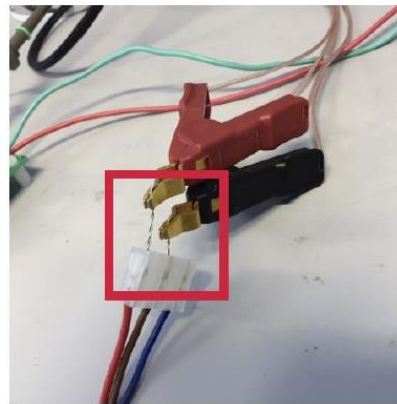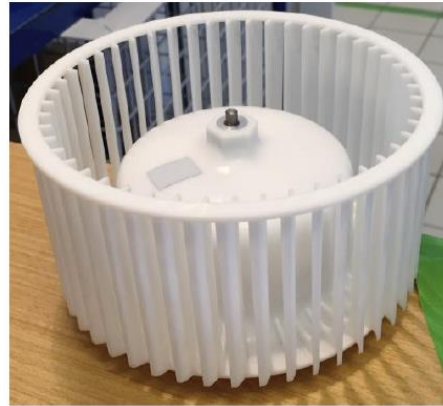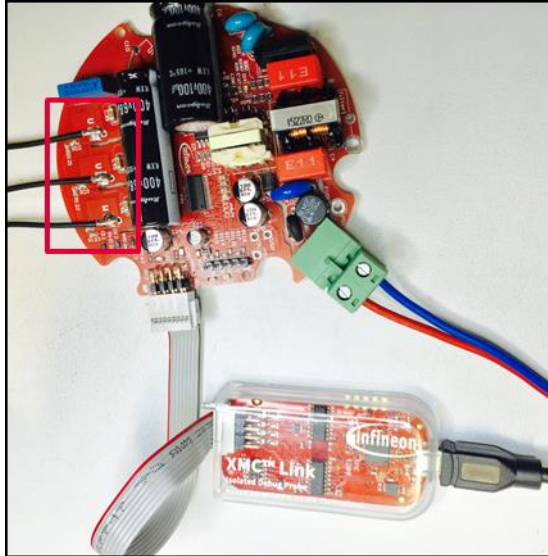



- › Detach motor cables
- › Connect two phases to RCL-meter set to 1 KHz
- › Leave third phase open
- › Write down the phase-to-phase inductance value

Measure pole pairs number

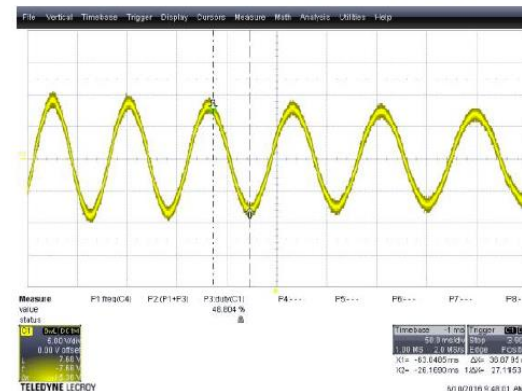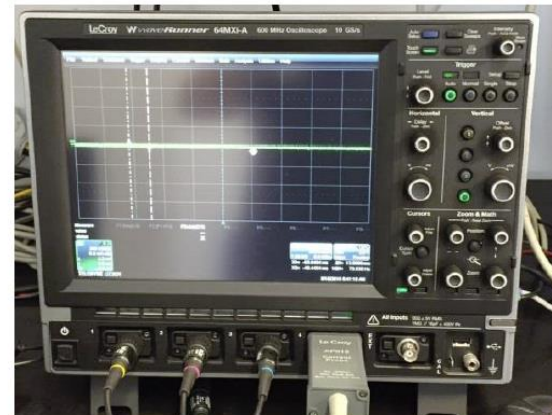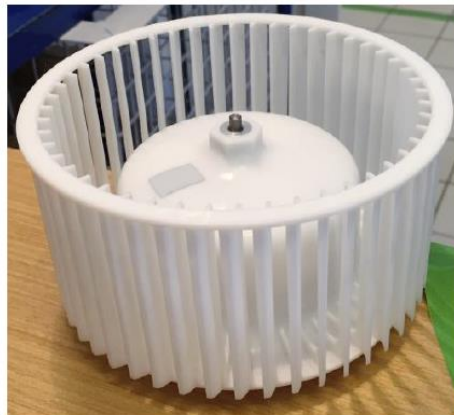
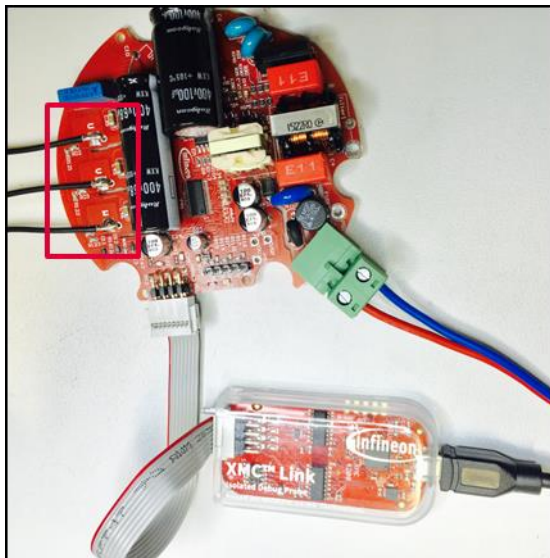


- › Detach motor cables
- › Connect two phases to oscilloscope voltage probe
- › Leave third phase open
- › Move the motor by hand and make one mechanical turn
- › Count the peaks of the sinusoid


Measure BEMF constant

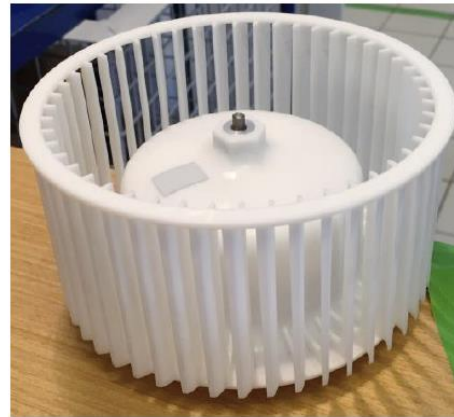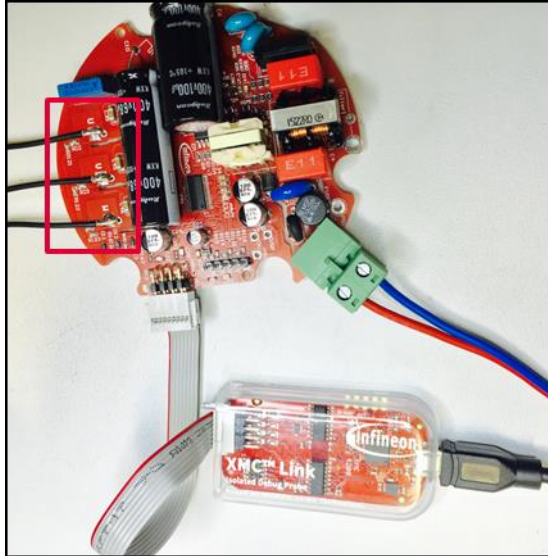


- › Detach motor cables
- › Connect two phases to oscilloscope voltage probe
- › Leave third phase open
- › Move the motor by hand
- › Write down the frequency and the peak-to-peak value of the sinusoid
- › Use equation in slide 9

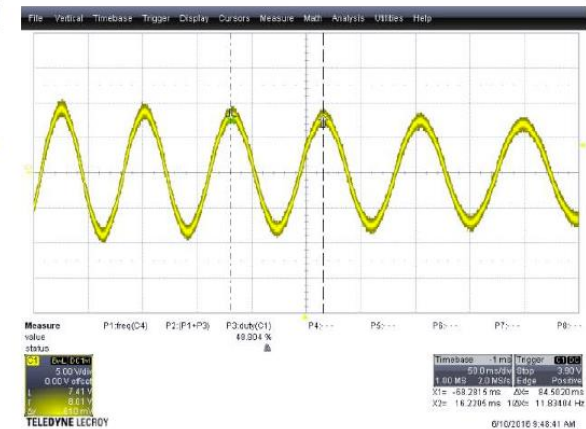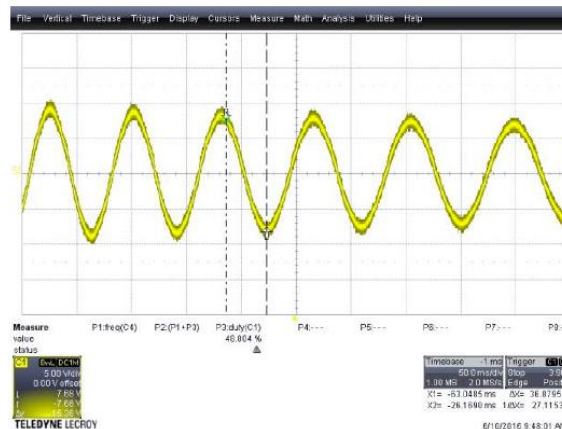

Measure BEMF constant

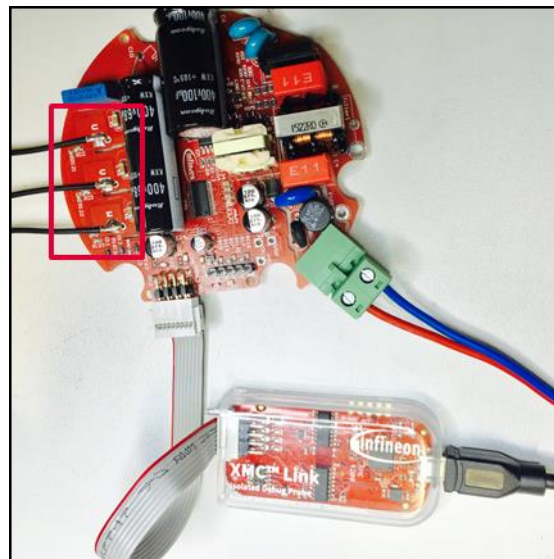

- › Detach motor cables
- › Connect two phases to oscilloscope voltage probe
- › Leave third phase open
- › Move the motor by hand
- › Write down the frequency and the peak-to-peak value of the sinusoid
- › Use equation in slide 9

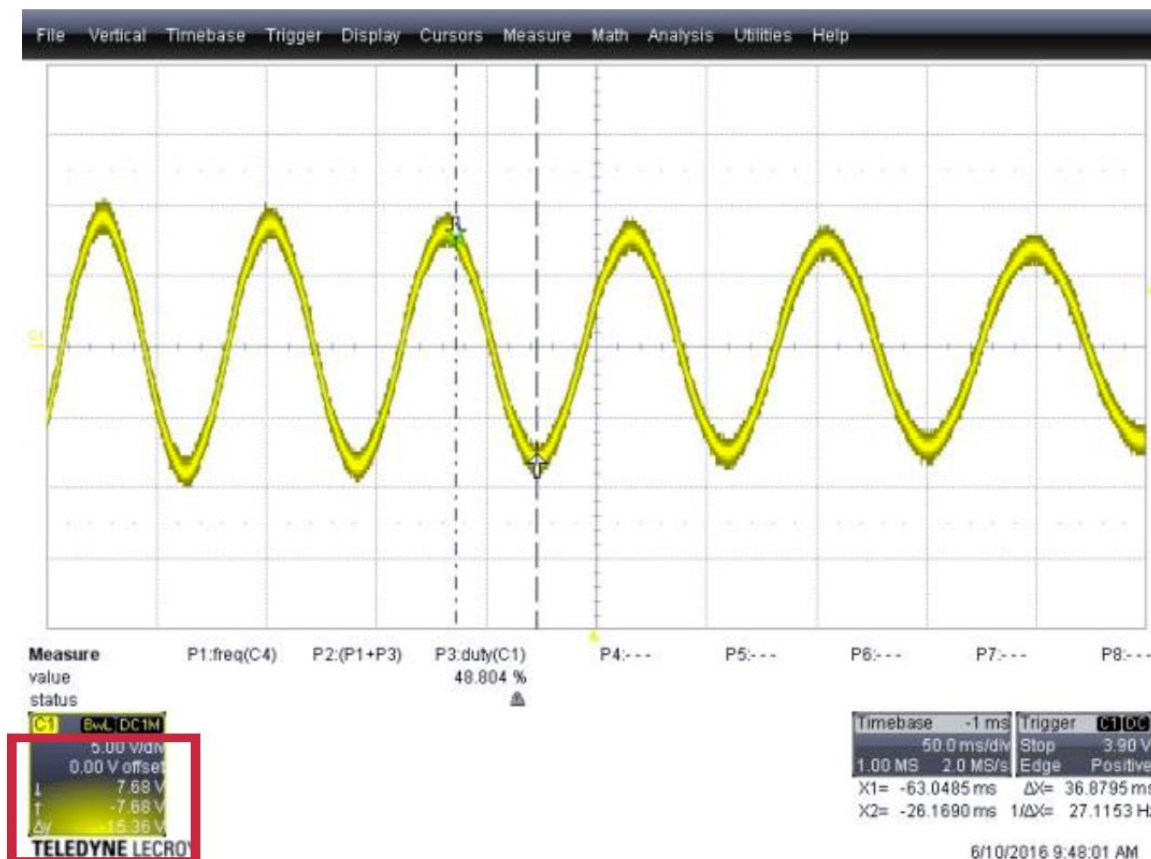


Formula to get BEMF at 1kRPM I/n rms

- › Use this formula to get the BEMF constant

$$K_{e_{1kRPM\ln rms}} = \frac{V_{pp}}{2 \times \sqrt{2} \times \sqrt{3}} \times \frac{16,67 \times N_{polepairs}}{f_{measured}} = \frac{V_{pp}}{f_{measured}} \times N_{polepairs} \times 3,40$$

Support Online tools and services

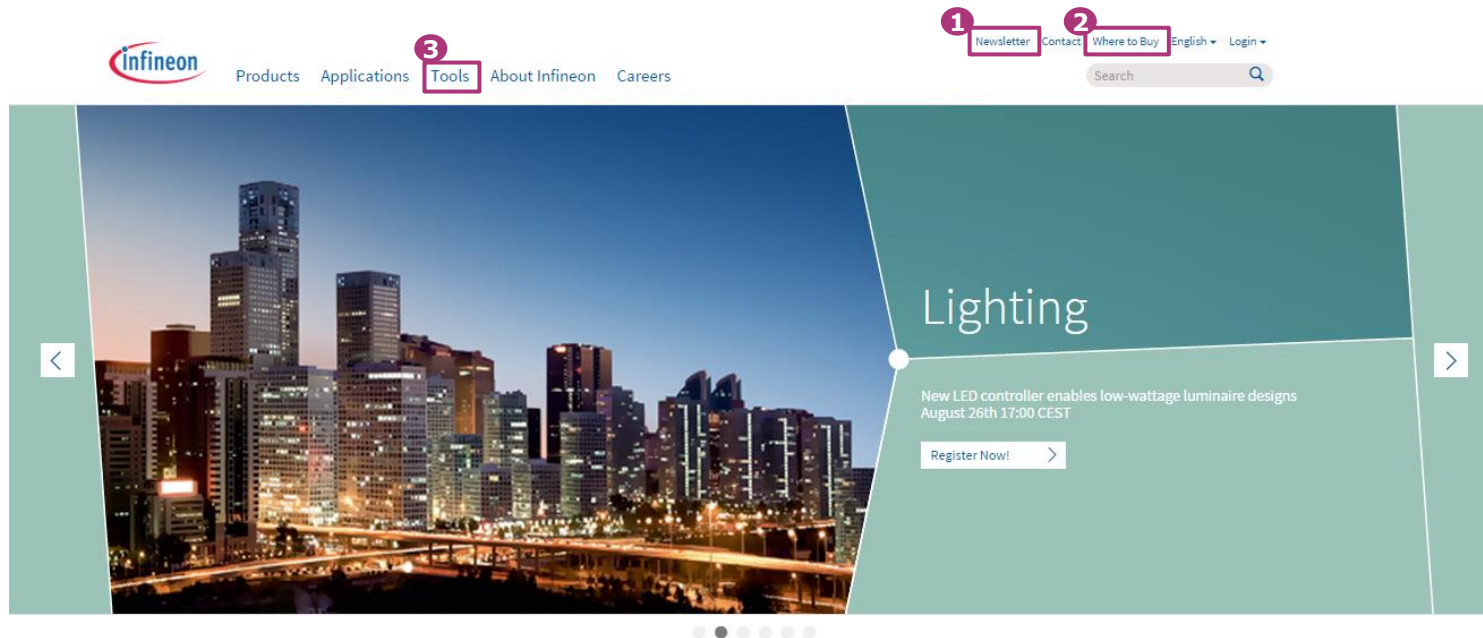

- 1 **Subscribe to Newsletter**
- 2 **Where to Buy**
- 3 **Tools, Finders and Selectors**
- 4 **Support**



News & Tweets



Part of your life. Part of tomorrow.

