

AP16010

C16xx

Input Signal Rise and Fall Times

Microcontrollers



Never stop thinking.

Revision History:		2004-02	V 1.0
Previous Version:		-	
Page	Subjects (major changes since last revision)		
All	Updated Layout to Infineon Corporate Design, updated release to 1.0, Content unchanged!		

Controller Area Network (CAN): License of Robert Bosch GmbH

We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all?
Your feedback will help us to continuously improve the quality of this document.

Please send your proposal (including a reference to this document) to:

mcdocu.comments@infineon.com



Edition 2004-02-01

**Published by
Infineon Technologies AG
81726 München, Germany**

**© Infineon Technologies AG 2006.
All Rights Reserved.**

LEGAL DISCLAIMER

THE INFORMATION GIVEN IN THIS APPLICATION NOTE IS GIVEN AS A HINT FOR THE IMPLEMENTATION OF THE INFINEON TECHNOLOGIES COMPONENT ONLY AND SHALL NOT BE REGARDED AS ANY DESCRIPTION OR WARRANTY OF A CERTAIN FUNCTIONALITY, CONDITION OR QUALITY OF THE INFINEON TECHNOLOGIES COMPONENT. THE RECIPIENT OF THIS APPLICATION NOTE MUST VERIFY ANY FUNCTION DESCRIBED HEREIN IN THE REAL APPLICATION. INFINEON TECHNOLOGIES HEREBY DISCLAIMS ANY AND ALL WARRANTIES AND LIABILITIES OF ANY KIND (INCLUDING WITHOUT LIMITATION WARRANTIES OF NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS OF ANY THIRD PARTY) WITH RESPECT TO ANY AND ALL INFORMATION GIVEN IN THIS APPLICATION NOTE.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Table of Contents		Page
1	Input Signal Rise and Fall Times.....	4

1 Input Signal Rise and Fall Times

All inputs of the C16x family have Schmitt-Trigger input characteristics. These Schmitt-Triggers are intended to always provide proper internal low and high levels, even if an undefined voltage level (between TTL-VIL and TTL-VIH) is externally applied to the pin. The hysteresis of these inputs, however, is very small, and can not be properly used in an application to suppress signal noise, and to shape slow rising/falling input transitions.

Thus, it must be taken care that rising/falling input signals pass the undefined area of the TTL-specification between VIL and VIH with a sufficient rise/fall time, as generally usual and specified for TTL components (e.g. 74LS series: gates 1V/us, clock inputs 20V/us). The effect of the implemented Schmitt-Trigger is that even if the input signal remains in the undefined area, well defined low/high levels are generated internally. Note that all input signals are evaluated at specific sample points (depending on the input and the peripheral function connected to it), at that signal transitions are detected if two consecutive samples show different levels. Thus, only the current level of an input signal at these sample points is relevant, that means, the necessary rise/fall times of the input signal is only dependant on the sample rate, that is the distance in time between two consecutive evaluation time points. If an input signal, for instance, is sampled through software every 10us, it is irrelevant, which input level would be seen between the samples. Thus, it would be allowable for the signal to take 10us to pass through the undefined area. Due to the sample rate of 10us, it is assured that only one sample can occur while the signal is within the undefined area, and no incorrect transition will be detected. For inputs which are connected to a peripheral function, e.g. capture inputs, the sample rate is determined by the clock cycle of the peripheral unit. In the case of the CAPCOM unit this means a sample rate of 400ns @ 20MHz CPU clock. This requires input signals to pass through the undefined area within these 400ns in order to avoid multiple capture events.

For input signals, which do not provide the required rise/fall times, external circuitry must be used to shape the signal transitions.

In the attached diagram, the effect of the sample rate is shown. The numbers 1 to 5 in the diagram represent possible sample points. Waveform a) shows the result if the input signal transition time through the undefined TTL-level area is less than the time distance between the sample points (sampling at 1, 2, 3, and 4). Waveform b) can be the result if the sampling is performed more than once within the undefined area (sampling at 1, 2, 5, 3, and 4).

Input Signal Rise and Fall Times

Sample points:

1. Evaluation of the signal clearly results in a low level
2. Either a low or a high level can be sampled here. If low is sampled, no transition will be detected. If the sample results in a high level, a transition is detected, and an appropriate action (e.g. capture) might take place.
3. Evaluation here clearly results in a high level. If the previous sample 2) had already detected a high, there is no change. If the previous sample 2) showed a low, a transition from low to high is detected now.
4. As for sample point 2), a low or a high level can be detected here. A transition would be detected only if the sample shows a low level.
5. If multiple samples occur while the signal is in the undefined area, incorrect transitions might be detected. In this case, a high-to-low transition would be detected here if the previous sample at 2) already showed a high level, but now, due to disturbances on the input signal or on the ground line, a low level is detected. This would again lead to the detection of a further transition at sample point 3).

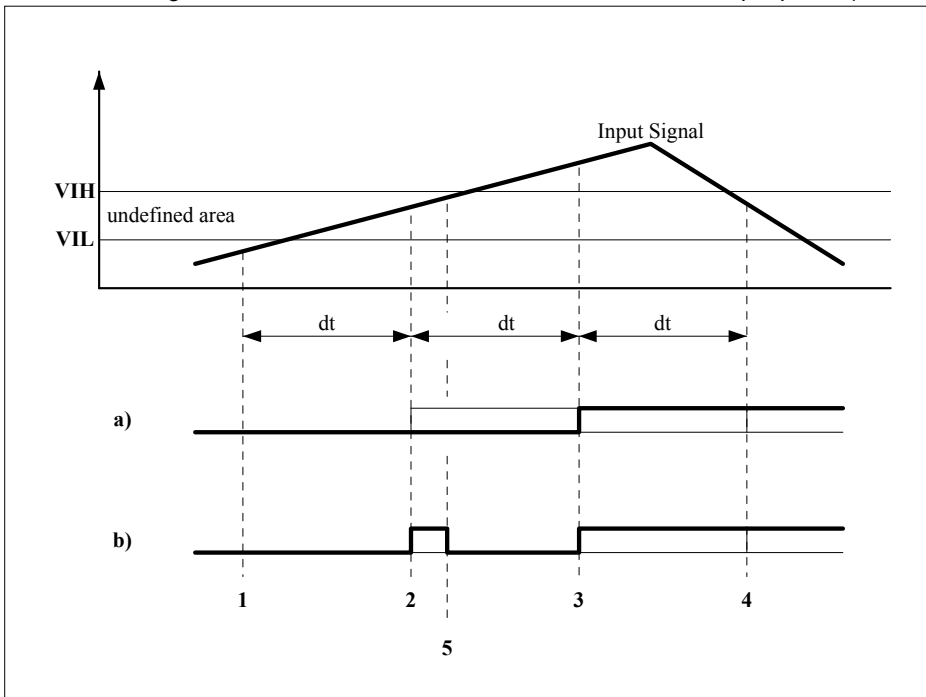


Figure 1 Input Signal Rise and Fall Times

<http://www.infineon.com>

Published by Infineon Technologies AG