

Evaluation board
EVAL-ISSI20B02FTS

EVAL-ISSI20B02FTS





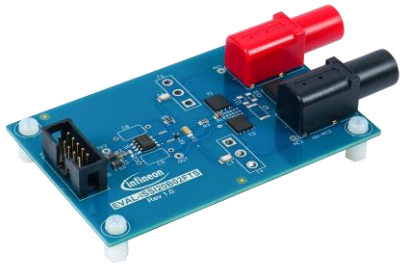

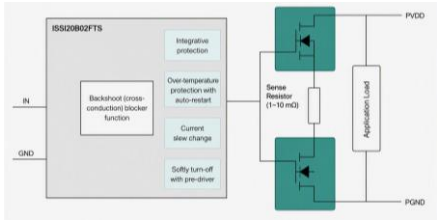

Technical & product details

Parameter	Value
Load Voltage	60 VDC / 48 VAC
Load Current	10 A DC / 6.5 A AC
Input Voltage	2.85 - 3.5V
Package	DSO8 - 1.27 mm pitch, 150 mil
Isolation	3 kVrms
Certifications	UL1577

Learn More	
Sales name	EVAL-ISSI20B02FTS
SAP mat number	SP006315202
Infineon order code	EVALISSI20B02FTSTOBO1
IFX Components	ISC035N10NM5LF, ISSI20B02F
Focus applications	AI Server BBU, BMS, Smart Home and Building, Industrial Automation PLC, SSR

Features

- Evaluation board with ISSI20B02F and two OptiMOS™ ISC035N10NM5LF MOSFETs in an AC switch configuration
- Over-temperature protection with PTC resistor
- Standard turn-on
- Fast turn-off after overcurrent and over-temperature protection
- Dynamic Miller clamping

Benefits

- Low-loss OptiMOS™ enables efficient AC switching
- PTC sensing and fast turn-off reduce thermal stress and load damage
- Miller clamping prevents parasitic turn-on

Copyright © Infineon Technologies AG 2026. All rights reserved.