

Evaluation board EVAL-ISSI20R11H

EVAL-ISSI20R11H

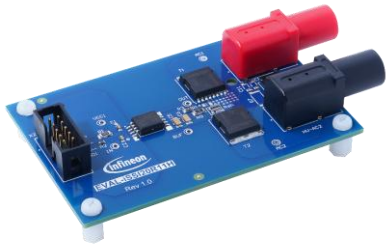

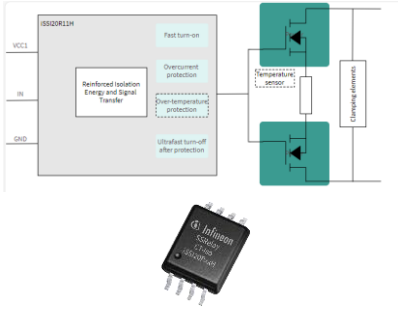

Home & building automation | PLC | SSR | Smart building | Smart lighting | AI | BMS

Technical & product details

Parameter	Value
Load Voltage	320 VDC / 230 VAC
Load Current	12 A DC / AC
Input Voltage	2.85 - 3.5V
Package	DSO8 - 1.27 mm pitch, 300 mil
Isolation	5.7 kVrms, 8 kVpk
Certifications	UL1577, IEC 60747-17

Learn More	
Sales name	EVAL-ISSI20R11H
SAP mat number	SP006046647
Infineon order code	EVALISSI20R11HTOBO1
IFX Components	IPT60R065S7, ISSI20R11H
Focus applications	AI Server BBU, BMS, Smart Home and Building, Industrial Automation PLC, SSR

Features

- Evaluation board with ISSI20R11H and two CoolMOS™ IPT60R065S7 MOSFETs in an AC switch configuration
- Ultra-fast overcurrent detection that is triggered at the typical peak current of 9 A
- Over-temperature protection with PTC resistor (optional).
- Fast turn-on
- Fast turn-off after overcurrent and over-temperature protection

Benefits

- CoolMOS™ enables efficient high-voltage AC switching
- Fast turn-on reduces switching losses
- 9 A detection and fast turn-off limit fault stress
- Optional PTC sensing helps prevent overheating and load damage

Copyright © Infineon Technologies AG 2026. All rights reserved.