


CUSTOMER TERMINAL	RoHS	LEAD(Pb)–FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

* DIMENSION MAY BE EXCEEDED WITH SOLDER ONLY.

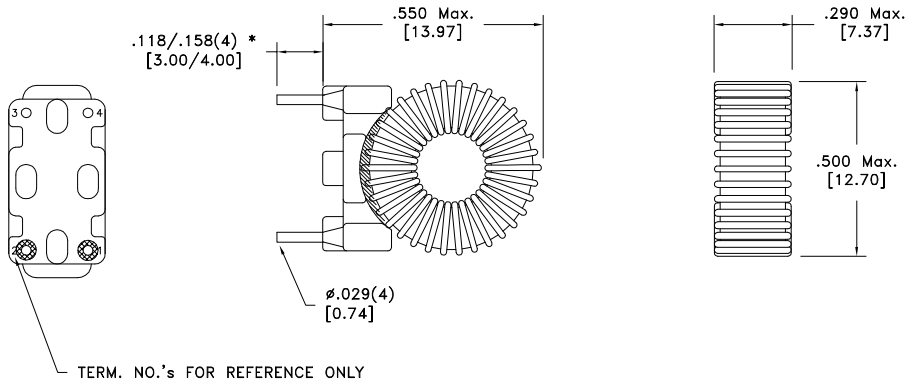





RECOMMENDED
P.C. PATTERN, COMPONENT SIDE

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER		TEST CONDITIONS	VALUE
D.C. RESISTANCE	1–2	@20°C	0.645 ohm max.
INDUCTANCE	1–2	10kHz, 100mV, Ls	5.1mH ±30%
DIELECTRIC	1–Core	500VAC, 1 second	–

GENERAL SPECIFICATIONS:
OPERATING TEMPERATURE RANGE: –40°C to +125°C.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE
00	3/18

Packaging Specifications
Method: Tray
PKG–NEW
www.we–online.com/midcom
SEE REVISION SHEET FOR REVISION LEVEL

CONVENTION PLACEMENT

Tolerances unless otherwise specified:
Angles: ±1° Decimals: ±.005 [.13]
Fractions: ±1/64 Footprint: ±.001 [.03]
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE
INDUCTOR
eiSos p/n: 750315750

compliant RoHS

PART NO.
750315750
SPECIFICATION SHEET 1 OF 1