

# OTP Programming and NVRAM Development Process for SDIO Embedded WLAN Devices

Associated Part Family: CYW4330

The Cypress CYW4330 is a single-chip Secure Digital I/O (SDIO) device intended for embedded applications. The CYW4330 supports IEEE 802.11 a/b/g/n. The device has a One-Time Programmable (OTP) nonvolatile memory for storing board-specific information such as Product ID, Manufacturer ID, MAC address, and more.

## Contents

|     |                                                         |   |     |                                                                                |    |
|-----|---------------------------------------------------------|---|-----|--------------------------------------------------------------------------------|----|
| 1   | About this Document.....                                | 1 | 5.1 | Driver Installation .....                                                      | 4  |
| 1.1 | Purpose and Audience .....                              | 1 | 6   | Customizing the nvram.txt File Template .....                                  | 6  |
| 1.2 | Cypress Part Numbering Scheme .....                     | 2 | 6.1 | Editing the nvram.txt File.....                                                | 7  |
| 1.3 | Acronyms and Abbreviations.....                         | 2 | 7   | Finalizing the nvram.txt File .....                                            | 8  |
| 2   | IoT Resources.....                                      | 2 | 8.1 | Method One: Programming OTP Using the Driver WL Command.....                   | 8  |
| 3   | Introduction .....                                      | 2 | 8.2 | Method Two: Programming OTP Using the Cypress Manufacturing Test Program ..... | 12 |
| 4   | NVRAM Content Development and OTP Programming Flow..... | 3 |     | Appendix A: Driver Removal .....                                               | 13 |
| 5   | SDIO Windows XP Driver Installation .....               | 4 |     |                                                                                |    |

## 1 About this Document

### 1.1 Purpose and Audience

The Cypress CYW4330 is a single-chip Secure Digital I/O (SDIO) device intended for embedded applications. The CYW4330 supports IEEE 802.11 a/b/g/n. The device has a One-Time Programmable (OTP) nonvolatile memory for storing board-specific information such as Product ID, Manufacturer ID, MAC address, and more.

The OTP memory content and an NVRAM file (referred to throughout this document as the nvram.txt file) combine to create a complete Card Information Structure (CIS) that hosts use to bring up Cypress SDIO embedded devices.

For designs where the host and device are permanently connected together, which is typically done with a hard-wired SDIO interface, programming the OTP memory in production is optional. It is equally acceptable to store all NVRAM parameters in host firmware and keep the OTP blank in production. For devices that may be installed on different hosts, the OTP is programmed to protect the unique MAC address and to prevent end-users from altering power control parameters (such as maximum output power and other PA parameters).

For host platforms running the Linux® or Windows® XP operating system, it is not necessary to program the OTP memory during board bring up and hardware tuning. Instead, store all required CIS information in the nvram.txt file. Although OTP programming is not required for devices used on these host operating systems, nvram.txt file development is still required. Developing an nvram.txt file is a secondary purpose of this document.

**Note:** To use this application note, users must retrieve the following from Cypress's Customer Support Portal, contacting the [cypress.com/support](http://cypress.com/support) if necessary:

- A CYW4330 design package, which contains:
  - A chip-specific development board, board schematic, bill of materials, and layout
  - An nvram.txt template file
- A Windows XP or Linux device driver for the relevant SDIO device
- Cypress Transmit Signal Strength Indicator (TSSI) calibration tools

## 1.2 Cypress Part Numbering Scheme

Cypress is converting the acquired IoT part numbers from Broadcom to the Cypress part numbering scheme. Due to this conversion, there is no change in form, fit, or function as a result of offering the device with Cypress part number marking. The table provides Cypress ordering part number that matches an existing IoT part number.

Table 1. Mapping Table for Part Number between Broadcom and Cypress

| Broadcom Part Number | Cypress Part Number |
|----------------------|---------------------|
| BCM4330              | CYW4330             |

## 1.3 Acronyms and Abbreviations

In most cases, acronyms and abbreviations are defined upon first use. For a more complete list of acronyms and other terms used in Cypress documents, go to: <http://www.cypress.com/glossary>.

## 2 IoT Resources

Cypress provides a wealth of data at <http://www.cypress.com/internet-things-iot> to help you to select the right IoT device for your design, and quickly and effectively integrate the device into your design. Cypress provides customer access to a wide range of information, including technical documentation, schematic diagrams, product bill of materials, PCB layout information, and software updates. Customers can acquire technical documentation and software from the Cypress Support Community website (<http://community.cypress.com/>).

## 3 Introduction

The initial state of all OTP bits in an unprogrammed device is 0. Individual bits can be programmed to 1, but once programmed, they can never be reprogrammed back to 0. The entire OTP array can be programmed in a single write cycle using wl commands provided with the SDIO driver. Alternatively, multiple write cycles can be used to selectively program specific fields, but only bits that are still in the 0 state can be programmed to the 1 state during each programming cycle.

Because the OTP programming process is irreversible, Cypress recommends that board designers finalize all parameters before programming the OTP memory. Boards should be tested using the editable nvram.txt file. The nvram.txt parameters can be loaded into on-chip RAM, allowing the chip to be tested even if the OTP memory has not yet been programmed. This method lets board designers tune RF components and alter critical parameters while testing boards using different versions of the nvram.txt file. After the critical parameters have been finalized, they can be programmed into the SDIO device OTP memory space.

### Note:

- For designs in which the host and device are permanently connected together, which is typically done with a hardwired SDIO interface, programming the OTP memory in production is optional. It is equally acceptable to store all NVRAM parameters in host firmware and keep the OTP blank in production. For devices which may be installed on different hosts, program the OTP to protect the unique MAC address and to prevent end-users from altering power control parameters such as maximum output power and other PA parameters.
- If a parameter is present in both the on-chip OTP and the nvram.txt file, the value from the OTP will override the value from the nvram.txt file; the WLAN driver will ignore the corresponding value in the nvram.txt file.

This document describes the method for creating an nvram.txt file and using the file to test a new board design, optimize all nvram values, and program the OTP. The document contains:

- An [NVRAM Content Development and OTP Programming Flow](#)
- [SDIO Windows XP Driver Installation](#)
- Information on [Customizing the nvram.txt File Template](#)
- Information on [Finalizing the nvram.txt File](#)
- An [OTP Programming Procedure](#) for an SDIO device


**Note:** Due to the irreversible OTP programming process, board development should be done on boards with blank

OTP memory spaces using the parameters in the editable nvram.txt file. Do not program the OTP memory until the contents of the nvram.txt file have been verified.

## 4 NVRAM Content Development and OTP Programming Flow

The nvram.txt file content development and the OTP programming flow is shown in [Figure 1](#). Parameters in the nvram.txt can be divided into two groups: basic parameters and advanced parameters. Pertinent OTP programming details for each phase can be found in [OTP Programming Procedure](#).

Figure 1. NVRAM Development and OTP Programming Flow

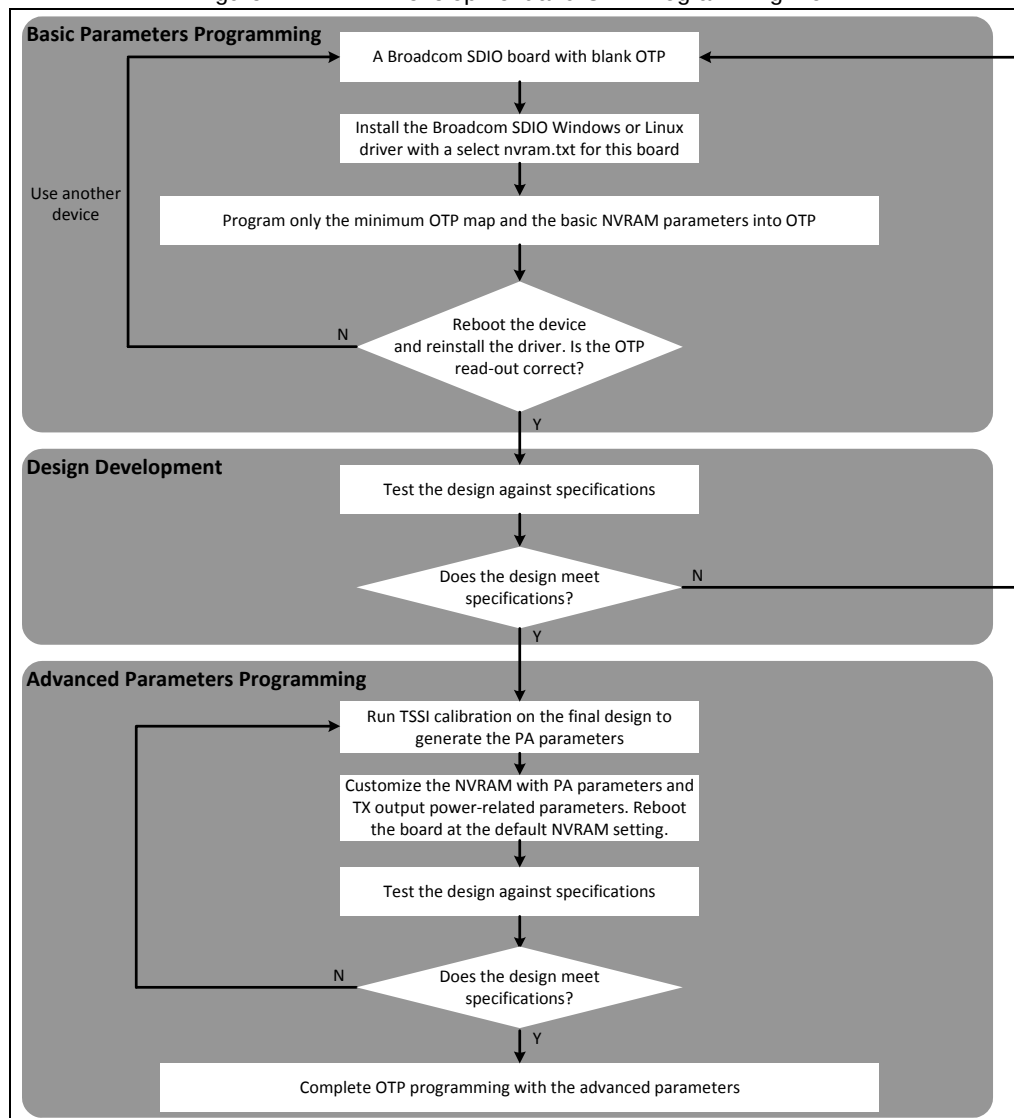

**Note:** The OTP programming flow shown in [Figure 1](#) is only used during the development stages of the program on small quantities of boards. Once this process is complete and a “golden” nvram.txt file or OTP file is established, the development phase can be bypassed, and the programming can be done in high volume for mass production, following the correct manufacturing procedure defined by each manufacturer.

## 5 SDIO Windows XP Driver Installation


A preliminary default version of the nvram.txt file for each Cypress reference board type and board revision is released with the hardware reference design package available from the docSAFE tab of Cypress's customer support portal ([cypress.com/support](http://cypress.com/support)). Typically the file is named after the board it supports, such as bcm94330sdg.txt. The content in this default NVRAM file may likely change as the design goes through testing and tuning during the development stage.

**Note:** In development environments where previous drivers have been installed, it may be necessary to uninstall a previously installed driver before proceeding with driver installation. If so, refer to [Appendix A: "Driver Removal,"](#) on page 13.

### 5.1 Driver Installation


To install an SDIO device driver:

1. Rename the NVRAM file to "nvram.txt" and copy it to C:\Windows\system32\drivers\
2. Turn off the power of a test Windows XP-based PC.
3. Install the adapter into the PC.
4. Turn PC power on and allow time for Windows XP to start.
5. Start the Windows Device Manager:
  - a. Click the **Start** button .
  - b. Right-click **My Computer**, and then click **Manage**.
  - c. In the left pane of **Computer Management**, double-click **Device Manager**.
6. In the right pane of **Computer Management**, right-click **Network adapters**, and click **Scan for hardware changes**.
7. Follow the Windows on-screen instructions to install the SDIO device driver.
8. Double-click on the newly installed network adapter to view the adapter properties.
9. On the **Advanced** tab of **Adapter Properties**, set the **IBSS Link Indication** property to **Legacy**, set the **IBSS 54g™ Mode** property to **54g-Auto**, and then click **OK**.

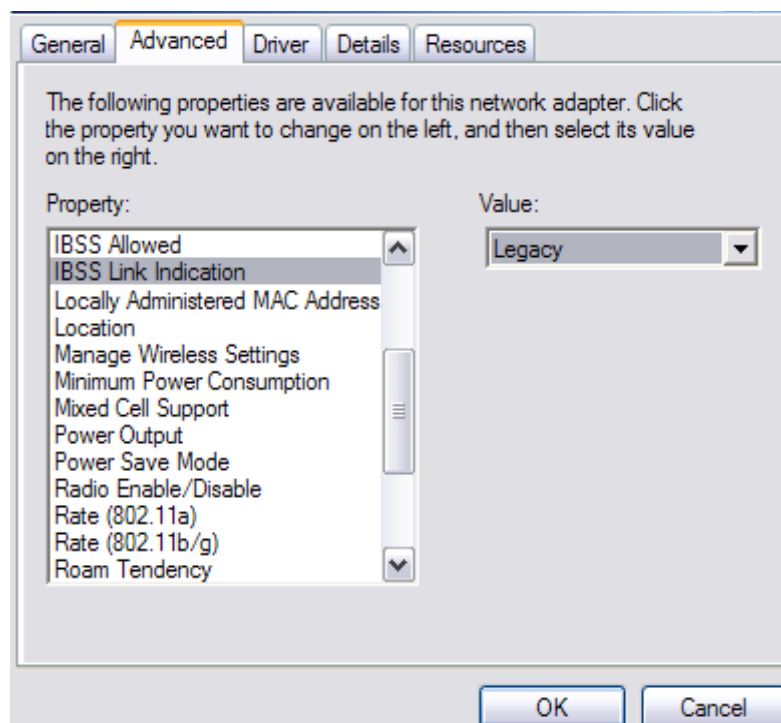


### To set the static IP address for the 802.11g SDIO WLAN adapter:

1. Click the **Start** button, then select **Control Panel**.
2. In the Control Panel, double-click **Network Connections**.
3. Right-click **Wireless Network Connection**, then select **Properties**.
4. In the **Wireless Network Connection Properties** window, click **Internet Protocol (TCP/IP)**, then click the **Properties** button .

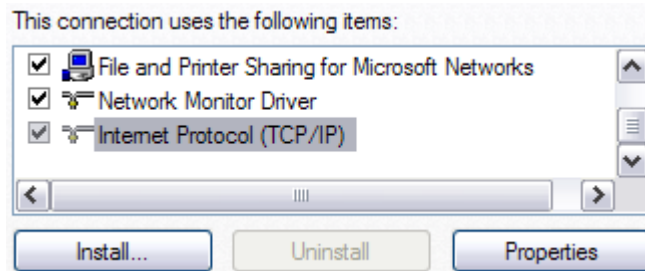

5. Select the **Use the following IP address** option.
6. Set the IP address to **192.168.1.101** and the Subnet mask to **255.255.255.0**, and then and click **OK**.

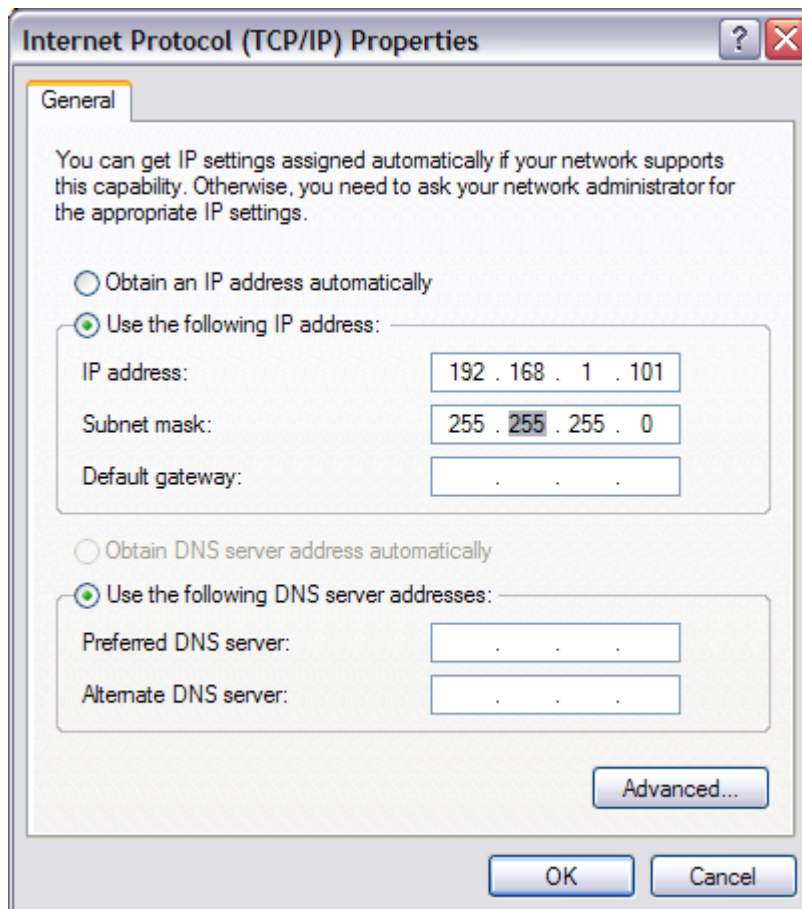

### To copy the WLAN test tools to enable driver test commands:

1. Copy wl.exe to C:\Windows\system32\
2. Copy brcm\_wlu.dll to C:\Windows\system32\

## 6 Customizing the nvram.txt File Template

Testing and tuning a board with a schematic copied from a Cypress reference design can take place using the nvram.txt file template provided with the design package. To test and tune a board with a schematic that differs from a Cypress reference design, customize the nvram.txt file template per the instructions in this section.

**Note:** When a change is made in nvram.txt, the file must be saved and the wireless device must be disabled and re-enabled in the Device Manager for the change to take effect. Be sure to save the file as “nvram.txt” and place it in C:\Windows\system32\drivers\. Delete or replace any previous file with the same name in this directory.

During the board development phase, start with the default PA parameters provided in the nvram.txt template. The PA parameters will eventually be optimized using Cypress's Transmit Signal Strength Indicator (TSSI) calibration tools.

A sample nvram.txt file, with parameters that are common to Cypress's SDIO single-band, 2.4 GHz reference design boards, is shown in Table 2 and Table 3. Parameters listed in Table 2 are used and specified by Cypress only and not to be changed by customer. Parameters listed in Table 3 are design variables and are generally modified by customer to fit design specifications during development.

**Note:** For some board designs, if the OTP memory space is not large enough to store all of the parameters that designers deem necessary for nonvolatile storage, designs can maintain an nvram.txt file external to the chip. Upon chip initialization, a combination of parameters from OTP and the nvram.txt file will be downloaded to on-chip RAM.

**Note:** Customers should not modify the parameters in Table 2.

Table 2. Cypress-Specified Single-Band 2.4 GHz NVRAM Parameters

| NVRAM Parameter | Example Data                     | Description                                                                                           |
|-----------------|----------------------------------|-------------------------------------------------------------------------------------------------------|
| boardtype       | 0x0532                           | Board type. This is a critical parameter that should be copied from a similar reference board design. |
| boardflags      | 0x10080a00                       | Board configuration flags that define power topology, external components (ePA, eLNA), etc.           |
| sromrev         | 3                                | SROM revision.                                                                                        |
| pa0itssit       | 0x20                             | Power detector dynamic range upper limit. Should be fixed at 0x20.                                    |
| triso2g         | 0                                | Defines T/R switch isolation (0 means default).                                                       |
| rssismf2g       | 0xa                              | 2.4 GHz RSSI midpoint select and board switch architecture (fixed values).                            |
| rssismc2g       | 0x3                              |                                                                                                       |
| rssisav2g       | 0x7                              |                                                                                                       |
| rssismf5g       | 0xa                              | 5 GHz RSSI midpoint select and board switch architecture (fixed values).                              |
| rssismc5g       | 0x7                              |                                                                                                       |
| rssisav5g       | 0x1                              |                                                                                                       |
| swctrlmap_2g    | 0x0c05, 0x0a03, 0x0a03, 0x0, 0x0 | Defines front-end RF switch or front-end module (FEM) control logic.                                  |
| RAW1            | 4a 0b ff ff 20<br>04 d0 02 36 43 | Defines SDIO hardware header per chipset.                                                             |
| otpimagesize    | 172                              | OTP memory size, in unit bytes.                                                                       |

Table 3. Customer-Modified Single-Band 2.4 GHz NVRAM Parameters

| NVRAM Parameter         | Example Data          | Description                                                                                                                                                                                                                                                                                                                                                    |
|-------------------------|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| boardrev                | 0x1301                | Board revision tracked by the internal test tool (optional).<br>Examples:<br><ul style="list-style-type: none"> <li>0x1301 converts to P301</li> <li>0x1208 converts to P208</li> </ul>                                                                                                                                                                        |
| xtalfreq                | 37400                 | On board XTAL or oscillator frequency in kHz.                                                                                                                                                                                                                                                                                                                  |
| maxp2ga0                | 0x46                  | Maximum output power in hexadecimal format. Units of 0.25 dB. This applies to all CCK rates as measured at antenna port. The nominal target power in dBm for CCK packets is $(0.25 \times \text{maxp2ga0 in decimal}) - 1.5 \text{ dB}$ (with a tolerance of $\pm 1.5 \text{ dB}$ ).                                                                           |
| ofdmgpo                 | 0x66666666            | The OFDM back-off from the maximum output power as defined by maxp2ga0. Resolution is 0.5 dB per step. Values are applied to the eight transmission rates: 54, 48, 36, 24, 18, 12, 9, and 6 Mbps. Rate 6 = LSB.                                                                                                                                                |
| mcs2gpo0                | 0x2222                | MCS0 to MCS3 per rate transmit power offset from maxp2ga0 for 2.4 GHz. One nibble per rate. Step size is 0.5 dB. MCS0 = LSB.                                                                                                                                                                                                                                   |
| mcs2gpo1                | 0x2222                | MCS4 to MCS7 per rate transmit power offset from maxp2ga0 for 2.4 GHz. One nibble per rate. Step size is 0.5 dB. MCS4 = LSB.                                                                                                                                                                                                                                   |
| pa0b0                   | 5836                  | PA parameters based on TSSI calibration.                                                                                                                                                                                                                                                                                                                       |
| pa0b1                   | -705                  |                                                                                                                                                                                                                                                                                                                                                                |
| pa0b2                   | -186                  |                                                                                                                                                                                                                                                                                                                                                                |
| aa2g                    | 3                     | Number of antennas in bit-mapped binary format:<br>1 = 01b for one antenna<br>3 = 11b for two antennas                                                                                                                                                                                                                                                         |
| ag0                     | 0x82                  | Antenna gain (in dBi) defined as:<br>Converts hex to 8 bits binary: lower 0–5 bits = signed 2's complement in units of dB; higher 6–7 bits unsigned number in units of quarter dB.<br>Examples:<br><ul style="list-style-type: none"> <li>0x82 = 2.5 dB (<math>2 + 2 \times 0.25</math>)</li> <li>0x7f = -0.75 dB (<math>-1 + 1 \times 0.25</math>)</li> </ul> |
| ccode                   | US                    | Country code.                                                                                                                                                                                                                                                                                                                                                  |
| il0macaddr <sup>a</sup> | 00:90:4c:fe:\${maclo} | The il0 MAC address format enables the firmware to use a default (dummy) MAC address if the OTP is blank (that is, if no valid MAC address has previously been programmed into the OTP).                                                                                                                                                                       |

- a. When devices with blank OTPs are used, the firmware may fail to load unless a MAC address is provided. During board development, Cypress recommends using an il0macaddr value, which provides the driver with a “dummy” MAC address. With il0macaddr in nvram.txt, the driver loads even when the OTP is blank. In production, each board should have a valid, unique MAC address programmed into its OTP. il0macaddr is ignored by the driver when the MAC address is programmed in the OTP.

## 6.1 Editing the nvram.txt File

The nvram.txt file content should be edited in a properly-formatted text editor, such as Windows WordPad, so that the original format of the file is preserved. Using a non-formatted text editor (such as Notepad) destroys the format of the nvram map, causing the driver to fail to read the nvram.txt correctly.

## 7 Finalizing the nvram.txt File

After final PA parameters for the design have been generated, update pa0b0, pa0b1, and pa0b2, then adjust the Tx output power-related parameters in the nvram.txt file. Run output power tests (using the updated nvram.txt) to verify that these parameters are providing the correct output power. Verify that the RF performance (such as EVM, spectral mask, and rxper) meets design specifications.

Cypress recommends running a regulatory prescan to verify that the required output power can be delivered without violating the band-edge limits. If the band-edge limits cannot be met, it may be necessary to reduce the output power at the band-edge channels.

After all prototype tests have passed and all nvram.txt file parameters have been optimized and frozen, users can select the desired parameters to program to the OTP.

The CYW4330 has 172 bytes of space in the OTP memory. Given the limited space in the OTP, it is impossible to program the entire nvram.txt to the OTP. The programmer must be very careful to select only the necessary parameters to go into the OTP. Parameters that typically go into the OTP are those that are unique to the board (such as MAC address) and those that are required to satisfy local regulatory requirements, which are usually output power-related parameters (such as maximum output power, power offset per-rate, PA parameters, country code, etc).

## 8 OTP Programming Procedure

There are two ways to program OTP:

- **Method One: Programming OTP Using the Driver WL Command.** This method requires the user to manually create an OTP binary map file and use a driver wl command to program the OTP.
- **Method Two: Programming OTP Using the Cypress Manufacturing Test Program<sup>1</sup>.** This method only requires the NVRAM file, but the programming is done by the Cypress Manufacturing Test Program, so the installation and usage of the tool is required on the user's system.

### 8.1 Method One: Programming OTP Using the Driver WL Command

Prior to OTP programming, an OTP binary map file must be prepared and edited with correct values. An OTP binary map completely defines the parameters that are to be programmed to the OTP. The SDIO OTP data format is based on the Card Information Structure (CIS) as defined by the PCMCIA/SD Card Association. CIS data contains the hardware header followed by one or more data blocks, where each data block (or tuple) contains the type, length, and value of the tuple.

#### 8.1.1 Minimum OTP Map

A set of parameters called the SDIO hardware header must be present in the OTP binary map as the header. The SDIO hardware header is required to boot up the CYW4330 via the SDIO interface when the driver detects there are contents in the OTP. Therefore, the SDIO hardware header is a minimal set of parameters when programming an OTP. Any other desired parameters to be programmed to the OTP are appended after the SDIO hardware header. When an OTP binary map contains only the SDIO hardware header, the binary map is called a minimal OTP map.

---

1. Confirm with Cypress engineering teams before using any Manufacturing Test Program to write OTP.

Table 4 shows the minimum OTP map for the CYW4330.

Table 4. CYW4330 Minimum OTP Map

| 172 Bytes OTP Map |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Offset            | 0x0 | 0x1 | 0x2 | 0x3 | 0x4 | 0x5 | 0x6 | 0x7 | 0x8 | 0x9 | 0xa | 0xb | 0xc | 0xd | 0xe | 0xf |
| 0x0000            | 4a  | 0b  | ff  | ff  | 20  | 04  | d0  | 02  | 30  | 43  | 80  | 02  | 00  | 03  | 80  | 03  |
| 0x0010            | 02  | 40  | 00  | 80  | 03  | 1b  | 32  | 05  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  |
| 0x0020            | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  |
| 0x0030            | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  |
| 0x0040            | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  |
| 0x0050            | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  |
| 0x0060            | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  |
| 0x0070            | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  |
| 0x0080            | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  |
| 0x0090            | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  |
| 0x00A0            | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | ff  | ff  |     |     |     |     |

For the CYW4330, the OTP map is terminated with 0xff 0xff.

### 8.1.2 Programming Basic NVRAM Parameters

Parameters in the nvram.txt file that are to be programmed to the OTP follow after the SDIO hardware header in the OTP binary map. These parameters form the CIS tuple in the CIS structure. Most parameters in the nvram.txt have a unique identifier called the CIS tuple tag. The driver recognizes and parses each CIS tuple by its tag number.

Table 5 lists the common basic nvram.txt parameters with their tag numbers and the byte size they occupy in the OTP memory space. Basic parameters are typically fixed values to a specific device or board, and tend to retain their values across the life of the device/board. For this reason, it is generally acceptable to program these basic parameters to the OTP early in the development, before the design is frozen.

Table 5. Basic NVRAM Parameters CIS Tuple Tags

| NVRAM Parameter     | CIS Tuple Tag | Length of Value (in bytes) |
|---------------------|---------------|----------------------------|
| sromrev             | 0x00          | 1                          |
| boardrev            | 0x02          | 2                          |
| boardtype           | 0x1b          | 2                          |
| macaddr             | 0x19          | 6                          |
| cocode <sup>a</sup> | 0x0a          | 2                          |

a. The value for ccode in the nvram.txt is in ASCII format. It must be converted to hex format before entering it into the OTP map (for example, "US" = "0x55 0x53").

In the OTP binary map, each tuple is formed by the four fragments described in Table 6.

Table 6. CIS Tuple Format

| Fragment | Description                             |
|----------|-----------------------------------------|
| 80       | Indicates the beginning of a new tuple. |

Table 6. CIS Tuple Format

| Fragment | Description                                                                                                      |
|----------|------------------------------------------------------------------------------------------------------------------|
| Length   | Defines the total size (in bytes) of the tag plus the value of the tuple that would occupy the OTP memory space. |
| Tag      | The identifier of the parameter in nvram.txt. A tag usually takes one byte in memory.                            |
| Value    | The value of the parameter. The format is in little endian (i.e., the first byte is the least significant byte). |

For example, a tuple that looks like the following is defined by the fragments listed in Table 7:

|    |    |    |    |    |
|----|----|----|----|----|
| 80 | 03 | 02 | 40 | 00 |
|----|----|----|----|----|

Table 7. Example Tuple Definition

| Fragment | Description                                                                            |
|----------|----------------------------------------------------------------------------------------|
| 80       | Beginning of the new tuple.                                                            |
| 03       | The tag (1 byte) and the value (2 bytes) would occupy 3 bytes total in the OTP memory. |
| 02       | Tag of 0x02 is the identifier for boardrev in the nvram.txt.                           |
| 00 40    | The value of boardrev in reverse binary byte, or 0x4000.                               |

Figure 2 shows an example of the OTP binary map for the CYW4330 that contains some of the nvram.txt parameters listed in Table 5.

Figure 2. Example CYW4330 OTP Binary Map Containing Basic Parameters

| 172 Bytes OTP Map |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Offset            | 0x0 | 0x1 | 0x2 | 0x3 | 0x4 | 0x5 | 0x6 | 0x7 | 0x8 | 0x9 | 0xa | 0xb | 0xc | 0xd | 0xe | 0xf |
| 0x0000            | 4a  | 0b  | ff  | ff  | 20  | 04  | d0  | 02  | 30  | 43  | 80  | 02  | 00  | 03  | 80  | 03  |
| 0x0010            | 02  | 40  | 00  | 80  | 03  | 1b  | 32  | 05  | 80  | 07  | 19  | 66  | 55  | 44  | 33  | 22  |
| 0x0020            | 11  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  |
| 0x0030            | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  |
| 0x0040            | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  |
| 0x0050            | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  |
| 0x0060            | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  |
| 0x0070            | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  |
| 0x0080            | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  |
| 0x0090            | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  |
| 0x00A0            | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | 00  | ff  | ff  |     |     |     |     |

minimum OTP header

boardtype

MAC address

srom rev

end of map

board rev

In this example, the values for each parameter are as follows:

- sromrev = 0x03
- boardrev = 0x40
- boardtype = 0x0532
- macaddr = 66:55:44:33:22:11

#### Note:

- CIS tuples do not have to be in any particular order, because each tuple begins with a unique identifier.
- OTP bytes can only be written to once, so only blank or zero-programmed bytes can be programmed on subsequent write cycles.

### 8.1.3 Creating and Editing the OTP Binary Map

To create and edit the OTP binary map, use a hexadecimal text editor of your choice. Cypress recommends a hexadecimal text editor called Notepad++, which is freeware and can be downloaded from the web at:

<http://notepad-plus-plus.org/>. Download the latest revision of the software, and follow the instructions to install the software.


Additionally, a hex plugin is needed to edit text in hex format:

1. On the Notepad++ webpage, click the Resources tab.
2. In the Plugins section, click the link for “A list of plugins”.
3. On the new page, search for “Hex Editor”, then click on Hex Editor (Unicode) to download the plugin. (The link to download this plugin is: <http://sourceforge.net/projects/npp-plugins/files/Hex%20Editor/Hex%20Editor%20Plugin%20v0.9.5/>)
4. Save the plugin file at C:\Program Files\Notepad++\plugins.

After the installation is complete, open Notepad++.

1. To create a new OTP map, select **New** from the **File** menu; or, to open and edit an existing OTP map, select **Open** from the **File** menu.
2. After creating or opening a file, click the “H” button on the toolbar to show the hex template:

Figure 3. Hex OTP Map Template

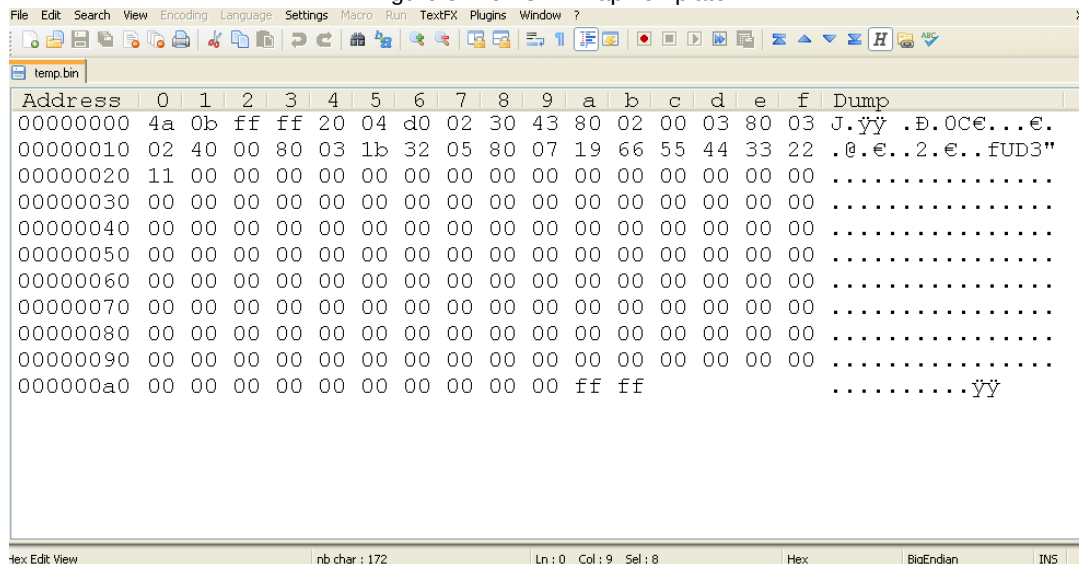

3. Add or edit each byte in the map to fill in the SDIO hardware header and the CIS tuple according to the OTP binary map instructions described earlier in this section. The map shown in [Figure 3](#) has been edited so that it matches the example CYW4330 OTP binary map in [Figure 2](#).
4. When editing is completed, select **Save As** from the **File** menu to save the file. Manually type “.bin” at the end of the file name as the file extension. The file name must have .bin as the extension so it can be programmed to the OTP. Store this file in the working directory that contains wl.exe.

For example purposes, this file is referred to as “4330\_OTP.bin” in the following instructions.

### 8.1.4 Programming Procedure Using Driver WL Command

To program the OTP binary map to the OTP of the device:

1. Load the driver to the CYW4330 device with the desired nvram.txt file. Confirm the driver installation by giving a few wl commands (e.g., wl ver).
2. Type the following wl command to program 4330\_OTP.bin to the OTP:  
 > wl ciswrite 4330\_OTP.bin
3. In Windows Device Manager, disable the wireless device, and then enable it.
4. Confirm OTP is programmed successfully by running > wl cisdump (the following MAC address is used as an example: 12 34 56 78 90 11). The output should look like the following, matching exactly the OTP binary map created in [Figure 3](#).

```
C:\WINDOWS\system32>wl ver
5.90 RC113.12
wl0: Mar  4 2011 20:59:28 version 5.90.113.12 <WLTEST>

C:\WINDOWS\system32>wl cisdump
Source: 2 <Internal OTP>
Maximum length: 172 bytes
Byte  0: 0x4a 0x0b 0xff 0xff 0x20 0x04 0xd0 0x02
Byte  8: 0x30 0x43 0x80 0x02 0x00 0x03 0x80 0x03
Byte 16: 0x02 0x40 0x00 0x80 0x03 0x1b 0x32 0x05
Byte 24: 0x80 0x07 0x19 0x12 0x34 0x56 0x78 0x90
Byte 32: 0x11 0x00 0x00 0x00 0x00 0x00 0x00 0x00
Byte 40: 0x00 0x00 0x00 0x00 0x00 0x00 0x00 0x00
Byte 48: 0x00 0x00 0x00 0x00 0x00 0x00 0x00 0x00
Byte 56: 0x00 0x00 0x00 0x00 0x00 0x00 0x00 0x00
Byte 64: 0x00 0x00 0x00 0x00 0x00 0x00 0x00 0x00
Byte 72: 0x00 0x00 0x00 0x00 0x00 0x00 0x00 0x00
Byte 80: 0x00 0x00 0x00 0x00 0x00 0x00 0x00 0x00
Byte 88: 0x00 0x00 0x00 0x00 0x00 0x00 0x00 0x00
Byte 96: 0x00 0x00 0x00 0x00 0x00 0x00 0x00 0x00
Byte 104: 0x00 0x00 0x00 0x00 0x00 0x00 0x00 0x00
Byte 112: 0x00 0x00 0x00 0x00 0x00 0x00 0x00 0x00
Byte 120: 0x00 0x00 0x00 0x00 0x00 0x00 0x00 0x00
Byte 128: 0x00 0x00 0x00 0x00 0x00 0x00 0x00 0x00
Byte 136: 0x00 0x00 0x00 0x00 0x00 0x00 0x00 0x00
Byte 144: 0x00 0x00 0x00 0x00 0x00 0x00 0x00 0x00
Byte 152: 0x00 0x00 0x00 0x00 0x00 0x00 0x00 0x00
Byte 160: 0x00 0x00 0x00 0x00 0x00 0x00 0x00 0x00
Byte 168: 0x00 0x00 0xff 0xff
C:\WINDOWS\system32>
```

If the cisdump is verified to match the OTP binary map, the OTP programming is complete. Once programmed, additional blank spaces (00) in the OTP can still be written by filling in those corresponding blank spaces in the OTP binary map. There is no restriction on how many times a device can be programmed, provided that each programming is writing to only blank, unwritten spaces. Follow the same procedure to program the additional blank spaces.

### 8.1.5 Programming Advanced NVRAM Parameters

This information is under development.


## 8.2 Method Two: Programming OTP Using the Cypress Manufacturing Test Program

This information is under development.

## Appendix A: Driver Removal

### A.1. Uninstalling a Driver

1. Start the Windows Device Manager.
  - a. Click the **Start** button .
  - b. Right-click **My Computer**, and then click **Manage**.
  - c. In the left pane of **Computer Management**, double-click **Device Manager**.
2. In the right pane of **Computer Management** under **Network adapters**, right-click **Broadcom 802.11g Network Adapter #10**, and then click **Uninstall**.
3. Click **OK** in **Confirm Device Removal**.

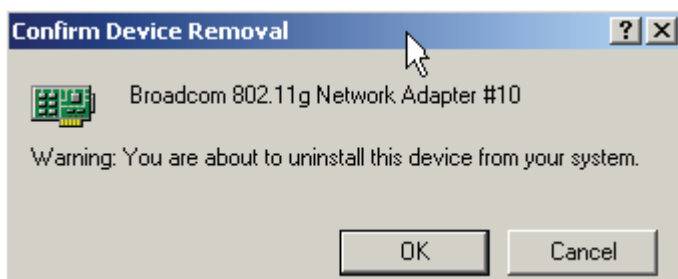

4. Delete the following files, referring to [Customizing the nvram.txt File Template](#) , if necessary:


| Filename     | Location                     |
|--------------|------------------------------|
| bcmsddhd.sys | C:\Windows\system32\drivers\ |
| nvram.txt    | C:\Windows\system32\drivers\ |
| oem#.inf     | C:\Windows\inf\              |
| oem#.pnf     | C:\Windows\inf\              |
| wl.exe       | C:\Windows\system32\         |
| brcm_wlu.dll | C:\Windows\system32\         |

The following files are typical SDIO driver files released with the Windows XP driver or design package:

bcm94329sdagb.txt  
bcmsddhd.inf  
bcmsddhd.sys  
brcm\_wlu.dll  
wl.exe

### A.2. Deleting the Correct oem#.inf and oem#.pnf Files

In some cases, multiple instances of Broadcom network adapters are installed. To locate the correct oem#.inf and oem#.pnf files for deletion, take the following steps with help from the Windows search facility:

1. Click the **Start** button  and then click **Search** .
2. In the **Search Companion** pane of **Search Results**, type **C:\Windows\inf\oem\*.inf** in the **All or part of the file name** box, type **Broadcom Corporation** in the **A word or phrase in the file** box, select **Local Hard Drives (C:)** from the **Look in** list, and then click **Search**.
3. If more than one INF file appears in the **Search Results**, open each in a text editor.

Delete the Broadcom oem#.inf file and the associated Broadcom oem#.pnf file for the oem#.inf file that looks similar to the file shown here.

```
;; bcm5ddhd.inf
;;
;; Copyright 1998-2005, Broadcom Corporation.
;; All Rights Reserved.
;;
;; This is UNPUBLISHED PROPRIETARY SOURCE CODE of Broadcom Corporation;
;; the contents of this file may not be disclosed to third parties, copied or
;; duplicated in any form, in whole or in part, without the prior written
;; permission of Broadcom Corporation.
;;

[version]
    Signature       = "$Windows NT$"           ; Combined Win9x/Win2k inf
    Class=Net
    ClassGUID       = {4d36e972-e325-11ce-bfc1-08002be10318}
    Provider        = %V_BCM%
    Compatible      = 1
DriverVer=06/10/2009, 4.218.84.1
    CatalogFile=BCM43XX.CAT
    CatalogFile.NTamd64=BCM43XX64.CAT

[Manufacturer]
    %V_BCM% = BROADCOM, NTamd64
```

## Document History Page

| Document Title: AN214935 - OTP Programming and NVRAM Development Process for SDIO Embedded WLAN Devices |         |                 |                 |                                                                     |
|---------------------------------------------------------------------------------------------------------|---------|-----------------|-----------------|---------------------------------------------------------------------|
| Document Number: 002-14935                                                                              |         |                 |                 |                                                                     |
| Rev.                                                                                                    | ECN No. | Orig. of Change | Submission Date | Description of Change                                               |
| **                                                                                                      | -       | -               | 05/17/2011      | 4330-AN500-R<br>Initial release                                     |
| *A                                                                                                      | 5459425 | UTSV            | 10/14/2016      | Added Cypress Part numbering Scheme.<br>Updated in Cypress template |
| *B                                                                                                      | 5834576 | BENV            | 07/27/2017      | Updated logo and copyright                                          |

## Worldwide Sales and Design Support

### Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturers' representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

### Products

|                               |                                                                    |
|-------------------------------|--------------------------------------------------------------------|
| ARM® Cortex® Microcontrollers | <a href="http://cypress.com/arm">cypress.com/arm</a>               |
| Automotive                    | <a href="http://cypress.com/automotive">cypress.com/automotive</a> |
| Clocks & Buffers              | <a href="http://cypress.com/clocks">cypress.com/clocks</a>         |
| Interface                     | <a href="http://cypress.com/interface">cypress.com/interface</a>   |
| Internet of Things            | <a href="http://cypress.com/iot">cypress.com/iot</a>               |
| Memory                        | <a href="http://cypress.com/memory">cypress.com/memory</a>         |
| Microcontrollers              | <a href="http://cypress.com/mcu">cypress.com/mcu</a>               |
| PSoC                          | <a href="http://cypress.com/psoc">cypress.com/psoc</a>             |
| Power Management ICs          | <a href="http://cypress.com/pmic">cypress.com/pmic</a>             |
| Touch Sensing                 | <a href="http://cypress.com/touch">cypress.com/touch</a>           |
| USB Controllers               | <a href="http://cypress.com/usb">cypress.com/usb</a>               |
| Wireless Connectivity         | <a href="http://cypress.com/wireless">cypress.com/wireless</a>     |

### PSoC® Solutions

[PSoC 1](#) | [PSoC 3](#) | [PSoC 4](#) | [PSoC 5LP](#) | [PSoC 6](#)

### Cypress Developer Community

[Forums](#) | [WICED IOT Forums](#) | [Projects](#) | [Video](#) | [Blogs](#) |  
[Training](#) | [Components](#)

### Technical Support

[cypress.com/support](http://cypress.com/support)



Cypress Semiconductor  
198 Champion Court  
San Jose, CA 95134-1709

© Cypress Semiconductor Corporation, 2011-2017. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, WICED, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit [cypress.com](http://cypress.com). Other names and brands may be claimed as property of their respective owners.