
PSoC® 62S1 Wi-Fi BT PIONEER KIT




Kit Contents:

1 PSoC® 62S1 Wi-Fi BT Pioneer Board
2 USB Type-A to Micro-B cable
3 Four jumper wires (four inches each)
4 Two jumper wires (five inches each)
5 Quick Start Guide (this document)

www.cypress.com/CYW9P62S1-43438EVB-01

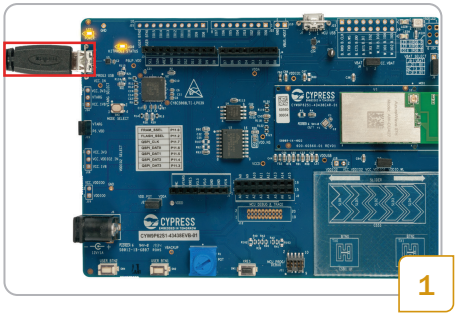

1

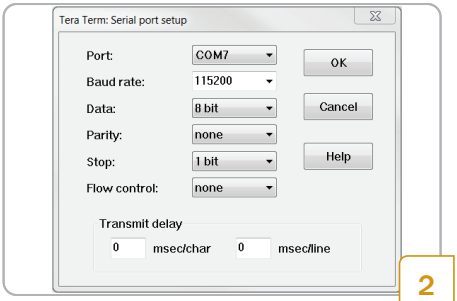


2

- Before starting, ensure you have the following:
  - PC with USB port
  - UART terminal software such as Tera Term or Minicom
- Visit the kit website to download and install the required software
- Connect the KitProg3 USB connector (J6) to your PC
- Wait for the drivers installation to complete

- Open the UART terminal software and connect to the kit's USB-UART COM port with the settings – Baud rate: 115200, Data: 8 bit, Parity: None, Stop bit: 1 bit, Flow control: None
- Press the XRES switch (SW1) to reset the device
- Follow the instructions displayed on the UART terminal to use the pre-programmed code example

Refer to the Kit Guide available at the kit website for details.

PSoC 62S1 Wi-Fi BT Pioneer Kit Details

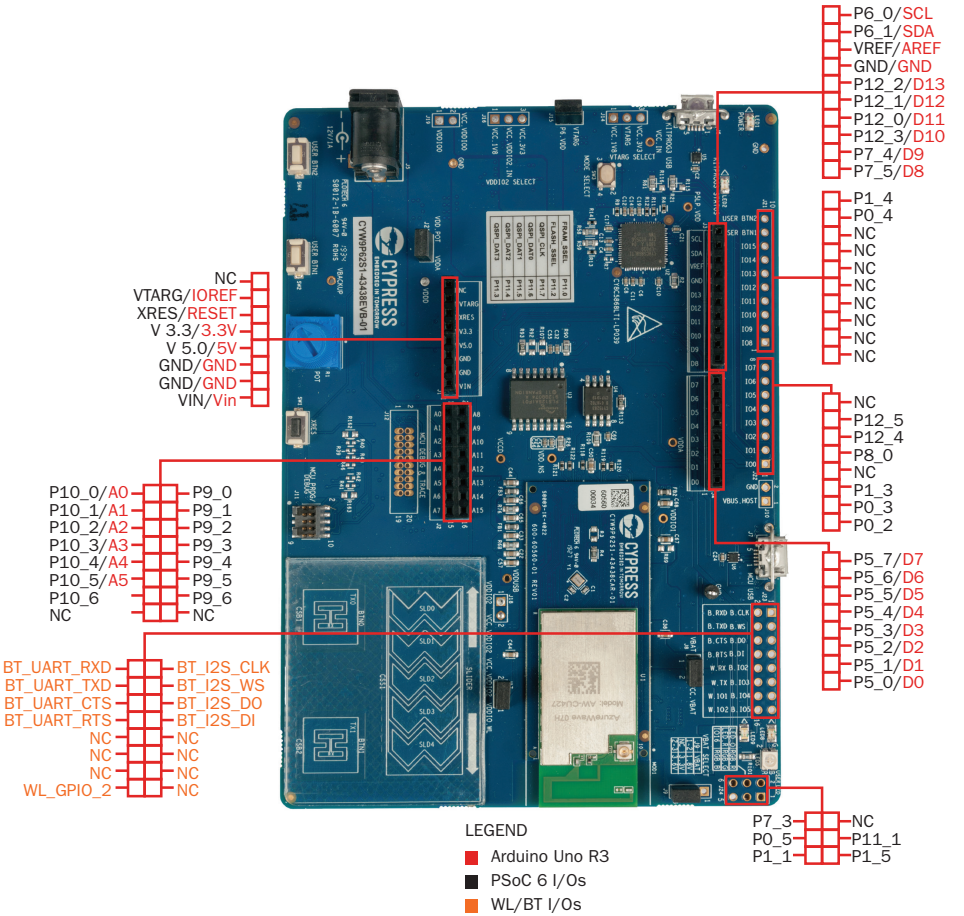

For the latest information about this kit, visit www.cypress.com/CYW9P62S1-43438EVB-01

© 2019 Cypress Semiconductor Corporation. All rights reserved.
All trademarks or registered trademarks referenced herein are the property of their respective owners.
002-28620 Rev**

CYPRESS EMBEDDED IN TOMORROW™