PRODUCT BRIEF

PSOC™ Edge E84 Microcontrollers

The Next Generation of Low-Power Advanced Machine Learning Microcontrollers with Graphics

The PSOC™ Edge E8 series of Arm® Cortex®-M microcontrollers feature high-performance, low-power, secured MCUs with integrated ML hardware acceleration, designed specifically for enabling efficient and responsive ML compute applications in edge devices. These MCUs are ideal for a variety of consumer and industrial applications including HMI, smart home, wearables, robotics, and other smart connected IoT products. In addition, PSOC™ Edge is supported by a rich set of enablement with the industry-recognized ModusToolbox™ software including integration with the DEEPCRAFT™ Studio AI solution and its off-the shelf ML models.

The PSOC™ Edge E84 microcontrollers are based on high-performance Arm® Cortex®-M55 including Helium DSP support, and Ethos U-55 NPU, and also a low-power Arm® Cortex®-M33 paired with Infineon's ultra-low power NNLite hardware accelerator. They also integrate 2.5D graphics accelerators and display interfaces, while featuring always-on acoustic activity detection and wake word detection efficient HMI operations and extended battery life. The PSOC™ Edge E84 incorporates both the graphics and the advanced ML capabilities, and boosts SRAM footprint to a total of 6 MB for the most demanding edge applications, providing a high-integration to reduce bill of materials (BOM) while still providing full flexibility in an energy-efficient microcontroller.

Power Performance Efficiency and Advanced ML Acceleration

- Multi-domain architecture for high-performance and fine-grained power optimization
- High-performance Arm® Cortex®-M55 CPU with Helium DSP and Ethos-U55 Neural Processing Unit for advanced ML
- Low-power Arm® Cortex®-M33 with FPU and DSP, and NNLite for low power AI/ML hardware acceleration

Advanced HMI Interfaces

- Audio multi-microphone interface for far-field applications
- Keyword spotting and Wake word detection
- 2.5D GPU with up to 1024x768 resolution and MIPI-DSI/DBI interfaces

State-of-the-art Security

- Lockstep secured enclave in low-power always-on domain
- Infineon Edge Protect Category 4/Platform Security Architecture (PSA) Level 4
- Off-the-shelf trusted Firmware-M enablement and Mbed-TLS for crypto operations

Ease-of-use for developers

- ModusToolbox™ software
  - Comprehensive collection of multi-platform tools and software libraries
  - Includes board support packages (BSPs), peripheral driver library (PDL), and middleware
- End-to-end ML solution with DEEPCRAFT™ Edge AI software and tools

For more information visit PSOC™ Edge E84

Key features

32-Bit MCU Subsystems
- Up to 400MHz Arm® Cortex®-M55 with Helium DSP
- Up to 200MHz Arm® Cortex®-M33

Machine Learning
- Ethos-U55 for advanced ML
- Infineon's NNLite for low-power AI/ML
- End-to-end ML with DEEPCRAFT™

Memory and SoC Integration
- High-capacity memory
- Ultra-low power RRAM
- Rich peripherals to reduce system cost
- Integrated low-power analog subsystem

Security
- Up to EPC4/PSA L4

HMI
- Keyword spotting and wake word detection
- Low-power graphics, up to 1024x768, 2.5D GPU, MIPI-DSI/DBI

Packages
- WLB-154, BGA-220, eWLB-235

Operating Temperature
- Ta: -20 to 70°C, -40 to 105°C

Target applications

- HMI
- Smart Home
- Wearables
- Robotics
- Security Camera

www.infineon.com

PRODUCT BRIEF

Block Diagram

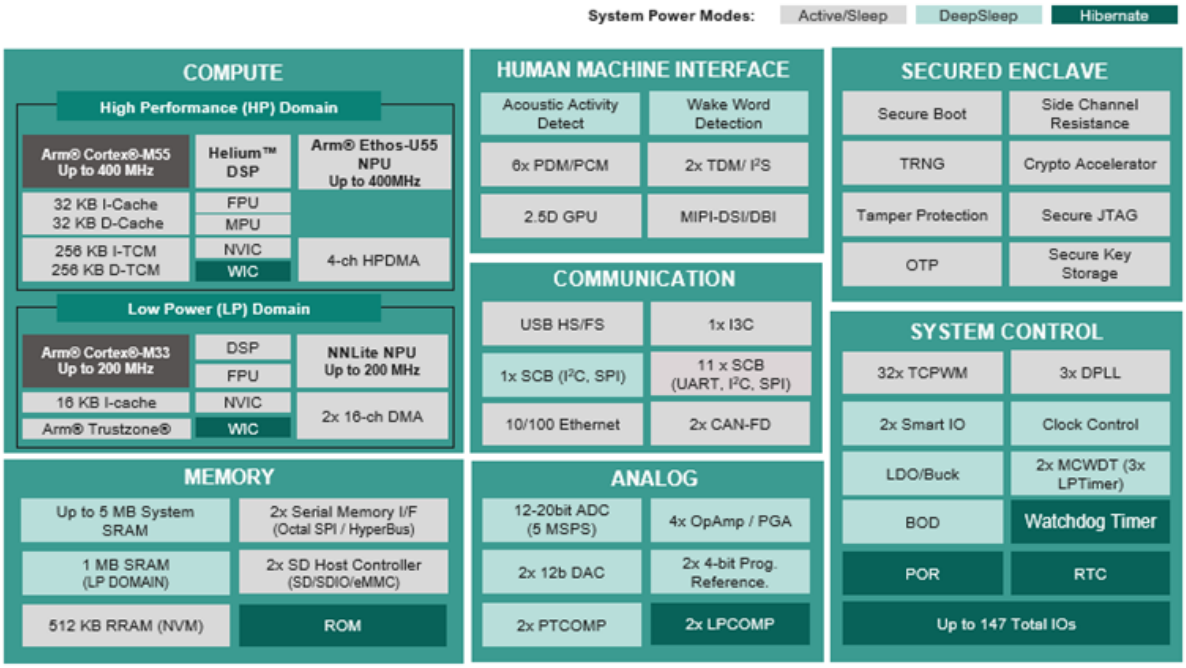

Orderable Part Numbers and Kits

Kit	Function	Part Number
PSOC™ Edge E84 Evaluation Kit	General purpose evaluation kit for PSOC™ Edge with full function integration of all interfaces	KIT_PSE84_EVAL
PSOC™ Edge E84 AI Kit	Low-cost kit with multiple sensors for evaluation of AI capabilities and fast prototyping	KIT_PSE84_AI
PSOC™ Edge E84 HMI Kit	Kit to showcase HMI and AI capabilities with multiple sensors, capacitive touch, and graphics	KIT_PSE84_HMI

Part Number	Package	Max Frequency	RRAM	Total SRAM	Ethernet and CAN	Security	Temp (Ta)
PSE845GPS2DFNC4T	WLB-154	400 MHz	512kB	6MB	-	PSA L2	-20 to 70 °C
PSE845GPS2DFMC4	eWLB-235	400 MHz	512kB	6MB	-	PSA L2	-20 to 70 °C
PSE846GPS2DBZC4	BGA-220	400 MHz	512kB	6MB	Yes	PSA L2	-20 to 70 °C
PSE846GPS2DBZQ3	BGA-220	400 MHz	512kB	6MB	Yes	PSA L2	-40 to 105 °C

Additional parts can be found on Infineon.com/PSOCEdgeE84

Published by
Infineon Technologies AG
Am Campeon 1-15, 85579 Neubiberg
Germany

© 2026 Infineon Technologies AG
All rights reserved.

Public

Version: V3.0_EN
Date: 06/2026

Scan QR code and explore offering
www.infineon.com

Please note!
This Document is for information purposes only and any information given herein shall in no event be regarded as a warranty, guarantee or description of any functionality, conditions and/or quality of our products or any suitability for a particular purpose. With regard to the technical specifications of our products, we kindly ask you to refer to the relevant product data sheets provided by us. Our customers and their technical departments are required to evaluate the suitability of our products for the intended application.

We reserve the right to change this document and/or the information given herein at any time.

Additional information
For further information on technologies, our products, the application of our products, delivery terms and conditions and/or prices, please contact your nearest Infineon Technologies office (www.infineon.com).

Warnings
Due to technical requirements, our products may contain dangerous substances. For information on the types in question, please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by us in a written document signed by authorized representatives of Infineon Technologies, our products may not be used in any life-endangering applications, including but not limited to medical, nuclear, military, life-critical or any other applications where a failure of the product or any consequences of the use thereof can result in personal injury.