


PROPRIETARY INFORMATION:
Information contained in this drawing is confidential. Copying, distributing or use in any matter, other than that specified by IRONWOOD ELECTRONICS, INC., is strictly prohibited and may be unlawful. If you have received this drawing in error, please destroy or return to IRONWOOD ELECTRONICS, INC. at the address listed below.

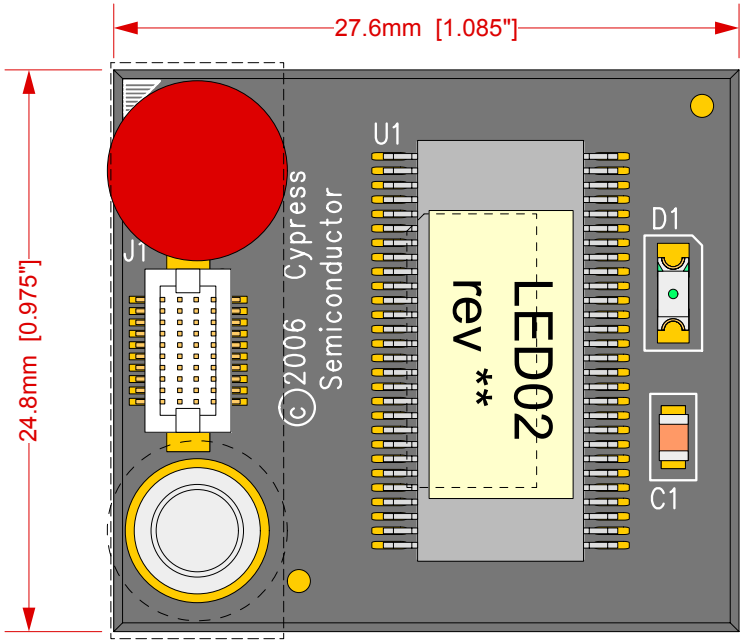

Top View

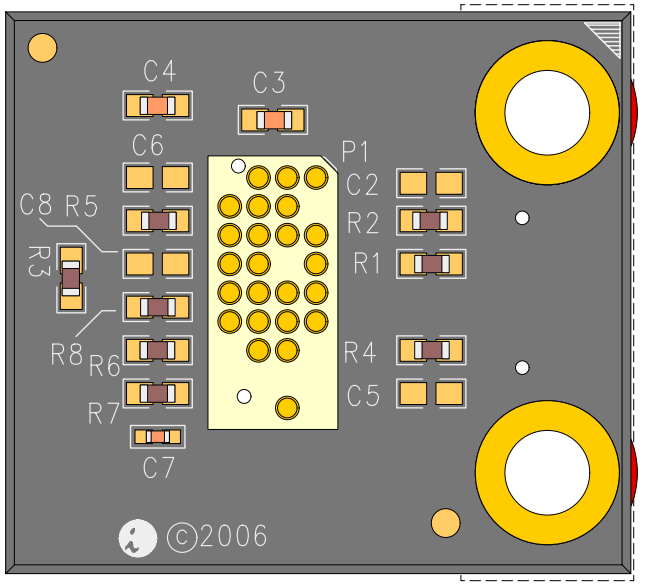

Bottom View

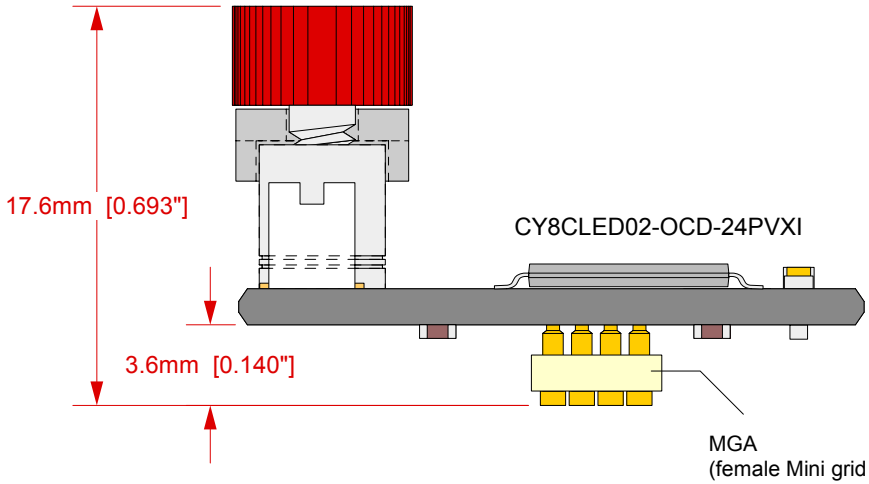

Side View

Description: **CY8CLED02 POD**
SSOP56 OCD (CY8CLED02-OCD-24PVXI).
Hirose cable connector with retension mechanism included.
Compatible with:
XT-PSoC-15-20H-10-01 - Flex cable (to ICE cube)
Compatible with C6822 - SOIC16


RoHS COMPLIANT


EA-8CLED02-NQ-01 Drawing	Status: Released	Scale: ~3:1	Rev: A
© 2008 IRONWOOD ELECTRONICS, INC. Tele: (800) 404-0204 www.ironwoodelectronics.com	Drawing: J. Glab	Date: 5/7/08	
	File: EA-8CLED02-NQ-01 Dwg	Modified:	

Tolerances: diameters ±0.03mm [±0.001"],
PCB perimeters ±0.13mm [±0.005"],
PCB thicknesses ±0.18mm [±0.007"],
pitches (from true position) ±0.08mm [±0.003"],
all other tolerances ±0.13mm [±0.005"]
unless stated otherwise. Materials and
specifications are subject to change without notice.

[+] Feedback

POD clearance, with respect to center of target pattern

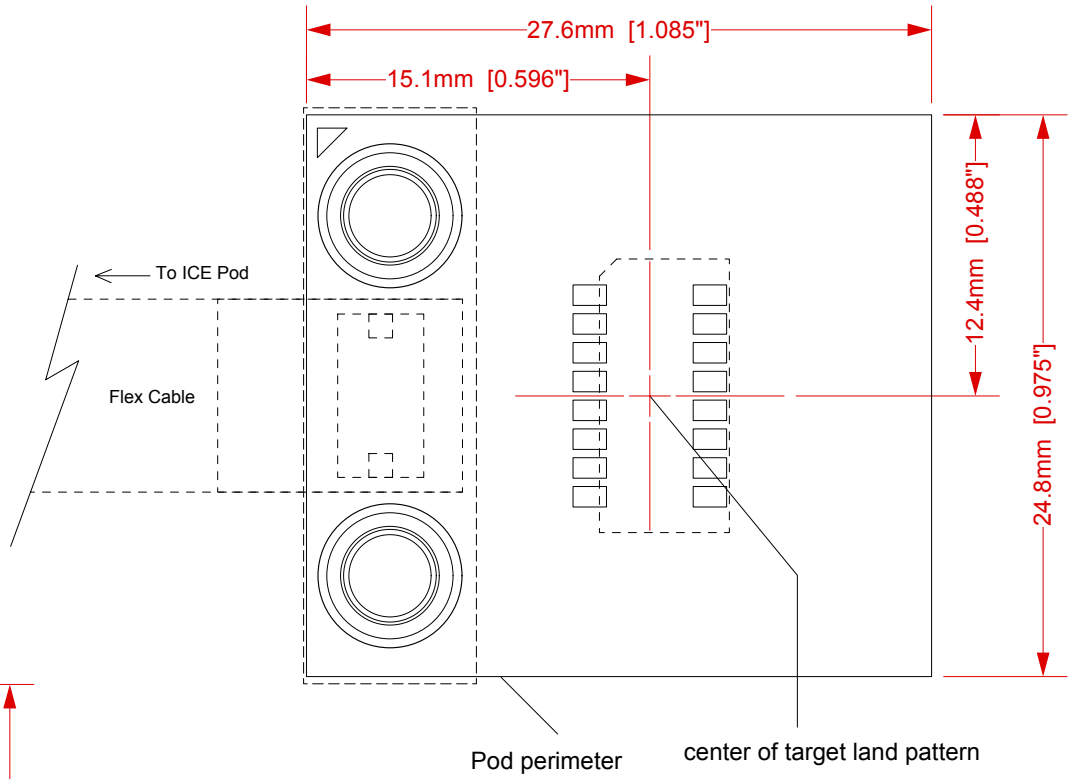

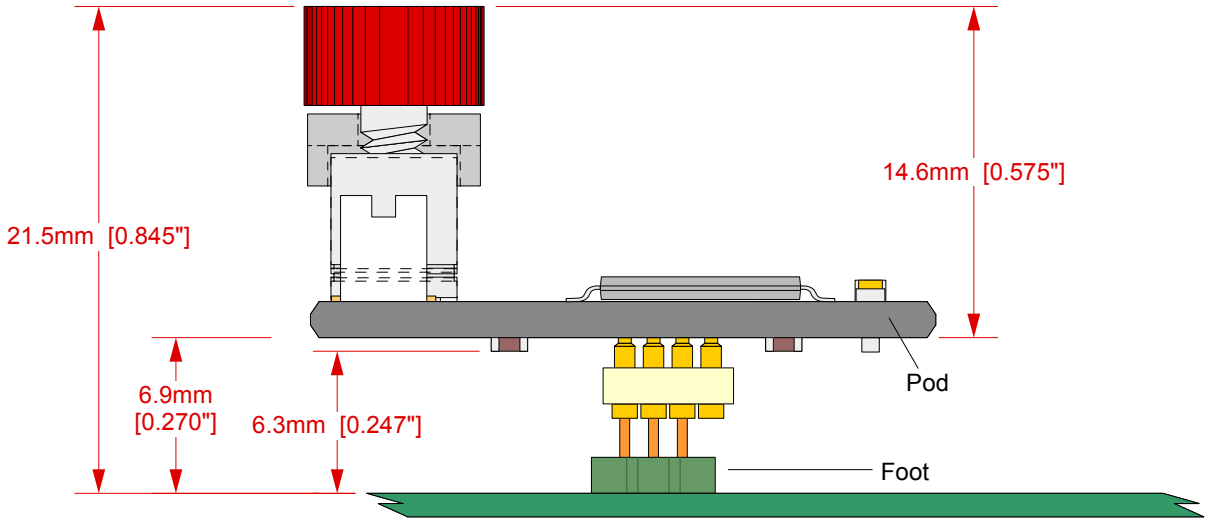

EA-8CLED02-NQ-01 Drawing	Status: Released	Scale: ~3:1	Rev: A
© 2008 IRONWOOD ELECTRONICS, INC. Tele: (800) 404-0204 www.ironwoodelectronics.com	Drawing: J. Glab	Date: 5/7/08	
	File: EA-8CLED02-NQ-01 Dwg	Modified:	

Tolerances: diameters ±0.03mm [±0.001"],
PCB perimeters ±0.13mm [±0.005"],
PCB thicknesses ±0.18mm [±0.007"],
pitches (from true position) ±0.08mm [±0.003"],
all other tolerances ±0.13mm [±0.005"]
unless stated otherwise. Materials and
specifications are subject to change without notice.

[+] Feedback