

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
2	RELEASE TO MANUFACTURING	06/04/07	DBD
**	RELEASE TO MANUFACTURING	06/22/07	DBD





DRILL CHART: TOP to BOTTOM				
ALL UNITS ARE IN MILS				
FIGURE	SIZE	TOLERANCE	PLATED	QTY
·	8.0	+3.0/-8.0	PLATED	44
·	31.0	+3.0/-3.0	PLATED	18
+	125.0	+3.0/-3.0	PLATED	1
○	44.0	+3.0/-3.0	NON-PLATED	2
○	59.0	+0.0/-0.0	NON-PLATED	2
▭	100.0x50.0	+3.0/-3.0	PLATED	2

NOTES:UNLESS OTHERWISE SPECIFIED

1. RoHS COMPLIANT CERTIFICATION OR MATERIAL DECLARATION REQUIRED
2. MATERIAL:
   A. NELCO 4000-11 OR IS410 OR EQUIVALENT. MATERIAL MUST CONFORM TO UL94V-0.
   B. USE HTE COPPER 1/2 oz. COPPER FOIL EXTERNAL LAYERS AND 1 oz COPPER FOIL FOR INTERNAL LAYERS UNLESS OTHERWISE SPECIFIED IN STACK VIEW.
   C. OVERALL METAL TO METAL THICKNESS .XXX +/- 10%
3. DRILLING:
   A. DIAMETERS IN DRILL TABLE ARE FINISHED HOLE SIZES +/-.003. UNLESS OTHERWISE SPECIFIED IN DRILL TABLE.
   B. TEARDROP ALLOWED ON ENTRY OF VIA ON EVERY TRACE LAYER.
4. PLATING:
   A. COPPER PLATING IN THRU-HOLES .001" min.
5. MARKING:
   A. SILKSCREEN IN WHITE NON-CONDUCTIVE EPOXY INK ON PRIMARY SIDE OF THE BOARD OR BOTH SIDES IF APPLICABLE.
   B. FABRICATIOR TO ETCH DATE CODE AND LOGO ON SECONDARY SIDE.
6. FINAL FABRICATION:
   A. SOLDERMASK PRIMARY AND SECONDARY SIDE OF BOARD USING LIQUID PHOTOIMAGABLE. MASK MATERIAL OVER BARE COPPER PER IPC-SM-840. SOLDERMASK COLOR **BLUE**.
7. FINISH:
   A. SHALL BE ELECTROLYTIC NICKEL/GOLD, ELECTROLESS NICKEL/IMMERSION GOLD(ENIG).
   B. NICKEL THICKNESS: 100-200 MICROINCHES.
   C. GOLD THICKNESS 3-10 MICROINCHES.
8. BOARDS SHALL BE PURCHASED FROM UL RECOGNIZED VENDORS ONLY AND SHALL BE MARKED IN COPPER ON SECONDARY SIDE OF BOARD WITH VENDORS UL IDENTIFICATION. FLAMABILITY RATING (94-VO).DATE CODE (WWYY) AND RoHS COMPLIANT SYMBOL.
9. MANUFACTURE BOARD TO BE IN ACCORDANCE WITH PERFORMANCE STANDARD IPC-6011/6012 CLASS 2 BOARD TO BE INSPECTED PER IPC-600-A CLASS 2.
10. MAXIMUM BOW OR TWIST SHALL NOT EXCEED 0.007 in/in.

UNLESS OTHERWISE SPECIFIED	SIGNATURES	DATE
DIMENSIONS ARE IN INCHES	DRAWN ZMK	05/18/07
TOLERANCES ON: ANGLES +/- 2°	CHECKED LKR	06/04/07
2 PL DECIMALS +/- .010	ENGRG DBD	06/04/07
3 PL DECIMALS +/- .005	ISSUED	
THIRD ANGLE PROJECTIONS		


CYPRESS PROPRIETARY
THIS DOCUMENT CONTAINS CONFIDENTAL, PROPRIETARY INFORMATION THAT IS CYPRESS SEMICONDUCTOR PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY CYPRESS.

CYPRESS SEMICONDUCTOR
10147 W. Emerald St. Suite 100
Boise, ID 83704
(208) 489-9303

FABRICATION DRAWING
FIRST TOUCH
PC BRIDGE

SIZE	FSCM NO	DWG NO	REV
C		PDCR-9403	**

SCALE: 1/1 SHEET: 1 OF 1

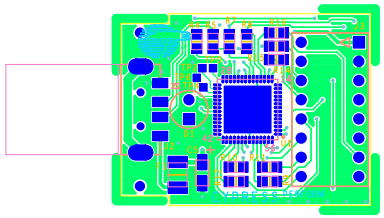

PDCR-9403 REV ** PRIMARY SIDE

PDCR-9403 REV ** PRIMARY SILKSCREEN

PDCR-9403 REV ** SECONDARY SIDE

PDCR-9403 REV ** SECONDARY SILKSCREEN