
IGT40R070D1 E8220

400V CoolGaN™ enhancement-mode Power Transistor

The 400V CoolGaN™ family is the derivative of industry benchmark 600V CoolGaN™ technology, optimized for Class-D Audio amplifier applications.

Features

- Enhancement mode transistor – Normally OFF switch
- Ultra fast switching
- No reverse-recovery charge
- Capable of reverse conduction
- Low gate charge, low output charge
- Superior commutation ruggedness
- Qualified according to JEDEC Standards (JESD47 and JESD22)

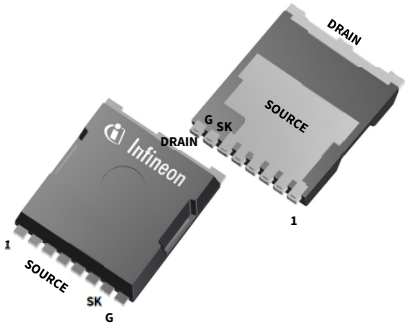

Gate	8
Drain	drain contact
Kelvin Source	7
Source	1,2,3,4,5,6

Benefits

- Improves efficiency due to best Figure Of Merit (FOM) in 400V class
- Exhibits very low noise level
- Lower THD compared to best-in-class Silicon switch
- Compatible with existing control ICs

Applications

- Class-D Audio Amplifier




Table 1 Key Performance Parameters at T_j = 25 °C

Parameter	Value	Unit
$V_{DS,max}$	400	V
$R_{DS(on),max}$	70	mΩ
$Q_{G,typ}$	4.5	nC
$I_{D,pulse}$	60	A
Q_{oss} @ 320 V	35	nC
Q_{rr}	0	nC

Table 2 Ordering Information

Type / Ordering Code	Package	Marking	Related links
IGT40R070D1 E8220	PG-HSOF-8	40L070D1	NA

Table of Contents

Features 1
Benefits 1
Applications 1
Table of Contents 2
1 Maximum ratings 3
2 Thermal characteristics 4
3 Electrical characteristics 5
4 Electrical characteristics diagrams 7
5 Test Circuits 13
6 Package Outlines 14
7 Revision History 15

1 Maximum ratings

at T_j = 25 °C, unless otherwise specified.

Continuous application of maximum ratings can deteriorate transistor lifetime. For further information, contact your local Infineon sales office.

Table 3 Maximum ratings

Parameter	Symbol	Values			Unit	Note/Test Condition
		Min.	Typ.	Max.		
Drain Source Voltage [1]	$V_{DS,max}$	-	-	400	V	V_{GS} = 0 V
Continuous current, drain source	I_D	-	-	31	A	T_C = 25 °C; $T_j = T_{j,max}$
		-	-	20		T_C = 100 °C; $T_j = T_{j,max}$
		-	-	14		T_C = 125 °C; $T_j = T_{j,max}$
Pulsed current, drain source [2] [3]	$I_{D,pulse}$	-	-	60	A	T_C = 25 °C; I_G = 26.1 mA; See Figure 3;Figure 21;
Pulsed current, drain source [3] [4]	$I_{D,pulse}$	-	-	35	A	T_C = 125 °C; I_G = 26.1 mA; See Figure 4;Figure 22;
Gate current, continuous [4] [5]	I_G	-	-	20	mA	T_j = 0 °C to 150 °C; Refer to gate drive app note
Gate current, pulsed [5]	$I_{G,pulse}$	-	-	2000	mA	T_j = 0 °C to 150 °C; t_{PULSE} = 50 ns, f=100 kHz Refer to gate drive app note
Gate source voltage, continuous [5]	V_{GS}	-10	-	-	V	T_j = 0 °C to 150 °C; Refer to gate drive app note
Gate source voltage, pulsed [5]	$V_{GS,pulse}$	-25	-	-	V	T_j = 0 °C to 150 °C; t_{PULSE} = 50 ns, f = 100 kHz; open drain Refer to gate drive app note
Power dissipation	P_{tot}	-	-	125	W	T_C = 25 °C
Operating temperature	T_j	0	-	150	°C	
Storage temperature	T_{stg}	0	-	150	°C	Max shelf life depends on storage conditions.
Drain-source voltage slew-rate	dV/dt			200	V/ns	

[1] All devices are 100% tested at I_{DS} = 12.2 mA to assure $V_{DS} \geq$ 800 V

[2] Limits derived from product characterization, parameter not measured during production

[3] Ensure that average gate drive current, I_G is ≤ 20 mA

[4] Parameter is influenced by rel-requirements. Please contact the local Infineon Sales Office to get an assessment of your application.

[5] We recommend using an advanced driving technique to optimize the device performance. Please see application information for details.

2 Thermal characteristics

Table 4 Thermal characteristics

Parameter	Symbol	Values			Unit	Note/Test Condition
		Min.	Typ.	Max.		
Thermal resistance, junction-case	R_{thJC}	-	-	1	°C/W	
Thermal resistance, junction-ambient	R_{thJA}	-	-	62	°C/W	Device on PCB, minimum footprint
Thermal resistance, junction-ambient for SMD version	R_{thJA}	-	35	45	°C/W	Device on 40mm*40mm* 1.5mm epoxy PCB FR4 with 6cm² (one layer, 70µm thickness) copper area for drain connection and cooling. PCB is vertical without air stream cooling.
Reflow soldering temperature	T_{sold}	-	-	260	°C	MSL1

3 Electrical characteristics

at T_j = 25 °C, unless specified otherwise

Table 5 Static characteristics

Parameter	Symbol	Values			Unit	Note/Test Condition
		Min.	Typ.	Max.		
Gate threshold voltage	$V_{GS(th)}$	0.9 0.7	1.2 1.0	1.6 1.4	V	I_{DS} = 2.6 mA; V_{DS} = 10 V; T_j =25 °C I_{DS} = 2.6 mA; V_{DS} = 10 V; T_j =125 °C
Drain-Source leakage current	I_{DSS}	- -	1 20	100 -	µA	V_{DS} = 400 V; V_{GS} = 0 V; T_j = 25 °C V_{DS} = 400 V; V_{GS} = 0 V; T_j = 150 °C
Drain-Source leakage current at application conditions[1]	I_{DSSapp}	-	60	-	µA	V_{DS} = 320 V; V_{GS} = 0 V; T_j = 125 °C
Gate-Source leakage current	I_{GSS}	-1 -1	- -	- -	mA	V_{DS} = 0 V; V_{GS} = -10 V; T_j = 25 °C V_{DS} = 0 V; V_{GS} = -10 V; T_j = 125 °C
Drain-Source on-state resistance	$R_{DS(on)}$	- -	0.055 0.100	0.070 -	Ω	I_G = 26.1 mA; I_D = 8 A; T_j = 25 °C I_G = 26.1 mA; I_D = 8 A; T_j = 150 °C
Gate resistance	$R_{G,int}$	-	0.68	-	Ω	LCR impedance measurement; f = f_{res}; open drain;

Table 6 Dynamic characteristics

Parameter	Symbol	Values			Unit	Note/Test Condition
		Min.	Typ.	Max.		
Input capacitance	C_{iss}	-	382	-	pF	V_{GS} = 0 V; V_{DS} = 320 V; f = 1 MHz
Output capacitance	C_{oss}	-	72	-	pF	V_{GS} = 0 V; V_{DS} = 320 V; f = 1 MHz
Reverse Transfer capacitance	C_{rss}	-	0.3	-	pF	V_{GS} = 0 V; V_{DS} = 320 V; f = 1 MHz
Effective output capacitance, energy related [2]	$C_{o(er)}$	-	84	-	pF	V_{DS} = 0 to 320 V
Effective output capacitance, time related [3]	$C_{o(tr)}$	-	109.4	-	pF	V_{GS} = 0 V; V_{DS} = 0 to 320 V; Id = const
Output charge	Q_{oss}	-	35	-	nC	V_{DS} = 0 to 320 V
Turn- on delay time	$t_{d(on)}$	-	11	-	ns	see Figure 23
Turn- off delay time	$t_{d(off)}$	-	11	-	ns	see Figure 23
Rise time	t_r	-	7.5	-	ns	see Figure 23
Fall time	t_f	-	9	-	ns	see Figure 23

[1] Parameter represents end of use leakage in applications

[2] $C_{o(er)}$ is a fixed capacitance that gives the same stored energy as Coss while VDS is rising from 0 to 320 V

[3] $C_{o(tr)}$ is a fixed capacitance that gives the same charging time as Coss while VDS is rising from 0 to 320 V

Table 7 Gate charge characteristics

Parameter	Symbol	Values			Unit	Note/Test Condition
		Min.	Typ.	Max.		
Gate charge	Q_G	-	4.5	-	nC	I_{GS} = 0 to 10 mA; V_{DS}= 320 V; I_D= 8 A

Table 8 Reverse conduction characteristics


Parameter	Symbol	Values			Unit	Note/Test Condition
		Min.	Typ.	Max.		
Source-Drain reverse voltage	V_{SD}	-	2.0	2.5	V	V_{GS} = 0 V; I_{SD} = 8 A
Pulsed current, reverse	$I_{S,pulse}$	- -	- -	60	A	I_G = 26.1 mA
Reverse recovery charge	Q_{rr} [1]	-	0	-	nC	I_S = 8 A, V_{DS} = 320 V
Reverse recovery time	t_{rr}	-	0	-	ns	
Peak reverse recovery current	I_{rrm}	-	0	-	A	

[1] Excluding Qoss

4 Electrical characteristics diagrams


at T_j = 25 °C, unless specified otherwise

Figure 1 Power dissipation

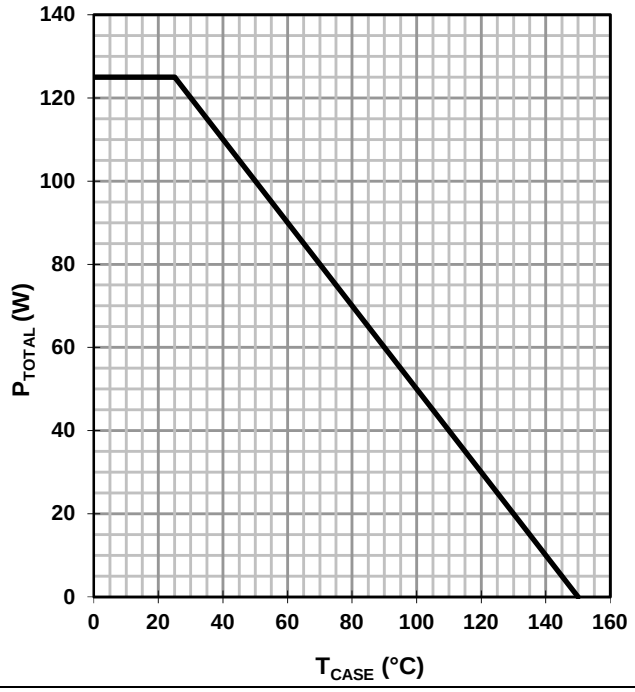


$P_{tot}=f(T_C)$

Figure 2 Max. transient thermal impedance

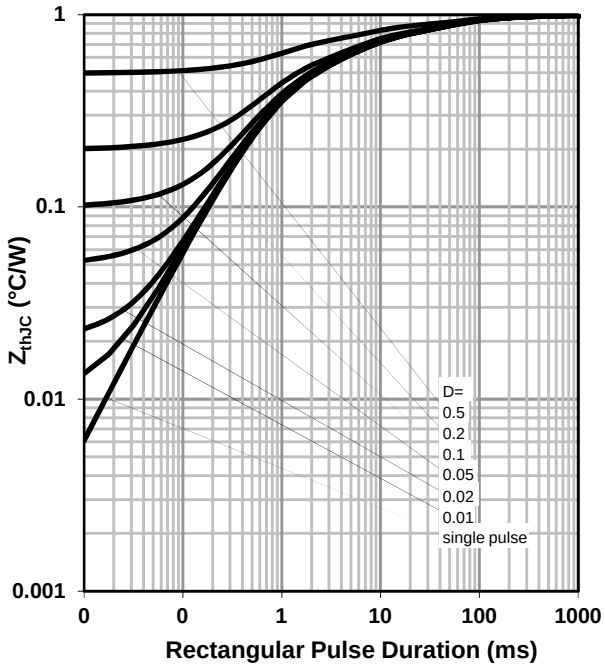


$Z_{thJC}=f(t_p, D)$

Figure 3 Safe operating area

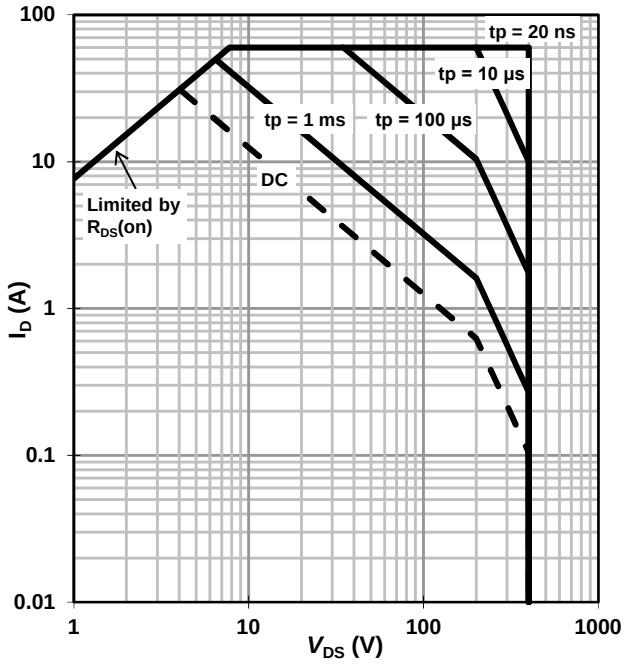


$I_D=f(V_{DS})$; T_C = 25 °C

Figure 4 Safe operating area

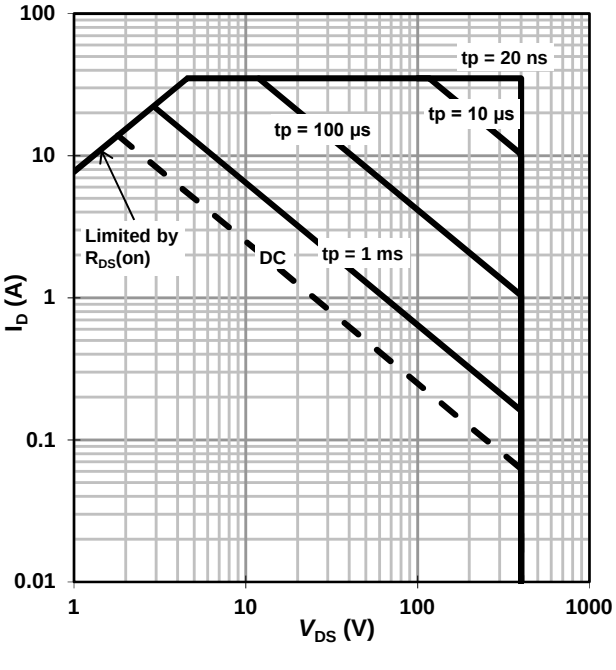


$I_D=f(V_{DS})$; T_C = 125 °C

Figure 5 Typ. output characteristics

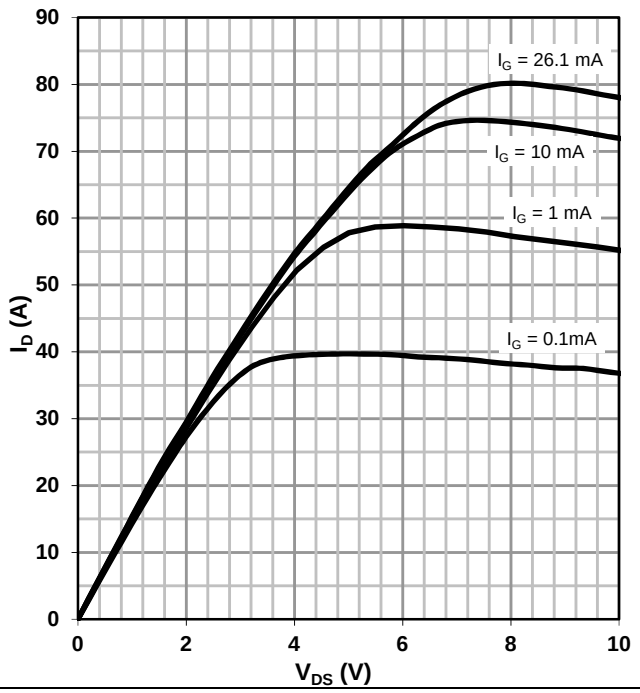


$I_D=f(V_{DS},I_G)$; T_j = 25 °C

Figure 6 Typ. output characteristics

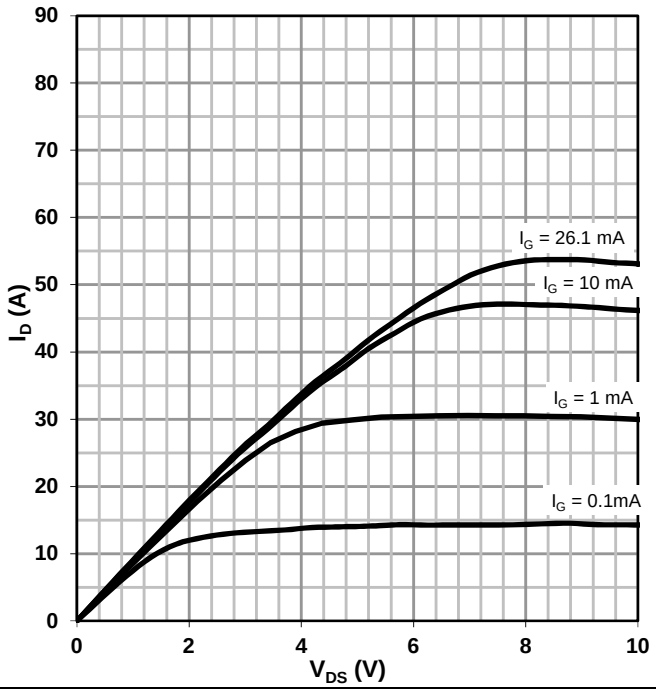


$I_D=f(V_{DS},I_G)$; T_j = 125 °C

Figure 7 Typ. Drain-source on-state resistance

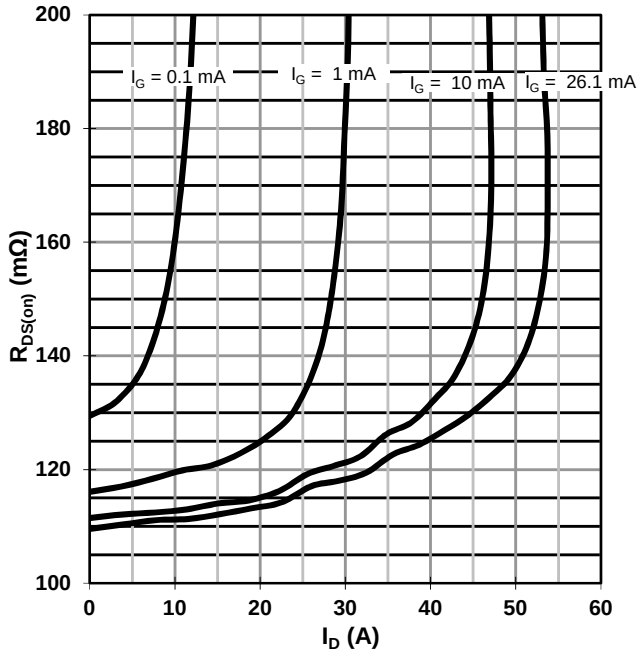


$R_{dson}=f(I_D,I_{GS})$; T_j = 125 °C

Figure 8 Drain-source on-state resistance

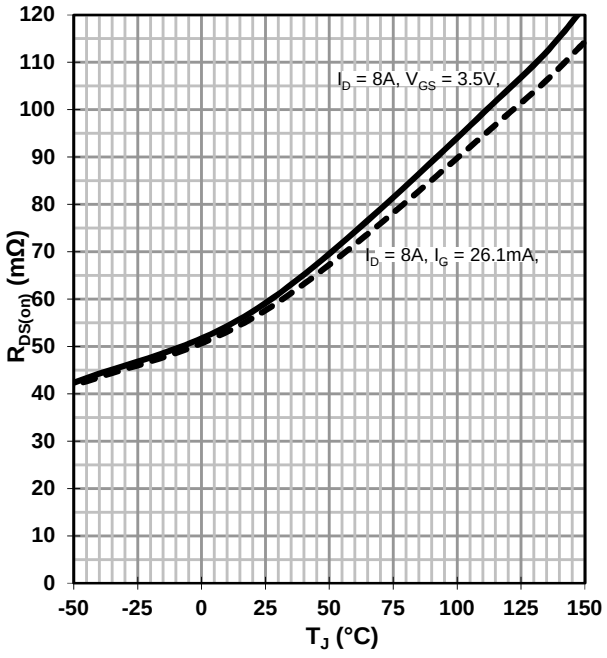


$R_{dson}=f(T_j)$; I_D = 8 A

Figure 9 Typ. gate characteristics forward

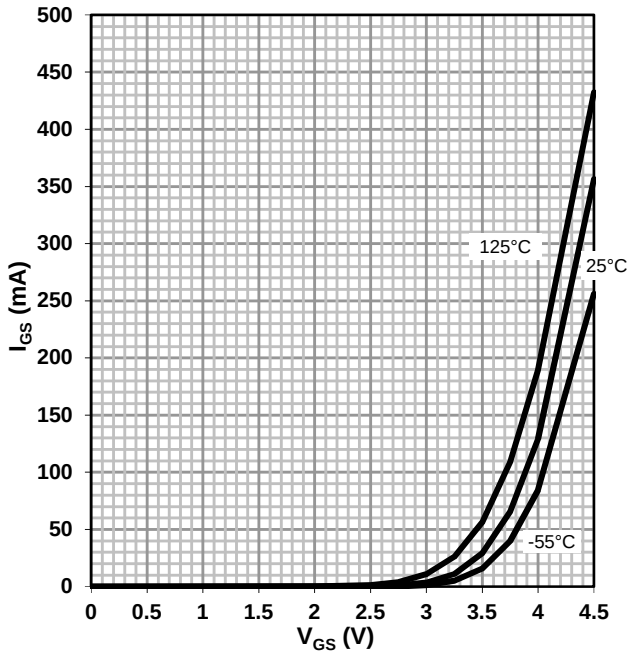


$I_{GS}=f(V_{GS},T_j)$; open drain

Figure 10 Typ. gate characteristics reverse

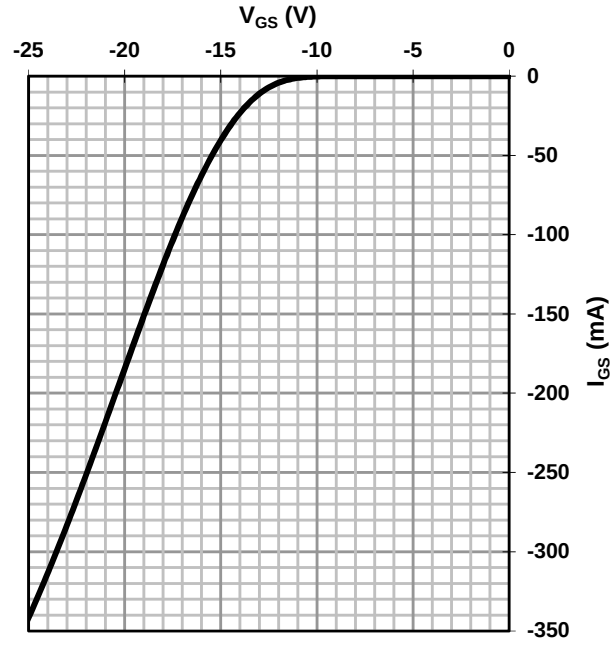


$I_{GS}=f(V_{GS})$; T_j = 25 °C

Figure 11 Typ. transfer characteristics

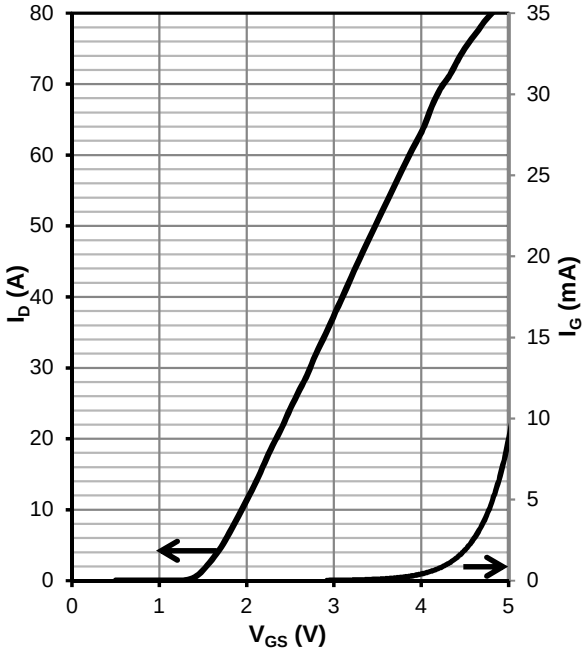


I_D, I_G $=f(V_{GS})$; V_{DS} = 8 V; T_j = 25 °C

Figure 12 Typ. transfer characteristics

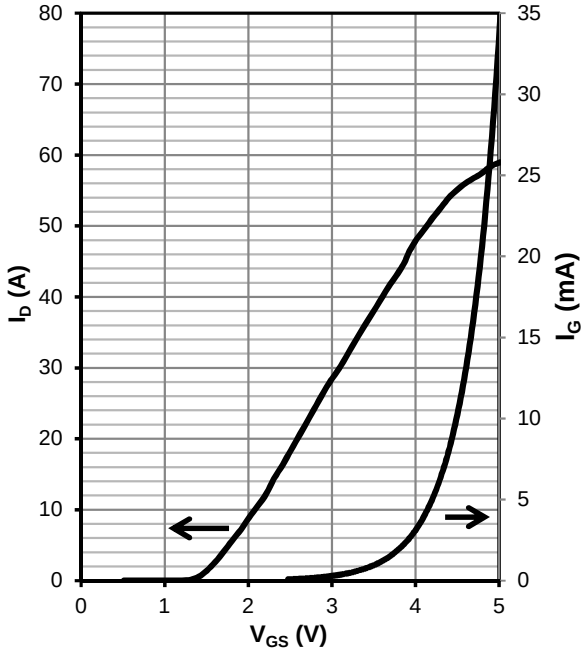


I_D, I_G $=f(V_{GS})$; V_{DS} = 8 V ; T_j = 125 °C

Figure 13 Typ. channel reverse characteristics

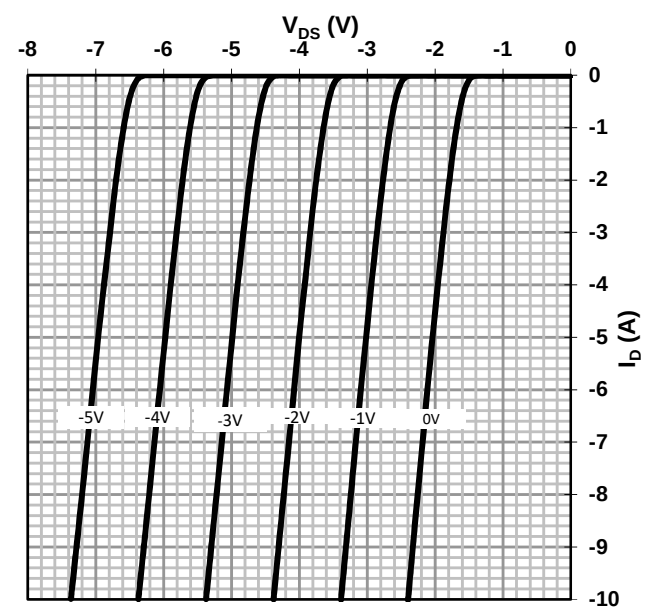


$V_{DS}=f(I_D, V_{GS})$; $T_j = 25$ °C

Figure 14 Typ. channel reverse characteristics

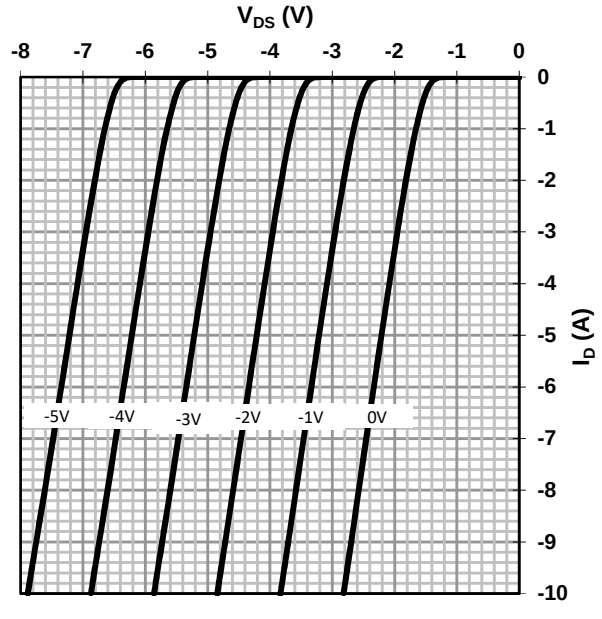


$V_{DS}=f(I_D, V_{GS})$; $T_j = 125$ °C

Figure 15 Typ. channel reverse characteristics

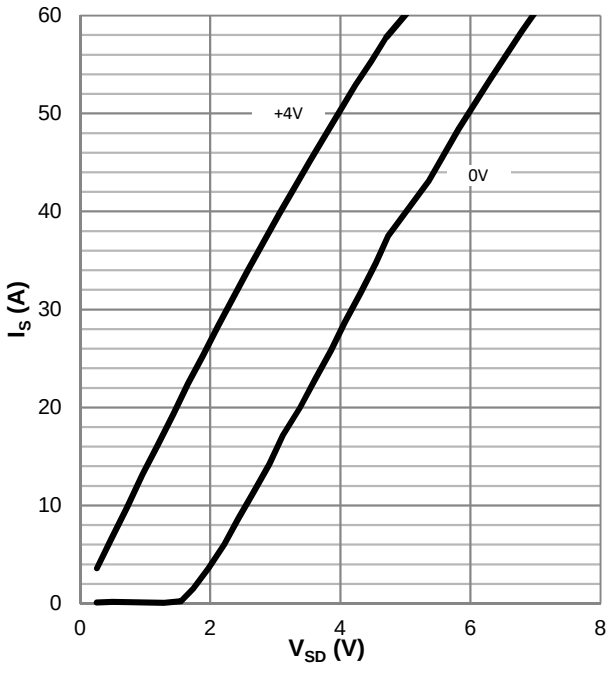


$I_D=f(V_{DS}, V_{GS})$; $T_j = 25$ °C

Figure 16 Typ. channel reverse characteristics

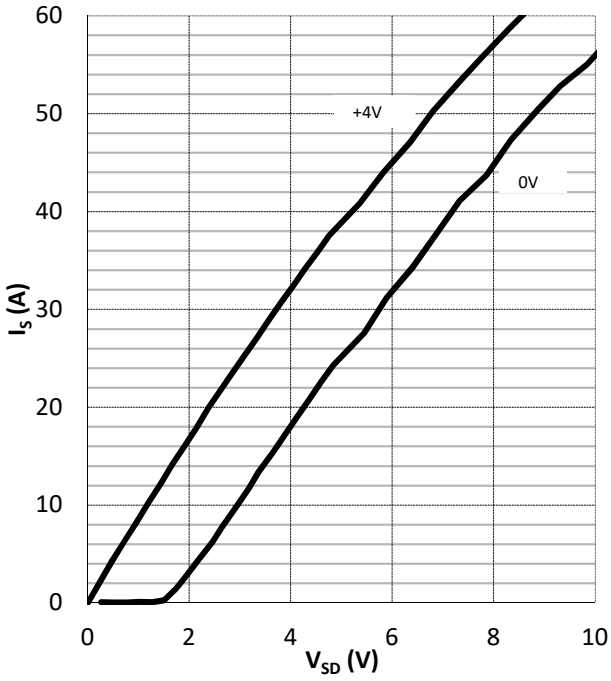


$I_D=f(V_{DS}, V_{GS})$; $T_j = 125$ °C

Figure 17 Typ. gate charge

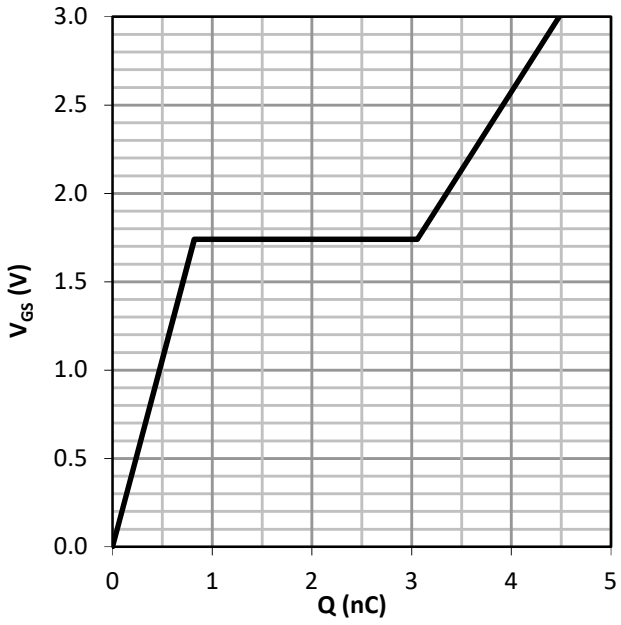


$V_{GS} = f(Q_G)$; V_{DCLINK} = 320 V; I_D = 8 A

Figure 18 Typ. capacitances

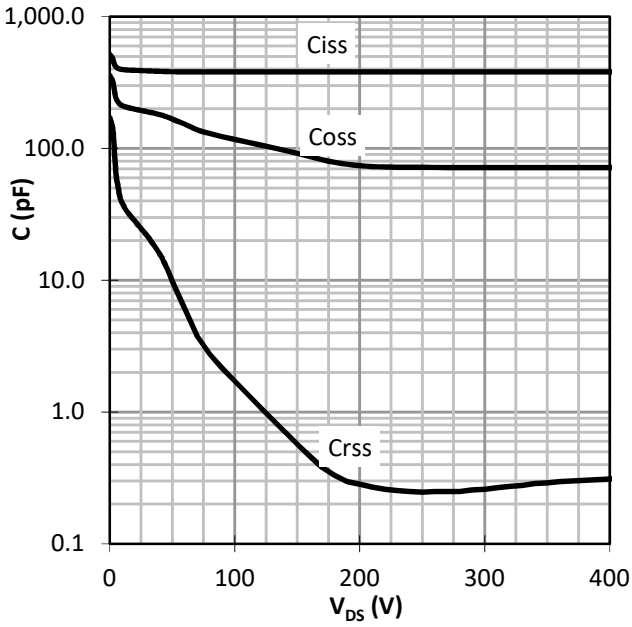


$C_{xSS} = f(V_{DS})$

Figure 19 Typ. output charge

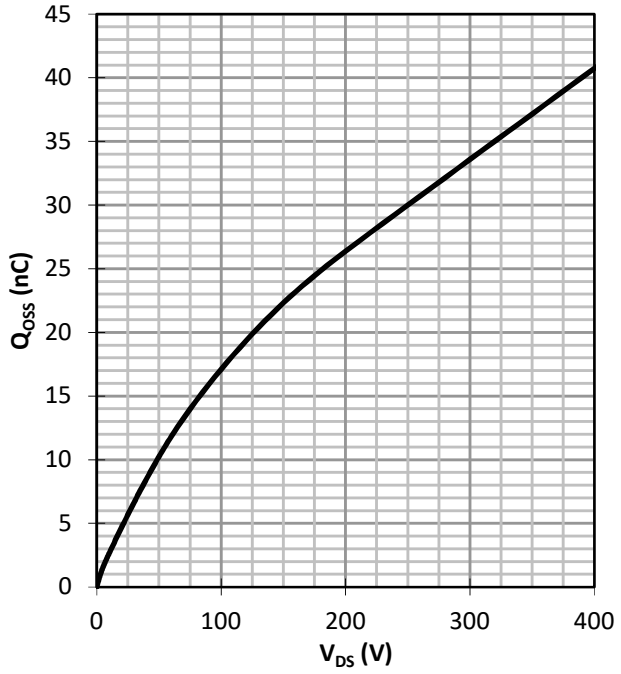


$Q_{OSS} = f(V_{DS})$

Figure 20 Typ. Coss stored Energy

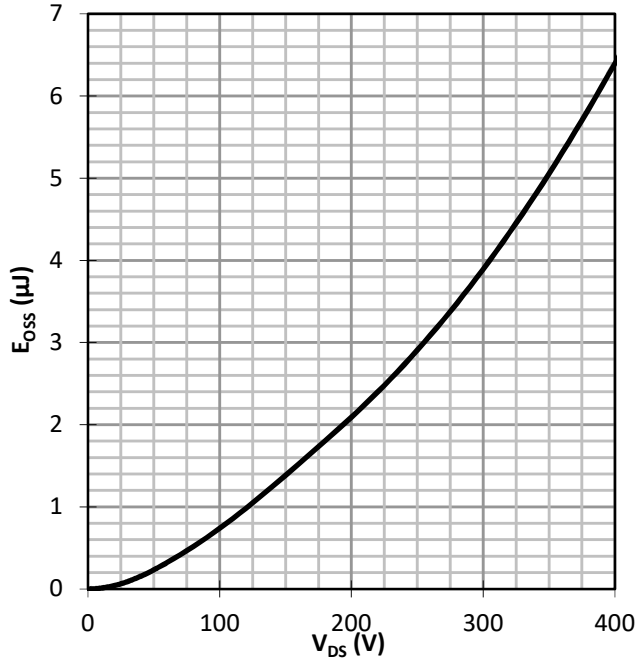


$E_{OSS} = f(V_{DS})$

Figure 21 Repetitive safe operating area[1]

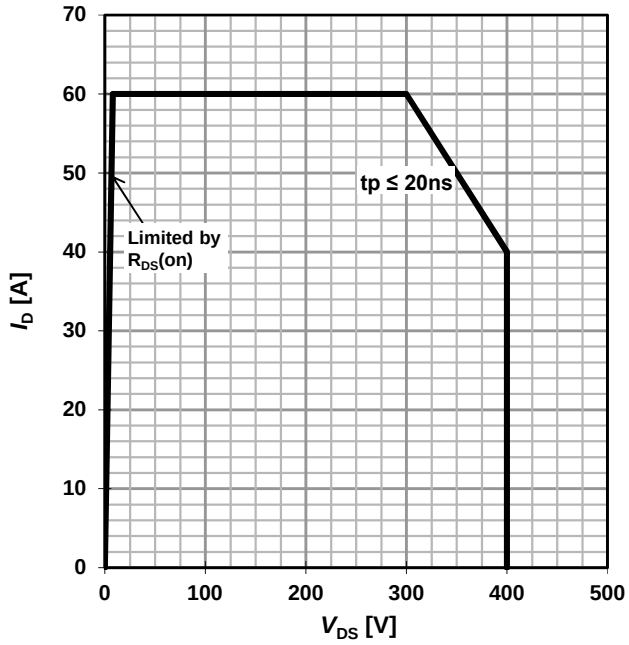

Tc = 25 °C; T_j ≤ 150 °C

Figure 22 Repetitive safe operating area[1]

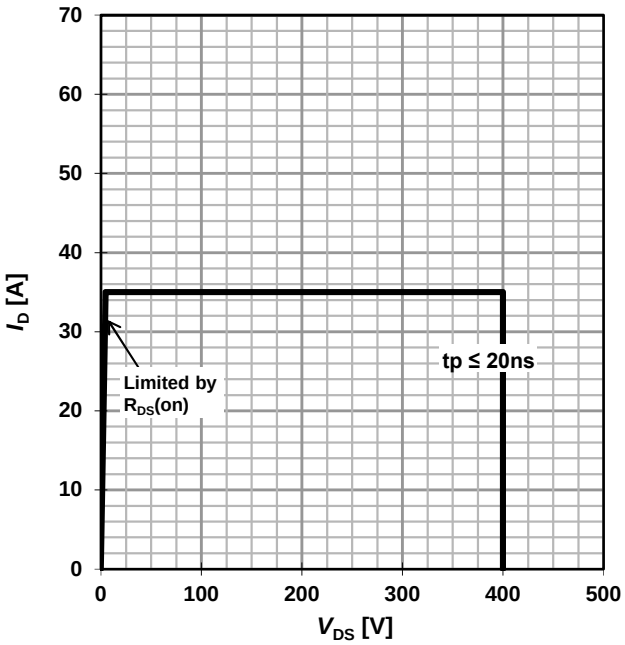

Tc = 125 °C; T_j ≤ 150 °C

[1] Parameter is influenced by rel-requirements. Please contact the local Infineon Sales Office to get an assessment of your application.

5 Test Circuits

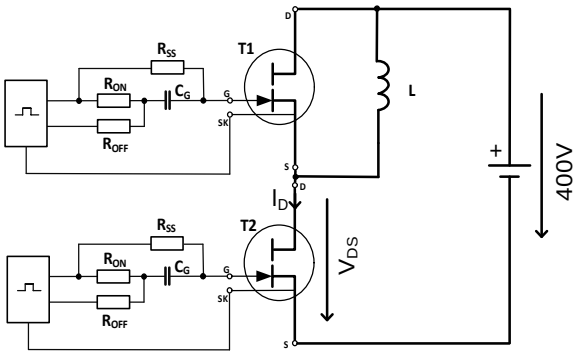
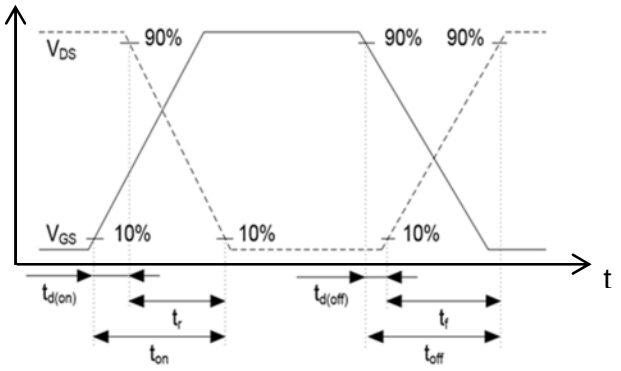
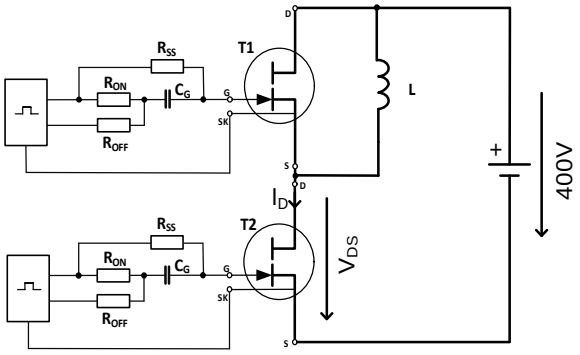
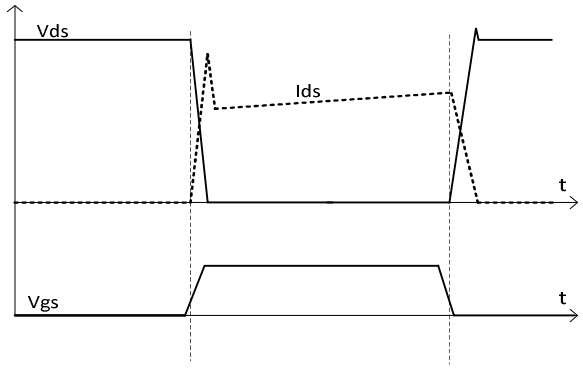
Figure 23 Switching times with inductive load	Figure 24 Switching times waveform
	
I_D = 8A, R_{ON} = 10 Ω; R_{OFF} = 10 Ω; R_{SS} = 820 Ω; C_G = 2 nF; V_{DRV} = 12V	

Figure 25 Reverse Channel Characteristics	Figure 26 Typ. Rev. Channel Recovery
	
I_D = 8 A, R_{ON} = 10 Ω; R_{OFF} = 10 Ω; R_{SS} = 820 Ω; C_G = 2 nF; V_{DRV} = 12V	The recovery charge is Q_{OSS} only, no additional Q_{rr}

6 Package Outlines

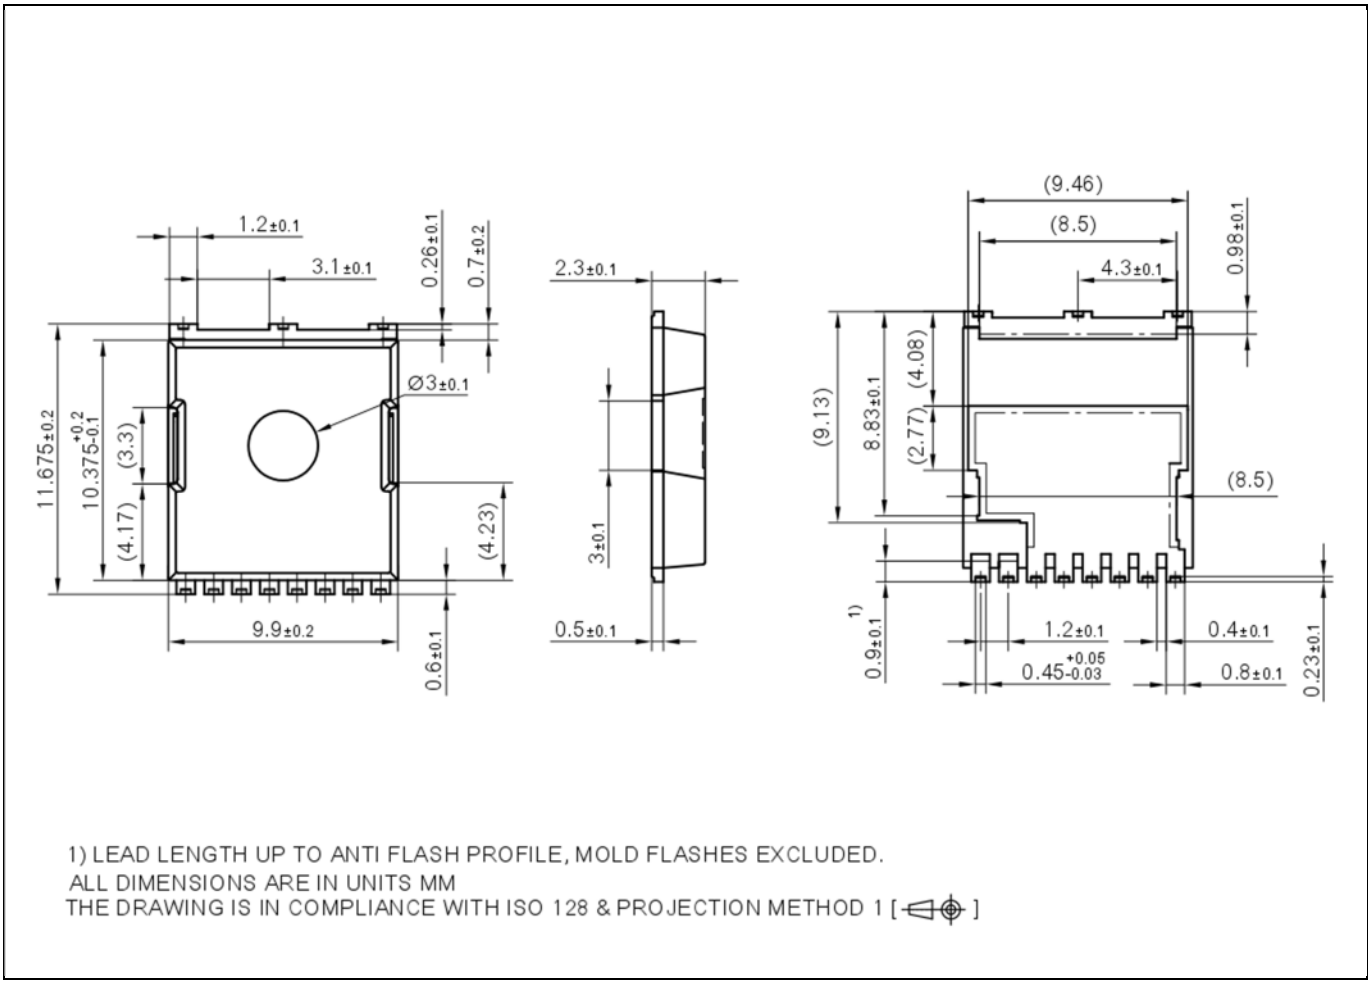


Figure 27 PG-HSOF-8 Package Outline, dimensions (mm)

7 Revision History

Major changes since the last revision

Revision	Date	Description of change
2.0	2018-04-25	Release of final version
2.1	2020-05-29	Updated to MSL1 in table 4

Trademarks of Infineon Technologies AG
µHVIC™, µIPM™, µPFC™, AU-ConvertIR™, AURIX™, C166™, CanPAK™, CIPOS™, CIPURSE™, CoolDP™, CoolGaN™, COOLiR™, CoolMOS™, CoolSET™, CoolSiC™, DAVE™, DI-POL™, DirectFET™, DrBlade™, EasyPIM™, EconoBRIDGE™, EconoDUAL™, EconoPACK™, EconoPIM™, EiceDRIVER™, eupec™, FCOS™, GaNpowIR™, HEXFET™, HITFET™, HybridPACK™, iMOTION™, IRAM™, ISOFACE™, IsoPACK™, LEDrivIR™, LITIX™, MIPAQ™, ModSTACK™, my-d™, NovalithIC™, OPTIGA™, OptiMOS™, ORIGA™, PowIRaudio™, PowIRStage™, PrimePACK™, PrimeSTACK™, PROFET™, PRO-SIL™, RASIC™, REAL3™, SmartLEWIS™, SOLID FLASH™, SPOC™, StrongIRFET™, SupIRBuck™, TEMPFET™, TRENCHSTOP™, TriCore™, UHVIC™, XHP™, XMC™

Trademarks updated November 2015

Other Trademarks
All referenced product or service names and trademarks are the property of their respective owners.

Edition 2020-05-29

Published by

Infineon Technologies AG

81726 München, Germany

© 2020 Infineon Technologies AG. All Rights Reserved.

Do you have a question about this document?

Email: erratum@infineon.com

Document reference

ifx1

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics (“Beschaffenheitsgarantie”) .

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer’s compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer’s products and any use of the product of Infineon Technologies in customer’s applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer’s technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office (**www.infineon.com**).

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies’ products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.