International
IOR Rectifier

IRF7457PbF-1

HEXFET® Power MOSFET

V_{DS}	20	V
$R_{DS(on)\ max}$ ($@V_{GS}$ = 10V)	7.0	mΩ
$R_{DS(on)\ max}$ ($@V_{GS}$ = 4.5V)	10.5	mΩ
$Q_{g\ (typical)}$	28	nC
I_D ($@T_A$ = 25°C)	15	A



Top View

SO-8

Features		Benefits
Industry-standard pinout SO-8 Package	⇒	Multi-Vendor Compatibility
Compatible with Existing Surface Mount Techniques		Easier Manufacturing
RoHS Compliant, Halogen-Free		Environmentally Friendlier
MSL1, Industrial qualification		Increased Reliability

Base Part Number	Package Type	Standard Pack		Orderable Part Number
		Form	Quantity	
IRF7457PbF-1	SO-8	Tube/Bulk	95	IRF7457PbF-1
		Tape and Reel	4000	IRF7457TRPbF-1

Absolute Maximum Ratings

Symbol	Parameter	Max.	Units
V_{DS}	Drain-Source Voltage	20	V
V_{GS}	Gate-to-Source Voltage	± 20	V
I_D @ T_A = 25°C	Continuous Drain Current, V_{GS} @ 10V	15	A
I_D @ T_A = 70°C	Continuous Drain Current, V_{GS} @ 10V	12	
I_{DM}	Pulsed Drain Current①	120	
P_D @T_A = 25°C	Maximum Power Dissipation③	2.5	W
P_D @T_A = 70°C	Maximum Power Dissipation③	1.6	W
	Linear Derating Factor	0.02	W/°C
T_J , T_{STG}	Junction and Storage Temperature Range	-55 to + 150	°C

Thermal Resistance

Symbol	Parameter	Typ.	Max.	Units
$R_{\theta JL}$	Junction-to-Drain Lead	–––	20	°C/W
$R_{\theta JA}$	Junction-to-Ambient ④	–––	50	

Notes ① through ④ are on page 8

Static @ T_J = 25°C (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
$V_{(BR)DSS}$	Drain-to-Source Breakdown Voltage	20	—	—	V	V_{GS} = 0V, I_D = 250µA
$\Delta V_{(BR)DSS}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	—	0.023	—	V/°C	Reference to 25°C, I_D = 1mA
$R_{DS(on)}$	Static Drain-to-Source On-Resistance	—	5.5	7.0	mΩ	V_{GS} = 10V, I_D = 15A ③
		—	8.0	10.5		V_{GS} = 4.5V, I_D = 12A ③
$V_{GS(th)}$	Gate Threshold Voltage	1.0	—	3.0	V	V_{DS} = V_{GS}, I_D = 250µA
I_{DSS}	Drain-to-Source Leakage Current	—	—	20	µA	V_{DS} = 16V, V_{GS} = 0V
		—	—	100		V_{DS} = 16V, V_{GS} = 0V, T_J = 125°C
I_{GSS}	Gate-to-Source Forward Leakage	—	—	200	nA	V_{GS} = 16V
	Gate-to-Source Reverse Leakage	—	—	-200		V_{GS} = -16V

Dynamic @ T_J = 25°C (unless otherwise specified)

Symbol	Parameter	Min.	Typ.	Max.	Units	Conditions
g_{fs}	Forward Transconductance	30	—	—	S	V_{DS} = 16V, I_D = 12A
Q_g	Total Gate Charge	—	28	42	nC	I_D = 12A
Q_{gs}	Gate-to-Source Charge	—	11	17		V_{DS} = 10V
Q_{gd}	Gate-to-Drain ("Miller") Charge	—	10	15		V_{GS} = 4.5V, ③
Q_{oss}	Output Gate Charge	—	25	38		V_{GS} = 0V, V_{DS} = 10V
$t_{d(on)}$	Turn-On Delay Time	—	14	—	ns	V_{DD} = 10V,
t_r	Rise Time	—	16	—		I_D = 12A
$t_{d(off)}$	Turn-Off Delay Time	—	16	—		R_G = 1.8Ω
t_f	Fall Time	—	7.5	—		V_{GS} = 4.5V ③
C_{iss}	Input Capacitance	—	3100	—	pF	V_{GS} = 0V
C_{oss}	Output Capacitance	—	1600	—		V_{DS} = 10V
C_{rss}	Reverse Transfer Capacitance	—	270	—		f = 1.0MHz

Avalanche Characteristics

	Parameter	Typ.	Max.	Units
E_{AS}	Single Pulse Avalanche Energy②	—	265	mJ
I_{AR}	Avalanche Current①	—	15	A

Diode Characteristics

Symbol	Parameter	Min.	Typ.	Max.	Units	Conditions
I_S	Continuous Source Current (Body Diode)	—	—	2.5	A	MOSFET symbol showing the integral reverse p-n junction diode.
I_{SM}	Pulsed Source Current (Body Diode) ①	—	—	120		
V_{SD}	Diode Forward Voltage	—	0.8	1.3	V	T_J = 25°C, I_S = 12A, V_{GS} = 0V ③
		—	0.67	—		T_J = 125°C, I_S = 12A, V_{GS} = 0V
t_{rr}	Reverse Recovery Time	—	50	75	ns	T_J = 25°C, I_F = 12A, V_R= 15V
Q_{rr}	Reverse Recovery Charge	—	70	105	nC	di/dt = 100A/µs ③
t_{rr}	Reverse Recovery Time	—	50	75	ns	T_J = 125°C, I_F = 12A, V_R=15V
Q_{rr}	Reverse Recovery Charge	—	74	110	nC	di/dt = 100A/µs ③

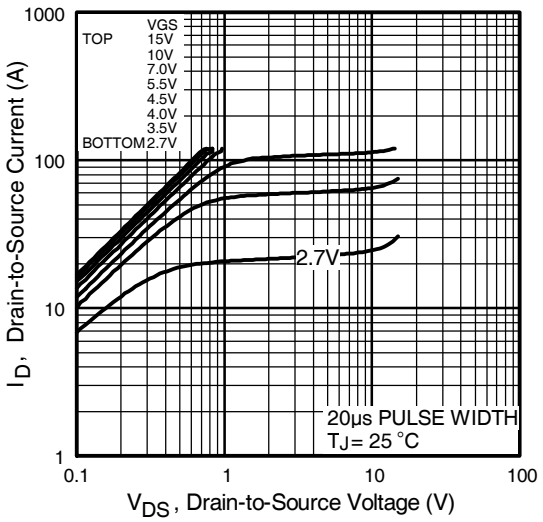

Fig 1. Typical Output Characteristics

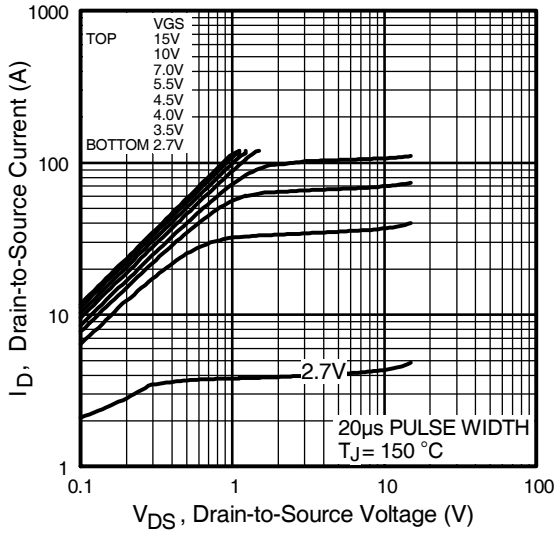

Fig 2. Typical Output Characteristics

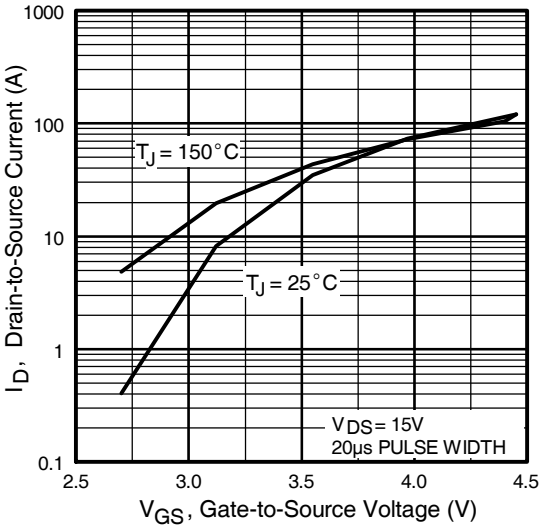

Fig 3. Typical Transfer Characteristics

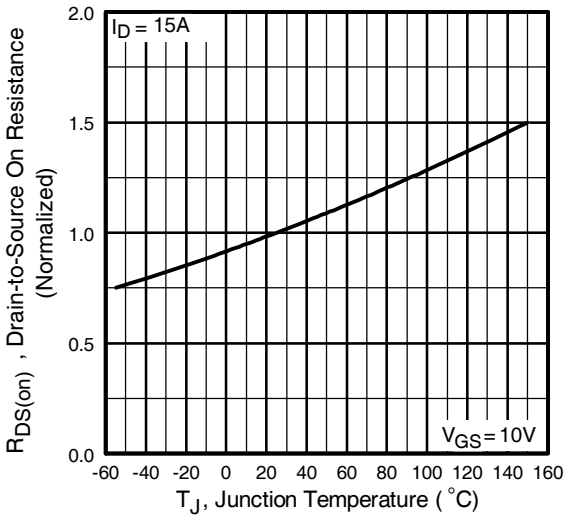

Fig 4. Normalized On-Resistance Vs. Temperature

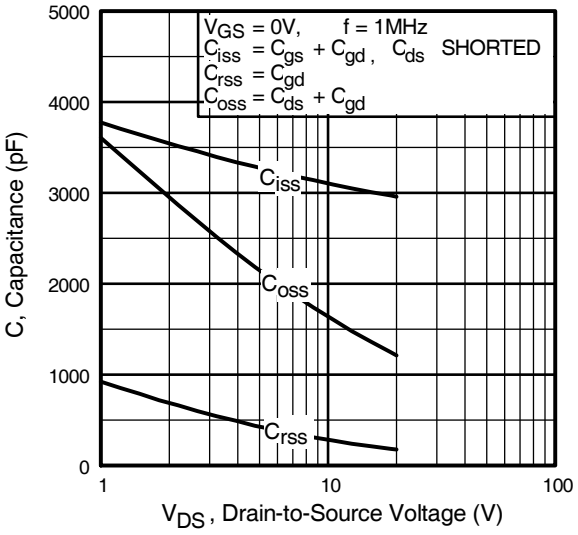

Fig 5. Typical Capacitance Vs. Drain-to-Source Voltage

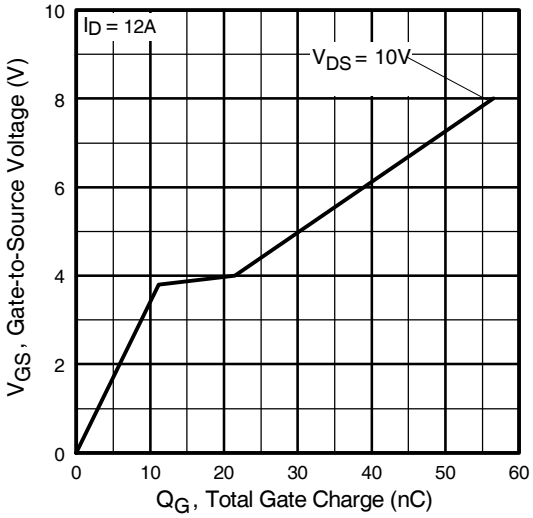

Fig 6. Typical Gate Charge Vs. Gate-to-Source Voltage

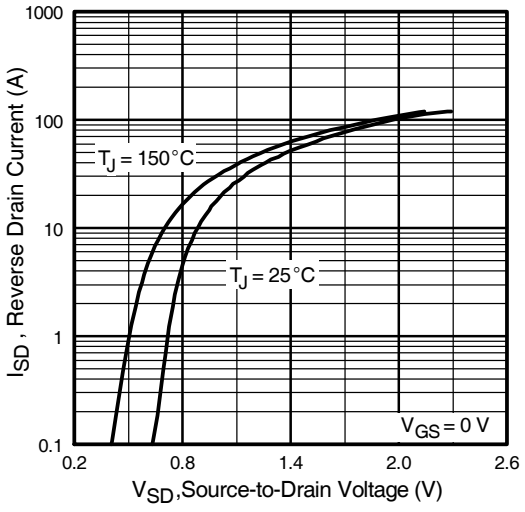

Fig 7. Typical Source-Drain Diode Forward Voltage

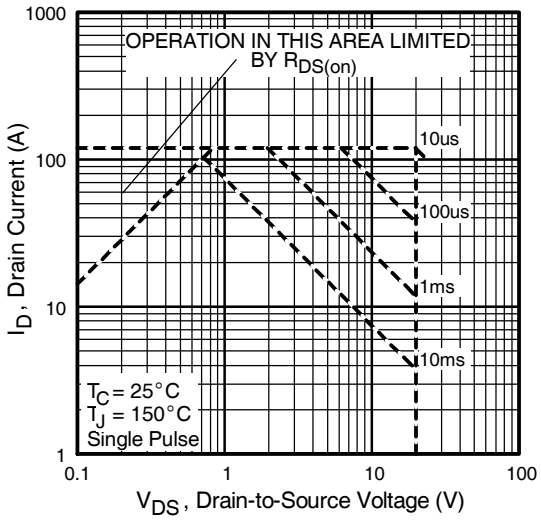

Fig 8. Maximum Safe Operating Area

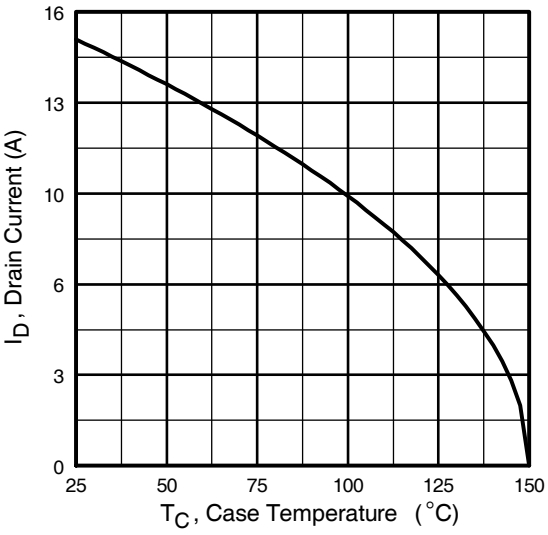

Fig 9. Maximum Drain Current Vs. Case Temperature

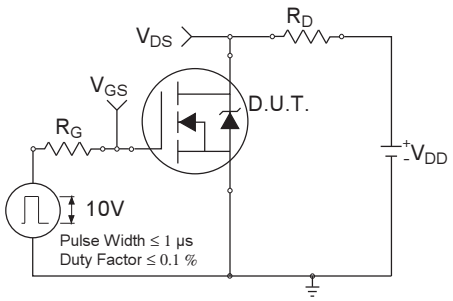

Fig 10a. Switching Time Test Circuit

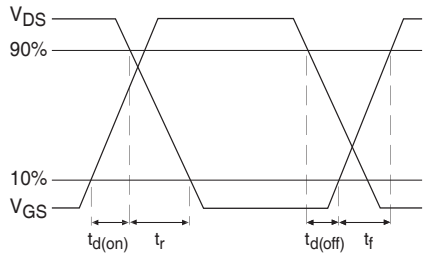

Fig 10b. Switching Time Waveforms

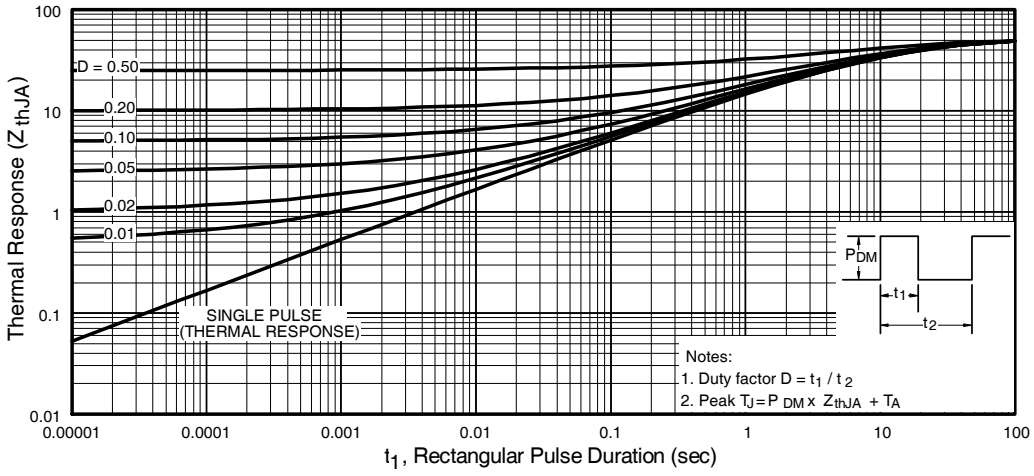

Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

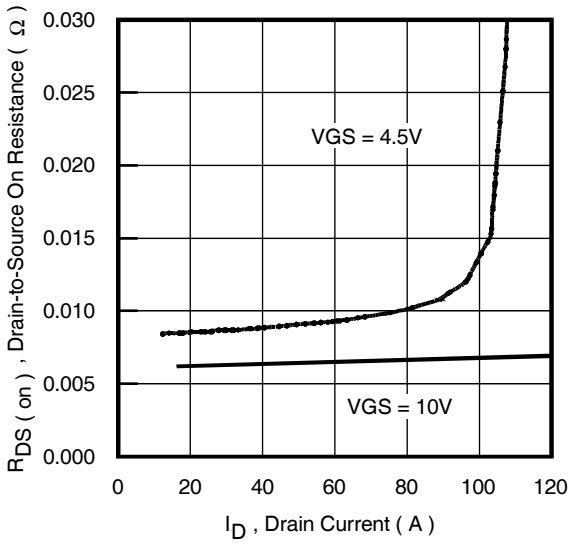

Fig 12. On-Resistance Vs. Drain Current

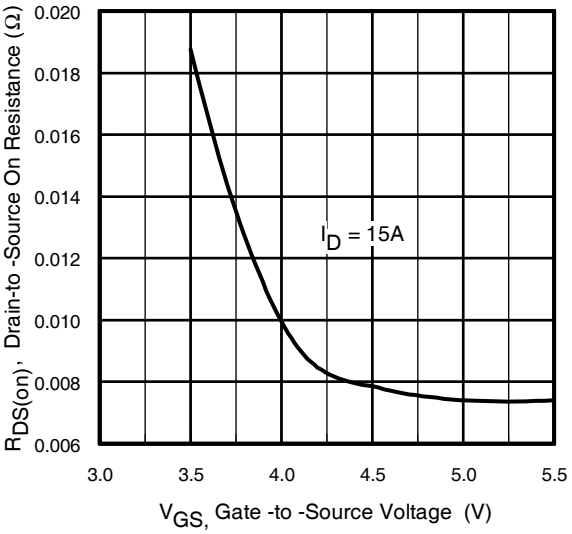

Fig 14. On-Resistance Vs. Gate Voltage

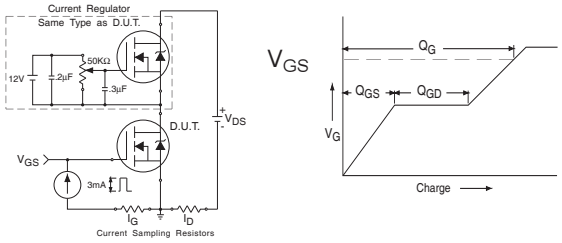

Fig 13a&b. Basic Gate Charge Test Circuit and Waveform

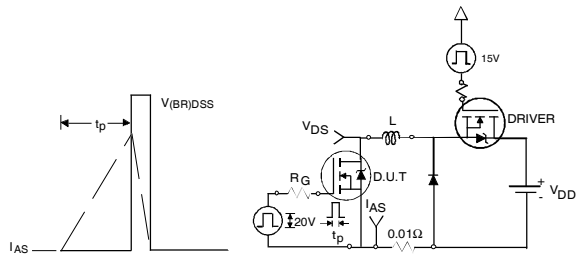

Fig 14a&b. Unclamped Inductive Test circuit and Waveforms

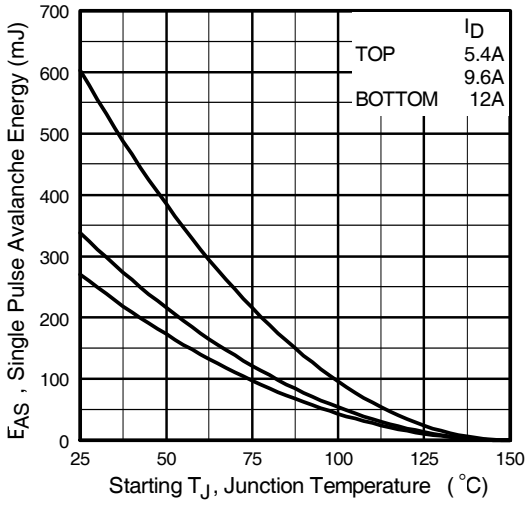

Fig 14c. Maximum Avalanche Energy Vs. Drain Current

SO-8 Package Outline(Mosfet & Fetky)

Dimensions are shown in milimeters (inches)

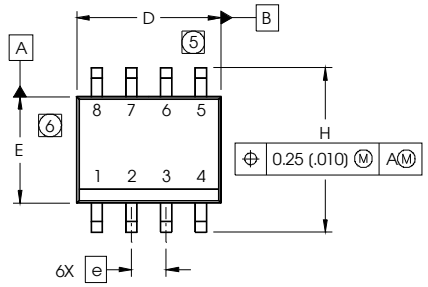

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.0532	.0688	1.35	1.75
A1	.0040	.0098	0.10	0.25
b	.013	.020	0.33	0.51
c	.0075	.0098	0.19	0.25
D	.189	.1968	4.80	5.00
E	.1497	.1574	3.80	4.00
e	.050 BASIC		1.27 BASIC	
e1	.025 BASIC		0.635 BASIC	
H	.2284	.2440	5.80	6.20
K	.0099	.0196	0.25	0.50
L	.016	.050	0.40	1.27
y	0°	8°	0°	8°

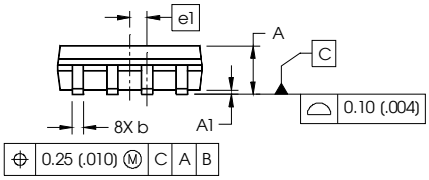



NOTES:

1. DIMENSIONING & TOLERANCING PER ASME Y14.5M-1994.
2. CONTROLLING DIMENSION: MILLIMETER
3. DIMENSIONS ARE SHOWN IN MILLIMETERS (INCHES).
4. OUTLINE CONFORMS TO JEDEC OUTLINE MS-012AA.

5 DIMENSION DOES NOT INCLUDE MOLD PROTRUSIONS. MOLD PROTRUSIONS NOT TO EXCEED 0.15 (.006).

6 DIMENSION DOES NOT INCLUDE MOLD PROTRUSIONS. MOLD PROTRUSIONS NOT TO EXCEED 0.25 (.010).

7 DIMENSION IS THE LENGTH OF LEAD FOR SOLDERING TO A SUBSTRATE.

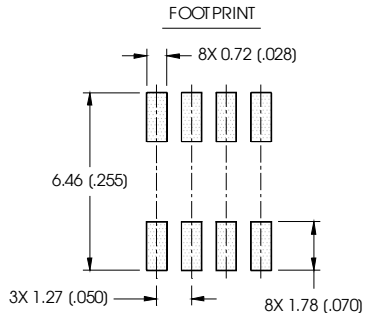

SO-8 Part Marking Information

EXAMPLE: THIS IS AN IRF7101 (MOSFET)

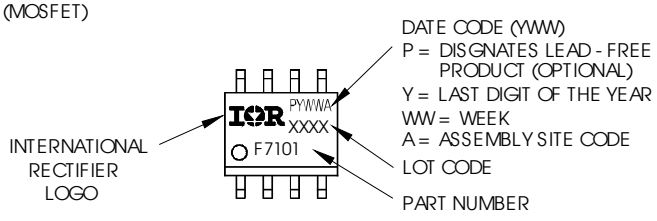

Note: For the most current drawing please refer to IR website at: http://www.irf.com/package/

SO-8 Tape and Reel (Dimensions are shown in milimeters (inches))

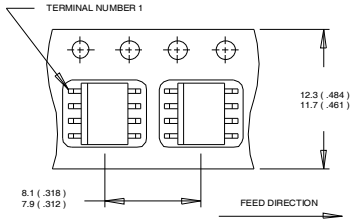

NOTES:
1. CONTROLLING DIMENSION : MILLIMETER.
2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS(INCHES).
3. OUTLINE CONFORMS TO EIA-481 & EIA-541.

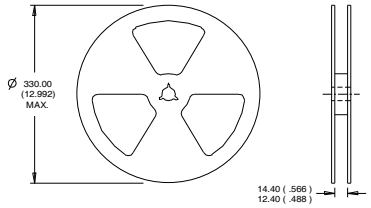

NOTES :
1. CONTROLLING DIMENSION : MILLIMETER.
2. OUTLINE CONFORMS TO EIA-481 & EIA-541.

Note: For the most current drawing please refer to IR website at: http://www.irf.com/package/

Notes:

① Repetitive rating; pulse width limited by max. junction temperature.
② Starting T_J = 25°C, L = 3.7mH, R_G = 25Ω, I_{AS} = 12A.
③ Pulse width ≤ 300µs; duty cycle ≤ 2%.
④ When mounted on 1 inch square copper board, t<10 sec

Qualification information†

Qualification level	Industrial (per JEDEC JESD47F†† guidelines)	
Moisture Sensitivity Level	SO-8	MSL1 (per JEDEC J-STD-020D††)
RoHS compliant	Yes	

† Qualification standards can be found at International Rectifier's web site: http://www.irf.com/product-info/reliability
†† Applicable version of JEDEC standard at the time of product release

International
IOR Rectifier

IR WORLD HEADQUARTERS: 101 N. Sepulveda Blvd., El Segundo, California 90245, USA
To contact International Rectifier, please visit http://www.irf.com/whoto-call/