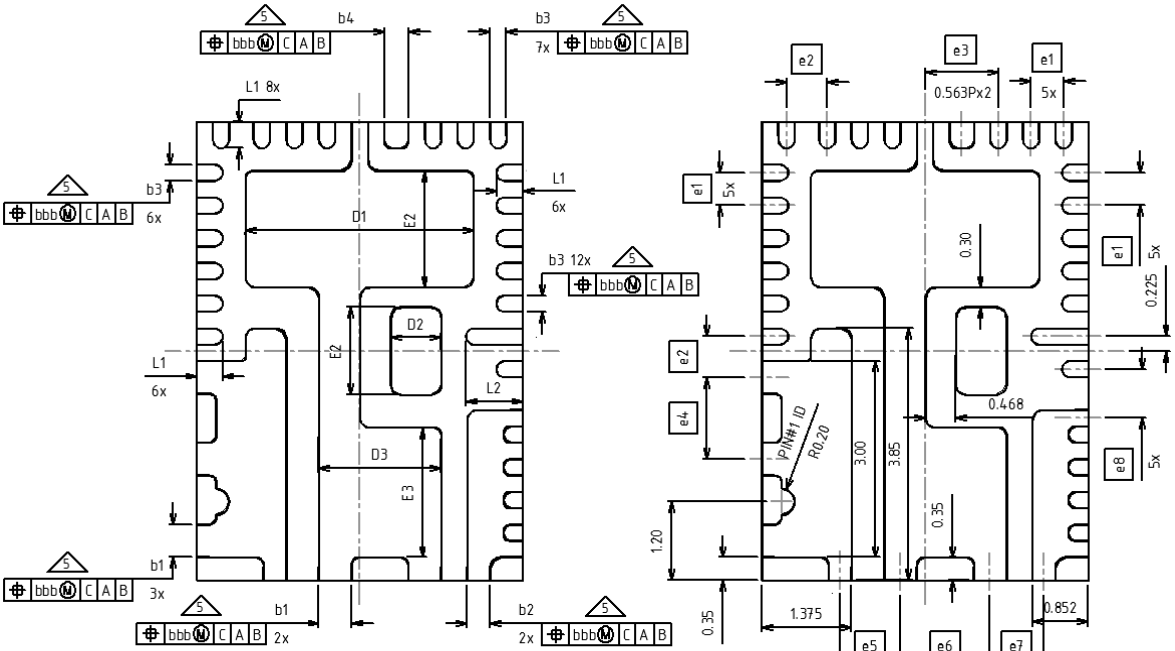

BOTTOM METALIZATION

DETAIL VIEW

Dimension Table				
Thickness / Symbol	V - Very Thin			NOTE
	MINIMUM	NOMINAL	MAXIMUM	
A	0.80	0.90	1.00	
A1	0.00	0.02	0.05	
b1	0.45	0.50	0.55	5
b2	0.30	0.35	0.40	5
b3	0.20	0.25	0.30	5
b4	0.325	0.375	0.425	5
D1	3.450	3.500	3.550	
E1	1.725	1.775	1.825	
D2	0.725	0.775	0.825	
E2	1.292	1.342	1.392	
D3	1.823	1.873	1.923	
E3	1.932	1.982	2.032	
L1	0.35	0.40	0.45	
L2	0.822	0.872	0.922	
aaa	0.05			
bbb	0.10			
ccc	0.10			
eee	0.08			
N	34			3
NOTES	1, 2			
LF PART NO.	B-3453			
REV.	3			

Dimension Table		
Thickness / Symbol	V - Very Thin	NOTE
D	5.00 BSC	
E	7.00 BSC	
A3	0.203 Ref.	
e1	0.50 BSC	
e2	0.625 BSC	
e3	1.125 BSC	
e4	1.250 BSC	
e5	0.925 BSC	
e6	1.373 BSC	
e7	0.825 BSC	
e8	0.750 BSC	
NOTES	1, 2	

NOTE:

1. Dimensioning and tolerancing conform to ASME Y14.5-2009.

2. All dimensions are in millimeters.

3. N is the total number of terminals.

4. Coplanarity applies to the terminals and all other bottom surface metallization.

5. Dimension b applies to metallized terminal. If the terminal has the optional radius on the other end, dimension b should not be measured in that radius area.

6. The terminal #1 identifier is within the hatched area.