


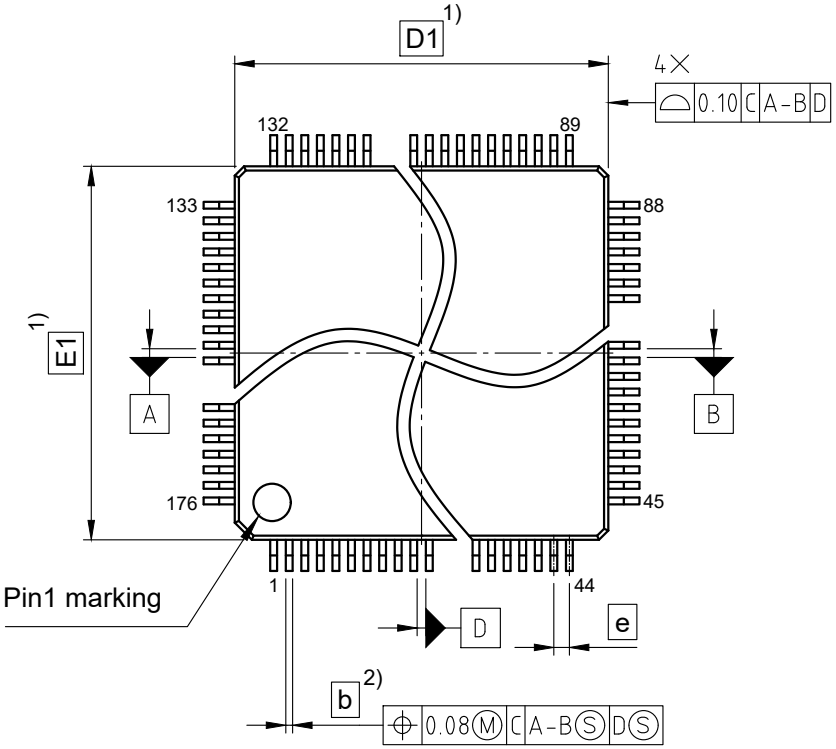


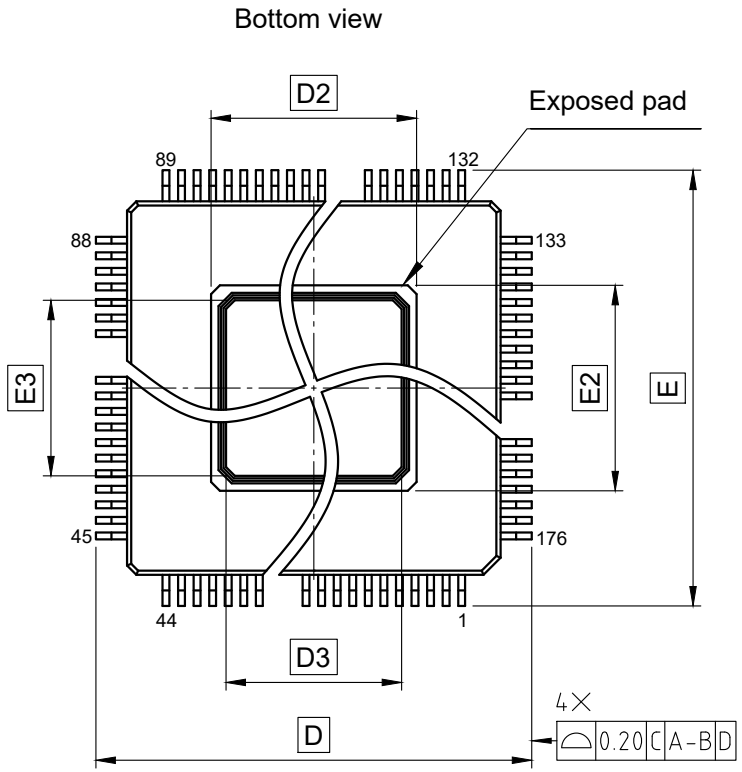


| SYMBOL | DIMENSIONS | | |
|---|---|---|---|
| | MIN. | NOM. | MAX. |
| A | - | - | 1.7 |
| A1 | 0.05 | - | 0.15 |
| A2 | 1.35 | 1.4 | 1.45 |
| D | 26 BSC | | |
| D1 | 24 BSC | | |
| D2 | 9.26 REF | | |
| D3 | 8.06 REF | | |
| E | 26 BSC | | |
| E1 | 24 BSC | | |
| E2 | 9.26 REF | | |
| E3 | 8.06 REF | | |
| θ | 0° | 4° | 8° |
| c | 0.12 | - | 0.2 |
| b | 0.17 | 0.22 | 0.27 |
| L | 0.45 | 0.6 | 0.75 |
| e | 0.5 BSC | | |

1) Dimensions D1 and E1 do not include mold protrusion.allowable protrusion is 0.25mm per side.

2) Dimension b does not include damber protrusion. the dambar protrusion(s) shall not cause the lead width to exceed b maximum by more than 0.08mm.

All dimensions are in units mm

The drawing is in compliance with ISO 128-30, Projection Method 1 [ ]