


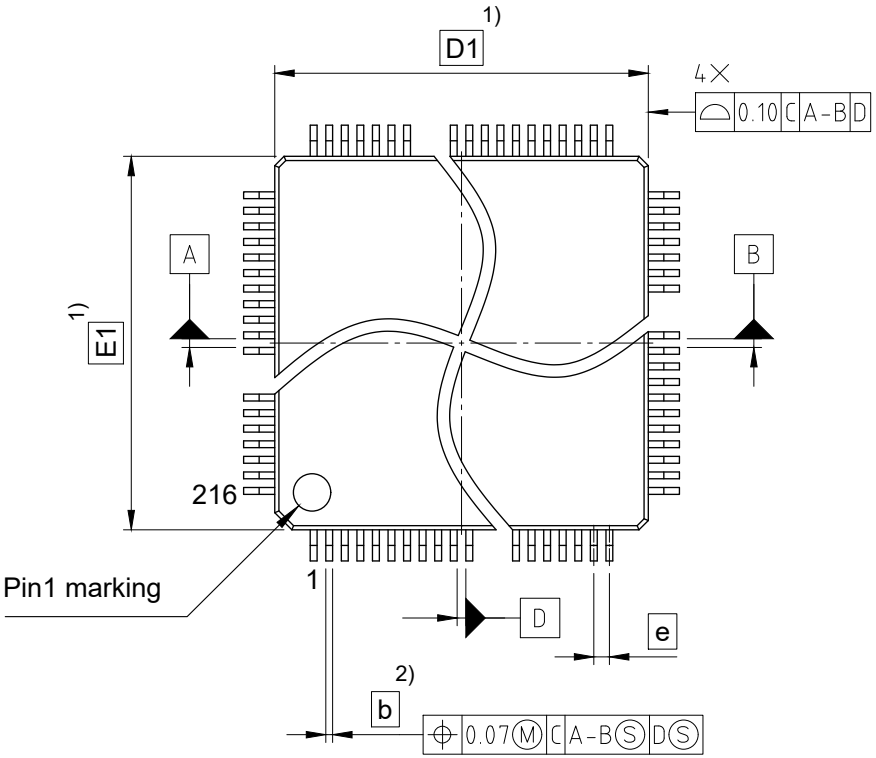


Bottom view

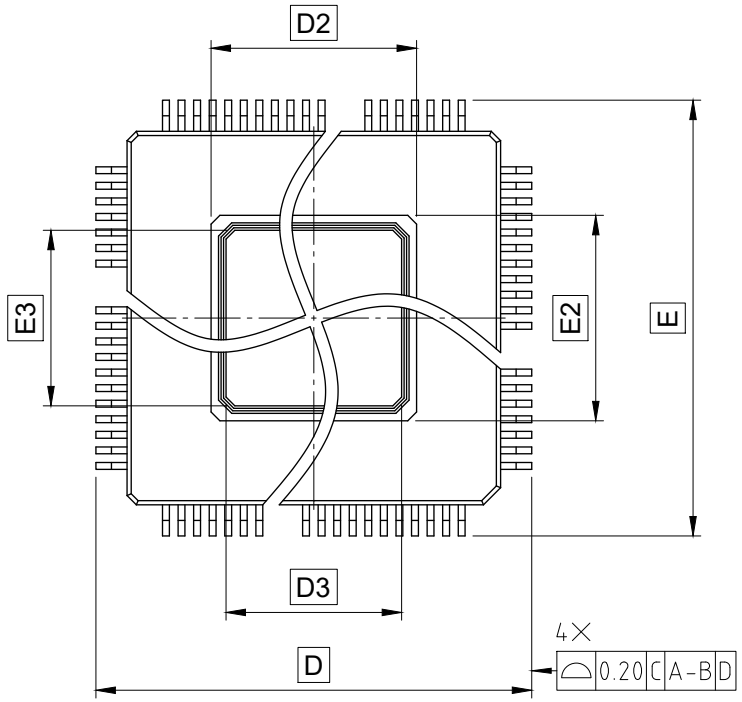


| SYMBOL | DIMENSIONS | | |
|---|---|---|---|
| | MIN. | NOM. | MAX. |
| A | - | - | 1.70 |
| A1 | 0.05 | - | 0.15 |
| A2 | 1.35 | 1.40 | 1.45 |
| D | | 26.00 BSC | |
| D1 | | 24.00 BSC | |
| D2 | | 9.90 REF | |
| D3 | | 8.70 REF | |
| E | | 26.00 BSC | |
| E1 | | 24.00 BSC | |
| E2 | | 9.90 REF | |
| E3 | | 8.70 REF | |
| θ | 0° | 4° | 8° |
| c | 0.09 | - | 0.20 |
| b | 0.13 | 0.18 | 0.23 |
| L | 0.45 | 0.60 | 0.75 |
| e | | 0.40 BSC | |

1) Dimensions D1 and E1 do not include mold protrusion.allowable protrusion is 0.25mm per side.

2) The dambar protrusion(s) shall not cause the lead width to exceed b maximum by more than 0.08mm.

All dimensions are in units mm

The drawing is in compliance with ISO 128-30, Projection Method 1 [ ]