

12CGQ150 (JANS1N7039CCT1)

PD-20359J

Schottky Rectifier High Efficiency Series Thru-Hole (TO-254AA) 150V, 35A

Features

- Hermetically sealed
- Center Tap
- Low forward voltage drops
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Light weight
- ESD rating: Class 1B per MIL-STD-750, Method 1020

Potential Applications

- DC-DC converter
- Protection circuits
- Motor drives

Product Summary

- **V_{RRM}**: 150V
- **I_{F(AV)}**: 35A
- **V_F @ 15Apk, T_J = 125°C**: 0.88V
- **I_{FSM} @ t_p = 8.3ms half-sine**: 180A
- **REF**: MIL-PRF-19500/737



Product Validation

Fully qualified according to MIL-PRF-19500 for space applications

Description

The 12CGQ150 (1N7039CCT1) center tap Schottky rectifier has been expressly designed to meet the rigorous requirements of IR HiRel environments. It is packaged in the hermetic isolated TO-254AA package. The device's forward voltage drop and reverse leakage current are optimized for the lowest power loss and the highest circuit efficiency for typical high frequency switching power supplies and resonant power converters. Full MIL-PRF-19500 quality conformance testing is available on source control drawings to TX, TXV and S quality levels.

Ordering Information

Table 1 **Ordering options**

Part number	Package	Screening Level
12CGQ150	TO-254AA	COTS
12CGQ150SCS	TO-254AA	S-Level
12CGQ150SCX	TO-254AA	TX-Level
12CGQ150SCV	TO-254AA	TXV-Level
JANS1N7039CCT1	TO-254AA	JANS
JANTX1N7039CCT1	TO-254AA	JANTX
JANTXV1N7039CCT1	TO-254AA	JANTXV

12CGQ150 (JANS1N7039CCT1)
Schottky Rectifier High Efficiency Series Thru-Hole (TO-254AA)

Table of contents

Table of contents

Features 1

Potential Applications..... 1

Product Validation..... 1

Description 1

Ordering Information..... 1

Table of contents..... 2

1 Absolute Maximum Ratings 3

2 Device Characteristics 4

2.1 Electrical Characteristics4

2.2 Thermal-Mechanical Specifications4

3 Electrical Characteristics Curves..... 5

4 Package Outline..... 7

Revision history..... 8

Absolute Maximum Ratings

1 Absolute Maximum Ratings**Table 2 Absolute Maximum Ratings**

Symbol	Parameter	Value	Unit
V_R	Max. DC reverse voltage (Per Leg)	150	V
V_{RWM}	Max. Working peak reverse voltage (Per Leg)	150	V
$I_{F(AV)}$	Max. average forward current - Refer to Fig. 5 ¹	35	A
I_{FSM}	Max. peak one cycle non-repetitive surge current (Per Leg) ²	180	A
T_J T_{STG}	Operating Junction and Storage Temperature Range	-65 to 150	°C
	Weight	9.3 (Typical)	g

¹ 50% duty cycle @ TC = 74°C, square waveform² t_p = 8.3 ms half-sine

Device Characteristics

2 Device Characteristics

2.1 Electrical Characteristics

Table 3 Electrical Characteristics

Symbol	Parameter	Max.	Unit	Test Conditions	
V _F	Forward Voltage Drop (Per Leg) See Fig. 1 ¹	1.35	V	@ 15A	T _J = -55°C
		1.13	V	@ 15A	T _J = 25°C
		1.60	V	@ 35A	
		0.86	V	@ 15A	T _J = 125°C
		1.20	V	@ 35A	
I _R	Reverse Leakage Current (Per Leg) See Fig. 2 ¹	0.5	mA	T _J = 25°C	V _R = rated V _R
		15	mA	T _J = 125°C	
C _J	Junction Capacitance (Per Leg)	405	pF	V _R = 5V _{DC} (1MHz, 25°C)	
L _S	Series Inductance (Per Leg)	6.7 (Typical)	nH	Measured from anode lead to cathode lead 6mm (0.25 in) from package	

2.2 Thermal-Mechanical Specifications

Table 4 Thermal-Mechanical Specifications

Symbol	Parameter	Max.	Unit	Test Conditions
$R_{\theta JC}$	Thermal Resistance, Junction to Case (Per Leg)	1.9	$^{\circ}\text{C/W}$	DC operation See Fig. 4
$R_{\theta JC}$	Thermal Resistance, Junction to Case (Per Package)	0.95	$^{\circ}\text{C/W}$	DC operation
	Die Size (Typical)	125 x 125	mils	

¹ Pulse Width < 300 μs , Duty Cycle < 2%

3 Electrical Characteristics Curves

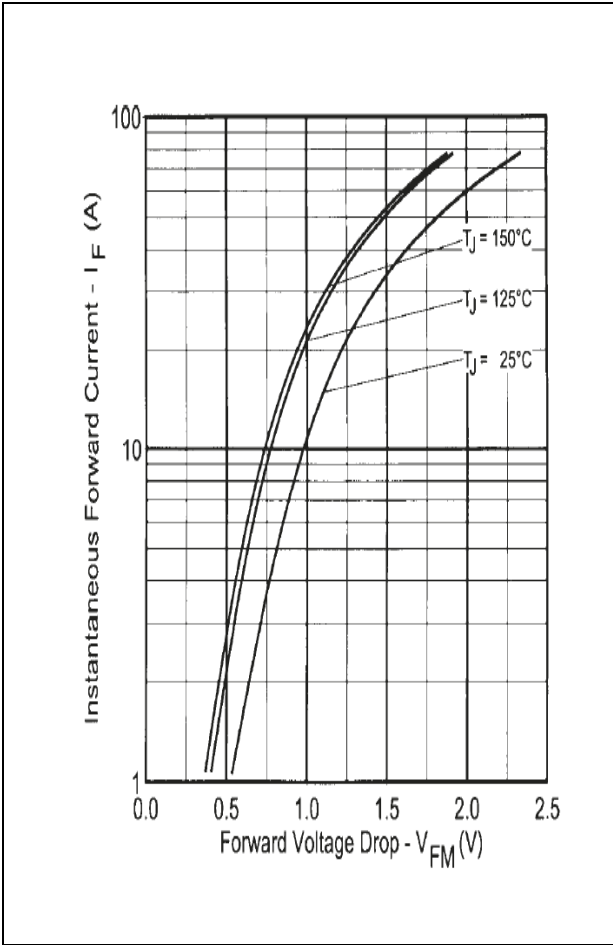


Figure 1 Maximum Forward Voltage Drop Characteristics (Per Leg)

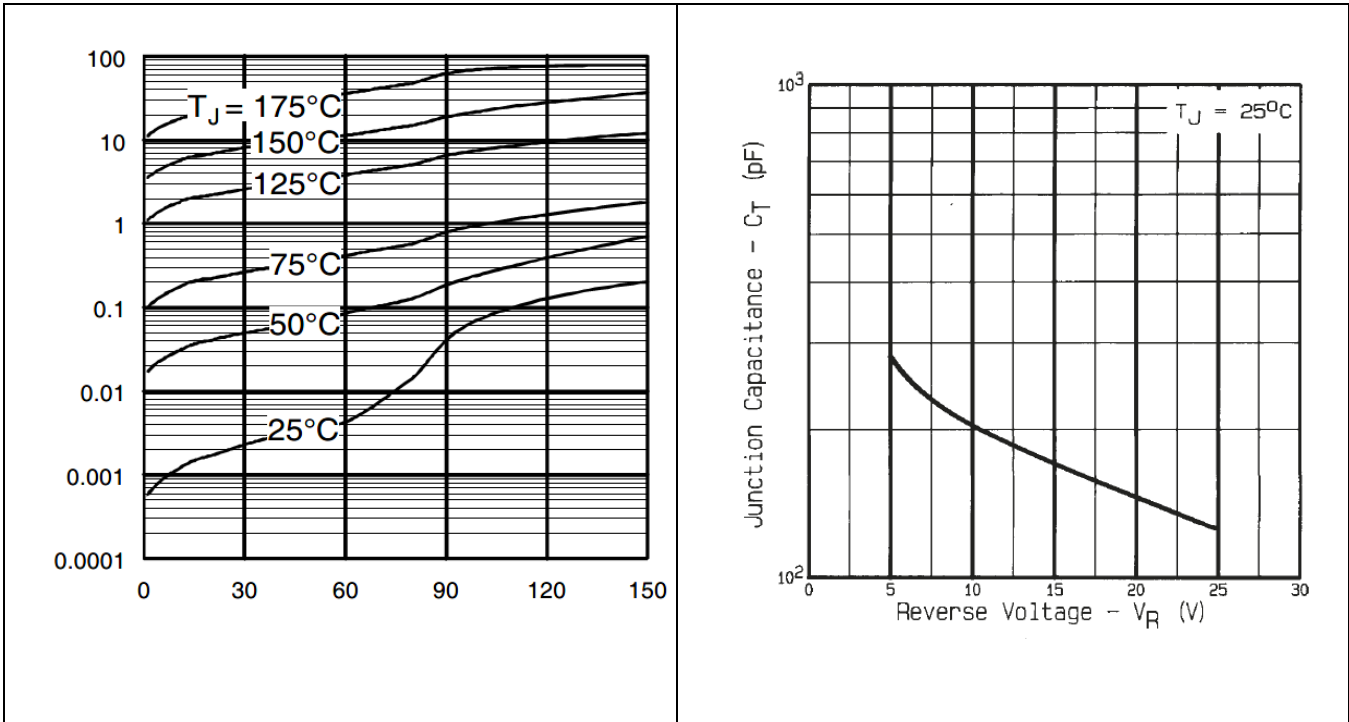


Figure 2 Typical Values of Reverse Current Vs. Reverse Voltage (Per Leg)

Figure 3 Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

12CGQ150 (JANS1N7039CCT1)

Schottky Rectifier High Efficiency Series Thru-Hole (TO-254AA)

Electrical Characteristics Curves

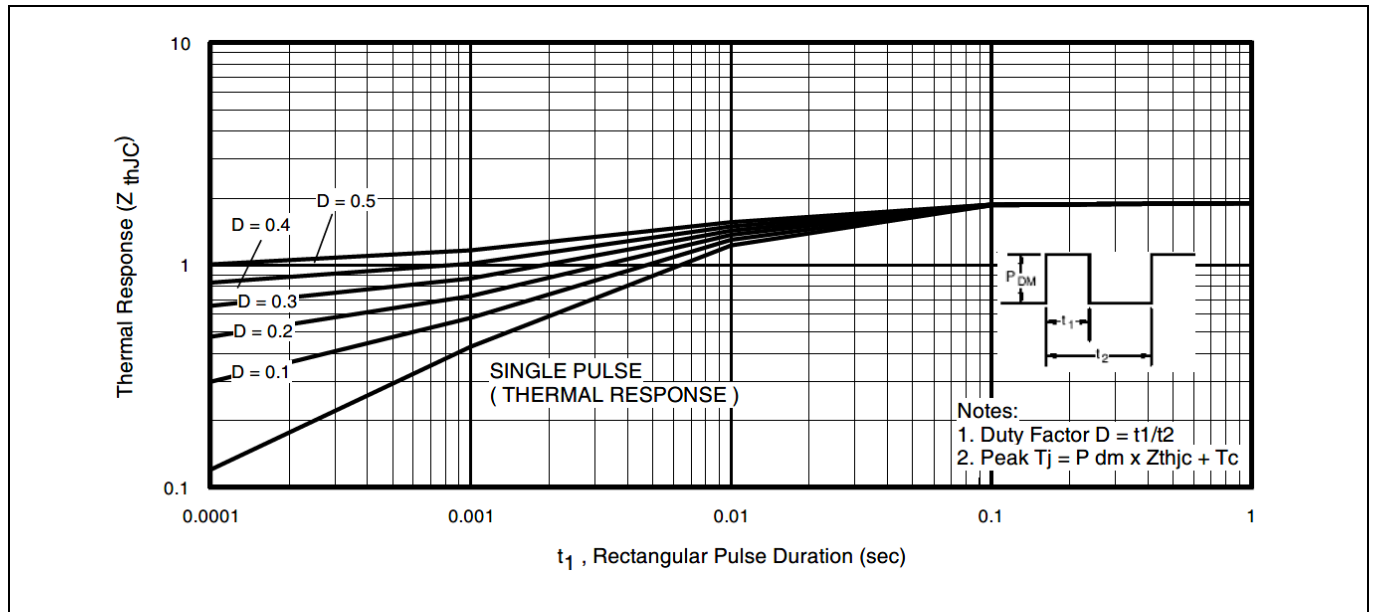


Figure 4 Maximum Thermal Impedance Z_{thJC} Characteristics (Per Leg)

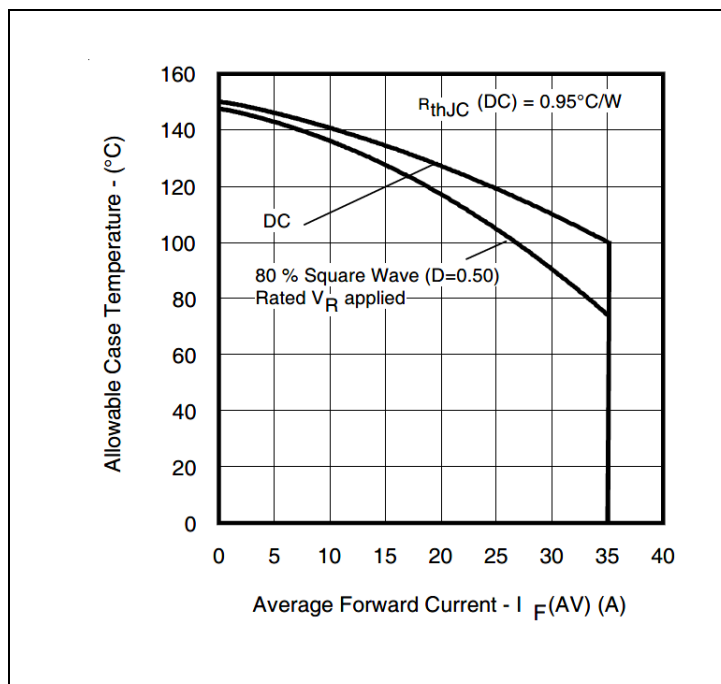


Figure 5 Maximum Allowable Case Temperature Vs. Average Forward Current (Per Leg)


12CGQ150 (JANS1N7039CCT1)

Schottky Rectifier High Efficiency Series Thru-Hole (TO-254AA)

Package Outline

4 Package Outline

Note: For the most updated package outline, please see the website: [TO-254AA](http://www.infineon.com/toc-254aa)

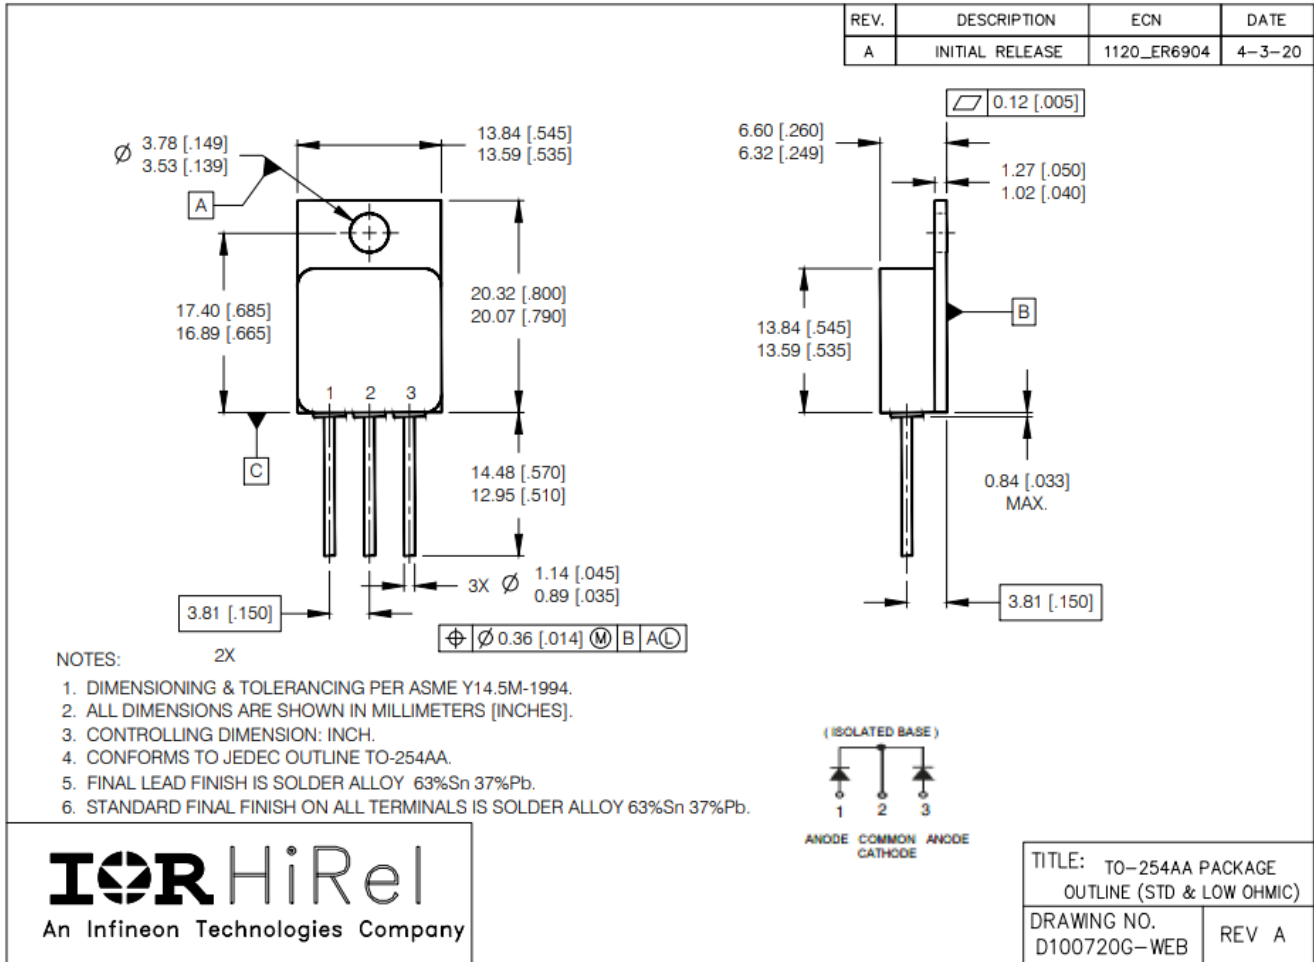

12CGQ150 (JANS1N7039CCT1)
Schottky Rectifier High Efficiency Series Thru-Hole (TO-254AA)

Revision history

Revision history

Document version	Date of release	Description of changes
	01/01/1997	Final datasheet (PD-20359B)
Rev C	02/26/1999	Updated VFM value
Rev D	02/25/2002	Updated new format
Rev E	02/20/2006	Updated per ECN-13821
Rev F	06/13/2008	Updated per ECN-16061
Rev G	06/26/2008	Updated schematic typo
Rev H	10/03/2012	Added ESD rating
Rev J	06/20/2024	Updated per ECN-1120-09965

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2024-06-20

Published by

**International Rectifier HiRel Products,
Inc.**

**An Infineon Technologies company
El Segundo, California 90245 USA**

**© 2024 Infineon Technologies AG.
All Rights Reserved.**

**Do you have a question about this
document?**

Email: erratum@infineon.com

Document reference

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenhheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office (www.infineon.com).

WARNINGS

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest International Rectifier HiRel Products, Inc., an Infineon Technologies company, office.

International Rectifier HiRel Components may only be used in life-support devices or systems with the expressed written approval of International Rectifier HiRel Products, Inc., an Infineon Technologies company, if failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety and effectiveness of that device or system.

Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.