Automotive PSOC™ 4: PSOC™ 4000S family

Based on Arm® Cortex®-M0+ CPU

General description

PSOC™ 4 is a scalable and reconfigurable platform architecture for a family of programmable embedded system controllers with an Arm® Cortex®-M0+ CPU while being AEC-Q100 compliant. It combines programmable and reconfigurable analog and digital blocks with flexible automatic routing. The PSOC™ 4000S product family is a member of the PSOC™ 4 platform architecture. It is a combination of a microcontroller with standard communication and timing peripherals, a capacitive touch-sensing system (CAPSENSE™) with best-in-class performance, programmable general-purpose continuous-time and switched-capacitor analog blocks, and programmable connectivity. PSOC™ 4000S products will be upward compatible with members of the PSOC™ 4 platform for new applications and design needs.

Features

- Automotive Electronics Council (AEC) AEC-Q100 qualified
- 32-bit MCU subsystem
  - 48-MHz Arm® Cortex®-M0+ CPU
  - Up to 32 KB of flash with read accelerator
  - Up to 4 KB of SRAM
- Programmable analog
  - Single-slope 10-bit ADC function provided by capacitance sensing block (all the GPIO pins support ADC function)
  - Two current DACs (IDACs) for general-purpose or capacitive sensing applications on any pin
  - Two low-power comparators that operate in Deep Sleep low-power mode
- Programmable digital
  - Programmable logic blocks allowing Boolean operations to be performed on port inputs and outputs
- Low-power 1.71 V to 5.5 V operation
  - Deep Sleep mode with operational analog and 2.5 µA digital system current
- Capacitive sensing
  - Capacitive sigma-delta (CSD) provides best-in-class signal-to-noise ratio (SNR) (>5:1) and water tolerance
  - Infineon-supplied software component makes capacitive sensing design easy
  - Automatic hardware tuning (smart sensing algorithm)
- Serial communication
  - Two independent run-time reconfigurable serial communication blocks (SCBs) with reconfigurable I^2C, SPI, or UART functionality
- LCD drive capability
  - LCD segment drive capability on all GPIOs
- Timing and pulse-width modulation
  - Five 16-bit timer/counter/pulse-width modulator (TCPWM) blocks
  - Center-aligned, edge, and pseudo-random modes
  - Comparator-based triggering of Kill signals for motor drive and other high-reliability digital logic applications
- Up to 34 programmable GPIO pins
  - 24-pin QFN, 28-pin SSOP, and 40-pin QFN
  - Any GPIO pin can be CAPSENSE™, analog, or digital
  - Drive modes, strengths, and slew rates are programmable

Features

- PSOC™ Creator design environment
  - Integrated development environment (IDE) provides schematic design entry and build (with analog and digital automatic routing)
  - Applications programming interface (API) component for all fixed-function and programmable peripherals
- Industry-standard tool compatibility
  - After schematic entry, development can be done with Arm®-based industry-standard development tools
- Temperature range
  - A-Grade: −40°C to +85°C
  - E-Grade: −40°C to +125°C
  - S-Grade: −40°C to +105°C

Table of contents

General description . . . 1
Features . . . 1
Table of contents . . . 3
1 Block diagram . . . 5
2 Functional definition . . . 7
2.1 CPU and memory subsystem . . . 7
2.1.1 CPU . . . 7
2.1.2 Flash . . . 7
2.1.3 SRAM . . . 7
2.1.4 SROM . . . 7
2.2 System resources . . . 7
2.2.1 Power system . . . 7
2.2.2 Clock system . . . 7
2.2.3 IMO clock source . . . 8
2.2.4 ILO clock source . . . 8
2.2.5 Watch crystal oscillator (WCO) . . . 9
2.2.6 Watchdog timer . . . 9
2.2.7 Reset . . . 9
2.2.8 Voltage reference . . . 9
2.3 Analog blocks . . . 9
2.3.1 Low-power comparators (LPC) . . . 9
2.3.2 Current DACs . . . 9
2.3.3 Analog multiplexed buses . . . 9
2.4 Programmable digital blocks . . . 9
2.5 Fixed function digital blocks . . . 10
2.5.1 Timer/Counter/PWM (TCPWM) block . . . 10
2.5.2 Serial communication block (SCB) . . . 10
2.6 GPIO . . . 10
2.7 Special function peripherals . . . 11
2.7.1 CAPSENSE™ . . . 11
2.7.2 LCD segment drive . . . 11
3 Pinouts . . . 13
3.1 Alternate pin functions . . . 17
3.2 Function names description . . . 19
4 Power . . . 21
4.1 Mode 1: 1.8 V to 5.5 V external supply . . . 21
4.2 Mode 2: 1.8 V ±5% external supply . . . 21

Table of contents

5 Development support . . . 23
5.1 Documentation . . . 23
5.2 Online . . . 23
5.3 Tools . . . 23
6 Electrical specifications . . . 24
6.1 Absolute maximum ratings . . . 24
6.2 Device level specifications . . . 24
6.2.1 GPIO . . . 26
6.2.2 XRES . . . 27
6.3 Analog peripherals . . . 28
6.3.1 CSD . . . 29
6.4 Digital peripherals . . . 32
6.4.1 Timer Counter Pulse-Width Modulator (TCPWM) . . . 32
6.4.2 I^2C . . . 33
6.5 Memory . . . 35
6.6 System resources . . . 36
6.6.1 Power-on reset (POR) . . . 36
6.6.2 SWD interface . . . 37
6.6.3 Internal main oscillator . . . 37
6.6.4 Internal low-speed oscillator . . . 38
7 Ordering information . . . 40
8 Packaging . . . 43
8.1 Package diagrams . . . 44
9 Acronyms . . . 47
10 Document conventions . . . 51
10.1 Units of measure . . . 51
11 Revision history . . . 53
Disclaimer . . . 54

1 Block diagram

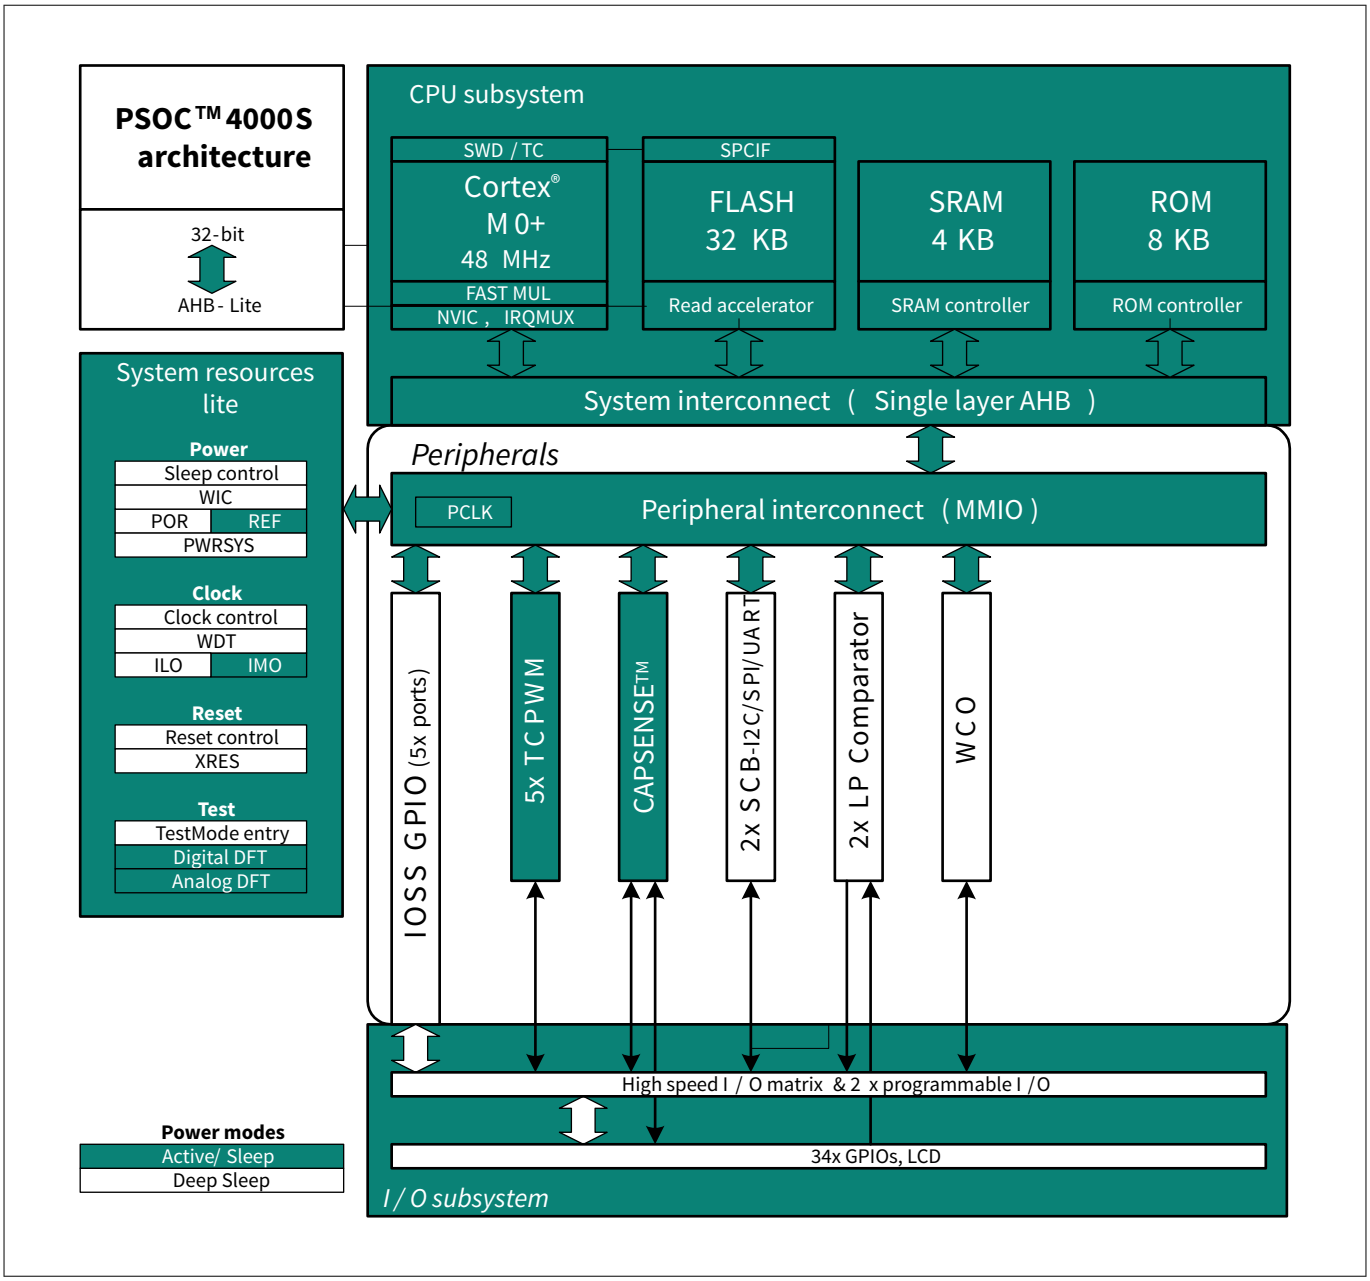


Figure 1 Block diagram

PSOC™ 4000S devices include extensive support for programming, testing, debugging, and tracing both hardware and firmware. The Arm® Serial-Wire Debug (SWD) interface supports all programming and debug features of the device.

Complete debug-on-chip functionality enables full-device debugging in the final system using the standard production device. It does not require special interfaces, debugging pods, simulators, or emulators. Only the standard programming connections are required to fully support debug.

The PSOC™ Creator IDE provides fully integrated programming and debug support for the PSOC™ 4000S devices. The SWD interface is fully compatible with industry-standard third-party tools. The PSOC™ 4000S family provides a level of security not possible with multi-chip application solutions or with microcontrollers. It has the following advantages:

- Allows disabling of debug features

1 Block diagram

- Robust flash protection
- Allows customer-proprietary functionality to be implemented in on-chip programmable blocks

The debug circuits are enabled by default and can be disabled in firmware. If they are not enabled, the only way to re-enable them is to erase the entire device, clear flash protection, and reprogram the device with new firmware that enables debugging. Thus firmware control of debugging cannot be over ridden without erasing the firmware thus providing security.

Additionally, all device interfaces can be permanently disabled (device security) for applications concerned about phishing attacks due to a maliciously reprogrammed device or attempts to defeat security by starting and interrupting flash programming sequences. All programming, debug, and test interfaces are disabled when maximum device security is enabled. Therefore, PSOC™ 4000S, with device security enabled, may not be returned for failure analysis. This is a trade off the PSOC™ 4000S allows the customer to make.

2 Functional definition

2.1 CPU and memory subsystem

2.1.1 CPU

The Cortex®-M0+ CPU in the PSOC™ 4000S is part of the 32-bit MCU subsystem, which is optimized for low-power operation with extensive clock gating. Most instructions are 16 bits in length and the CPU executes a subset of the Thumb-2 instruction set. It includes a nested vectored interrupt controller (NVIC) block with eight interrupt inputs and also includes a Wakeup Interrupt Controller (WIC). The WIC can wake the processor from Deep Sleep mode, allowing power to be switched off to the main processor when the chip is in Deep Sleep mode.

The CPU also includes a debug interface, the serial wire debug (SWD) interface, which is a two-wire form of JTAG. The debug configuration used for PSOC™ 4000S has four breakpoint (address) comparators and two watchpoint (data) comparators.

2.1.2 Flash

The PSOC™ 4000S device has a flash module with a flash accelerator, tightly coupled to the CPU to improve average access times from the flash block. The low-power flash block is designed to deliver two wait-state (WS) access time at 48 MHz. The flash accelerator delivers 85% of single-cycle SRAM access performance on average.

2.1.3 SRAM

Four KB of SRAM is provided with zero wait-state access at 48 MHz.

2.1.4 SROM

A supervisory ROM that contains boot and configuration routines is provided.

2.2 System resources

2.2.1 Power system

The power system is described in detail in the Power section. It provides assurance that voltage levels are as required for each respective mode and either delays mode entry (for example, on power-on reset (POR)) until voltage levels are as required for proper functionality, or generates resets (for example, on brown-out detection). The PSOC™ 4000S operates with a single external supply over the range of either 1.8 V ±5% (externally regulated) or 1.8 to 5.5 V (internally regulated) and has three different power modes, transitions between which are managed by the power system. The PSOC™ 4000S provides Active, Sleep, and Deep Sleep low-power modes.

All subsystems are operational in Active mode. The CPU subsystem (CPU, flash, and SRAM) is clock-gated off in Sleep mode, while all peripherals and interrupts are active with instantaneous wake-up on a wake-up event. In Deep Sleep mode, the high-speed clock and associated circuitry is switched off; wake-up from this mode takes 35 µs. The opamps can remain operational in Deep Sleep mode.

2.2.2 Clock system

The PSOC™ 4000S clock system is responsible for providing clocks to all subsystems that require clocks and for switching between different clock sources without glitching. In addition, the clock system ensures that there are no metastable conditions.

The clock system for the PSOC™ 4000S consists of the internal main oscillator (IMO), internal low-frequency oscillator (ILO), a 32 kHz watch crystal oscillator (WCO) and provision for an external clock. Clock dividers are provided to generate clocks for peripherals on a fine-grained basis. Fractional dividers are also provided to enable clocking of higher data rates for UARTs.

The HFCLK signal can be divided down to generate synchronous clocks for the analog and digital peripherals. There are eight clock dividers for the PSOC™ 4000S, two of those are fractional dividers. The 16-bit capability allows flexible generation of fine-grained frequency values, and is fully supported in PSOC™ Creator.

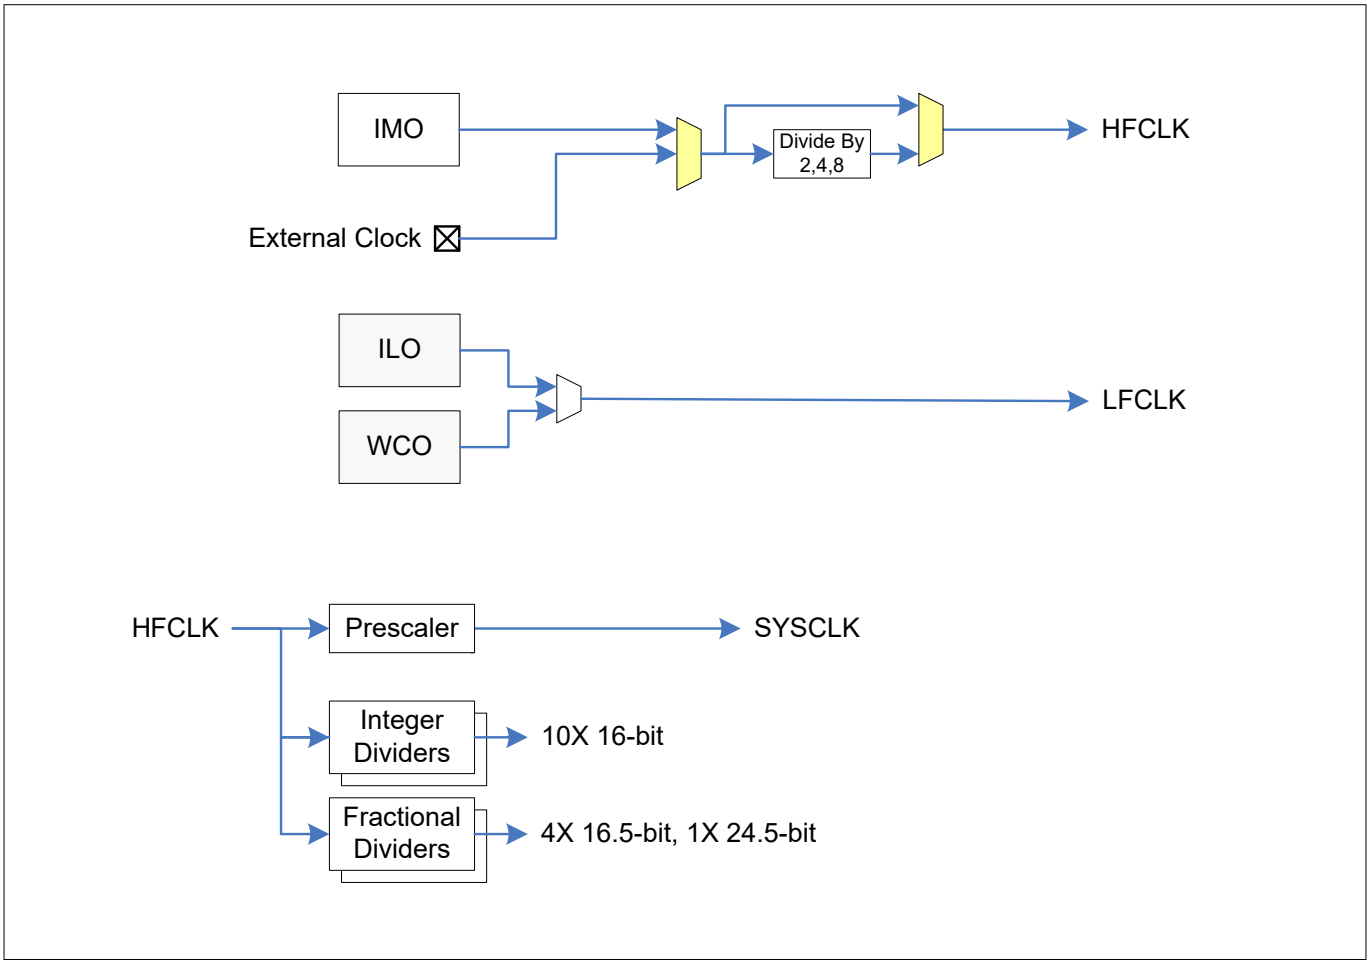


Figure 2 PSOC™ 4000S MCU clocking architecture

2.2.3 IMO clock source

The IMO is the primary source of internal clocking in the PSOC™ 4000S. It is trimmed during testing to achieve the specified accuracy.The IMO default frequency is 24 MHz and it can be adjusted from 24 to 48 MHz in steps of 4 MHz. The IMO tolerance with Infineon-provided calibration settings is ±2%.

2.2.4 ILO clock source

The ILO is a very low power, nominally 40-kHz oscillator, which is primarily used to generate clocks for the watchdog timer (WDT) and peripheral operation in Deep Sleep mode. ILO-driven counters can be calibrated to the IMO to improve accuracy. Infineon provides a software component, which does the calibration.

2.2.5 Watch crystal oscillator (WCO)

The PSOC™ 4000S clock subsystem also implements a low-frequency (32 kHz watch crystal) oscillator that can be used for precision timing applications.

2.2.6 Watchdog timer

A watchdog timer is implemented in the clock block running from the ILO; this allows watchdog operation during Deep Sleep and generates a watchdog reset if not serviced before the set timeout occurs. The watchdog reset is recorded in a Reset Cause register, which is firmware readable.

2.2.7 Reset

The PSOC™ 4000S can be reset from a variety of sources including a software reset. Reset events are asynchronous and guarantee reversion to a known state. The reset cause is recorded in a register, which is sticky through reset and allows software to determine the cause of the reset. An XRES pin is reserved for external reset by asserting it active low. The XRES pin has an internal pull-up resistor that is always enabled.

2.2.8 Voltage reference

The PSOC™ 4000S reference system generates all internally required references. A 1.2 V voltage reference is provided for the comparator. The IDACs are based on a ±5% reference.

2.3 Analog blocks

2.3.1 Low-power comparators (LPC)

The PSOC™ 4000S has a pair of low-power comparators, which can also operate in Deep Sleep modes. This allows the analog system blocks to be disabled while retaining the ability to monitor external voltage levels during low-power modes. The comparator outputs are normally synchronized to avoid metastability unless operating in an asynchronous power mode where the system wake-up circuit is activated by a comparator switch event. The LPC outputs can be routed to pins.

2.3.2 Current DACs

The PSOC™ 4000S has two IDACs, which can drive any of the pins on the chip. These IDACs have programmable current ranges.

2.3.3 Analog multiplexed buses

The PSOC™ 4000S has two concentric independent buses that go around the periphery of the chip. These buses (called amux buses) are connected to firmware-programmable analog switches that allow the chip's internal resources (IDACs, comparator) to connect to any pin on the I/O Ports.

2.4 Programmable digital blocks

The programmable I/O (Smart I/O) block is a fabric of switches and LUTs that allows Boolean functions to be performed in signals being routed to the pins of a GPIO port. The Smart I/O can perform logical operations on input pins to the chip and on signals going out as outputs.

2.5 Fixed function digital blocks

2.5.1 Timer/Counter/PWM (TCPWM) block

The TCPWM block consists of a 16-bit counter with user-programmable period length. There is a capture register to record the count value at the time of an event (which may be an I/O event), a period register that is used to either stop or auto-reload the counter when its count is equal to the period register, and compare registers to generate compare value signals that are used as PWM duty cycle outputs. The block also provides true and complementary outputs with programmable offset between them to allow use as dead-band programmable complementary PWM outputs. It also has a Kill input to force outputs to a predetermined state; for example, this is used in motor drive systems when an over-current state is indicated and the PWM driving the FETs needs to be shut off immediately with no time for software intervention. There are five TCPWM blocks in the PSOC™ 4000S.

2.5.2 Serial communication block (SCB)

The PSOC™ 4000S has two serial communication blocks, which can be programmed to have SPI, I2C, or UART functionality.

I²C mode: The hardware I²C block implements a full multi-master and slave interface (it is capable of multi-master arbitration). This block is capable of operating at speeds of up to 1 Mbps (Fast Mode Plus) and has flexible buffering options to reduce interrupt overhead and latency for the CPU. It also supports EZI2C that creates a mailbox address range in the memory of the PSOC™ 4000S and effectively reduces I²C communication to reading from and writing to an array in memory. In addition, the block supports an 8-deep FIFO for receive and transmit which, by increasing the time given for the CPU to read data, greatly reduces the need for clock stretching caused by the CPU not having read data on time.

The I²C peripheral is compatible with the I²C Standard-mode and Fast Mode Plus devices as defined in the NXP I²C-bus specification and user manual (UM10204). The I²C bus I/O is implemented with GPIO in open-drain modes.

The PSOC™ 4000S is not completely compliant with the I²C spec in the following respect:

- GPIO cells are not overvoltage tolerant and, therefore, cannot be hot-swapped or powered up independently of the rest of the I²C system.

UART mode: This is a full-feature UART operating at up to 1 Mbps. It supports automotive single-wire interface (LIN), infrared interface (IrDA), and SmartCard (ISO7816) protocols, all of which are minor variants of the basic UART protocol. In addition, it supports the 9-bit multiprocessor mode that allows addressing of peripherals connected over common RX and TX lines. Common UART functions such as parity error, break detect, and frame error are supported. An 8-deep FIFO allows much greater CPU service latencies to be tolerated.

SPI mode: The SPI mode supports full Motorola SPI, TI SSP (adds a start pulse used to synchronize SPI Codecs), and National Microwire (half-duplex form of SPI). The SPI block can use the FIFO.

LIN slave mode: The LIN slave mode uses the SCB hardware block and implements a full LIN slave interface. This LIN Slave is compliant with LIN v1.3, v2.1/2.2, ISO 17987-6, and SAE J2602-2 specification standards. It is certified by C&S GmbH based on the standard protocol and data link layer conformance tests. LIN slave can be operated at baud rates of up to ~20 Kbps with a maximum of 40-meter cable length. PSOC™ Creator software supports up to two LIN slave interfaces in the PSOC™ 4 device, providing built-in application programming interfaces (APIs) based on the LIN specification standard.

2.6 GPIO

The PSOC™ 4000S has up to 34 GPIOs. The GPIO block implements the following:

- Eight drive modes:
  - Analog input mode (input and output buffers disabled)

- Input only
- Weak pull-up with strong pull-down
- Strong pull-up with weak pull-down
- Open drain with strong pull-down
- Open drain with strong pull-up
- Strong pull-up with strong pull-down
- Weak pull-up with weak pull-down

- Input threshold select (CMOS or LVTTL)
- Individual control of input and output buffer enabling/disabling in addition to the drive strength modes
- Selectable slew rates for dV/dt related noise control to improve EMI

The pins are organized in logical entities called ports, which are 8-bit in width (less for Ports 2 and 3). During power-on and reset, the blocks are forced to the disabled state so as not to crowbar any inputs and/or cause excess turn-on current. A multiplexing network known as a high-speed I/O matrix is used to multiplex between various signals that may connect to an I/O pin.

Data output and pin state registers store, respectively, the values to be driven on the pins and the states of the pins themselves.

Every I/O pin can generate an interrupt if so enabled and each I/O port has an interrupt request (IRQ) and interrupt service routine (ISR) vector associated with it (5 for PSOC™ 4000S).

2.7 Special function peripherals

2.7.1 CAPSENSE™

CAPSENSE™ is supported in the PSOC™ 4000S through a capacitive sigma-delta (CSD) block that can be connected to any pins through an analog multiplex bus via analog switches. CAPSENSE™ function can thus be provided on any available pin or group of pins in a system under software control. A PSOC™ Creator component is provided for the CAPSENSE™ block to make it easy for the user.

Shield voltage can be driven on another analog multiplex bus to provide water-tolerance capability. Water tolerance is provided by driving the shield electrode in phase with the sense electrode to keep the shield capacitance from attenuating the sensed input. Proximity sensing can also be implemented.

The CAPSENSE™ block has two IDACs, which can be used for general purposes if CAPSENSE™ is not being used (both IDACs are available in that case) or if CAPSENSE™ is used without water tolerance (one IDAC is available). The CAPSENSE™ block also provides a 10-bit Slope ADC function, which can be used in conjunction with the CAPSENSE™ function.

The CAPSENSE™ block is an advanced, low-noise, programmable block with programmable voltage references and current source ranges for improved sensitivity and flexibility. It can also use an external reference voltage. It has a full-wave CSD mode that alternates sensing to VDDA and Ground to null out power-supply related noise.

2.7.2 LCD segment drive

The PSOC™ 4000S has an LCD controller, which can drive up to 8 commons and 28 segments. It uses full digital methods to drive the LCD segments requiring no generation of internal LCD voltages. The two methods used are referred to as Digital Correlation and PWM. Digital Correlation pertains to modulating the frequency and drive levels of the common and segment signals to generate the highest RMS voltage across a segment to light it up or to keep the RMS signal to zero. This method is good for STN displays but may result in reduced contrast with TN (cheaper) displays. PWM pertains to driving the panel with PWM signals to effectively use the capacitance of the panel to provide the integration of the modulated pulse-width to generate the desired LCD voltage. This

method results in higher power consumption but can result in better results when driving TN displays. LCD operation is supported during Deep Sleep refreshing a small display buffer (4 bits; one 32-bit register per port).

3 Pinouts

Table 1 provides the pin list for PSOC™ 4000S for the 24-pin QFN, 28-pin SSOP and 40-pin packages. All port pins support GPIO.

Table 1 Automotive PSOC™ 4000S 24-pin QFN, 28-pin SSOP, and 40-pin list

24-QFN		28-SSOP-AUTO		40-QFN-AUTO	
Pin	**Name**	**Pin**	**Name**	**Pin**	**Name**
13	P0.0	19	P0.0	22	P0.0
14	P0.1	20	P0.1	23	P0.1
		21	P0.2	24	P0.2
		22	P0.3	25	P0.3
15	P0.4			26	P0.4
16	P0.5			27	P0.5
17	P0.6	23	P0.6	28	P0.6
		24	P0.7	29	P0.7
18	XRES	25	XRES	30	XRES
19	VCCD	26	VCCD	31	VCCD
20	VSSD	27	VSS	32	VSSD
21	VDD	28	VDD	33	VDD
22	VSSA			34	VSSA
		1	P1.0	35	P1.0
		2	P1.1	36	P1.1
23	P1.2	3	P1.2	37	P1.2
24	P1.3	4	P1.3	38	P1.3
		5	P1.4	39	P1.4
1	P1.7	6	P1.7/VREF	40	P1.7/VREF
2	P2.0			1	P2.0
3	P2.1			2	P2.1
				3	P2.2
				4	P2.3
		7	P2.4	5	P2.4
		8	P2.5	6	P2.5
4	P2.6	9	P2.6	7	P2.6
5	P2.7	10	P2.7	8	P2.7
				9	VSSD
6	P3.0	11	P3.0	10	P3.0
		12	P3.1	11	P3.1

(table continues...)

Table 1 (continued) Automotive PSOC™ 4000S 24-pin QFN, 28-pin SSOP, and 40-pin list

24-QFN		28-SSOP-AUTO		40-QFN-AUTO	
Pin	**Name**	**Pin**	**Name**	**Pin**	**Name**
7	P3.2	13	P3.2	12	P3.2
8	P3.3	14	P3.3	13	P3.3
				14	P3.4
				15	P3.5
				16	P3.6
				17	P3.7
9	P4.0	15	P4.0	18	P4.0
10	P4.1	16	P4.1	19	P4.1
11	P4.2	17	P4.2	20	P4.2
12	P4.3	18	P4.3	21	P4.3

Descriptions of the pin functions are as follows:

VDDD: Power supply for the digital section

VDDA: Power supply for the analog section

VSSD, VSSA: Ground pins for the digital and analog sections respectively

VCCD: Regulated digital supply (1.8 V ±5%)

VDD: On some packages, VDDA and VDDD are shorted inside and brought out as a single power supply

VSS: On some packages, VSSA and VSSD are shorted inside and brought out as a single ground

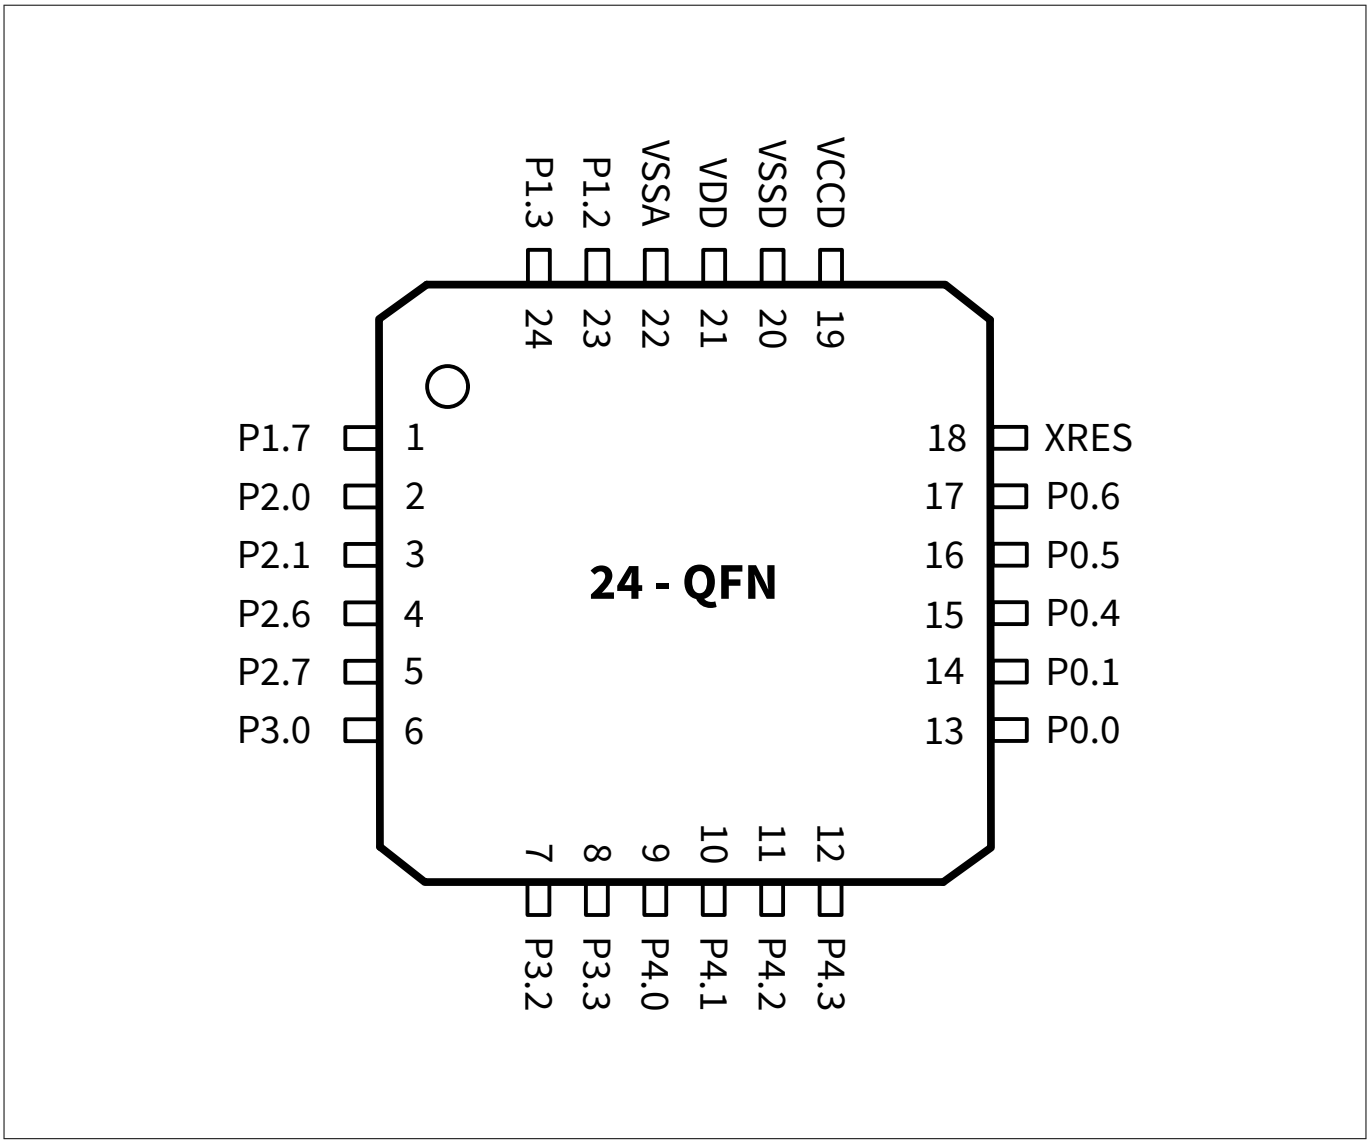


Figure 3 24-pin QFN pinout

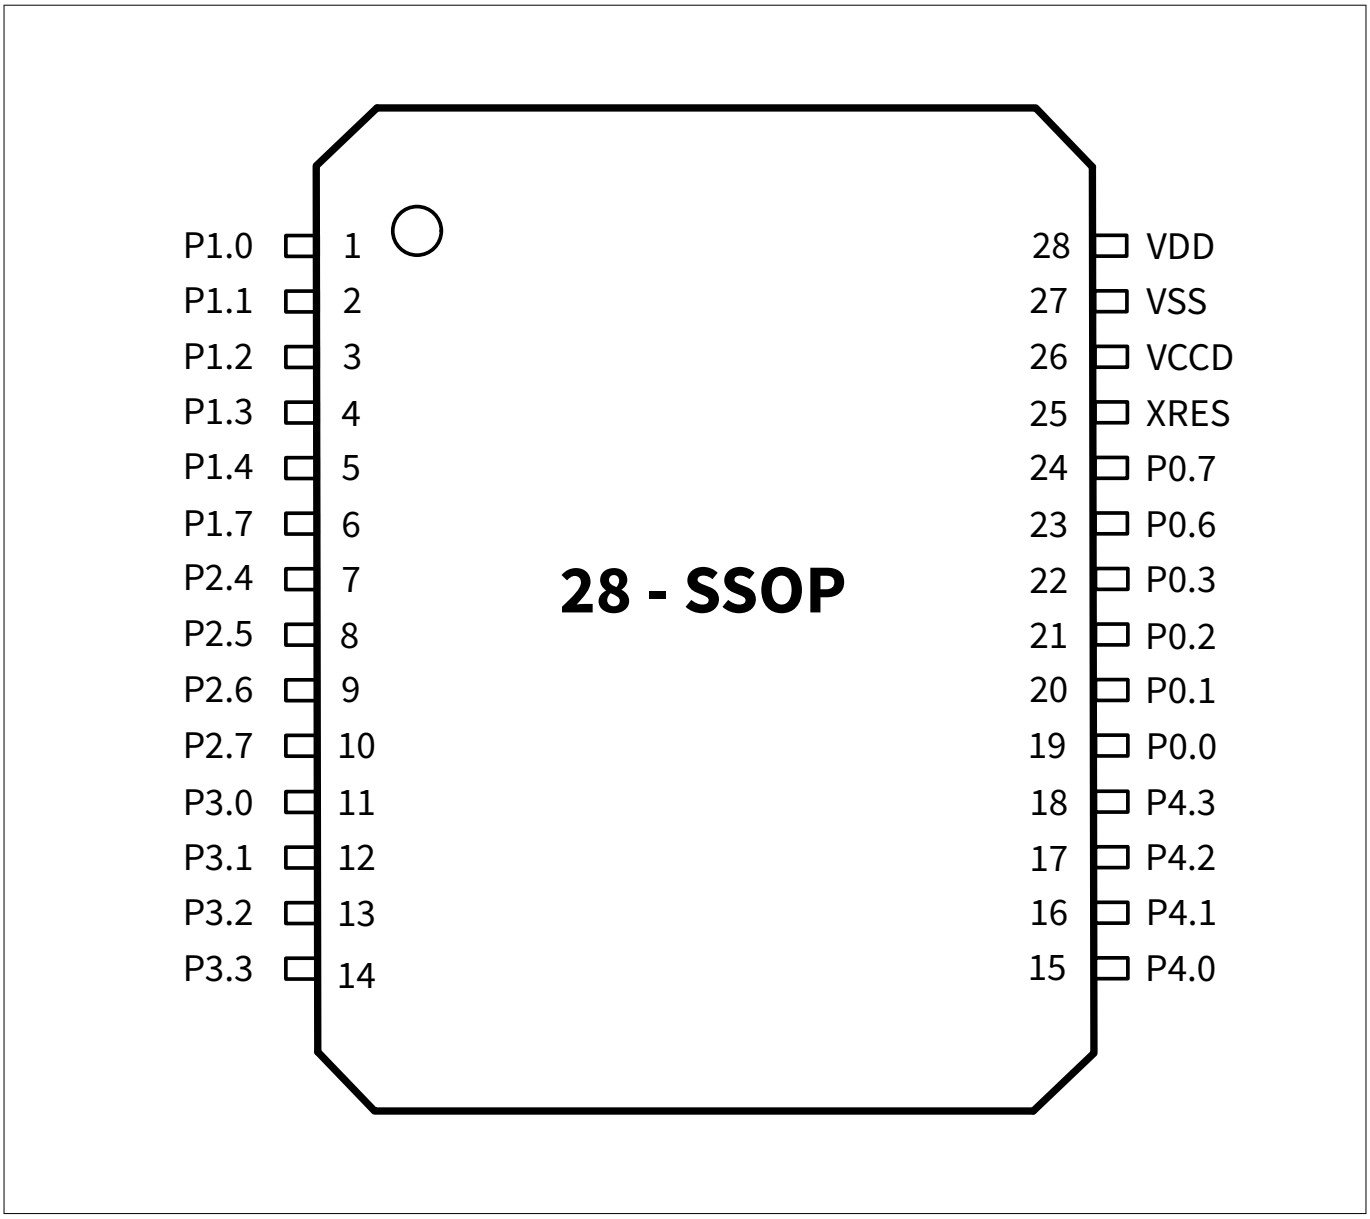


Figure 4 28-SSOP pin

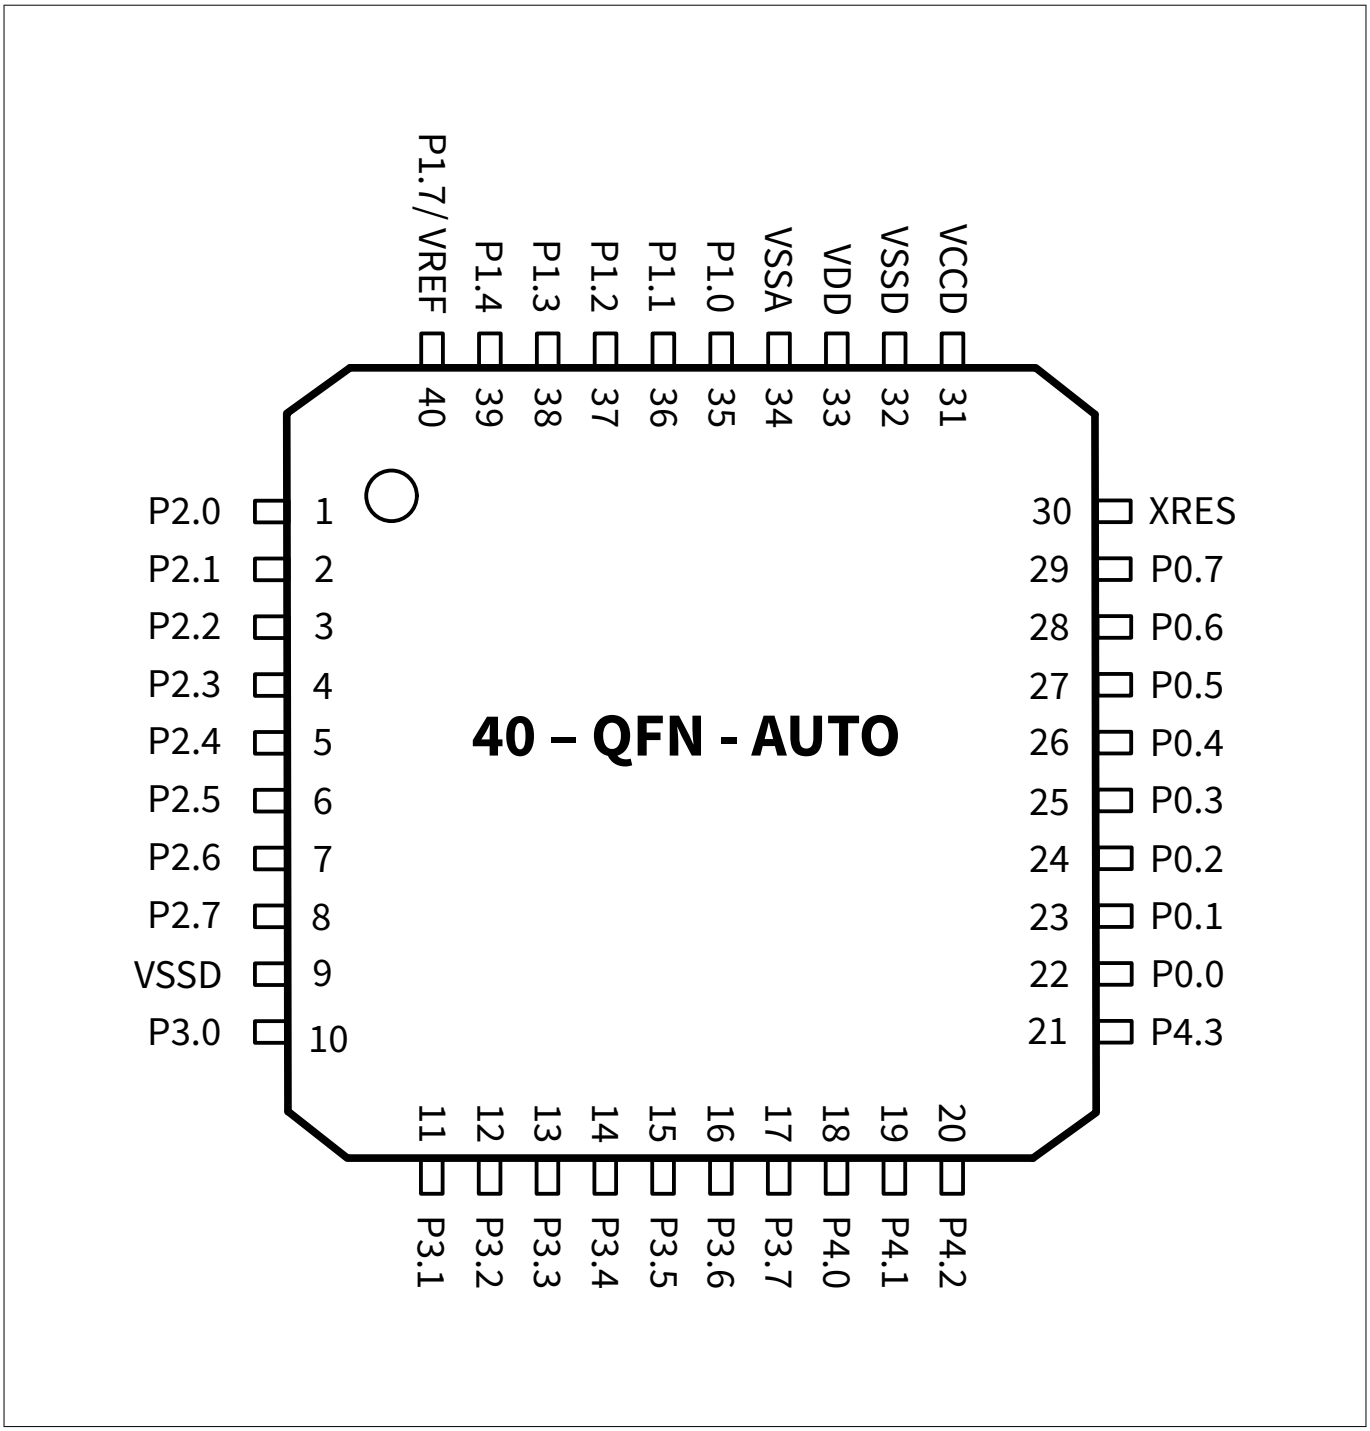


Figure 5 40-QFN pinout

3.1 Alternate pin functions

Each port pin can be assigned to one of multiple functions; it can, for instance, be an analog I/O, a digital peripheral function, an LCD pin, or a CAPSENSE™ pin. The pin assignments are shown in the following table.

Table 2 Alternative pin functions

24-QFN-AUTO	28-SSOP-AUTO	40-QFN-AUTO	Port/p pin	Analog	Smart I/O	Alternate function 1	Alternate function 2	Alternate function 3	Deep Sleep 2	Deep Sleep 3
Pin	Pin	Pin	Name							
13	19	22	P0.0	lpcomp.in_p[0]				tcpwm.tr_in[0]		scb[0].spi_select1:0
14	20	23	P0.1	lpcomp.in_n[0]				tcpwm.tr_in[1]		scb[0].spi_select2:0
	21	24	P0.2	lpcomp.in_p[1]						scb[0].spi_select3:0
	22	25	P0.3	lpcomp.in_n[1]						
15		26	P0.4	wco.wco_in			scb[1].uart_rx:0		scb[1].i2c_scl:0	scb[1].spi_mosi:1
16		27	P0.5	wco.wco_out			scb[1].uart_tx:0		scb[1].i2c_sda:0	scb[1].spi_miso:1
17	23	28	P0.6			srss.ext_clk	scb[1].uart_cts:0			scb[1].spi_clk:1
	24	29	P0.7				scb[1].uart_rts:0			scb[1].spi_select0:1
	1	35	P1.0			tcpwm.line[2]:1	scb[0].uart_rx:1		scb[0].i2c_scl:0	scb[0].spi_mosi:1
	2	36	P1.1			tcpwm.line_compl[2]:1	scb[0].uart_tx:1		scb[0].i2c_sda:0	scb[0].spi_miso:1
23	3	37	P1.2			tcpwm.line[3]:1	scb[0].uart_cts:1	tcpwm.tr_in[2]		scb[0].spi_clk:1
24	4	38	P1.3			tcpwm.line_compl[3]:1	scb[0].uart_rts:1	tcpwm.tr_in[3]		scb[0].spi_select0:1
	5	39	P1.4							scb[0].spi_select1:1
1	6	40	P1.7/ V_{REF}							
2		1	P2.0		prgio[0].io[0]	tcpwm.line[4]:0	csd.comp	tcpwm.tr_in[4]	scb[1].i2c_scl:1	scb[1].spi_mosi:2
3		2	P2.1		prgio[0].io[1]	tcpwm.line_compl[4]:0		tcpwm.tr_in[5]	scb[1].i2c_sda:1	scb[1].spi_miso:2
		3	P2.2		prgio[0].io[2]					scb[1].spi_clk:2

(table continues...)

Table 2 (continued) Alternative pin functions

24-QFN-AUTO	28-SSOP-AUTO	40-QFN-AUTO	Port/p pin	Analog	Smart I/O	Alternate function 1	Alternate function 2	Alternate function 3	Deep Sleep 2	Deep Sleep 3
		4	P2.3		prgio[0].io[3]					scb[1].spi_select0:2
	7	5	P2.4		prgio[0].io[4]	tcpwm.line[0]:1				scb[1].spi_select1:1
	8	6	P2.5		prgio[0].io[5]	tcpwm.line_compl[0]:1				scb[1].spi_select2:1
4	9	7	P2.6		prgio[0].io[6]	tcpwm.line[1]:1				scb[1].spi_select3:1
5	10	8	P2.7		prgio[0].io[7]	tcpwm.line_compl[1]:1			lpcomp.comp[0]:1	
6	11	10	P3.0		prgio[1].io[0]	tcpwm.line[0]:0	scb[1].uart_rx:1		scb[1].i2c_scl:2	scb[1].spi_mosi:0
	12	11	P3.1		prgio[1].io[1]	tcpwm.line_compl[0]:0	scb[1].uart_tx:1		scb[1].i2c_sda:2	scb[1].spi_miso:0
7	13	12	P3.2		prgio[1].io[2]	tcpwm.line[1]:0	scb[1].uart_cts:1		cpuss.swd_data	scb[1].spi_clk:0
8	14	13	P3.3		prgio[1].io[3]	tcpwm.line_compl[1]:0	scb[1].uart_rts:1		cpuss.swd_clk	scb[1].spi_select0:0
		14	P3.4		prgio[1].io[4]	tcpwm.line[2]:0		tcpwm.tr_in[6]		scb[1].spi_select1:0
		16	P3.6		prgio[1].io[6]	tcpwm.line[3]:0		tcpwm.tr_in[8]		scb[1].spi_select3:0
		17	P3.7		prgio[1].io[7]	tcpwm.line_compl[3]:0		tcpwm.tr_in[9]	lpcomp.comp[1]:1	
9	15	18	P4.0	csd.vref_ext			scb[0].uart_rx:0	tcpwm.tr_in[10]	scb[0].i2c_scl:1	scb[0].spi_mosi:0
10	16	19	P4.1	csd.cshieldpads/ csd.cmod			scb[0].uart_tx:0	tcpwm.tr_in[11]	scb[0].i2c_sda:1	scb[0].spi_miso:0
11	17	20	P4.2	csd.cmod/ csd.CintA			scb[0].uart_cts:0		lpcomp.comp[0]:0	scb[0].spi_clk:0
12	18	21	P4.3	csd.csh_tankpadd/ csd.CintB			scb[0].uart_rts:0		lpcomp.comp[1]:0	scb[0].spi_select0:0

3.2 Function names description

Table 3 provides the description for each function name used in Sec 2.1 Alternate pin function table.

Table 3 Function name description

Function name	Description	I/O
lpcomp.in_p[x]	Low Power Comparator Input - Positive of Block [X]	I
lpcomp.in_n[x]	Low Power Comparator Input - Negative of Block [X]	I
WCO.wco_in	Watch Crystal Oscillator Input	I
WCO.wco_out	Watch Crystal Oscillator Output	O
csd.vref_ext	CAPSENSE™ Block External Vref Voltage	I
csd.cshieldpads	CAPSENSE™ Shield connection (all other IO pins are also supported)	O
csd.cmodpad	CAPSENSE™ CMOD capacitor for CSD	I/O
csd.csh_tank	CAPSENSE™ Tank Capacitor for Shield (optional)	I/O
csd.cintA	CAPSENSE™ CintA Capacitor for CSX	I/O
csd.cintA	CAPSENSE™ CintB capacitor for CSX	I/O
prgio[x].io[y]	Programmable/Smart IO Block [X] - IO Pin [Y]	I/O
srss.ext_clk	External clock signal input	I
tcpwm.line[X]	Timer Counter PWM(TCPWM) Block [X] - Output	O
tcpwm.line_- compl[X]	Timer Counter PWM(TCPWM) Block [X] - Output Complement	O
SCB[x].uart_rx	Serial Communication Block [X] - UART Receive	I
SCB[x].uart_tx	Serial Communication Block [X] - UART Transmit	O
SCB[x].uart_rts	Serial Communication Block [X] - UART Request To Send	I/O
SCB[x].uart_cts	Serial Communication Block [X] - UART Clear To Send	I/O
csd.comp	CAPSENSE™ Comparator Output (internal signal only for testing)	O
tcpwm.tr_in[y]	Timer Counter PWM(TCPWM) Block trigger input [Y] - for Reload/ Start/Stop/Count/Capture	I
SCB[x].i2c_scl	Serial Communication Block [X] - I2C SCL	I/O
SCB[x].i2c_sda	Serial Communication Block [X] - I2C SDA	I/O
lpcomp.comp[X]	Low Power Comparator Output for Block [X]	O
cpuss.swd_data	SWD_Data (Programming/Debug)	I/O
cpuss.swd_clk	SWD_CLK (Programming/Debug)	I/O
SCB[x].spi_select	Serial Communication Block [X] - SPI select	I/O
SCB[x].spi_mosi	Serial Communication Block [X] - SPI MOSI	I/O
SCB[x].spi_miso	Serial Communication Block [X] - SPI MISO	I/O
SCB[x].spi_clk	Serial Communication Block [X] - SPI Clock	I/O

4 Power

The following power system diagram shows the set of power supply pins as implemented for the PSOC™ 4000S. The system has one regulator in Active mode for the digital circuitry. There is no analog regulator; the analog circuits run directly from the V_{DDA} input.

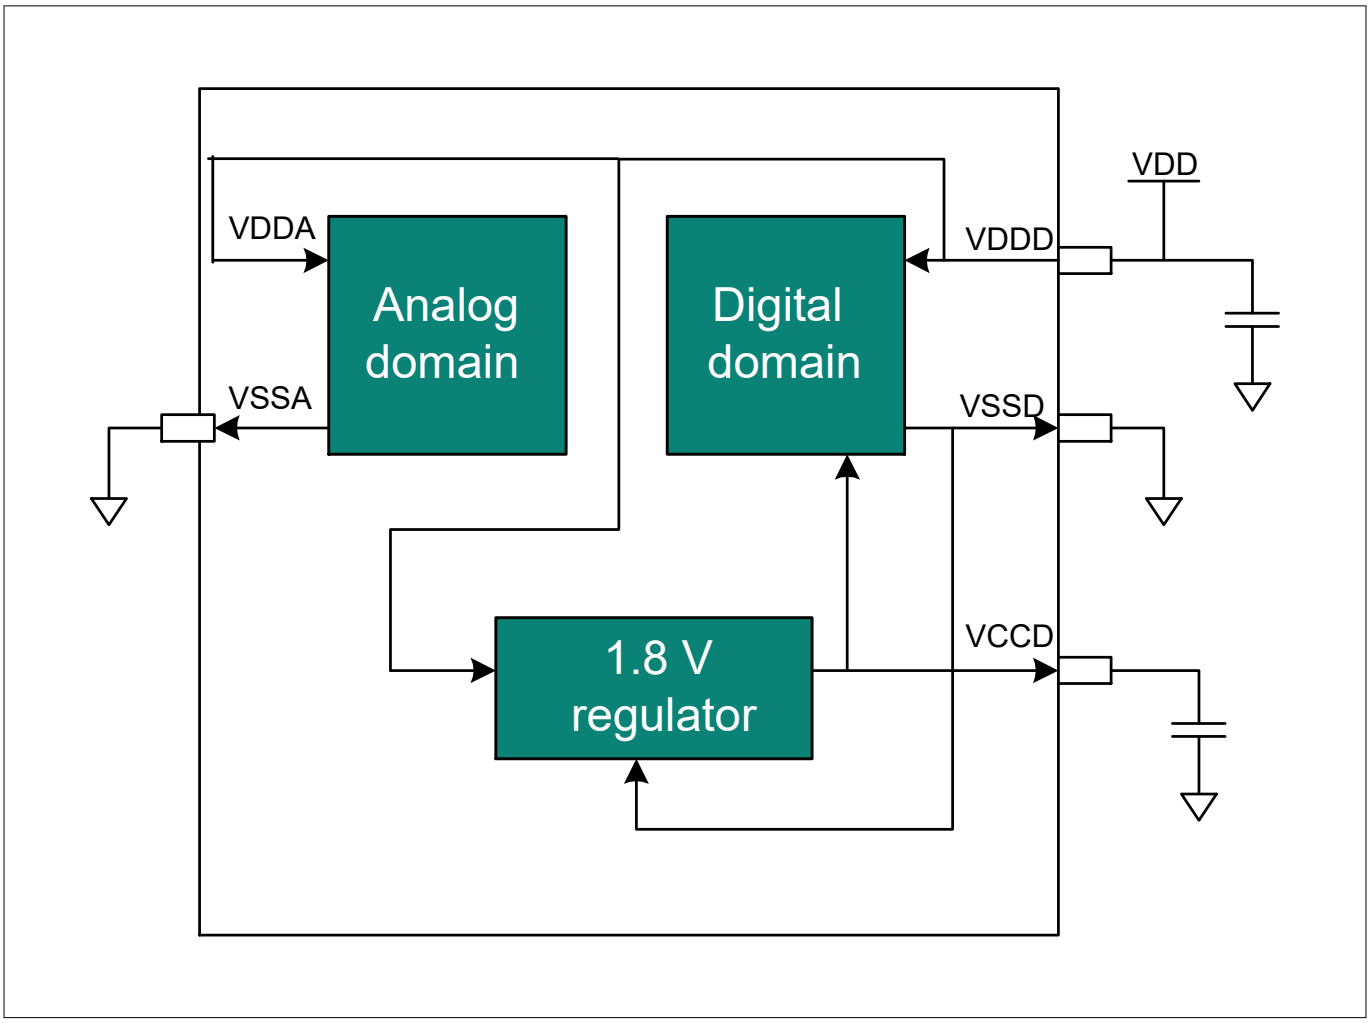


Figure 6 Power supply connections

There are two distinct modes of operation. In Mode 1, the supply voltage range is 1.8 V to 5.5 V (unregulated externally; internal regulator operational). In Mode 2, the supply range is 1.8 V ±5% (externally regulated; 1.71 to 1.89, internal regulator bypassed).

4.1 Mode 1: 1.8 V to 5.5 V external supply

In this mode, the PSOC™ 4000S is powered by an external power supply that can be anywhere in the range of 1.8 to 5.5 V. This range is also designed for battery-powered operation. For example, the chip can be powered from a battery system that starts at 3.5 V and works down to 1.8 V. In this mode, the internal regulator of the PSOC™ 4000S supplies the internal logic and its output is connected to the V_{CCD} pin. The VCCD pin must be bypassed to ground via an external capacitor (0.1 µF; X5R ceramic or better) and must not be connected to anything else.

4.2 Mode 2: 1.8 V ±5% external supply

In this mode, the PSOC™ 4000S is powered by an external power supply that must be within the range of 1.71 to 1.89 V; note that this range needs to include the power supply ripple too. In this mode, the VDD and VCCD pins are shorted together and bypassed.

Bypass capacitors must be used from VDD to ground. The typical practice for systems in this frequency range is to use a capacitor in the 1-µF range, in parallel with a smaller capacitor (0.1 µF, for example). Note that these are simply rules of thumb and that, for critical applications, the PCB layout, lead inductance, and the bypass capacitor parasitic should be simulated to design and obtain optimal bypassing.

An example of a bypass scheme is shown in Figure 7.

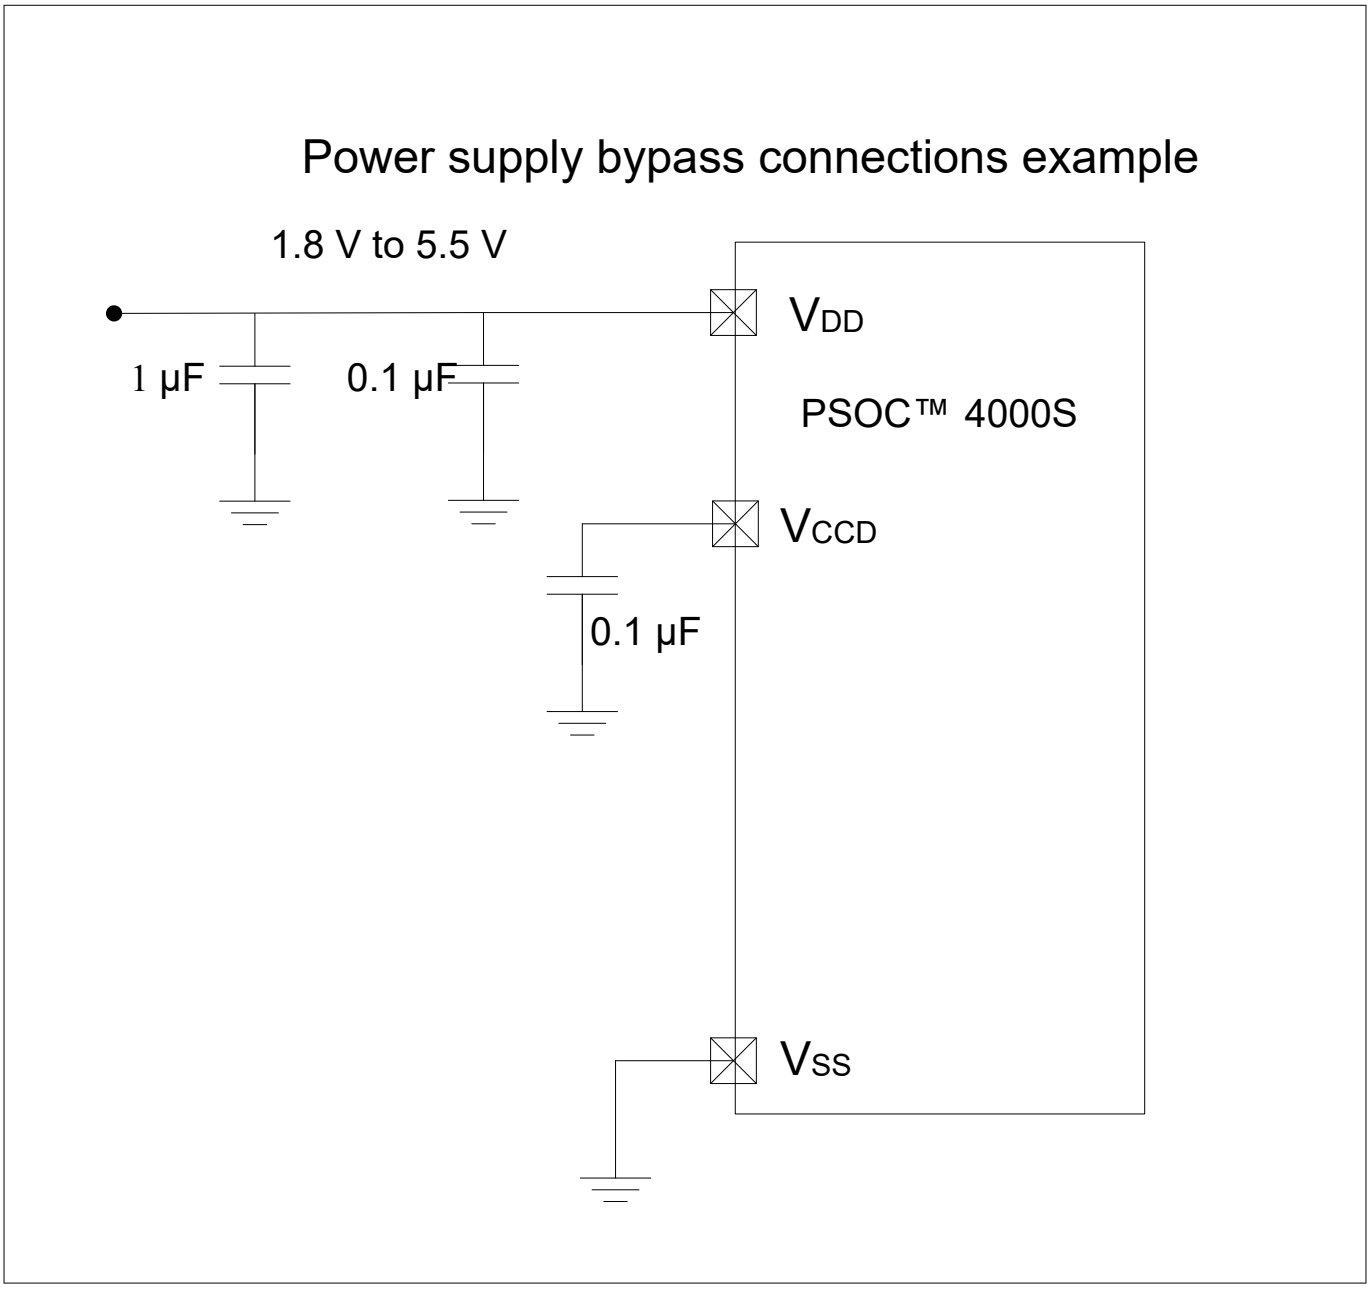


Figure 7 External supply range from 1.8 V to 5.5 V with internal regulator active

5 Development support

The PSOC™ 4000S family has a rich set of documentation, development tools, and online resources to assist you during your development process. Visit PSOC™ 4 MCU webpage to find out more.

5.1 Documentation

A suite of documentation supports the PSOC™ 4000S family to ensure that you can find answers to your questions quickly. This section contains a list of some of the key documents.

Software user guide: A step-by-step guide for using PSOC™ Creator. The software user guide shows you how the PSOC™ Creator build process works in detail, how to use source control with PSOC™ Creator, and much more.

Component datasheets: The flexibility of PSOC™ allows the creation of new peripherals (components) long after the device has gone into production. Component data sheets provide all of the information needed to select and use a particular component, including a functional description, API documentation, example code, and AC/DC specifications.

Application notes: PSOC™ application notes discuss a particular application of PSOC™ in depth; examples include brushless DC motor control and on-chip filtering. Application notes often include example projects in addition to the application note document.

Reference manual: The reference manual (TRM) contains all the technical detail you need to use a PSOC™ device, including a complete description of all PSOC™ registers. The document is available in the Documentation section at PSOC™ 4 MCU webpage .

5.2 Online

In addition to print documentation, the PSOC™ forums connect you with fellow PSOC™ users and experts in PSOC™ from around the world, 24 hours a day, 7 days a week.

5.3 Tools

With industry standard cores, programming, and debugging interfaces, the PSOC™ 4000S family is part of a development tool ecosystem. Visit us at PSOC™ Creator webpage for the latest information on the revolutionary, easy to use PSOC™ Creator IDE, supported third party compilers, programmers, debuggers, and development kits.

PSOC™ 4000S devices support ModusToolbox™ software, which enables cross platform code development with a robust suite of tools and software

6 Electrical specifications

6.1 Absolute maximum ratings

Table 4 Absolute maximum ratings[1)]

Spec ID#	Parameter	Description	Min	Typ	Max	Unit	Details/ conditions
SID1	V_{DDD_ABS}	Digital supply relative to V_{SS}	−0.5	–	6	V	–
SID2	V_{CCD_ABS}	Direct digital core voltage input relative to V_{SS}	−0.5	–	1.95		–
SID3	V_{GPIO_ABS}	GPIO voltage	−0.5	–	V_{DD} +0. 5		–
SID4	I_{GPIO_ABS}	Maximum current per GPIO	−25	–	25	mA	–
SID5	$I_{GPIO_injection}$	GPIO injection current,Max for $V_{IH} > V_{DDD}$, and Min for $V_{IL} < V_{SS}$	−0.5	–	0.5		Current injected per pin
BID44	ESD_HBM	Electrostatic discharge human body model	2200	–	–	V	–
BID45	ESD_CDM	Electrostatic discharge charged device model	500	–	–		–
BID46	LU	Pin current for latch-up	−140	–	140	mA	–

1) Usage above the absolute maximum conditions listed in Table 4 may cause permanent damage to the device. Exposure to Absolute Maximum conditions for extended periods of time may affect device reliability. The Maximum Storage Temperature is 150°C in compliance with JEDEC Standard JESD22-A103, High Temperature Storage Life. When used below Absolute Maximum conditions but above normal operating conditions, the device may not operate to specification.

6.2 Device level specifications

All specifications are valid for −40°C ≤ T_A ≤ 85°C for A grade devices and −40°C ≤ T_A ≤ 105°C for S grade devices, except where noted. Specifications are valid for 1.71 V to 5.5 V, except where noted.

Table 5 DC specifications

Typical values measured at VDD = 3.3 V and 25°C.

Spec ID#	Parameter	Description	Min	Typ	Max	Unit	Details/ conditions
SID53	V_{DD}	Power supply input voltage	1.8	–	5.5	V	Internally regulated supply
SID255	V_{DD}	Power supply input voltage ($V_{CCD} = V_{DD} = V_{DDA}$)	1.71	–	1.89		Internally unregulated supply
SID54	VCCD	Output voltage (for core logic)	–	1.8	–		–
SID55	C_{EFC}	External regulator voltage bypass	–	0.1	–	µF	X5R ceramic or better
SID56	C_{EXC}	Power supply bypass capacitor	–	1	–		X5R ceramic or better

Active Mode, V_{DD} = 1.8 V to 5.5 V. Typical values measured at VDD = 3.3 V and 25°C.

(table continues...)

Table 5 (continued) DC specifications

Typical values measured at VDD = 3.3 V and 25°C.

Spec ID#	Parameter	Description	Min	Typ	Max	Unit	Details/ conditions
SID10	I_{DD5}	Execute from flash; CPU at 6 MHz	–	1.2	2.0	mA	Max is at 105°C and 5.5 V
SID16	I_{DD8}	Execute from flash; CPU at 24 MHz	–	2.4	4.0		Max is at 105°C and 5.5 V
SID19	I_{DD11}	Execute from flash; CPU at 48 MHz	–	4.6	5.9		Max is at 105°C and 5.5 V
Sleep Mode, VDDD = 1.8 V to 5.5 V (Regulator on)							
SID22	I_{DD17}	I²C wakeup WDT, and Comparators on	–	1.1	1.6	mA	6 MHz, Max is at 105°C and 5.5 V
SID25	I_{DD20}	I²C wakeup, WDT, and Comparators on	–	1.4	1.9		12 MHz, Max is at 105°C and 5.5 V
Sleep Mode, V_{DDD} = 1.71 V to 1.89 V (Regulator bypassed)							
SID28	I_{DD23}	I²C wakeup, WDT, and Comparators on	–	0.7	0.9	mA	6 MHz, Max is at 105°C
SID28A	I_{DD23A}	I²C wakeup, WDT, and Comparators on	–	0.9	1.1	mA	12 MHz, Max is at 105°C and 5.5 V
Deep Sleep Mode, V_{DD} = 1.8 V to 3.6 V (Regulator on)							
SID31	I_{DD26}	I²C wakeup and WDT on	–	2.5	60	µA	Max is at 105°C and 3.6 V
Deep Sleep Mode, V_{DD} = 3.6 V to 5.5 V (Regulator on)							
SID34	I_{DD29}	I²C wakeup and WDT on	–	2.5	60	µA	Max is at 105°C
Deep Sleep Mode, V_{DD} = V_{CCD} = 1.71 V to 1.89 V (Regulator bypassed)							
SID37	I_{DD32}	I²C wakeup and WDT on	–	2.5	60	µA	Max is at 105°C
XRES Current							
SID307	I_{DD_XR}	Supply current while XRES asserted	–	2	5	mA	Max is at 105°C

Table 6 AC specifications

Spec ID#	Parameter	Description	Min	Typ	Max	Unit	Details/ conditions
SID48	F_{CPU}	CPU frequency	DC	–	48	MHz	1.71 ≤ V_{DD} ≤ 5.5
SID49 [1)]	T_{SLEEP}	Wakeup from Sleep mode	–	0	–	µs	–
SID50 [1)]	$T_{DEEPSLEEP}$	Wakeup from Deep Sleep mode	–	35	–		–

1) Guaranteed by characterization.

6.2.1 GPIO

Table 7 GPIO DC specifications

Spec ID#	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID57	V_{IH}[1)]	Input voltage high threshold	0.7 x V_{DDD}	–	–	V	CMOS Input
SID58	V_{IL}	Input voltage low threshold	–	–	0.3 x V_{DDD}		CMOS Input
SID241	V_{IH}[1)]	LVTTL input, V_{DDD} < 2.7 V	0.7 x V_{DDD}	–	–		–
SID242	V_{IL}	LVTTL input, V_{DDD} < 2.7 V	–	–	0.3 x V_{DDD}		–
SID243	V_{IH}[1)]	LVTTL input, V_{DDD} ≥ 2.7 V	2.0	–	–		–
SID244	V_{IL}	LVTTL input, V_{DDD} ≥ 2.7 V	–	–	0.8		–
SID59	V_{OH}	Output voltage high level	V_{DDD} -0.6	–	–		I_{OH} = 4 mA at 3 V V_{DDD}
SID60	V_{OH}	Output voltage high level	V_{DDD} -0.5	–	–		I_{OH} = 1 mA at 3 V V_{DDD}
SID61	V_{OL}	Output voltage low level	–	–	0.6		I_{OL} = 4 mA at 1.8 V V_{DDD}
SID62	V_{OL}	Output voltage low level	–	–	0.6		I_{OL} = 10 mA at 3 V V_{DDD}
SID62A	V_{OL}	Output voltage low level	–	–	0.4	kΩ	I_{OL} = 3 mA at 3 V V_{DDD}
SID63	R_{PULLUP}	Pull-up resistor	3.5	5.6	8.5		–
SID64	$R_{PULLDOWN}$	Pull-down resistor	3.5	5.6	8.5		–
SID65	I_{IL}	Input leakage current (absolute value)	–	–	2	nA	25°C, V_{DDD} = 3.0 V
SID66	C_{IN}	Input capacitance	–	–	7	pF	–
SID67[2)]	V_{HYSTTL}	Input hysteresis LVTTL	25	40	–	mV	V_{DDD} ≥ 2.7 V
SID68[2)]	$V_{HYSCMOS}$	Input hysteresis CMOS	0.05 × V_{DDD}	–	–		V_{DD} < 4.5 V
SID68A[2)]	$V_{HYSCMOS5V5}$	Input hysteresis CMOS	200	–	–		V_{DD} > 4.5 V
SID69[2)]	I_{DIODE}	Current through protection diode to V_{DD} /V_{SS}	–	–	100	µ A	–

(table continues...)

Table 7 (continued) GPIO DC specifications

Spec ID#	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID69A[2)]	I_{TOT_GPIO}	Maximum total source or sink chip current	–	–	200	mA	–

1) V_{IH} must not exceed V_{DDD} + 0.2 V.
2) Guaranteed by characterization.

Table 8 GPIO AC specifications

(Guaranteed by characterization)

Spec ID#	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID70	T_{RISEF}	Rise time in fast strong mode	2	–	12	ns	3.3 V V_{DDD}, Cload = 25 pF
SID71	T_{FALLF}	Fall time in fast strong mode	2	–	12		3.3 V V_{DDD}, Cload = 25 pF
SID72	T_{RISES}	Rise time in slow strong mode	10	–	60	–	3.3 V V_{DDD}, Cload = 25 pF
SID73	T_{FALLS}	Fall time in slow strong mode	10	–	60	–	3.3 V V_{DDD}, Cload = 25 pF
SID74	$F_{GPIOUT1}$	GPIO F_{OUT} ; 3.3 V ≤ V_{DDD} ≤ 5.5 V Fast strong mode	–	–	33	MHz	90/10%, 25 pF load, 60/40 duty cycle
SID75	$F_{GPIOUT2}$	GPIO F_{OUT}; 1.71 V ≤ V_{DDD} ≤ 3.3 V Fast strong mode	–	–	16.7		90/10%, 25 pF load, 60/40 duty cycle
SID76	$F_{GPIOUT3}$	GPIO F_{OUT} ; 3.3 V ≤ V_{DDD} ≤ 5.5 V Slow strong mode	–	–	7		90/10%, 25 pF load, 60/40 duty cycle
SID245	$F_{GPIOUT4}$	GPIO F_{OUT} ; 1.71 V ≤ V_{DDD} ≤ 3.3 V Slow strong mode.	–	–	3.5		90/10%, 25 pF load, 60/40 duty cycle
SID246	F_{GPIOIN}	GPIO input operating frequency; 1.71 V ≤ V_{DDD} ≤ 5.5 V	–	–	48		90/10% V_{IO}

6.2.2 XRES

Table 9 XRES DC specifications

Spec ID#	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID77	V_{IH}	Input voltage high threshold	0.7 × V_{DDD}	–	–	V	CMOS Input
SID78	V_{IL}	Input voltage low threshold	–	–	0.3 x V_{DDD}		
SID79	R_{PULLUP}	Pull-up resistor	–	60	–	kΩ	–
SID80	C_{IN}	Input capacitance	–	–	7	pF	–

(table continues...)

Table 9 (continued) XRES DC specifications

Spec ID#	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID81 [1)]	$V_{HYSXRES}$	Input voltage hysteresis	–	100	–	mV	Typical hysteresis is 200 mV for V_{DD} > 4.5 V
SID82	I_{DIODE}	Current through protection diode to V_{DD} /V_{SS}	–	–	100	µA	–

1) Guaranteed by characterization.

Table 10 XRES AC specifications

Spec ID#	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID83 [1)]	$T_{RESETWIDTH}$	Reset pulse width	1	–	–	µs	–
BID194 [1)]	$T_{RESETWAKE}$	Wake-up time from reset release	–	–	2.7	ms	–

1) Guaranteed by characterization.

6.3 Analog peripherals

Table 11 Comparator DC specifications

Spec ID#	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID84	$V_{OFFSET1}$	Input offset voltage, Factory trim	–	–	±10	mV	–
SID85	$V_{OFFSET2}$	Input offset voltage, Custom trim	–	–	±4		–
SID86	V_{HYST}	Hysteresis when enabled	–	10	35		–
SID87	V_{ICM1}	Input common mode voltage in normal mode	0	–	V_{DDD} −0.1	V	Modes 1 and 2
SID247	V_{ICM2}	Input common mode voltage in low power mode	0	–	V_{DDD}		–
SID247A	V_{ICM3}	Input common mode voltage in ultra low power mode	0	–	V_{DDD} −1.15		V_{DDD} ≥ 2.2 V at −40°C
SID88	C_{MRR}	Common mode rejection ratio	50	–	–	dB	V_{DDD} ≥ 2.7V
SID88A	C_{MRR}	Common mode rejection ratio	42	–	–		V_{DDD} ≤ 2.7V
SID89	I_{CMP1}	Block current, normal mode	–	–	400	µA	–
SID248	I_{CMP2}	Block current, low power mode	–	–	100		–
SID259	I_{CMP3}	Block current in ultra low-power mode	–	6	28		V_{DDD} ≥ 2.2 V at −40°C
SID90	Z_{CMP}	DC Input impedance of comparator	35	–	–	MΩ	–

Table 12 Comparator AC specifications

Spec ID#	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID91	TRESP1	Response time, normal mode, 50 mV overdrive	–	38	110	ns	–
SID258	TRESP2	Response time, low power mode, 50 mV overdrive	–	70	200		–
SID92	TRESP3	Response time, ultra-low power mode, 200 mV overdrive	–	2.3	15	µs	V_{DDD} ≥ 2.2 V at −40°C

6.3.1 CSD

Table 13 CSD and IDAC specifications

Spec ID#	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SYS.PER #3	VDD_RIPPLE	Max allowed ripple on power supply, DC to 10 MHz	–	–	±50	mV	V_{DD} > 2 V (with ripple), 25°C T_A, Sensitivity = 0.1 pF
SYS.PER #1 6	VDD_RIP-PLE_1.8	Max allowed ripple on power supply, DC to 10 MHz	–	–	±25	mV	V_{DD} > 1.75V (with ripple), 25°C T_A, Parasitic Capacitance (C_P) < 20 pF, Sensitivity ≥ 0.4 pF
SID.CSD. BL K	ICSD	Maximum block current	–	–	4000	µA	Maximum block current for both IDACs in dynamic (switching) mode including comparators, buffer, and reference generator.
SID.CSD #15	V_{REF}	Voltage reference for CSD and Comparator	0.6	1.2	V_{DDA} - 0.6	V	V_{DDA} - 0.06 or 4.4, whichever is lower
SID.CSD #15 A	VREF_EXT	External voltage reference for CSD and Comparator	0.6		V_{DDA} - 0.6	V	V_{DDA} - 0.06 or 4.4, whichever is lower
SID.CSD #16	IDAC1IDD	IDAC1 (7-bits) block current	–	–	1750	µA	–
SID.CSD #17	IDAC2IDD	IDAC2 (7-bits) block current	–	–	1750	µA	–
SID308	VCSD	Voltage range of operation	1.71	–	5.5	V	1.8 V ±5%or 1.8 V to 5.5 V
SID308A	VCOMPIDAC	Voltage compliance range of IDAC	0.6	–	V_{DDA} - 0.6	V	V_{DDA} - 0.06 or 4.4, whichever is lower
SID309	IDAC1DNL	DNL	-1	–	1	LSB	–

(table continues...)

Table 13 (continued) CSD and IDAC specifications

Spec ID#	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID310	IDAC1INL	INL	-2	–	2	LSB	INL is ±5.5 LSB for V_{DDA} < 2 V
SID311	IDAC2DNL	DNL	-1	–	1	LSB	
SID312	IDAC2INL	INL	-2	–	2	LSB	INL is ±5.5 LSB for V_{DDA} < 2 V
SID313	SNR	Ratio of counts of finger to noise. Guaranteed by characterization	5	–	–	Ratio	Capacitance range of 5 to 35 pF, 0.1-pF sensitivity. All use cases. V_{DDA} > 2 V.
SID314	IDAC1CRT1	Output current of IDAC1 (7 bits) in low range	4.2	–	5.4	µA	LSB = 37.5-nA typ.
SID314A	IDAC1CRT2	Output current of IDAC1 (7 bits) in medium range	34	–	41	µA	LSB = 300-nA typ.
SID314B	IDAC1CRT3	Output current of IDAC1 (7 bits) in high range	275	–	330	µA	LSB = 2.4-µA typ.
SID314C	IDAC1CRT12	Output current of IDAC1 (7 bits) in low range, 2X mode	8	–	10.5	µA	LSB = 75-nA typ.
SID314D	IDAC1CRT22	Output current of IDAC1 (7 bits) in medium range, 2X mode	69	–	82	µA	LSB = 600-nA typ.
SID314E	IDAC1CRT32	Output current of IDAC1(7 bits) in high range, 2X mode	540	–	660	µA	LSB = 4.8-µA typ.
SID315	IDAC2CRT1	Output current of IDAC2 (7 bits) in low range	4.2	–	5.4	µA	LSB = 37.5-nA typ.
SID315A	IDAC2CRT2	Output current of IDAC2 (7 bits) in medium range	34	–	41	µA	LSB = 300-nA typ.
SID315B	IDAC2CRT3	Output current of IDAC2 (7 bits) in high range	275	–	330	µA	LSB = 2.4-µA typ.
SID315C	IDAC2CRT12	Output current of IDAC2 (7 bits) in low range, 2X mode	8	–	10.5	µA	LSB = 75-nA typ.
SID315D	IDAC2CRT22	Output current of IDAC2 (7 bits) in medium range, 2X mode	69	–	82	µA	LSB = 600-nA typ.
SID315E	IDAC2CRT32	Output current of IDAC2 (7 bits) in high range, 2X mode	540	–	660	µA	LSB = 4.8-µA typ.
SID315F	IDAC3CRT13	Output current of IDAC in 8-bit mode in low range	8	–	10.5	µA	LSB = 37.5-nA typ.
SID315G	IDAC3CRT23	Output current of IDAC in 8-bit mode in medium range	69	–	82	µA	LSB = 300-nA typ.

(table continues...)

Table 13 (continued) CSD and IDAC specifications

Spec ID#	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID315H	IDAC3CRT33	Output current of IDAC in 8-bit mode in high range	540	–	660	µA	LSB = 2.4-µA typ.
SID320	IDACOFFSET	All zeroes input	–	–	1	LSB	Polarity set by Source or Sink. Offset is 2 LSBs for 37.5 nA/LSB mode
SID321	IDACGAIN	Full-scale error less offset	–	–	±10	%	–
SID322	IDACMIS-MATCH1	Mismatch between IDAC1 and IDAC2 in Low mode	–	–	9.2	LSB	LSB = 37.5-nA typ.
SID322A	IDACMIS-MATCH2	Mismatch between IDAC1 and IDAC2 in Medium mode	–	–	5.6	LSB	LSB = 300-nA typ.
SID322B	IDACMIS-MATCH3	Mismatch between IDAC1 and IDAC2 in High mode	–	–	6.8	LSB	LSB = 2.4-µA typ.
SID323	IDACSET8	Settling time to 0.5 LSB for 8-bit IDAC	–	–	10	µs	Full-scale transition. No external load.
SID324	IDACSET7	Settling time to 0.5 LSB for 7-bit IDAC	–	–	10	µs	Full-scale transition. No external load.
SID325	CMOD	External modulator capacitor.	–	2.2	–	nF	6-V rating (or higher), X7R cap, or NP0/C0G cap for hot temperature operation

Table 14 10-bit CAPSENSE™ ADC specifications

Spec ID#	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SIDA94	A_RES	Resolution	–	–	10	bits	Auto-zeroing is required every milli-second
SIDA95	A_CHNLS_S	Number of channels single ended	–	–	16		Defined by AMUX Bus.
SIDA97	A-MONO	Monotonicity	–	–	–	Yes	–
SIDA98	A_GAINERR	Gain error	–	–	±2	%	In V_{REF} (2.4 V) mode with V_{DDA} bypass capacitance of 10 µF
SIDA99	A_OFFSET	Input offset voltage	–	–	3	mV	In V_{REF} (2.4 V) mode with V_{DDA} bypass capacitance of 10 µF
SIDA100	A_ISAR	Current consumption	–	–	0.25	mA	–
SIDA101	A_VINS	Input voltage range-single ended	V_{SSA}	–	V_{DDA}	V	–
SIDA103	A_INRES	Input resistance	–	2.2	–	KΩ	–
SIDA104	A_INCAP	Input capacitance	–	20	–	pF	–

(table continues...)

Table 14 (continued) 10-bit CAPSENSE™ ADC specifications

Spec ID#	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SIDA106	A_PSRR	Power supply rejection ratio	–	60	–	dB	In V_{REF} (2.4 V) mode with V_{DDA} bypass capacitance of 10 µF
SIDA107	A_TACQ	Sample acquisition time	–	1	–	µs	–
SIDA108	A_CONV8	Conversion time for 8-bit resolution at conversion rate = Fhclk/(2^(N+2)). Clock frequency = 48 MHz.	–	–	21.3	µs	Does not include acquisition time. Equivalent to 44.8 ksps including acquisition time.
SIDA108 A	A_CONV10	Conversion time for 10-bit resolution at conversion rate = Fhclk/(2^(N+2)). Clock frequency = 48 MHz.	–	–	85.3	µs	Does not include acquisition time. Equivalent to 11.6 ksps including acquisition time.
SIDA109	A_SND	Signal-to-noise and Distortion ratio (SINAD)	–	61	–	dB	With 10-Hz input sine wave, external 2.4-V reference,V REF (2.4 V) mode
SIDA110	A_BW	Input bandwidth without aliasing	–	–	22.4	kHz	8-bit resolution
SIDA111	A_INL	Integral non linearity. 1 ksps.	–	–	2	LSB	V_{REF} = 2.4 V or greater
SIDA112	A_DNL	Differential non linearity. 1 ksps.	–	–	1	LSB	–

6.4 Digital peripherals

6.4.1 Timer Counter Pulse-Width Modulator (TCPWM)

Table 15 TCPWM specifications

Spec ID	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID.TCPWM.1	ITCPWM1	Block current consumption at 3 MHz	–	–	45	µA	All modes (TCPWM)
SID.TCPWM.2	ITCPWM2	Block current consumption at 12 MHz	–	–	155		All modes (TCPWM)
SID.TCPWM.2 A	ITCPWM3	Block current consumption at 48 MHz	–	–	650		All modes (TCPWM)
SID.TCPWM.3	TCPWM FREQ	Operating frequency	–	–	Fc	MHz	Fc max = CLK_SYS Maximum = 48 MHz
SID.TCPWM.4	TPWM ENEXT	Input trigger pulse width	2/Fc	–	–	ns	For all trigger events [1)]

(table continues...)

Table 15 (continued) TCPWM specifications

Spec ID	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID.TCPWM.5	TPWM EXT	Output trigger pulse widths	2/Fc	–	–		Minimum possible width of Overflow, Underflow, and CC (Counter equals Compare value) outputs
SID.TCPWM.5 A	TC RES	Resolution of counter	1/Fc	–	–		Minimum time between successive counts
SID.TCPWM.5 B	PWM RES	PWM resolution	1/Fc	–	–		Minimum pulse width of PWM Output
SID.TCPWM.5 C	Q RES	Quadrature inputs resolution	1/Fc	–	–		Minimum pulse width between Quadrature phase inputs

1) Guaranteed by characterization.

6.4.2 I²C

Table 16 Fixed I²C DC specifications[1)]

Spec ID	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID149	I_{I2C1}	Block current consumption at 100 kHz	–	–	50	µA	–
SID150	I_{I2C2}	Block current consumption at 400 kHz	–	–	135		–
SID151	I_{I2C3}	Block current consumption at 1 Mbps	–	–	310		–
SID152	I_{I2C4}	I²C enabled in Deep Sleep mode	–	–	1.4		–

1) Guaranteed by characterization.

Table 17 Fixed I²C AC specifications[1)]

Spec ID	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID153	F_{I2C1}	Bit rate	–	–	1	Msps	–

1) Guaranteed by characterization.

Table 18 SPI DC specifications[1)]

Spec ID	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID163	ISPI1	Block current consumption at 1 Mbps	–	–	360	µA	–

(table continues...)

Table 18 (continued) SPI DC specifications[1)]

Spec ID	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID164	ISPI2	Block current consumption at 4 Mbps	–	–	560		–
SID165	ISPI3	Block current consumption at 8 Mbps	–	–	600		–

1) Guaranteed by characterization.

Table 19 SPI AC specifications[1)]

Spec ID	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID166	FSPI	SPI operating frequency (Master; 6X Oversampling)	–	–	8	MHz	–
Fixed SPI Master Mode AC specifications							
SID167	TDMO	MOSI valid after SClock driving edge	–	–	15	ns	–
SID168	TDSI	MISO valid before SClock capturing edge	20	–	–		Full clock, late MISO sampling
SID169	THMO	Previous MOSI data hold time	0	–	–		Referred to Slave capturing edge
Fixed SPI Slave Mode AC specifications							
SID170	TDMI	MOSI valid before Sclock Capturing edge	40	–	–	ns	–
SID171	TDSO	MISO valid after Sclock driving edge	–	–	42 + 3*Tcpu		$T_{CPU} = 1/F_{CPU}$
SID171A	TDSO_EXT	MISO valid after Sclock driving edge in Ext. Clk mode	–	–	48		–
SID172	THSO	Previous MISO data hold time	0	–	–		–
SID172A	TSSELSSC K	SSEL valid to first SCK Valid edge	–	–	100	ns	–

1) Guaranteed by characterization.

Table 20 UART DC specifications[1)]

Spec ID	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID160	I_{UART1}	Block current consumption at 100 Kbps	–	–	55	µA	–
SID161	I_{UART2}	Block current consumption at 1000 Kbps	–	–	312	µA	–

1) Guaranteed by characterization.

Table 21 UART AC specifications[1)]

Spec ID	Parameter	Description	Min	Typ	Max	Unit	Details/ conditions
SID162	F_{UART}	Bit rate	–	–	1	Mbps	–

1) Guaranteed by characterization.

Table 22 LCD direct drive DC specifications[1)]

Spec ID	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID154	I_{LCDLOW}	Operating current in low power mode	–	5	–	µA	16 x 4 small segment disp. at 50 Hz
SID155	C_{LCDCAP}	LCD capacitance per segment/common driver	–	500	5000	pF	–
SID156	LCD_{OFFSET}	Long-term segment offset	–	20	–	mV	–
SID157	I_{LCDOP1}	LCD system operating current Vbias = 5 V	–	2	–	mA	32 x 4 segments. 50 Hz, 25°C.
SID158	I_{LCDOP2}	LCD system operating current Vbias = 3.3 V	–	2	–		32 x 4 segments. 50 Hz, 25°C.

1) Guaranteed by characterization.

Table 23 LCD direct drive AC specifications[1)]

Spec ID	Parameter	Description	Min	Typ	Max	Unit	Details/ conditions
SID159	F_{LCD}	LCD frame rate	10	50	150	Hz	–

1) Guaranteed by characterization.

6.5 Memory

Table 24 Flash DC specifications

Spec ID	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID173	V_{PE}	Erase and program voltage	1.71	–	5.5	V	–

Table 25 Flash AC specifications

Spec ID	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID174	$T_{ROWWRITE}$[1)]	Row (block) write time (erase and program)	–	–	20	ms	Row (block) = 128 bytes
SID175	$T_{ROWERASE}$[1)]	Row erase time	–	–	16		–

(table continues...)

Table 25 (continued) Flash AC specifications

Spec ID	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID176	$T_{ROWPROGRAM}$ 1)	Row program time after erase	–	–	4		–
SID178	$T_{BULKERASE}$ [8]	Bulk erase time (32 KB)	–	–	35		–
SID180 2)	$T_{DEVPROG}$ 1)	Total device program time	–	–	7	Seconds	–
SID181 2)	F_{END}	Flash endurance	100 K	–	–	Cycles	–
SID182 2)	F_{RET}	Flash retention. $T_A \leq 55°C$, 100 K P/E cycles	20	–	–	Years	–
SID182A 2)		Flash retention. $T_A \leq 85°C$, 10 K P/E cycles	10	–	–		–
SID182B	F_{RETQ}	Flash retention. $T_A \leq 105°C$, 10 KP/E cycles with no more than 3 years at $T_A > 85°C$	10	–	–		Guaranteed by design
SID256	TWS48	Number of Wait states at 48 MHz	2	–	–		CPU execution from Flash
SID257	TWS24	Number of Wait states at 24 MHz	1	–	–		CPU execution from Flash

1) It can take as much as 20 milliseconds to write to Flash. During this time the device should not be Reset, or Flash operations will be interrupted and cannot be relied on to have completed. Reset sources include the XRES pin, software resets, CPU lockup states and privilege violations, improper power supply levels, and watchdogs. Make certain that these are not inadvertently activated.
2) Guaranteed by characterization.

6.6 System resources

6.6.1 Power-on reset (POR)

Table 26 Power-on reset (PRES)

Spec ID	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID.CLK#6	SR_POWER	Power supply slew rate	1	–	67	V/ms	On power-up and power-down
SID185 1)	$V_{RISEIPOR}$	Rising trip voltage	0.80	–	1.5	V	–
SID186 1)	$V_{FALLIPOR}$	Falling trip voltage	0.70	–	1.4		–

1) Guaranteed by characterization.

Table 27 Brown-out detect (BOD) for V_{CCD}

Spec ID	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID190[1)]	$V_{FALLPPOR}$	BOD trip voltage in active and sleep modes	1.48	–	1.62	V	–
SID192[1)]	$V_{FALLDPSLP}$	BOD trip voltage in Deep Sleep	1.11	–	1.5		–

6.6.2 SWD interface

Table 28 SWD interface specifications

Spec ID	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID213	F_SWDCLK1	3.3 V ≤ V_{DD} ≤ 5.5 V	–	–	14	MHz	SWDCLK ≤ 1/3 CPU clock frequency
SID214	F_SWDCLK2	1.71 V ≤ V_{DD} ≤ 3.3 V	–	–	7		SWDCLK ≤ 1/3 CPU clock frequency
SID215[1)]	T_SWDI_-SETUP	T = 1/f SWDCLK	0.25*T	–	–	ns	–
SID216[1)]	T_SWDI_HOL D	T = 1/f SWDCLK	0.25*T	–	–		–
SID217[1)]	T_SWDO_VALI D	T = 1/f SWDCLK	–	–	0.5*T		–
SID217A[1)]	T_SWDO_HOL D	T = 1/f SWDCLK	1	–	–		–

1) Guaranteed by characterization.

6.6.3 Internal main oscillator

Table 29 IMO DC specifications

(Guaranteed by Design)

Spec ID	Parameter	Description	Min	Typ	Max	Units	Details/conditions
SID218	I_{IMO1}	IMO operating current at 48 MHz	–	–	250	µA	–
SID219	I_{IMO2}	IMO operating current at 24 MHz	–	–	180	µA	–

Table 30 IMO AC specifications

Spec ID	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID223[1)]	$F_{IMOTOL1}$	Frequency variation at 24, 32, and 48 MHz (trimmed)	–	–	±2	%	–
SID226	$T_{STARTIMO}$	IMO startup time	–	–	7	µs	–
SID228	$T_{JITRMSIMO2}$	RMS jitter at 24 MHz	–	145	–	ps	–

1) +/- 2% is final accuracy of IMO even under aging tests as well.

6.6.4 Internal low-speed oscillator

Table 31 ILO DC specifications

(Guaranteed by Design)

Spec ID	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID231[1)]	I_{LO1}	ILO operating current	–	0.3	1.05	µA	–

1) Guaranteed by characterization.

Table 32 ILO AC specifications

Spec ID	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID234[1)]	$T_{STARTILO1}$	ILO startup time	–	–	2	ms	–
SID236[1)]	$T_{ILODUTY}$	ILO duty cycle	40	50	60	%	–
SID237	$F_{ILOTRIM1}$	ILO frequency range	20	40	80	kHz	–

1) Guaranteed by characterization.

Table 33 Watch crystal oscillator (WCO) specifications

Spec ID	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID398	FWCO	Crystal frequency	–	32.76 8	–	kHz	–
SID399	FTOL	Frequency tolerance	–	50	250	ppm	With 20-ppm crystal
SID400	ESR	Equivalent series resistance	–	50	–	kΩ	–
SID401	PD	Drive level	–	–	1	µW	–
SID402	TSTART	Startup time	–	–	500	ms	–
SID403	CL	Crystal load capacitance	6	–	12.5	pF	–
SID404	C0	Crystal shunt capacitance	–	1.35	–	pF	–
SID405	IWCO1	Operating current (high power mode)	–	–	8	µA	–
SID406	IWCO2	Operating current (low power mode)	–	–	1	µA	–

Table 34 External clock specifications

Spec ID	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID305[1)]	ExtClkFreq	External clock input frequency	0	–	48	MHz	–
SID306[1)]	ExtClkDuty	Duty cycle; measured at $V_{DD}/2$	45	–	55	%	–

1) Guaranteed by characterization.

Table 35 Block specs

Spec ID	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID262 [1)]	$T_{CLKSWITCH}$	System clock source switching time	3	–	4	Periods	–

1) Guaranteed by characterization.

Table 36 Smart I/O pass-through time (Delay in Bypass mode)

Spec ID	Parameter	Description	Min	Typ	Max	Unit	Details/conditions
SID252	PRG_BYPASS	Max delay added by Smart I/O in bypass mode	–	–	1.6	ns	–

7 Ordering information

Table 37 lists the Automotive PSOC™ 4000S part numbers and features.

Table 37 Automotive PSOC™ 4000S ordering information

Category	Product	Features										Packages			Operating temperature		
		Max CPU speed (MHz)	Flash (KB)	SRAM(KB)	Opamp(CTBm)	CSD	12-bit SAR ADC	LP Comparators	TCPWM Blocks	SCB Blocks	GPIO	24-pin QFN	28-pin SSOP	40-pin QFN	–40 to +85°C	–40 to +105°C	–40 to +125°C
4024	CY8C4024LQA-S411	24	16	2	0	1	0	2	5	2	19	X	–		X	–	–
	CY8C4024LQS-S411	24	16	2	0	1	0	2	5	2	19	X	–		–	X	–
	CY8C4024PVA-S412	24	16	2	0	1	0	2	5	2	24	–	X		X	–	–
	CY8C4024PVS-S412	24	16	2	0	1	0	2	5	2	24	–	X		–	X	–
	CY8C4024LQA-S413	24	16	2	0	1	0	2	5	2	34			X	X		
	CY8C4024LQS-S413	24	16	2	0	1	0	2	5	2	34			X		X	
	CY8C4024LQE-S413	24	16	2	–	1	–	2	5	2	34			X			X
4025	CY8C4025LQA-S411	24	32	4	0	1	0	2	5	2	19	X	–		X	–	–
	CY8C4025LQS-S411	24	32	4	0	1	0	2	5	2	19	X	–		–	X	–
	CY8C4025PVA-S412	24	32	4	0	1	0	2	5	2	24	–	X		X	–	–
	CY8C4025PVS-S412	24	32	4	0	1	0	2	5	2	24	–	X		–	X	–
	CY8C4025LQA-S413	24	32	4	0	1	0	2	5	2	34			X	X		
	CY8C4025LQS-S413	24	32	4	0	1	0	2	5	2	34			X		X	
	CY8C4025LQE-S413	24	32	4	–	1	–	2	5	2	34			X			X
4045	CY8C4045LQA-S411	48	32	4	0	1	0	2	5	2	19	X	–		X	–	–
	CY8C4045LQS-S411	48	32	4	0	1	0	2	5	2	19	X	–		–	X	–
	CY8C4045PVA-S412	48	32	4	0	1	0	2	5	2	24	–	X		X	–	–
	CY8C4045PVS-S412	48	32	4	0	1	0	2	5	2	24	–	X		–	X	–
	CY8C4045LQA-S413	48	32	4	0	1	0	2	5	2	34			X	X		
	CY8C4045LQS-S413	48	32	4	0	1	0	2	5	2	34			X		X	
	CY8C4045LQE-S413	48	32	4	–	1	–	2	5	2	34			X			X

***Note**: Some of the TCPWM blocks can only be internal to the device without connection to the external pins.*

The nomenclature used in the preceding table is based on the following part numbering convention:

7 Ordering information

Field	Description	Values	Meaning
CY8C	Cypress (an Infineon company) prefix		–
4	Architecture	4	PSOC™ 4
A	Family	0	4000 family
B	CPU speed	2	24 MHz
		4	48 MHz
C	Flash capacity	4	16 KB
		5	32 KB
		6	64 KB
		7	128 KB
DE	Package code	LQ/LD	QFN
		PV	SSOP
F	Temperature range	I	Industrial
		A	Automotive (AEC-Q100: −40°C to +85°C)
		S	Automotive (AEC-Q100: −40°C to +105°C)
		E	Automotive (AEC-Q100: −40°C to +125°C)
S	Silicon family	S	PSOC™ 4A-S1, PSOC™ 4A-S2
		M	PSOC™ 4A-M
		L	PSOC™ 4A-L
		BL	PSOC™ 4A-BLE
XYZ	Attributes code	000-999	Code of feature set in the specific family
XX	Fab/assembly location	Non KA	Initial assembly location
		Blank	

The following is an example of a part number:

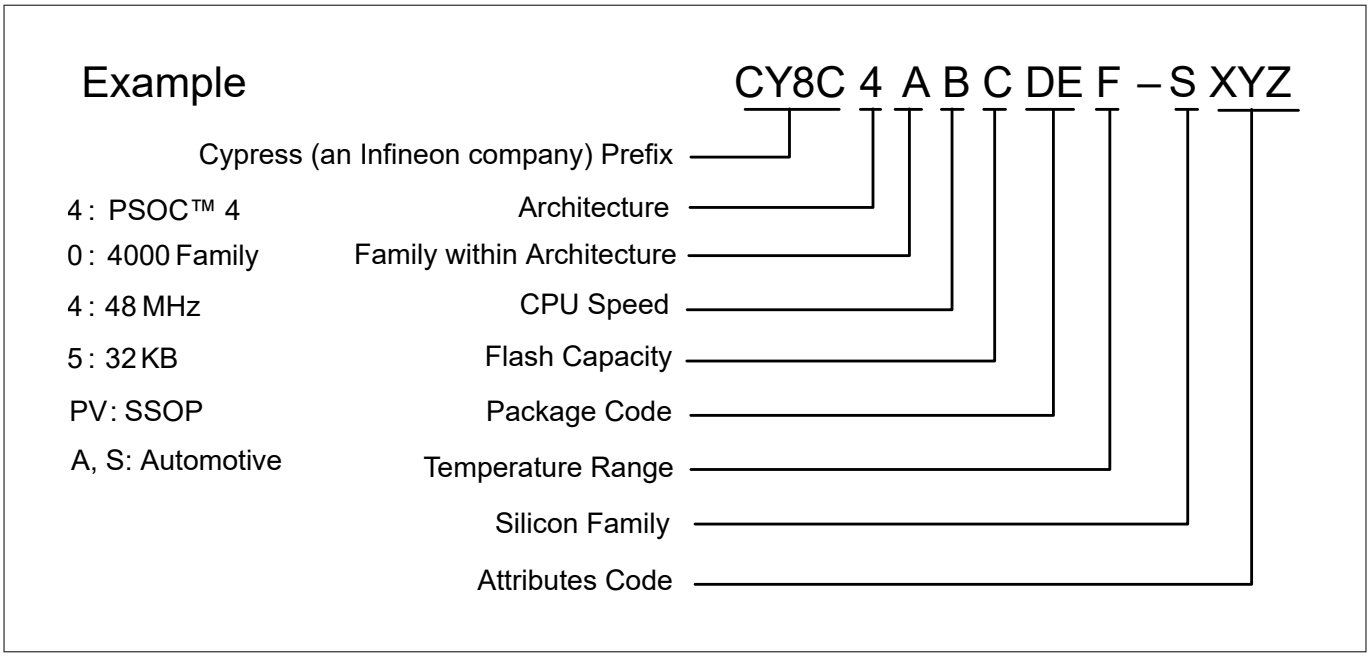


Figure 8 Ordering part number

8 Packaging

The Automotive PSOC™ 4000S will be offered in 24-QFN, 28-SSOP, and 40-pin QFN packages. Table 38 provides the package dimensions and Infineon drawing numbers.

Table 38 Package list

Spec ID	Package	Description	Package drawing
BID34	24-pin QFN	4 × 4 × 0.6 mm height, 2.75 × 2.75 mm EPAD (Sawn)	002-23807
BID28	28-pin SSOP	210 Mils O28.21	51-85079
BID27	40-pin QFN	40 LEAD QFN 6.0 × 6.0 × 0.6 mm LD40G 3.8 × 3.8 mm EPAD(wettable flank)	002-36765

Table 39 Package thermal characteristics

Parameter	Description	Package	Conditions	Min	Typ	Max	Unit
T_A	Operating ambient temperature		For A-grade devices	−40	25	85	°C
			For S-grade devices	−40	25	105	
T_J	Operating junction temperature		For A-grade devices	−40	–	100	°C
			For S-grade devices	−40	–	120	
T_{JA}	Package θ_{JA}	24-pin QFN		–	21.7	–	°C/Watt
T_{JC}	Package θ_{JC}	24-pin QFN		–	5.6	–	°C/Watt
T_{JA}	Package θ_{JA}	28-pin SSOP		–	66.58	–	°C/Watt
T_{JC}	Package θ_{JC}	28-pin SSOP		–	46.28	–	°C/Watt
T_{JA}	Package θ_{JA}	40-pin QFN	–	–	24.70	–	°C/Watt
T_{JC}	Package θ_{JC}	40-pin QFN	–	–	12.09	–	°C/Watt


Table 40 Solder reflow peak temperature

Package	Maximum peak temperature	Maximum time at peak temperature
All	260°C	30 seconds

Table 41 Package moisture sensitivity level (MSL), IPC/JEDEC J-STD-020

Package	MSL
All	MSL 3

8.1 Package diagrams

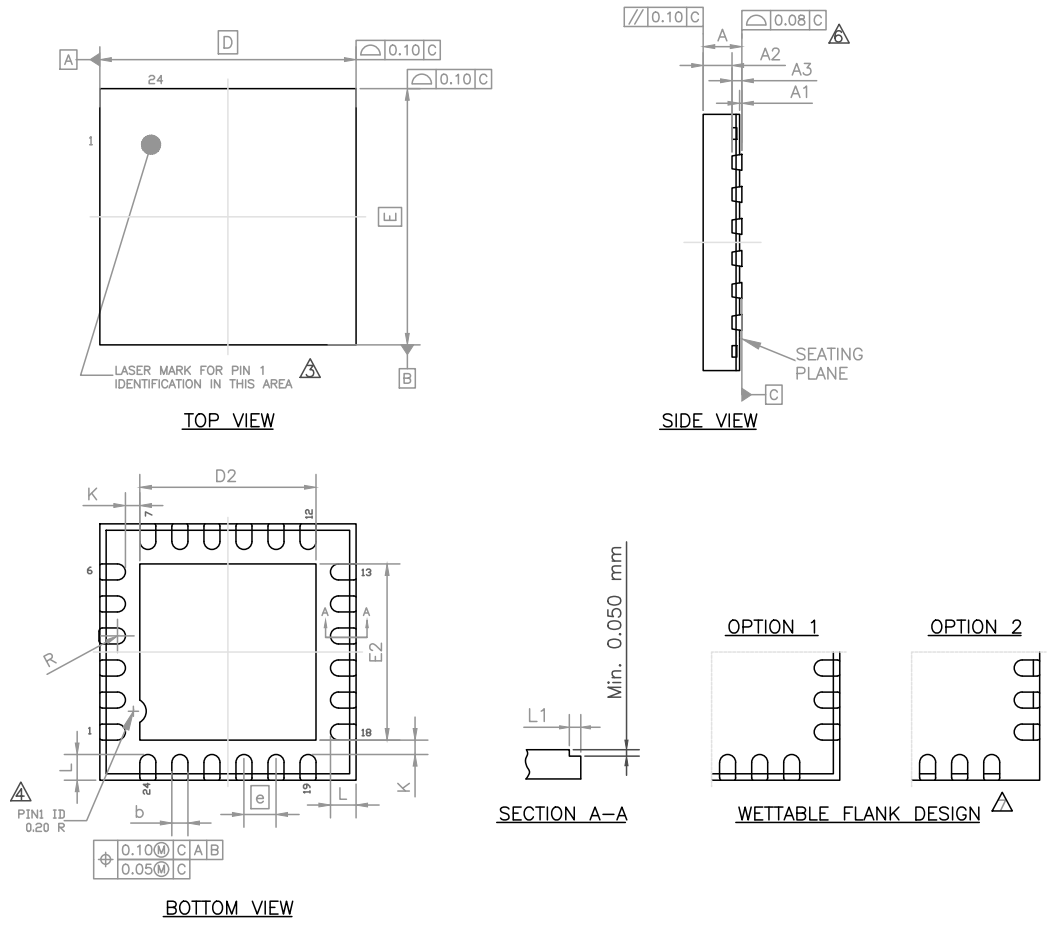

SYMBOL	DIMENSIONS		
	MIN	NOM	MAX
A	–	–	0.60
A1	0.00	–	0.05
A2	–	0.400	0.425
A3	0.152 REF		
b	0.18	0.25	0.30
D	4.00 BSC		
E	4.00 BSC		
D2	2.65	2.75	2.85
E2	2.65	2.75	2.85
e	0.50 BSC		
L	0.30	0.40	0.50
K	0.225	–	–
R	0.09	–	–
L1	0.025	0.075	0.125

NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. DIMENSIONING & TOLERANCES CONFORM TO ASME Y14.5M. –1994.
3. THE PIN #1 IDENTIFIER MUST BE PLACED ON THE TOP SURFACE OF THE PACKAGE BY USING INDENTATION MARK OR OTHER FEATURE OF PACKAGE BODY.
4. EXACT SHAPE AND SIZE OF THIS FEATURE IS OPTIONAL.
5. PACKAGE WARPAGE MAX 0.08 mm.
6. APPLIED FOR EXPOSED PAD AND TERMINALS.
7. PLEASE REFER TO WETTABLE FLANK DESIGN OPTIONS.
8. JEDEC SPECIFICATION NO. REF. : N/A.

002-23807 *F

Figure 9 24-pin QFN package outline (PG-VQFN-24)

8 Packaging

The center pad on the QFN package should be connected to ground (VSS) for best mechanical, thermal, and electrical performance. If not connected to ground, it should be electrically floating and not connected to any other signal.


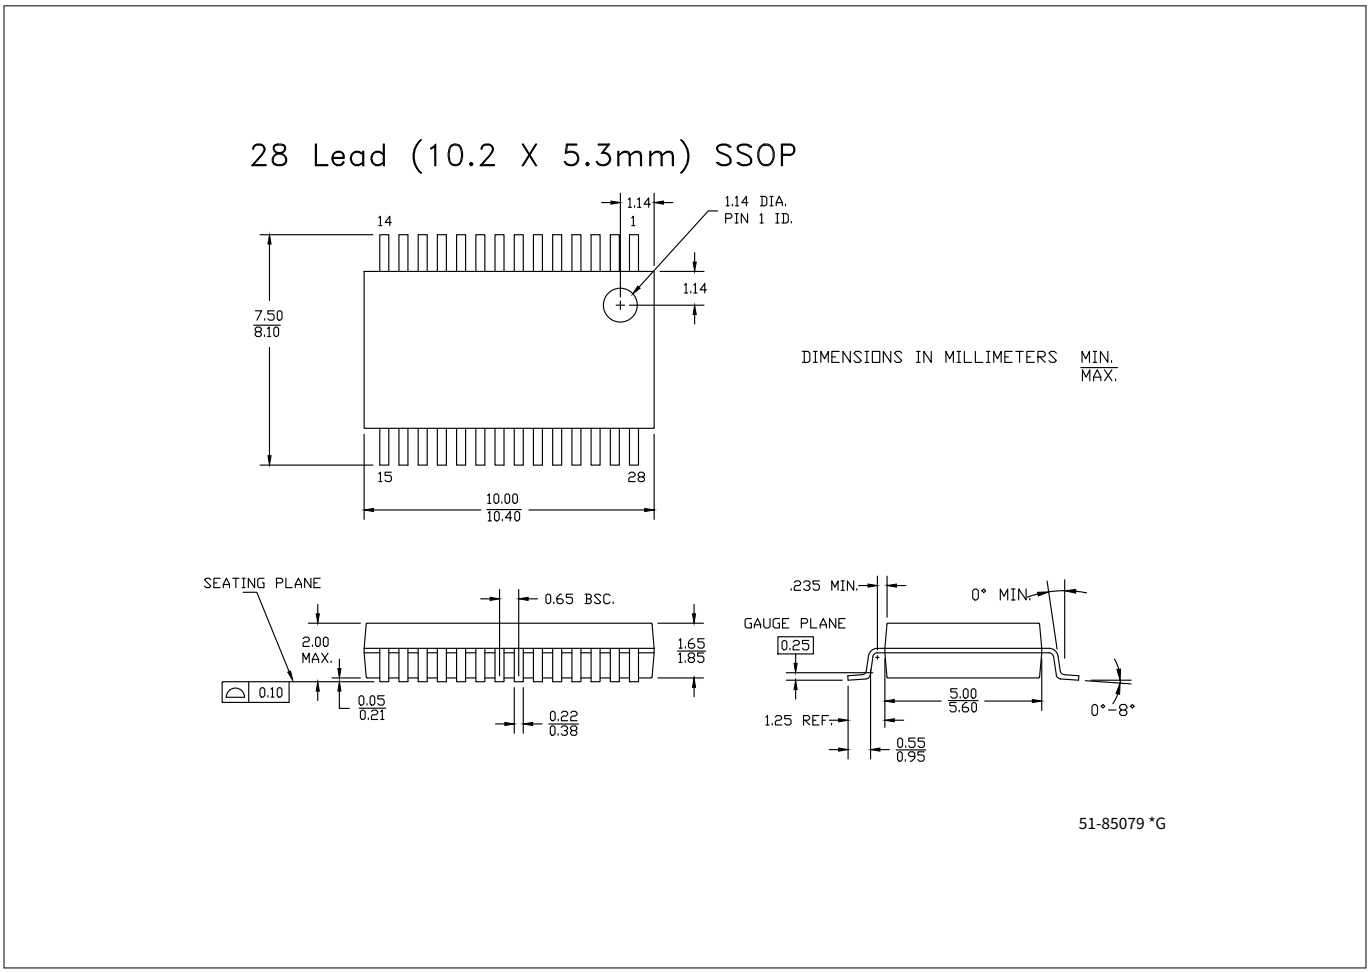


Figure 10 28-pin SSOP package outline (PG-SSOP-28)

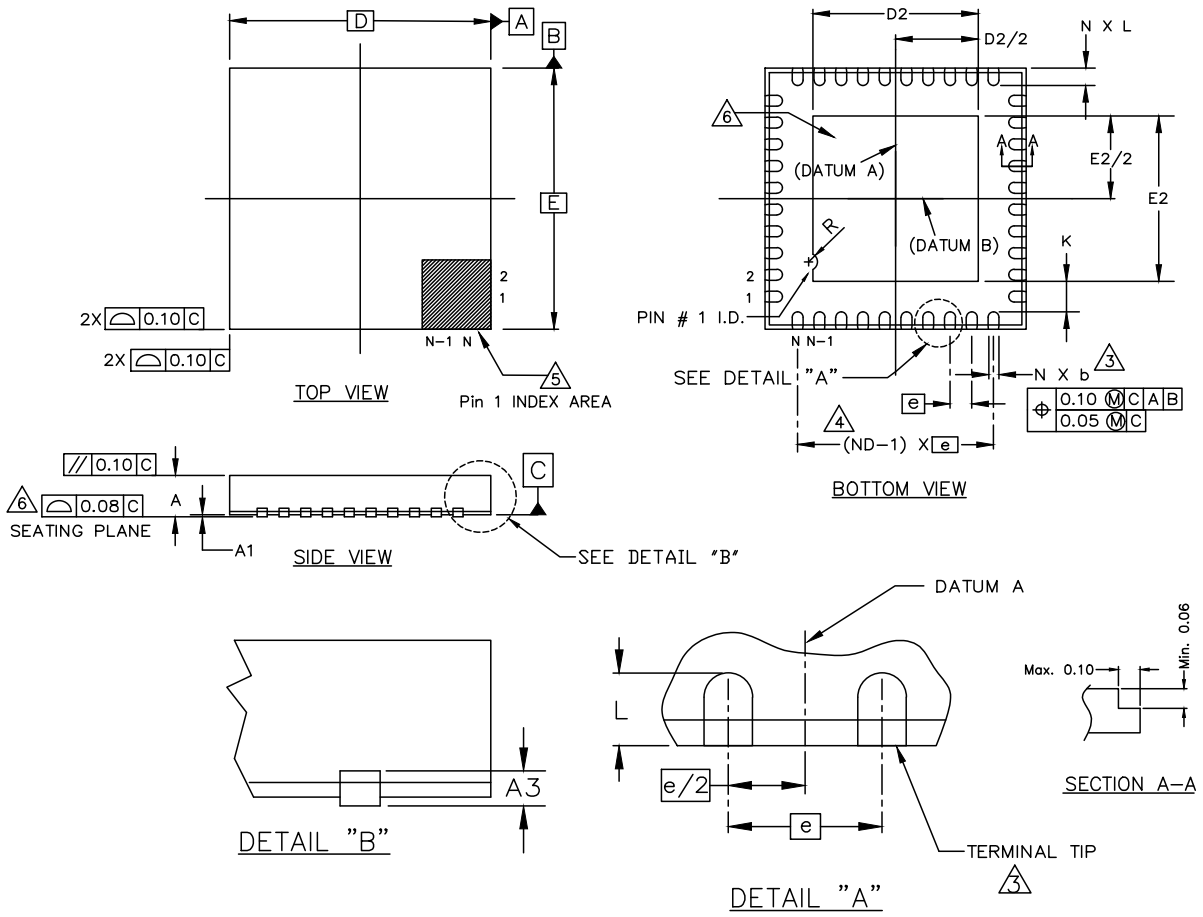

SYMBOL	DIMENSIONS		
	MIN.	NOM.	MAX.
e		0.50 BSC	
N		40	
ND		10	
L	0.30	0.40	0.50
b	0.18	0.25	0.30
D2	3.70	3.80	3.90
E2	3.70	3.80	3.90
D		6.00 BSC	
E		6.00 BSC	
A	-	-	0.60
A1	0.00	-	0.05
A3		0.152 REF	
R		0.20 TYP	
K		0.70 MIN	

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. N IS THE TOTAL NUMBER OF TERMINALS.
3. DIMENSION "b" APPLIES TO METALLIZED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.30mm FROM TERMINAL TIP. IF THE TERMINAL HAS THE OPTIONAL RADIUS ON THE OTHER END OF THE TERMINAL, THE DIMENSION "b" SHOULD NOT BE MEASURED IN THAT RADIUS AREA.
4. ND REFERS TO THE NUMBER OF TERMINALS ON D SIDE.
5. PIN #1 ID ON TOP WILL BE LOCATED WITHIN THE INDICATED ZONE.
6. COPLANARITY ZONE APPLIES TO THE EXPOSED HEAT SINK SLUG AS WELL AS THE TERMINALS.
7. JEDEC SPECIFICATION NO. REF. : N/A.

002-36765 **

Figure 11 40-pin QFN package outline

9 Acronyms

Table 42 Acronyms used in this document

Acronym	Description
abus	analog local bus
ADC	analog-to-digital converter
AG	analog global
AHB	AMBA (advanced microcontroller bus architecture) high-performance bus, an Arm® data transfer bus
ALU	arithmetic logic unit
AMUXBUS	analog multiplexer bus
API	application programming interface
APSR	application program status register
Arm®	advanced RISC machine, a CPU architecture
ATM	automatic thump mode
BW	bandwidth
CAN	Controller Area Network, a communications protocol
CMRR	common-mode rejection ratio
CPU	central processing unit
CRC	cyclic redundancy check, an error-checking protocol
DAC	digital-to-analog converter, see also IDAC, VDAC
DFB	digital filter block
DIO	digital input/output, GPIO with only digital capabilities, no analog. See GPIO.
DMIPS	Dhrystone million instructions per second
DMA	direct memory access, see also TD
DNL	differential nonlinearity, see also INL
DNU	do not use
DR	port write data registers
DSI	digital system interconnect
DWT	data watchpoint and trace
ECC	error correcting code
ECO	external crystal oscillator
EEPROM	electrically erasable programmable read-only memory
EMI	electromagnetic interference
EMIF	external memory interface
EOC	end of conversion
EOF	end of frame

(table continues...)

Table 42 (continued) Acronyms used in this document

Acronym	Description
EPSR	execution program status register
ESD	electrostatic discharge
ETM	embedded trace macrocell
FIR	finite impulse response, see also IIR
FPB	flash patch and breakpoint
FS	full-speed
GPIO	general-purpose input/output, applies to a PSOC™ pin
HVI	high-voltage interrupt, see also LVI, LVD
IC	integrated circuit
IDAC	current DAC, see also DAC, VDAC
IDE	integrated development environment
I^2C, or IIC	Inter-Integrated Circuit, a communications protocol
IIR	infinite impulse response, see also FIR
ILO	internal low-speed oscillator, see also IMO
IMO	internal main oscillator, see also ILO
INL	integral nonlinearity, see also DNL
I/O	input/output, see also GPIO, DIO, SIO, USBIO
IPOR	initial power-on reset
IPSR	interrupt program status register
IRQ	interrupt request
ITM	instrumentation trace macrocell
LCD	liquid crystal display
LIN	Local Interconnect Network, a communications protocol.
LR	link register
LUT	lookup table
LVD	low-voltage detect, see also LVI
LVI	low-voltage interrupt, see also HVI
LVTTL	low-voltage transistor-transistor logic
MAC	multiply-accumulate
MCU	microcontroller unit
MISO	master-in slave-out
NC	no connect
NMI	nonmaskable interrupt

(table continues...)

Table 42 (continued) Acronyms used in this document

Acronym	Description
NRZ	non-return-to-zero
NVIC	nested vectored interrupt controller
NVL	nonvolatile latch, see also WOL
opamp	operational amplifier
PAL	programmable array logic, see also PLD
PC	program counter
PCB	printed circuit board
PGA	programmable gain amplifier
PHUB	peripheral hub
PHY	physical layer
PICU	port interrupt control unit
PLA	programmable logic array
PLD	programmable logic device, see also PAL
PLL	phase-locked loop
PMDD	package material declaration data sheet
POR	power-on reset
PRES	precise power-on reset
PRS	pseudo random sequence
PS	port read data register
PSOC™	Programmable System-on-Chip
PSRR	power supply rejection ratio
PWM	pulse-width modulator
RAM	random-access memory
RISC	reduced-instruction-set computing
RMS	root-mean-square
RTC	real-time clock
RTL	register transfer language
RTR	remote transmission request
RX	receive
SAR	successive approximation register
SC/CT	switched capacitor/continuous time
SCL	I^2C serial clock
SDA	I^2C serial data

(table continues...)

Table 42 (continued) Acronyms used in this document

Acronym	Description
S/H	sample and hold
SINAD	signal to noise and distortion ratio
SIO	special input/output, GPIO with advanced features. See GPIO.
SOC	start of conversion
SOF	start of frame
SPI	Serial Peripheral Interface, a communications protocol
SR	slew rate
SRAM	static random access memory
SRES	software reset
SWD	serial wire debug, a test protocol
SWV	single-wire viewer
TD	transaction descriptor, see also DMA
THD	total harmonic distortion
TIA	transimpedance amplifier
TTL	transistor-transistor logic
TX	transmit
UART	Universal Asynchronous Transmitter Receiver, a communications protocol
UDB	universal digital block
USB	universal serial bus
USBIO	USB input/output, PSOC™ pins used to connect to a USB port
VDAC	voltage DAC, see also DAC, IDAC
WDT	watchdog timer
WOL	write once latch, see also NVL
WRES	watchdog timer reset
XRES	external reset I/O pin
XTAL	crystal

10 Document conventions

10.1 Units of measure

Table 43 Units of measure

Symbol	Unit of measure
°C	degrees Celsius
dB	decibel
fF	femto farad
Hz	hertz
KB	1024 bytes
kbps	kilobits per second
Khr	kilohour
kHz	kilohertz
kΩ	kilo ohm
ksps	kilosamples per second
LSB	least significant bit
Mbps	megabits per second
MHz	megahertz
MΩ	mega ohm
Msps	megasamples per second
µA	microampere
µF	microfarad
µH	microhenry
µs	microsecond
µV	microvolt
µW	microwatt
mA	milliampere
ms	millisecond
mV	millivolt
nA	nanoampere
ns	nanosecond
nV	nanovolt
W	ohm
pF	picofarad
ppm	parts per million

(table continues...)

Table 43 (continued) Units of measure

Symbol	Unit of measure
ps	picosecond
s	second
sps	samples per second
sqrtHz	square root of hertz
V	volt

11 Revision history

Document version	Date of release	Description of changes
*G	2023-01-27	Updated Ordering information . Converted to Infineon template. Release to web.
*H	2023-03-20	Updated Ordering information .
*I	2023-09-05	Removed 40-QFN and 48-QFN in Table 2. Removed 40-QFN and 48-QFN in Table 37.
*J	2024-05-02	Updated Ordering information with 40-pin QFN MPNs. Updated Package list with 40-pin QFN package. Added 40-pin QFN package diagram. Updated Figure 3, Figure 4, Figure 5. Added function names description in Function names description. Updated Table 2 to include PINs of different packages.
*K	2024-11-29	Updated Figure 9. Updated Table 38. Updated Table 37.
*L	2026-09-16	Template update Updated Figure 9

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2026-09-16

Published by

Infineon Technologies AG

81726 Munich, Germany

© 2026 Infineon Technologies AG

All Rights Reserved.

Do you have a question about any aspect of this document?

Email: erratum@infineon.com

Document reference
IFX-ylw1776155511129

Important notice

Products which may also include samples and may be comprised of hardware or software or both ("Product(s)") are sold or provided and delivered by Infineon Technologies AG and its affiliates ("Infineon") subject to the terms and conditions of the frame supply contract or other written agreement(s) executed by a customer and Infineon or, in the absence of the foregoing, the applicable Sales Conditions of Infineon. General terms and conditions of a customer or deviations from applicable Sales Conditions of Infineon shall only be binding for Infineon if and to the extent Infineon has given its express written consent.

For the avoidance of doubt, Infineon disclaims all warranties of non-infringement of third-party rights and implied warranties such as warranties of fitness for a specific use/purpose or merchantability. Infineon shall not be responsible for any information with respect to samples, the application or customer's specific use of any Product or for any examples or typical values given in this document.

If this document is marked as 'Preliminary', 'Target', 'Draft' or 'Proposal', Infineon reserves the right to change all information given in this document at any time without notice. Subject to the development and release of a Product for series supply by Infineon, the technical specifications of the Product are set forth in the relevant datasheet provided by Infineon without such marking.

The data contained in this document is exclusively intended for technically qualified and skilled customer representatives. It is the responsibility of the customer to evaluate the suitability of the Product for the intended application and the customer's specific use and to verify all relevant technical data contained in this document in the intended application and the customer's specific use. The customer is responsible for properly designing, programming, and testing the functionality and safety of the intended application, as well as complying with any legal requirements related to its use.

Unless otherwise explicitly approved by Infineon, Products may not be used in any application where a failure of the Products or any consequences of the use thereof can reasonably be expected to result in personal injury.

However, the foregoing shall not prevent the customer from using any Product in such fields of use that Infineon has explicitly designed and sold it for, provided that the overall responsibility for the application lies with the customer. Infineon expressly reserves the right to use its content for commercial text and data mining (TDM) according to applicable laws, e.g. Section 44b of the German Copyright Act (UrhG). If the Product includes security features:

Because no computing device can be absolutely secure, and despite security measures implemented in the Product, Infineon does not guarantee that the Product will be free from intrusion, data theft or loss, or other breaches ("Security Breaches"), and Infineon shall have no liability arising out of any Security Breaches.

If this document includes or references software:

The software is owned by Infineon under the intellectual property laws and treaties of the United States, Germany, and other countries worldwide. All rights reserved. Therefore, you may use the software only as provided in the software license agreement accompanying the software.

If no software license agreement applies, Infineon hereby grants you a personal, non-exclusive, non-transferable license (without the right to sublicense) under its intellectual property rights in the software (a) for software provided in source code form, to modify and reproduce the software solely for use with Infineon hardware products, only internally within your organization, and (b) to distribute the software in binary code form externally to end users, solely for use on Infineon hardware products. Any other use, reproduction, modification, translation, or compilation of the software is prohibited.

For further information on the Product, technology, delivery terms and conditions, and prices, please contact your nearest Infineon office or visit www.infineon.com.