


# Bluetooth Low Energy (BLE)

## 2.30

## Features

- Bluetooth v4.1 compliant protocol stack
- Generic Access Profile (GAP) Features
  - Broadcaster, Observer, Peripheral and Central roles
  - Supports role reversal between Peripheral and Central
  - User-defined advertising data
  - Bonding support for up to four devices
  - Security modes 1 and 2
- Generic Attribute Profile (GATT) Features
  - GATT Client and Server
  - 16-, 32-, and 128-bit UUIDs
- Special Interest Group (SIG) adopted GATT-based Profiles and Services, and quick prototype of new profile design through intuitive GUI Custom Profile development
- Security Manager features
  - Pairing methods: Just works, Passkey Entry, Out of Band
  - Authenticated man-in-the-middle (MITM) protection and data signing
- Logical Link Adaption Protocol (L2CAP) Connection Oriented Channel
- Link Layer (LL) Features
  - Master and Slave role
  - 128-bit AES encryption
  - Low Duty Cycle Advertising
  - LE Ping



## General Description

The Bluetooth Low Energy (BLE) Component provides a comprehensive GUI-based configuration window to facilitate designing applications requiring BLE connectivity. The Component incorporates a Bluetooth Core Specification v4.1 compliant protocol stack and provides APIs to enable user applications to access the underlying hardware via the stack.

## When to use the BLE Component

BLE is used in very low power Wireless Personal Area Network (WPAN) and Internet of Things (IoT) solutions aimed for low-cost battery operated devices that can quickly connect and form simple wireless links. Target applications include HID, remote controls, sports and fitness monitors, portable medical devices and smart phone accessories, among many others that are being added to a long list of BLE supporting solutions.

## Bluetooth Qualification

BLE solutions provided by Cypress are listed on the Bluetooth SIG website as certified solutions. The qualification is modular, allowing greater flexibility to customers. The following is the list of Qualified Design IDs (QD ID) and Declaration IDs.

QD ID(s)	Declaration ID#	Description
63199	D025070	Profiles supported by BLE Component in PSoC Creator
73181	D026298	
61908	D024756	Host
62243	D024755	Link Layer
62245	D024754	RF-PHY for 56-QFN package
63368	D025068	RF-PHY for 68-ball WLCSP package
62887	D024757	PSoC 4 BLE and PSoC BLE end product (56-QFN package)
63683	D025069	PSoC 4 BLE and PSoC BLE end product (68-ball WLCSP package)

## SIG adopted Profiles and Services

The BLE Component supports numerous SIG-adopted GATT-based Profiles and Services. Each of these can be configured for either a GATT Client or GATT Server. The Component generates all the necessary code for a particular Profile/Service operation, as configured in the component Configure dialog.

The component can also support several Profiles at a time by adding the required Services of a Profile to a base Profile. For example, you can select HID as a base Profile. Then to add a Find Me Profile, add the Immediate Alert Service to the HID Profile.

See [BLE Service-Specific APIs](#) for a list of supported Profiles and Services.



## Comprehensive APIs

The BLE Component provides application-level APIs to design solutions without requiring manual stack level configuration. The [BLE Component API documentation](#) is also provided in a separate HTML-based file.

## Custom Profiles


You can create custom Profiles that use existing Services, and you can create custom Services with custom Characteristics and Descriptors. There are no restrictions for GAP roles for a custom Profile.

## Debug Support

For testing and debugging, the Component can be configured to HCI mode through a Component embedded UART. For over-the-air verification, Cypress CySmart verification tool can be used for generic Bluetooth host stack emulation. To launch this tool, right click on the Component to bring up the context menu, and choose to deploy the CySmart tool.

## BLE Component Architecture

The BLE Component consists of the BLE Stack, BLE Profile, BLE Component Hardware Abstraction Layer (HAL), and the Link Layer. The following figure shows a high-level architecture of the BLE Component, illustrating the relationship between each of the layers and the route in which the application interacts with the Component. Note that the application is informed of the BLE events through the use of callback functions. You may build your state machine using these. Refer to the [Callback Functions](#) section for more details.

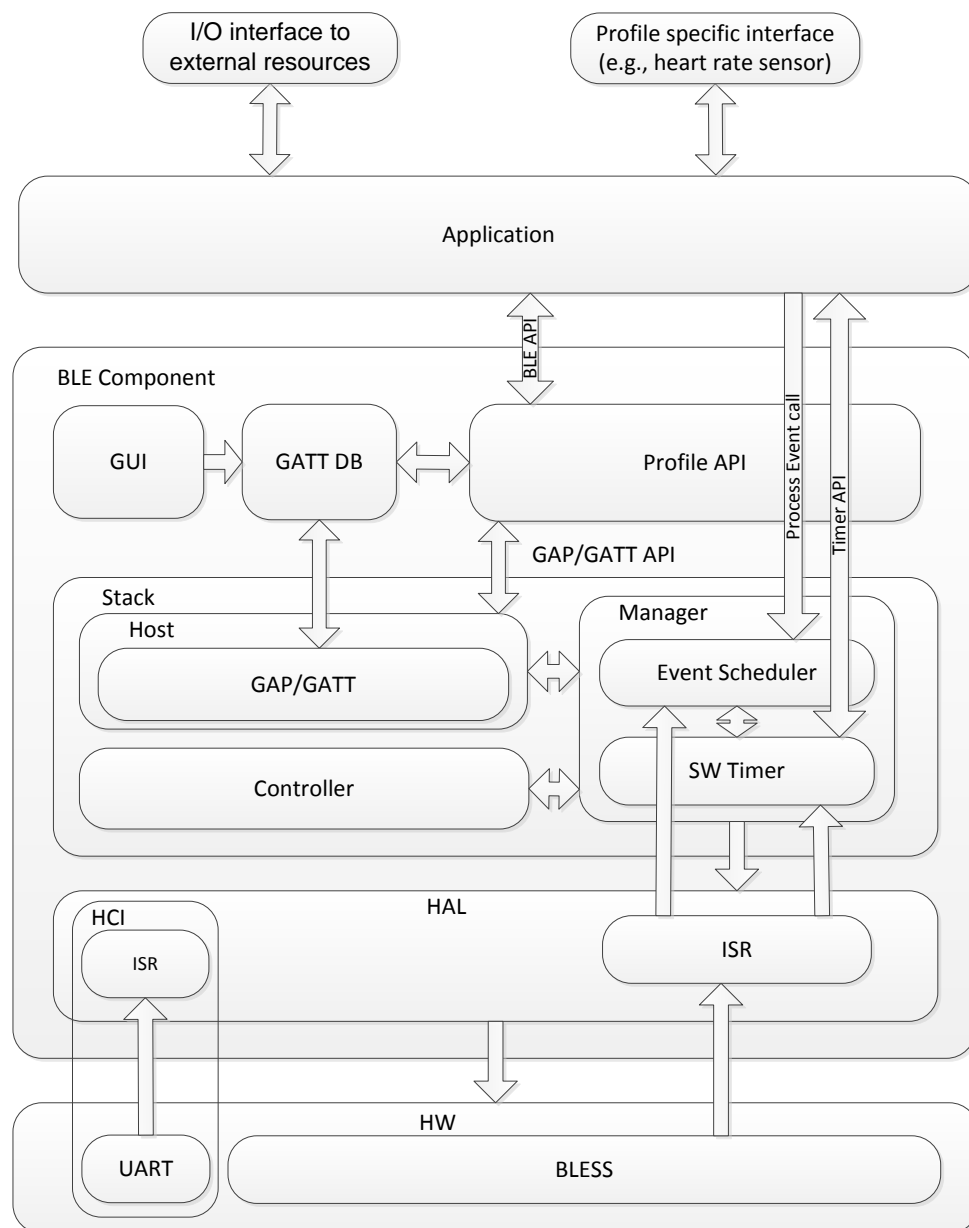


The following sub-sections give an overview of each of these layers.

## BLE Stack

The BLE stack implements the core BLE functionality as defined in the Bluetooth Core Specification 4.1. The stack is included as a precompiled library and it is embedded inside the BLE Component.

The BLE stack implements all the mandatory and optional features of Low Energy Single Mode compliant to Bluetooth Core Specification 4.1. The BLE Stack implements a layered architecture of the BLE protocol stack as shown in the following figure.

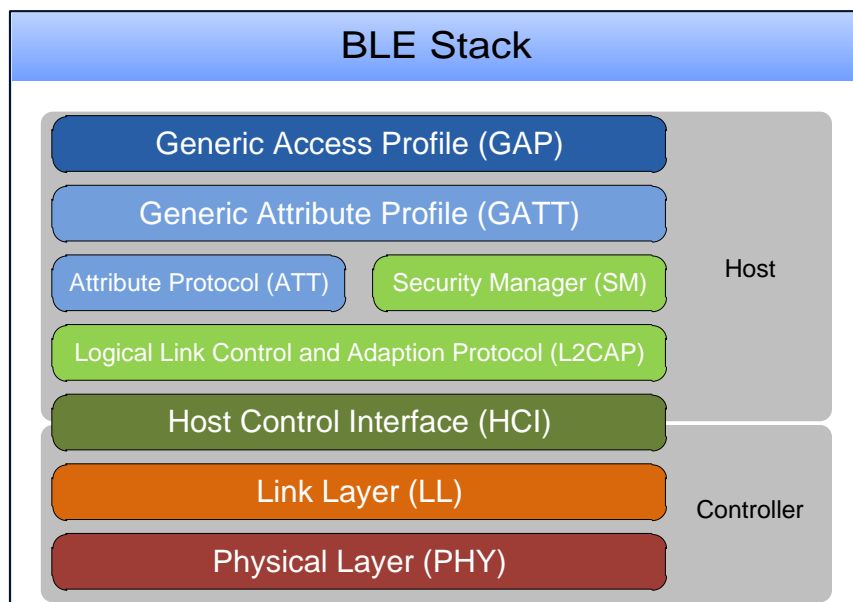

### Generic Access Profile (GAP)

The Generic Access Profile defines the generic procedures related to discovery of Bluetooth devices and link management aspects of connecting to Bluetooth devices. In addition, this profile includes common format requirements for parameters accessible on the user interface level.

The Generic Access Profile defines the following roles when operating over the LE physical channel:

- **Broadcaster role:** A device operating in the Broadcaster role can send advertising events. It is referred to as a Broadcaster. It has a transmitter and may have a receiver.
- **Observer role:** A device operating in the Observer role is a device that receives advertising events. It is referred to as an Observer. It has a receiver and may have a transmitter.

- **Peripheral role:** A device that accepts the establishment of an LE physical link using any of the connection establishment procedures is termed to be in a "Peripheral role." A device operating in the Peripheral role will be in the "Slave role" in the Link Layer Connection State. A device operating in the Peripheral role is referred to as a Peripheral. A Peripheral has both a transmitter and a receiver.
- **Central role:** A device that supports the Central role initiates the establishment of a physical connection. A device operating in the "Central role" will be in the "Master role" in the Link Layer Connection. A device operating in the Central role is referred to as a Central. A Central has a transmitter and a receiver.

### *Generic Attribute Profile (GATT)*

The Generic Attribute Profile defines a generic service framework using the ATT protocol layer. This framework defines the procedures and formats of services and their Characteristics. It defines the procedures for Service, Characteristic, and Descriptor discovery, reading, writing, notifying, and indicating Characteristics, as well as configuring the broadcast of Characteristics.

### *GATT Roles*

- **GATT Client:** This is the device that wants data. It initiates commands and requests towards the GATT Server. It can receive responses, indications, and notifications data sent by the GATT Server.
- **GATT Server:** This is the device that has the data and accepts incoming commands and requests from the GATT Client and sends responses, indications, and notifications to a GATT Client.

The BLE Stack supports both roles simultaneously for a custom profile use case.

### *Attribute Protocol (ATT)*

The Attribute Protocol layer defines a Client/Server architecture above the BLE logical transport channel. The attribute protocol allows a device referred to as the GATT Server to expose a set of attributes and their associated values to a peer device referred to as the GATT Client. These attributes exposed by the GATT Server can be discovered, read, and written by a GATT Client, and can be indicated and notified by the GATT Server. All the transactions on attributes are atomic.

### *Security Manager Protocol (SMP)*

Security Manager Protocol defines the procedures and behavior to manage pairing, authentication, and encryption between the devices. These include:

- Encryption and Authentication
- Pairing and Bonding
  - Pass Key and Out of band bonding
- Key Generation for a device identity resolution, data signing and encryption
- Pairing method selection based on the IO capability of the GAP central and GAP peripheral device

### *Logical Link Control Adaptation Protocol (L2CAP)*

L2CAP provides a connectionless data channel. LE L2CAP provides the following features:

- Channel multiplexing, which manages three fixed channels. Two channels are dedicated for higher protocol layers like ATT, SMP. One channel is used for the LE-L2CAP protocol signaling channel for its own use.
- Segmentation and reassembly of packets whose size is up to the BLE Controller managed maximum packet size.
- Connection-oriented channel over a specific application registered using the PSM (protocol service multiplexer) channel. It implements credit-based flow control between two LE L2CAP entities. This feature can be used for BLE applications that require transferring large chunks of data.

### *Host Controller Interface (HCI)*

The HCI layer implements a command, event, and data interface to allow link layer access from upper layers such as GAP, L2CAP, and SMP.

### *Link Layer (LL)*

The LL protocol manages the physical BLE connections between devices. It supports all LL states such as Advertising, Scanning, Initiating, and Connecting (Master and Slave). It implements all the key link control procedures such as LE Encryption, LE Connection Update, LE Channel Update, and LE Ping. The Link Layer is a hardware-firmware co-implementation, where the key time critical LL functions are implemented in the LL hardware. The LL firmware maintains and controls the key LL procedure state machines. It supports all the BLE chip specific low power modes.

The BLE Stack is a pre-compiled library in the BLE Component solution. The appropriate configuration of the BLE Stack library is linked during a build process based on application. The



BLE Stack libraries are ARM Embedded Application Binary Interface (eabi) compliant and they are compiled using ARM compiler version 5.03.

The following table shows the mapping between the BLE Stack library to the user-configured Profile Role in Profile Mode or HCI Mode. Refer to the [Generic Tab](#) section for selection of stack configuration.

BLE Component Configuration	GAP Role	BLE Stack Library
BLE Profile	Central + Peripheral	CyBLEStack_BLE_SOC_CENTRAL_PERIPHERAL.a
BLE Profile	Central	CyBLEStack_BLE_SOC_CENTRAL.a
BLE Profile	Peripheral	CyBLEStack_BLE_SOC_PERIPHERAL.a
Broadcaster/Observer	Broadcaster	CyBLEStack_BLE_SOC_PERIPHERAL.a
Broadcaster/Observer	Observer	CyBLEStack_BLE_SOC_CENTRAL.a
HCI Mode	N/A	CyBLEStack_HCI_MODE_CENTRAL_PERIPHERAL.a


## Profile Layer

In BLE, data is organized into concepts called Profiles, Services, and Characteristics.

- A **Profile** describes how devices connect to each other to find and use Services. It is a definition used by Bluetooth devices to describe the type of application and the general expected behavior of that device. See the [Profile parameter](#) for how to configure to the BLE Component.
- A **Service** is a collection of data entities called Characteristics. A Service is used to define a certain function in a Profile. A Service may also define its relationship to other Services. A Service is assigned a Universally Unique Identifier (UUID). This is 16 bits for SIG adopted Services and 128 bits for custom Services. See the [Toolbar](#) section for information about adding Services to a Profile.
- A **Characteristic** contains a Value and the Descriptor that describes a Characteristic Value. It is an attribute type for a specific piece of information within a Service. Like a Service, each Characteristic is designated with a UUID; 16 bits for SIG adopted Characteristics and 128 bits for custom Characteristics. See the [Toolbar](#) section for information about adding Characteristics and Descriptors.



The following diagram shows the relationship between Profiles, Services, and Characteristics in a sample BLE heart rate monitor application using a Heart Rate Profile.

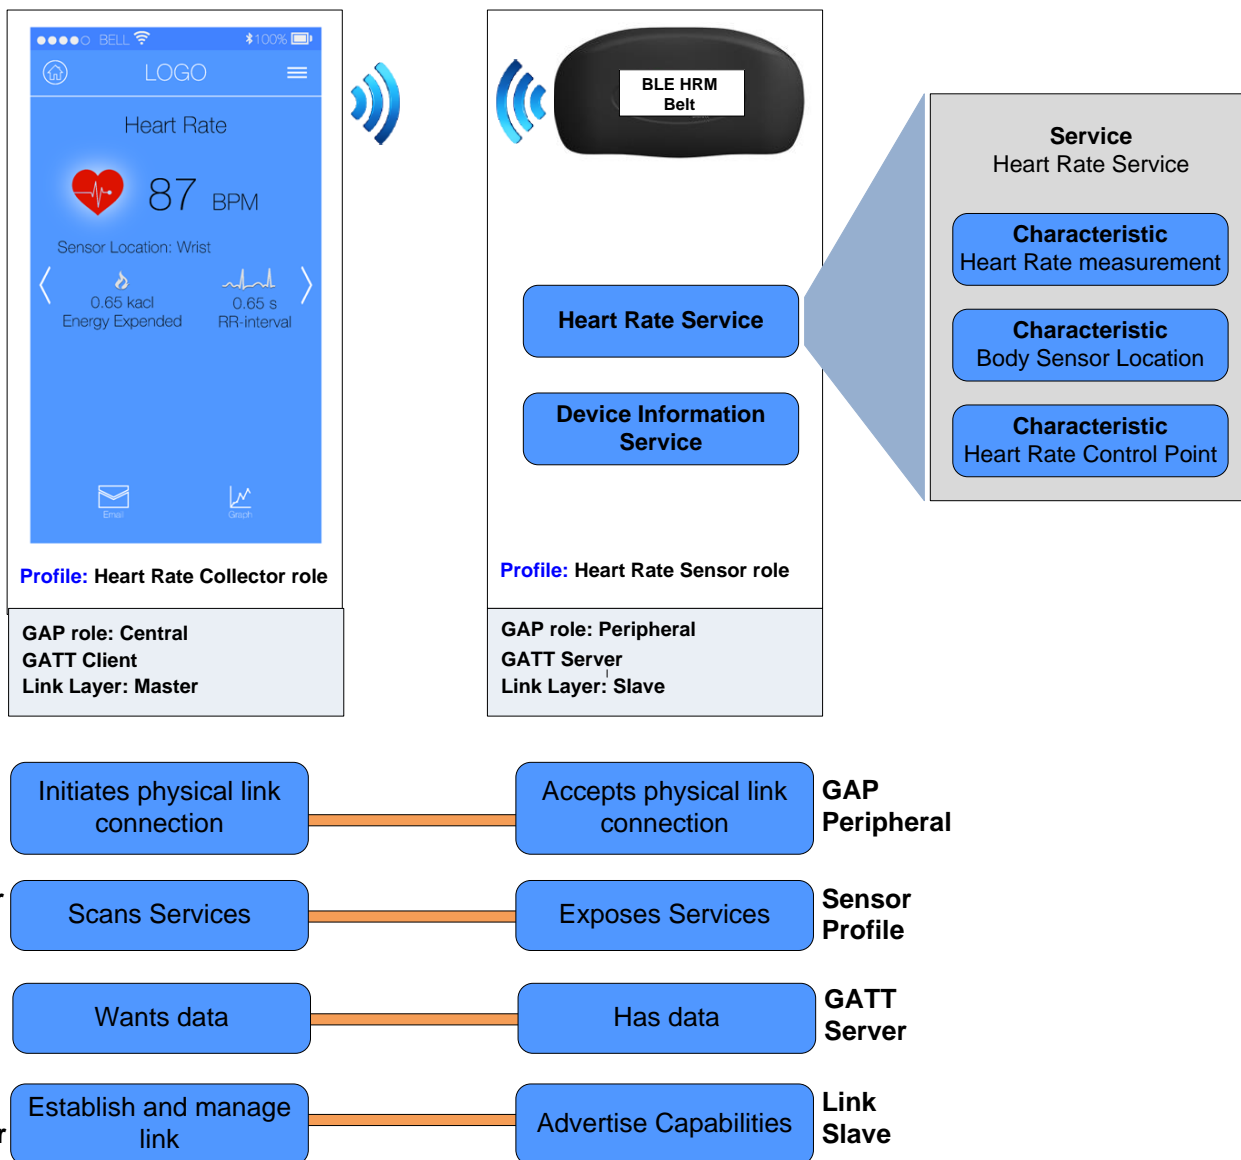

The Heart Rate Profile contains a Heart Rate Service and a Device Information Service. Within the Heart Rate Service, there are three Characteristics, each containing different information. The device in the diagram is configured as a Sensor role, meaning that in the context of the Heart Rate Profile, the device is a GAP Peripheral and a GATT Server. These concepts are explained in the [BLE Stack](#) description.

The Profile layer is generated by PSoC Creator using the parameter configurations specified in the GUI. The Profile implements the Profile specific attribute database and APIs required for the application. You can choose to configure the standard SIG adopted Profile and generate a

design or define a Custom Profile required by an application. The GUI also allows import/export of a Profile design in XML format for Profile design reuse.


### **Hardware Abstraction Layer (HAL)**

The HAL implements the interface between the BLE stack and the underlying hardware. This layer is meant for the stack only and is not advisable to modify it.

# Functional Description

## Operation Flow

A typical application code consists of three separate stages: Initialization, Normal operation, and Low power operation.

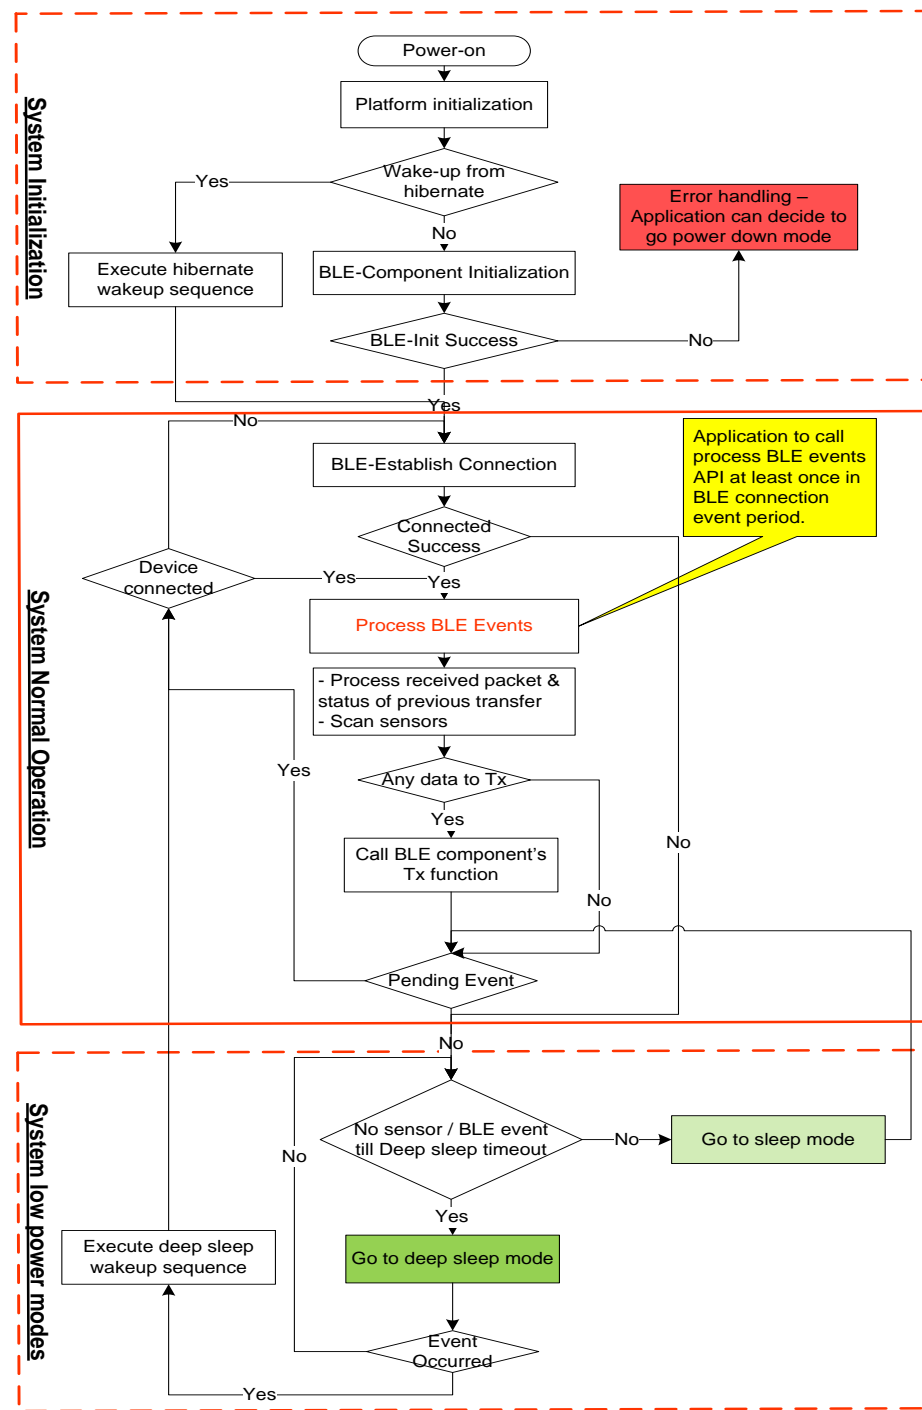

Once the Component is initialized, it enters normal operation and periodically enters various degrees of low power operation to conserve power. Hence initialization should only happen at system power-up, and the Component should operate between normal mode and low power mode afterwards.

## System Initialization

The initialization stage happens at system power-up or when waking from system hibernation. This stage sets up the platform and the Component parameters. The application code should also start the Component and set up the callback functions for the event callbacks that will happen in the other modes of operation.

## System Normal Operation

Upon successful initialization of the BLE Component or hibernate wakeup sequence, the Component enters normal mode. Normal operation first establishes a BLE connection if it is not already connected. It should then process all pending BLE events by checking the stack status. This is accomplished by calling `CyBle_ProcessEvents()`. When all events have been processed, it can transmit any data that need to be communicated and enters low power operation unless there is another pending event. In such a case, it should execute the normal operation flow again. Processing of BLE events should be performed at least once in a BLE connection event period. The BLE connection event is configured by application using the customizer.

## System Low power Operation

When there are no pending interrupts in Normal operation, the Component should be placed in low power mode. It should first enter sleep mode. After a certain application defined timeout, you may place the Component in Deep Sleep Mode. If an event happens at any time in low power mode, it should re-enter normal operation.

**Note** The MCU and BLE Sub-System (BLESS) have separate power modes and are able to go to different power modes independent of each other. The check marks in the following table show the possible combination of power modes of MCU and BLESS.

BLESS Power Modes	PSoC 4200-BL, PSoC 4200-BL MCUs Power Modes				
	Active	Sleep	Deep Sleep	Hibernate	Off
Active (idle/Tx/Rx)	✓	✓			
Sleep	✓	✓			
Deep Sleep (ECO off)	✓	✓	✓		
Off				✓	✓

## Callback Functions

The BLE Component requires that you define a callback function for handling BLE stack events. This is passed as a parameter to the `CyBle_Start()` API. The callback function is of type `CYBLE_CALLBACK_T`, as defined by:

```
void (* CYBLE_CALLBACK_T)(uint32 eventCode, void *eventParam);
```

- `eventCode`: The stack event code
- `eventParam` : Stack event parameters

The callback function should then evaluate the `eventCode` (and `eventParam` for certain events) and provide stack event-specific actions. Hence the events are used to build your application specific state machine for general events such as advertisement, scan, connection and timeout. Refer to the [BLE Common Events](#) section for the BLE stack events.

Similarly, you will need to provide a callback function for each Service that you wish to use. This function is also of type `CYBLE_CALLBACK_T` and is passed as a parameter to the Service-specific callback registration function. The callback function is used to evaluate the Service-specific events and to take appropriate action as defined by your application. Then a Service specific state machine can be built using these events. Refer to the [BLE Service-Specific Events](#) section for the BLE Service-specific events.

## Device Bonding

The BLE Component will store the link key of a connection after pairing with the remote device. If a connection is lost and re-established, the devices will use the previously stored key for the connection.

The BLE stack will update the bonding data in RAM while the devices are connected. If the bonding data is to be retained during shutdown, the application can use `CyBle_StoreBondingData()` API to write the bonding data from RAM to the dedicated Flash location, as defined by the Component. Refer to the `BLE_HID_Keyboard` example project for usage details.

### Notes

- For BLE devices with 128 K of Flash memory, the Flash write modifies the IMO of the chip to 48 MHz temporarily during the write cycle. Therefore, you should only perform the bonding data Flash storage while the BLE devices are disconnected, because the change in IMO will disrupt the communication. Likewise, you should either temporarily halt all peripherals running off of the IMO or compensate for the brief frequency change during the Flash write cycle.
- If BLE device with 128 K of Flash memory, is configured to run at 48 MHz, then the IMO does not change and does not affect other peripherals. However, the Flash write is a blocking call and may disrupt the BLE communication. Therefore, it is advisable to perform the Flash write while the devices are disconnected.



## LFCLK configuration

The LFCLK configuration as set in the **Clocks** tab of the Design-Wide Resources (<project>.cydwr) file affects the BLE Component's ability to operate in Deep Sleep Mode. If the WCO is chosen, then the Component Deep Sleep Mode is available for use. However, if the ILO is chosen, then the Component cannot enter Deep Sleep.

**Note** The LFCLK is used in the BLE Component only during Deep Sleep Mode and hence the ILO inaccuracy does not affect the BLE communication.

## Unsupported Features

The BLE Component stack does not support the following optional Bluetooth v4.1 protocol features, as listed in Vol 6, Part B, section 4.6 of the specification:

- Connection Parameters Request Procedure (Vol 6, Part B, section 4.6.2)
- Extended Reject Indication (Vol 6, Part B, section 4.6.3)
- Slave-initiated Features Exchange (Vol 6, Part B, section 4.6.4)

## Input/Output Connections


This Component does not require hardware terminals. All the hardware connections are direct and dedicated to specific pins in the underlying BLE hardware.

## Component Parameters

Drag a BLE Component onto your design and double-click it to open the Configure dialog. This dialog has the following tabs with different parameters.

### General Tab

The **General** tab allows general configuration of the BLE Component. This tab contains tools to load and save configurations, three main areas for the type of configuration, and an option to use low power mode.

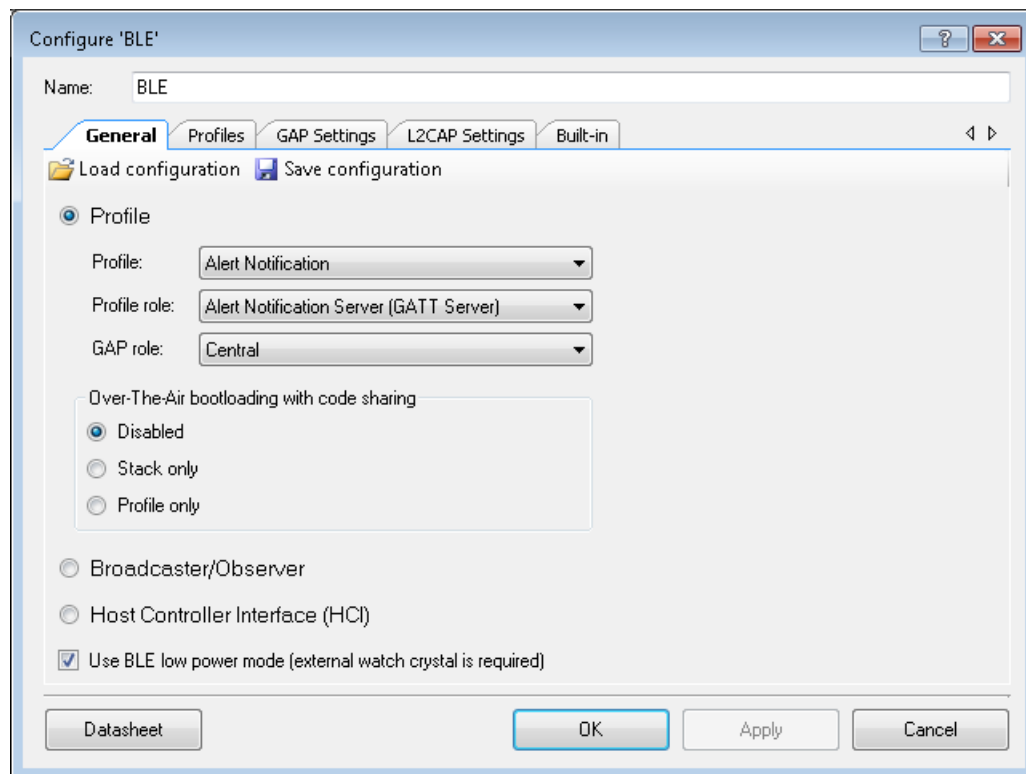

### Load Configuration/Save Configuration

Use the **Load Configuration** button to load the previously saved xml Component configuration; use the Save Configuration button to save the current configuration for use in other designs. It is possible to import and export the customizer configuration in xml format.

### Mode Selection

On the main part of this tab, there are three options to select a mode:

- [Profile](#)
- [Broadcaster/Observer](#)



## ■ Host Controller Interface


### Use BLE low power mode

There is also a parameter that identifies if the low power mode support is required for the BLE component. Default: true.

When this parameter is set, WCO must be selected as the LFCLK source in the Design-Wide Resources Clock Editor. This configuration is a requirement if you intend to use the Component in the low power mode.

### General Tab – Profile

The Profile mode is used to select the target Profile, Profile role, and GAP role, as well as Over-The-Air (OTA) Bootloading options.

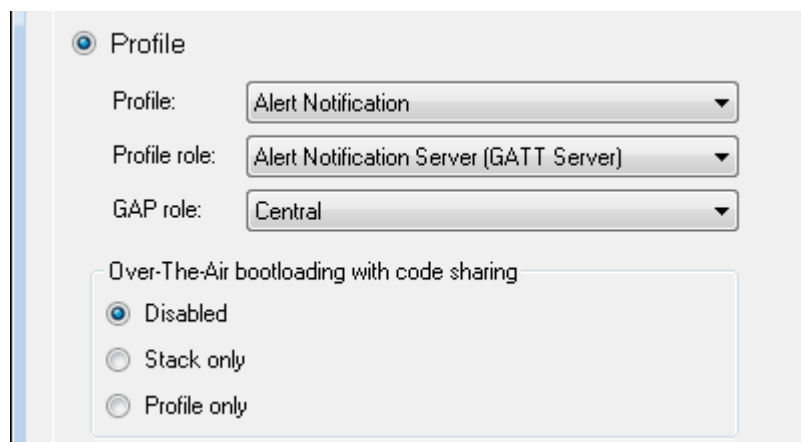

### Profile

The **Profile** option is used to choose the target Profile from a list of supported Profiles. See [Profile, Service, and Characteristic](#). The following Profiles are available for selection:

#### *Alert Notification*

This Profile enables a GATT Client device to receive different types of alerts and event information, as well as information on the count of new alerts and unread items, which exist in the GATT Server device.

- **Alert Notification Server** Profile role – Specified as a GATT Server. Requires the following Service: **Alert Notification Service**.
  - Central GAP role
  - Peripheral and Central GAP role



- **Alert Notification Client** Profile role – Specified as a GATT Client.

- ☐ Peripheral GAP role
- ☐ Peripheral and Central GAP role

### *Blood Pressure*

This Profile enables a device to connect and interact with a Blood Pressure Sensor device for use in consumer and professional health care applications.

- **Blood Pressure Sensor** Profile role – Specified as a GATT Server. Requires the following Services: **Blood Pressure Service**, **Device Information Service**.

- ☐ Peripheral GAP role

- **Blood Pressure Collector** Profile role – Specified as a GATT Client. Requires support of the following Services: **Blood Pressure Service**. Support of **Device Information Service** is optional.

- ☐ Central GAP role

### *Continuous Glucose Monitoring*

This Profile enables a device to connect and interact with a Continuous Glucose Monitoring Sensor device for use in consumer healthcare applications.

- **Continuous Glucose Monitoring Sensor** Profile role – Specified as a GATT Server. Requires the following Services: **Continuous Glucose Monitoring Service**, **Device Information Service**. Optionally may include **Bond Management Service**.

- ☐ Peripheral GAP role

- **Collector** Profile role – Specified as a GATT Client. Requires support of the following Services: **Continuous Glucose Monitoring Service**. Support of **Bond Management Service** and **Device Information Service** is optional.

- ☐ Central GAP role



### *Cycling Power*

This Profile enables a Collector device to connect and interact with a Cycling Power Sensor for use in sports and fitness applications.

- **Cycling Power Sensor** Profile role – Specified as a GATT Server. Requires the following Service: **Cycling Power Service**. Optionally may include **Device Information Service** and **Battery Service**.
  - Peripheral GAP role
- **Cycling Power Broadcaster** Profile role. Requires the following Service: **Cycling Power Service**.
  - Broadcaster GAP role
- **Cycling Power Observer** Profile role. Can only talk to a device with the **Cycling Power Broadcaster** role. Requires support of the following Service: **Cycling Power Service**.
  - Observer GAP role
- **Collector** Profile role – Specified as a GATT Client. Requires support of the following Service: **Cycling Power Service**. Support of **Device Information Service** and **Battery Service** is optional.
  - Central GAP role

### *Cycling Speed and Cadence*

This Profile enables a Collector device to connect and interact with a Cycling Speed and Cadence Sensor for use in sports and fitness applications.

- **Cycling Speed and Cadence Sensor** Profile role – Specified as a GATT Server. Requires the following Service: **Cycling Speed and Cadence Service**. Optionally may include **Device Information Service**.
  - Peripheral GAP role
- **Collector** Profile role – Specified as a GATT Client. Requires support of the following Service: **Cycling Speed and Cadence Service**. Support of **Device Information Service** is optional.
  - Central GAP role



### *Environmental Sensing Profile*

This Profile enables a Collector device to connect and interact with an Environmental Sensor for use in outdoor activity applications.

- **Environmental Sensor** Profile role – Specified as a GATT Server. Requires the following Service: **Environmental Sensing Service**. Optionally may include **Device Information Service** and **Battery Service**.
  - Peripheral GAP role
- **Collector** Profile role – Specified as a GATT Client. Requires support of the following Service: **Environmental Sensing Service**. Support of **Device Information Service** and **Battery Service** is optional.
  - Central GAP role

### *Find Me*

The Find Me Profile defines the behavior when a button is pressed on one device to cause an alerting signal on a peer device.

- **Find Me Target** Profile role – Specified as a GATT Server. Requires the following Service: **Immediate Alert Service**.
  - Peripheral GAP role
  - Central GAP role
  - Peripheral and Central GAP roles
- **Find Me Locator** Profile role – Specified as a GATT Client. Requires support of the following Service: **Immediate Alert Service**.
  - Peripheral GAP role
  - Central GAP role
  - Peripheral and Central GAP roles

### *Glucose*

This Profile enables a device to connect and interact with a Glucose Sensor for use in consumer healthcare applications.

- **Glucose Sensor** Profile role – Specified as a GATT Server. Requires the following Services: **Glucose Service**, **Device Information Service**.
  - Peripheral GAP role



- **Collector** Profile role – Specified as a GATT Client. Requires support of the following Service: **Glucose Service**. Support of **Device Information Service** is optional.
  - Central GAP role

### *Health Thermometer*

This Profile enables a Collector device to connect and interact with a Thermometer sensor for use in healthcare applications.

- **Thermometer** Profile role – Specified as a GATT Server. Requires the following Services: **Health Thermometer Service**, **Device Information Service**.
  - Peripheral GAP role
- **Collector** Profile role – Specified as a GATT Client. Requires support of the following Service: **Health Thermometer Service**. Support of **Device Information Service** is optional.
  - Central GAP role

### *Heart Rate*

This Profile enables a Collector device to connect and interact with a Heart Rate Sensor for use in fitness applications.

- **Heart Rate Sensor** Profile role – Specified as a GATT Server. Requires the following Services: **Heart Rate Service**, **Device Information Service**.
  - Peripheral GAP role
- **Collector** Profile role – Specified as a GATT Client. Requires support of the following Service: **Heart Rate Service**. Support of **Device Information Service** is optional.
  - Central GAP role

### *HID over GATT*

This Profile defines how a device with BLE wireless communications can support HID Services over the BLE protocol stack using the Generic Attribute Profile.

- **HID Device** Profile role – Specified as a GATT Server. Requires the following Services: **HID Service**, **Battery Service**, and **Device Information Service**. Optionally may include **Scan Parameters Service** as part of the **Scan Server** role of the **Scan Parameters**



Profile. **HID Device** supports multiple instances of **HID Service** and **Battery Service** and may include any other optional Services.

- ☐ Peripheral GAP role
- **Boot Host** Profile role – Specified as a GATT Client. Requires support of the following Service: **HID Service**. Support of **Battery Service** and **Device Information Service** is optional.
  - ☐ Central GAP role
- **Report Host** Profile role – Specified as a GATT Client. Requires support of the following Services: **HID Service**, **Battery Service**, **Device Information Service**. Support of **Scan Client** role of the **Scan Parameters** is optional.
  - ☐ Central GAP role
- **Report and Boot Host** Profile role – Specified as a GATT Client. Requires support of the following Services: **HID Service**, **Battery Service**, **Device Information Service**. Support of **Scan Client** role of the **Scan Parameters** is optional.
  - ☐ Central GAP role

### *Internet Protocol Support*

This Profile provides the support of exchanging IPv6 packets between devices over the Bluetooth Low Energy transport. The IPSP defines two roles – Node role and Router role. A device may support both Node role and Router role. A device supporting the Node role is likely to be a sensor or actuator. A device supporting the Router role is likely to be an Access Point (such as home router, mobile phone, or similar).

- **Node** Profile role – Specified as a GATT Server. Requires the following Service: **Internet Protocol Support Service**.
  - ☐ Peripheral GAP role
  - ☐ Peripheral and Central GAP role
- **Router** Profile role – Specified as a GATT Client. Requires support of the following Services: **Internet Protocol Support Service**.
  - ☐ Central GAP role
  - ☐ Peripheral and Central GAP role



### *Location and Navigation*

This Profile enables devices to communicate with a Location and Navigation Sensor for use in outdoor activity applications.

- **Location and Navigation Sensor** Profile role – Specified as a GATT Server. Requires the following Service: **Location and Navigation Service**. Optionally may include **Device Information Service** and **Battery Service**.
  - Peripheral GAP role
- **Collector** Profile role – Specified as a GATT Client. Requires support of the following Services: **Location and Navigation Service**. Support of **Device Information Service** and **Battery Service** is optional.
  - Central GAP role

### *Phone Alert Status*

This Profile enables a device to alert its user about the alert status of a phone connected to the device.

- **Phone Alert Server** Profile role – Specified as a GATT Server. Requires the following Services: **Phone Alert Status Service**.
  - Central GAP role
  - Peripheral and Central GAP role
- **Phone Alert Client** Profile role – Specified as a GATT Client. Requires support of the following Service: **Phone Alert Service**.
  - Peripheral GAP role
  - Peripheral and Central GAP role

### *Proximity*

The Proximity Profile enables proximity monitoring between two devices.

- **Proximity Reporter** Profile role – Specified as a GATT Server. Requires the following Service: **Link Loss Service**. Optionally may include **Immediate Alert Service** and **Tx Power Service** if both are used. Using only one of the optional Services is not allowed.
  - Peripheral GAP role
  - Central GAP role

- **Proximity Monitor** Profile role – Specified as a GATT Client. Requires support of the following Services: **Link Loss Service**. Support of **Immediate Alert Service** and **Tx Power Service** is optional. Same restrictions apply as to **Proximity Reporter**.
  - Central GAP role
  - Peripheral GAP role
  - Peripheral and Central GAP role

### *Running Speed and Cadence*

This Profile enables a Collector device to connect and interact with a Running Speed and Cadence Sensor for use in sports and fitness applications.

- **Running Speed and Cadence Sensor** Profile role – Specified as a GATT Server. Requires the following Service: **Running Speed and Cadence Service**. Optionally may include **Device Information Service**.
  - Peripheral GAP role
- **Collector** Profile role – Specified as a GATT Client. Requires support of the following Services: **Running Speed and Cadence Service**. Support of **Device Information Service** is optional.
  - Central GAP role

### *Scan Parameters*

This Profile defines how a Scan Client device with BLE wireless communications can write its scanning behavior to a Scan Server, and how a Scan Server can request updates of the Scan Client scanning behavior.

- **Scan Server** Profile role – Specified as a GATT Server. Requires the following Service: **Scan Parameters Service**.
  - Peripheral GAP role
- **Scan Client** Profile role – Specified as a GATT Client. Required support of the following Service: **Scan Parameters Service**.
  - Central GAP role



## Time

The Time Profile enables the device to get the date, time, time zone, and DST information and control the functions related to time.

- **Time Server** Profile role – Specified as a GATT Server. Requires the following Service: **Current Time Service**. Optionally may include **Next DST Change Service** and **Reference Time Update Service**.
  - Central GAP role
  - Peripheral and Central GAP role
- **Time Client** Profile role – Specified as a GATT Client. Requires support of the following Service: **Current Time Service**. Support of **Next DST Change Service** and **Reference Time Update Service** is optional.
  - Peripheral GAP role
  - Peripheral and Central GAP role

## Weight Scale

The Weight Scale Profile is used to enable a data collection device to obtain data from a Weight Scale that exposes the Weight Scale Service.

- **Weight Scale** Profile role – Specified as a GATT Server, and may be also a GATT Client. Requires the following Services: **Weight Scale Service** and **Device Information Service**.  
Optionally may include: **User Data Service**, **Body Composition Service**, **Battery Service** and **Current Time Service**.
  - Peripheral GAP role
- **Collector** Profile role – Specified as a GATT Client, and may be also a GATT Service. Required support of the following Service: **Weight Scale Service** and **Device Information Service**.  
Support of **User Data Service**, **Body Composition Service**, **Battery Service** and **Current Time Service** is optional.
  - Central GAP role



### *Wireless Power Transfer*

The Wireless Power Transfer Profile enables communication between Power Receiver Unit and Power Transmitter Unit in the Wireless Power Transfer systems.

- **Power Receiver Unit** Profile role – Specified as a GATT Server. Requires the following Service: **Wireless Power Transfer**.
  - Peripheral GAP role
- **Power Transmitter Unit** Profile role – Specified as a GATT Client. Requires support of the following Service: **Wireless Power Transfer**.
  - Central GAP role

### *Custom*

Used to create a custom Profile. This Profile mode allows you to add in a **Custom Service** and gives control over the Service types. Custom Services cannot be used in stand-alone mode; they need to be used in a Profile. For example, the Device Information Service is used in the Heart Rate Profile. It can be used in a custom Profile, or it can be added to any of existing Profiles.

**Note** The Apple Notification Center Service is not included into any Bluetooth SIG adopted Profiles, so it can be used only within custom Profile.

- **Server (GATT Server)** Profile role
  - Peripheral GAP role
  - Central GAP role
  - Peripheral and Central GAP roles
- **Client (GATT Client)** Profile role
  - Peripheral GAP role
  - Central GAP role
  - Peripheral and Central GAP roles
- **Client and Server (GATT Client and Server)** Profile role
  - Peripheral GAP role
  - Central GAP role
  - Peripheral and Central GAP roles



### *Bootloader Profile*

The component also has support for a Bootloader Profile and Bootloader Service, which allows a Bootloader component to update the existing firmware on the Cypress BLE device. The Bootloader Service uses the Bluetooth Low Energy interface as a communication interface. It can be added to any of the profiles if the design requires updating the firmware Over-the-Air (OTA).

The Bootloader Service is designed to be used with the Cypress Bootloader/Bootloadable components and therefore it uses the characteristic structure compatible with the Bootloader component command format.

### **Profile Role**

The **Profile role** parameter configuration depends on the chosen **Profile**, and the **Profile role** selection affects the **GAP role** parameter. These parameters affect the options available on the **Profiles** tab.

- **GATT Server** – Defines the role of the device that contains a specific data in a structured form. The device in this role is usually a sensor that gets the data. The data is structured in the GATT database. BLE Profiles can introduce their own names to identify GATT Server device (e.g. Find Me Profile uses “Find Me Target”). GATT Server devices usually utilize the GAP Peripheral role.
- **GATT Client** – Defines the role of the device that generates requests to the GATT Server device to fetch data. BLE Profiles can introduce their own names to identify GATT Client device (e.g. Find Me Profile uses “Find Me Locator”). GATT Client devices usually utilize the GAP Peripheral role.
- **Client and Server** – Defines the role of the device that concurrently can perform functionality of a GATT Client and Server Profile role. A device in this role should be configured for Peripheral and Central GAP role. For example, a peripheral device can act as a GATT Client and start discovering the iOS device's (acting as GATT Server) Services (Battery, Time and Apple Notification Central Service).

### **Gap Role**

The **GAP role** parameter can take the following values:

- **Peripheral** – Defines a device that advertises using connectable advertising packets and so becomes a slave once connected. Peripheral devices need a Central device, as the Central device initiates connections. Through the advertisement data, a Peripheral device can broadcast the general information about a device.
- **Central** – Defines a device that initiates connections to peripherals and will therefore become a master when connected. Peripheral devices need a Central device, as the Central device initiates connections.

- **Peripheral and Central** – In this role, the application can perform role reversal between Peripheral and Central roles at run time. For example, Bluetooth Smart watch (Peripheral) can connect to a smartphone (Central device). The same sports watch can then switch to the Central device mode to obtain data from other Peripheral devices such as a heart rate monitor and a blood pressure sensor.

## Over-The-Air bootloading with code sharing

This option is used in the over-the-air (OTA) implementation. It allows you to share the BLE component code between two component instances: one instance with profile-specific code and one with the stack. This parameter allows you to choose between the following options:

- **Disabled** – This option disables the OTA feature.
- **Stack only** – When this option is selected, the component represents only the stack portion of BLE along with a Bootloader Service. It is used to isolate the stack from the profiles. In this mode, the **Profile configuration** fields are disabled and the **Profiles** tab configuration is non-editable.


The **Stack only** mode is used in the BLE OTA Upgradable Stack Example.

**Note** This mode requires approximately 3024 additional bytes of heap memory. If there is not enough heap memory, the BLE component will not work. The Heap size property can be modified in the PSoC Creator Design-Wide Resources System Editor. See the PSoC Creator Help for more information.

- **Profile only** – This option makes the component only have the profile-specific code. Stack is excluded.
  - **Stack dependency** – This field allows you to associate a **Profiles only** project with the **Stack only** project. Each project configured in the **Stack only** mode during the build generates the .CYCSA file located in the *Generated\_Source* project folder. This file needs to be referenced from the **Profiles only** project using this field.

## General Tab – Broadcaster/Observer

The **Broadcaster/Observer** mode allows you to configure the device directly into one of the non-connectable GAP roles that does not require a Profile definition.

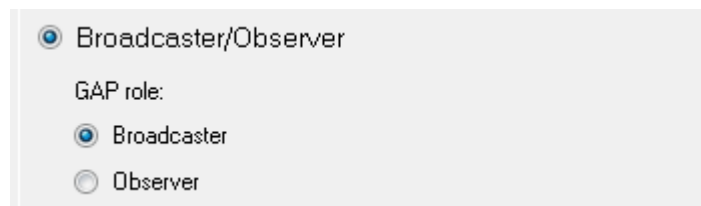

☒ Broadcaster/Observer  
 GAP role:  
☒ Broadcaster  
☐ Observer




Two GAP roles are available for selection:

- **Broadcaster** – Similar to the Peripheral role, the device sends advertising data. However Broadcaster does not support connections and can only send data but not receive them.
- **Observer** – When in this role, the device scans for Broadcasters and reports the received information to an application. The Observer role does not allow transmissions.

## General Tab – Host Controller Interface

Choosing this configuration places the component in HCI mode, which enables use of the device as a BLE controller. It also allows communication with a host stack using a Component embedded UART. When choosing this mode, the **Profiles** tab, **GAP Settings** tab, and **L2CAP Settings** tab become unavailable.

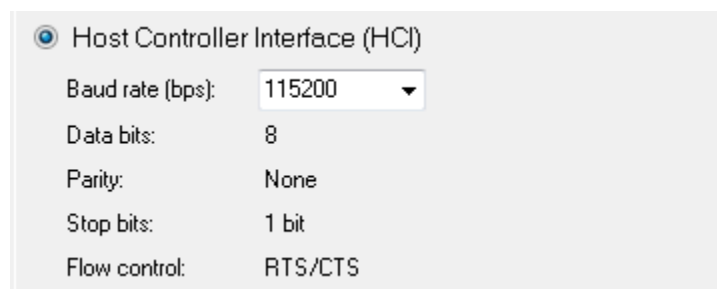

☒ Host Controller Interface (HCI)

Baud rate (bps): 115200 ▼

Data bits: 8

Parity: None

Stop bits: 1 bit


Flow control: RTS/CTS

The UART is a full-duplex 8 data bit, 1 stop bit, no parity with Flow control interface. All settings except Baud rate are fixed.

- Baud rate (bps) – Configures the UART baud rate.

## Profiles Tab

The **Profiles** tab is used to configure Profile-specific parameters. It is directly affected by the choice of **Profile** settings set in the **General** tab. The **Profiles** tab has 3 areas: toolbars, a Profiles tree, and a parameters configuration section.

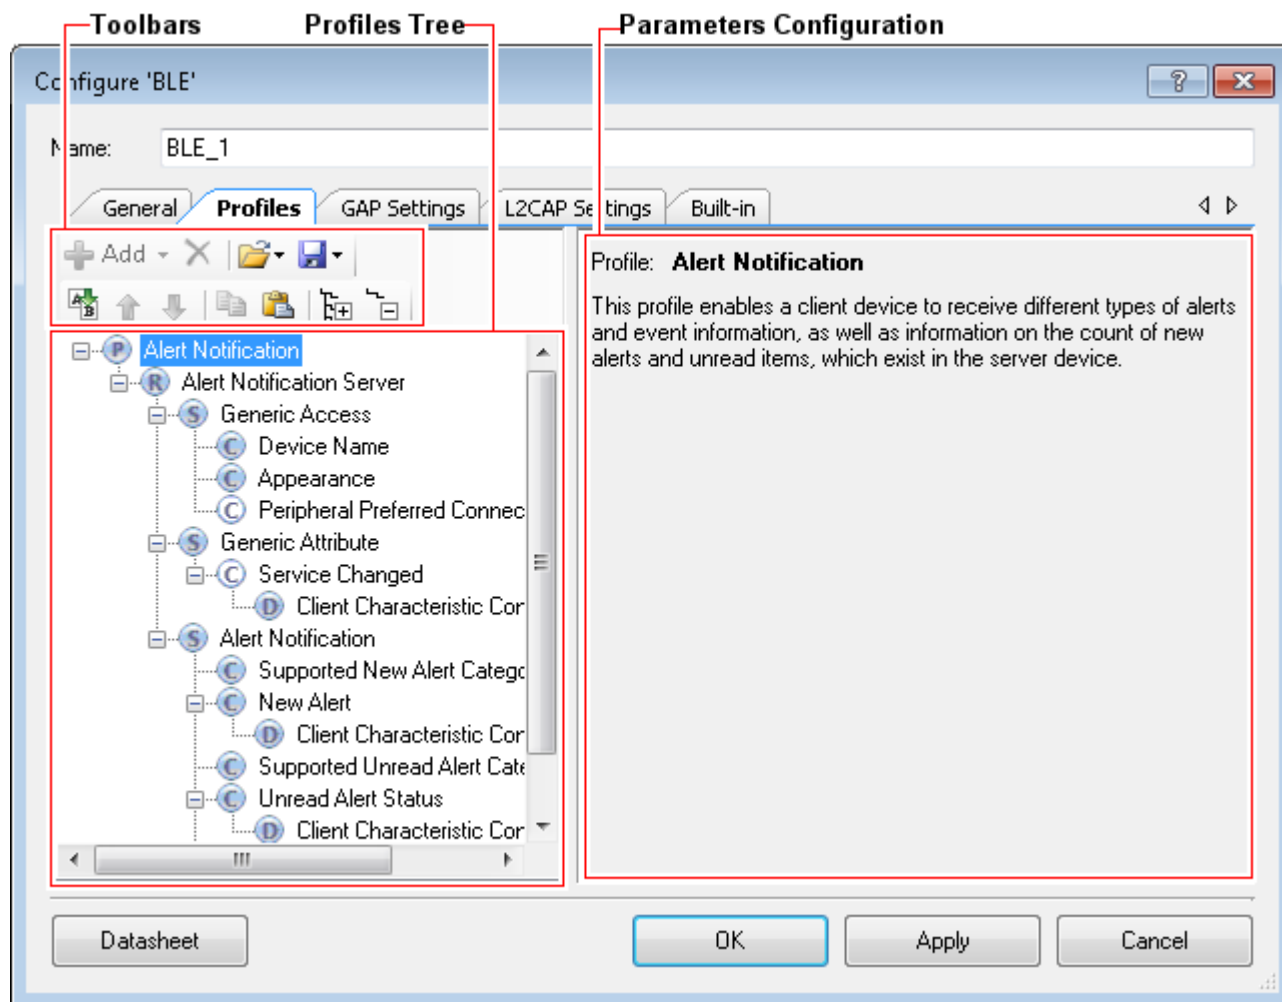

### Toolbars

The toolbars contain navigation options and a means to add or delete Services, Characteristics, and Descriptors.

- **Add Service** – This option is available when the **Profile Role** is highlighted in the Profile tree. It allows loading of Services in the selected **Profile Role**. In GATT server configuration, this option adds the selected service data to the server GATT database and enables service specific APIs. In GATT client configuration, the data structures for auto discovery of this service is created by the Component. If services that are not populated in the GUI are discovered during auto discovery, the Component ignores those service and

the application is responsible for discovering the details of such services. Refer to the [Profile](#) section for the available Services.

- **Add Characteristic** – This option is available when a Service is highlighted in the Profile tree. The Characteristic options are unique to each Service and are all loaded automatically when a Service is added to the design. The **Add Characteristic** button can be used to manually add new Characteristics to the Service. All Characteristics for the above mentioned Services plus Custom Characteristic are available for selection.
- **Add Descriptor** – This option is available when a Characteristic is highlighted in the Profile tree. Similar to the Characteristic options, Descriptor options are unique to a Characteristic and are all automatically loaded when a Characteristic is added to the design. For more information about BLE Characteristic Descriptors, refer to [developer.bluetooth.org](http://developer.bluetooth.org). (**Note** You should be a member of Bluetooth SIG to have full access to this site.)
- **Delete** – Deletes the selected Service, Characteristic, or Descriptor.
- **Load/Save** – Imports/Exports Profiles, Services, Characteristics, and Descriptors as shown in the tree. This functionality is independent of the **Load Configuration/Save Configuration** buttons on the **General** tab. That is, this allows you to customize this tree independent of the general settings. Each exported file type will have its own extension.  
  
The BLE component supports import and export of profiles in the file format of **Bluetooth Developer Studio** tool (Beta version). Use **Load BDS Profile** command to import the BDS profile and **Save Profile in BDS format** command to export the profile into the BDS file format.
- **Rename** – Renames the selected item in the Profiles tree.
- **Move Up/Down** – Moves the selected item up or down in the Profiles tree.
- **Copy/Paste** – Copies/pastes items in the Profiles tree.
- **Expand All** – Expands all items in the Profiles tree.
- **Collapse all Services** – Collapses all Services in the Profiles tree.

## Profiles Tree

The Profiles tree is used to view Services, Characteristics, and Descriptors in the selected Profile. By navigating through the tree, you can quickly add, delete, or modify Services, Characteristics, and Descriptors using the toolbar buttons or the context menu. You can configure the parameters by clicking an item on the tree. These parameters will show in the [Parameters Configuration](#) section.




## Parameters Configuration

The Parameters Configuration section allows you to configure a Service or Characteristic by selecting the type of Service or Characteristic in the tree.

### Notes

- All Profiles must have a **Generic Access Service** and a **Generic Attribute Service**.
- The Service Characteristics are configurable only when the device is a GATT Server.
- The security settings located in the **GAP Settings** tab are applied globally. In addition to this, you may manually configure the security of each Characteristic/Descriptor.
- Tree node icons may have two colors: blue and white. Blue color indicates that a node is mandatory and cannot be deleted. White color indicates that a node is optional.

### Generic Access Service

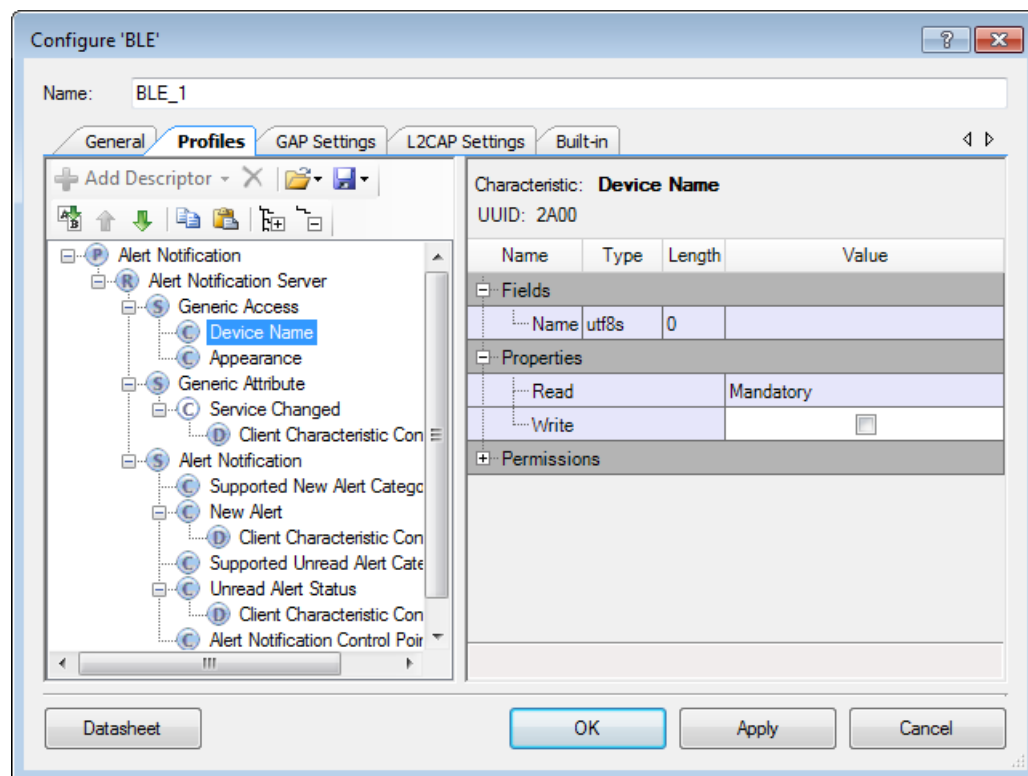

This Service is used to define the basic Bluetooth connection and discovery parameters. Click on the Characteristic under the **Generic Access Service** to view that particular Characteristic settings. You perform the actual Characteristics configuration in the **General** options located in the **GAP Settings** tab.

- **Device Name:** This is the name of your device. It has a read (without authentication/authorization) property associated with it by default. This parameter can be up to 248 bytes. The value comes from the **Device Name** field on the GAP Settings tab, under General.
- **Appearance:** The device's logo or appearance, which is a SIG defined 2-byte value. It has a read (without authentication/authorization) property associated with it by default. The value comes from the **Appearance** field on the GAP Settings tab, under General.
- **Peripheral Preferred Connection:** A device in the peripheral role can convey its preferred connection parameter to the peer device. This parameter is 8 bytes in total and is composed of the following sub-parameters.

**Note** This parameter is read-only and is derived from the **GAP Settings** tab, **Peripheral Preferred Connection Parameters** node. It will only be available when the device supports a Peripheral role. Refer to the [GAP Settings Tab Peripheral preferred connection parameters](#) section for more information.

- **Minimum Connection Interval:** This is a 2-byte parameter that denotes the minimum permissible connection time.
- **Maximum Connection Interval:** This is a 2-byte parameter that denotes the maximum permissible connection time.
- **Slave Latency:** This is a 2-byte value and defines the latency between consecutive connection events.
- **Connection Supervision Timeout Multiplier:** This is a 2-byte value that denotes the LE link supervision timeout interval. It defines the timeout duration for which an LE link needs to be sustained in case of no response from the peer device over the LE link.


**Note** The above parameters are used for connection parameters update procedure over L2CAP if a GAP central device does not use the peripheral preferred connection parameters. For example, iOS7 ignores peripheral preferred connection parameter Characteristics and establishes a connection with a default 30 ms connection interval. The peripheral device should request a connection parameter update by sending an L2CAP connection parameter update request at an appropriate time.

A typical peripheral implementation should initiate L2CAP connection parameter update procedure once any Characteristic is configured for periodic notification or indication.






## Generic Attribute Service

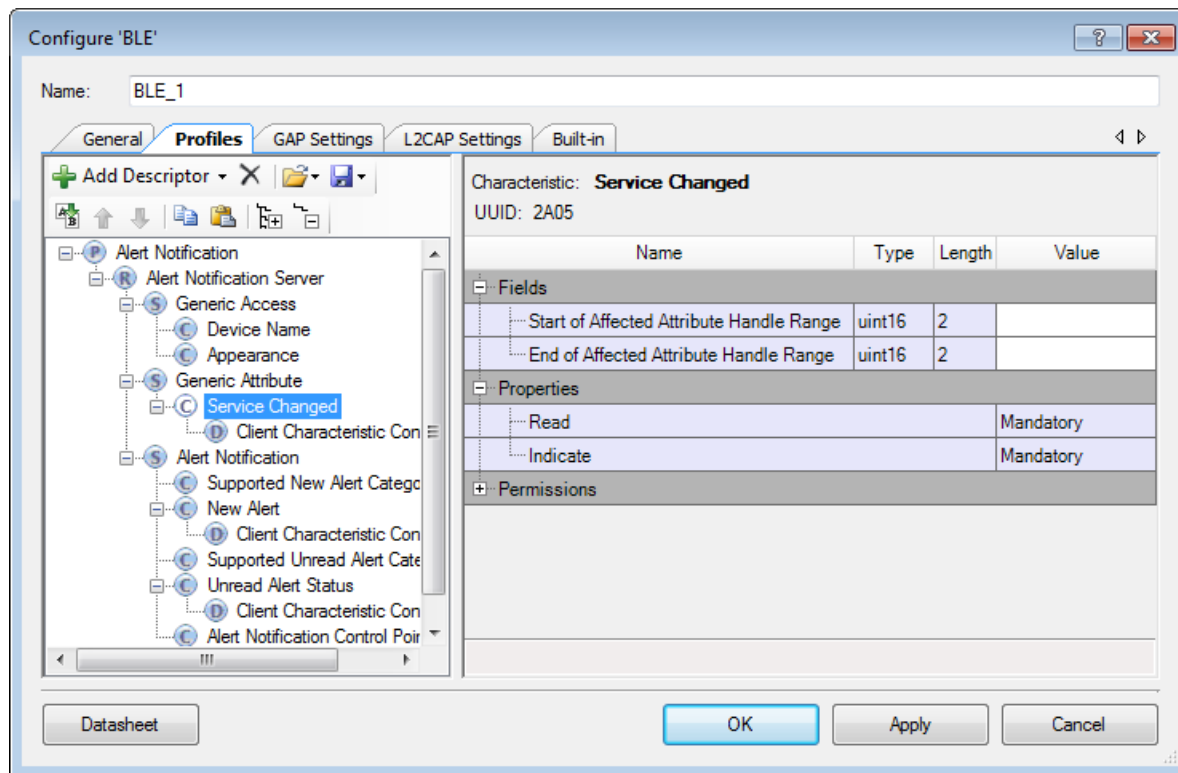

Click on the Characteristic under the Generic Attribute Service to configure that particular Characteristic.

- Service Changed** - This Characteristic is used to indicate to the connected devices that a Service has changed (i.e., added, removed, or modified). It is used to indicate to GATT Clients that have a trusted relationship (i.e., bond) with the GATT Server when GATT based Services have changed when they re-connect to the GATT Server. It is mandatory for the device in the GATT Client role. For the device in the GATT Server role, the Characteristic is mandatory if the GATT Server changes the supported Services in the device.

## Custom Service Configuration

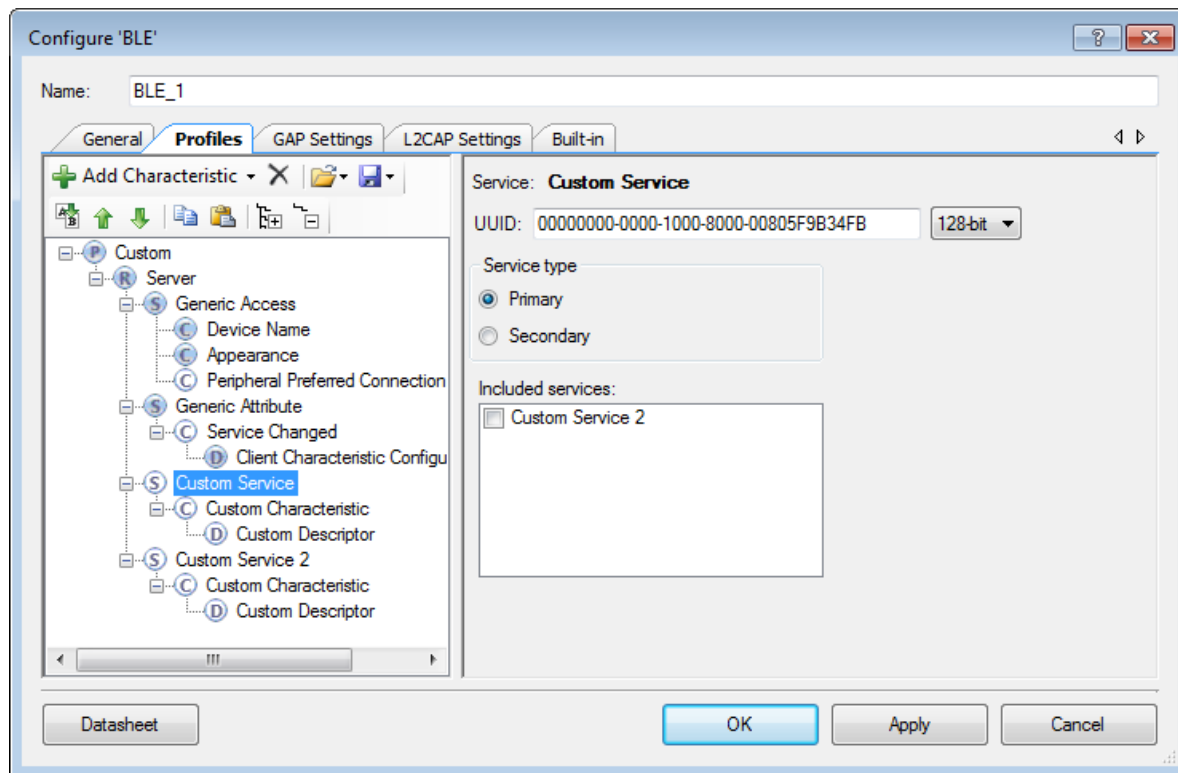

### UUID

A universally unique identifier of the service. This field is editable for Custom Services.

### Service type

- **Primary** – Represents the primary functionality of the device.
- **Secondary** – Represents an additional functionality of the device. The secondary service must be included in another service.

### Included services

- The list of the Services that can be included in the selected Service. Each Service may have one or more included Services. The included Services provide the additional functionality for the Service.

## Custom Characteristic Configuration

The screenshot shows the 'Configure BLE' dialog box with the 'Profiles' tab selected. The 'Name' field is set to 'BLE\_1'. The left sidebar shows a tree view of BLE profiles, with 'Custom' expanded and 'Custom Characteristic' selected. The main area displays the configuration for a 'Custom Characteristic'.

**Characteristic: Custom Characteristic**

UUID: 00000000-0000-1000-8000-00805F9B34FB (128-bit)

Name	Type	Length	Value
<b>Fields</b>			
New field	uint8	1	
<b>Properties</b>			
Broadcast			<input type="checkbox"/>
Read			<input checked="" type="checkbox"/>
Write			<input type="checkbox"/>
WriteWithoutResponse			<input type="checkbox"/>
Notify			<input type="checkbox"/>
Indicate			<input type="checkbox"/>
SignedWrite			<input type="checkbox"/>
ReliableWrite			<input type="checkbox"/>
WritableAuxiliaries			<input type="checkbox"/>
<b>Permissions</b>			
<input checked="" type="checkbox"/> Read			
Encryption		No encryption required	
Authentication		No authentication required	
Authorization		No authorization required	
<input type="checkbox"/> Write			

Buttons at the bottom: Datasheet, OK, Apply, Cancel.

### UUID

A universally unique identifier of the Characteristic. This field is editable for Custom Characteristics.

### Fields

Fields represent a Characteristic value. The default value for each field can be set in the **Value** column. In case of the Custom Characteristic, the fields are customizable.




## Properties

The Characteristic properties define how the Characteristic value can be used. Some properties (Broadcast, Notify, Indicate, Reliable Write, Writable Auxiliaries) require the presence of a corresponding Characteristic Descriptor. For details, please see [Bluetooth Core Specification Vol.3, part G \(GATT\), section 3.3.1.1 “Characteristic Properties”](#).

## Permissions

Characteristic permissions define how the Characteristic Value attribute can be accessed and the security level required for this access. Access permissions are set based on the Characteristic properties. Security permissions are automatically updated for all Characteristics when the **Security Mode** or **Security Level** parameters are changed on the GAP tab.

## Custom Descriptor Configuration

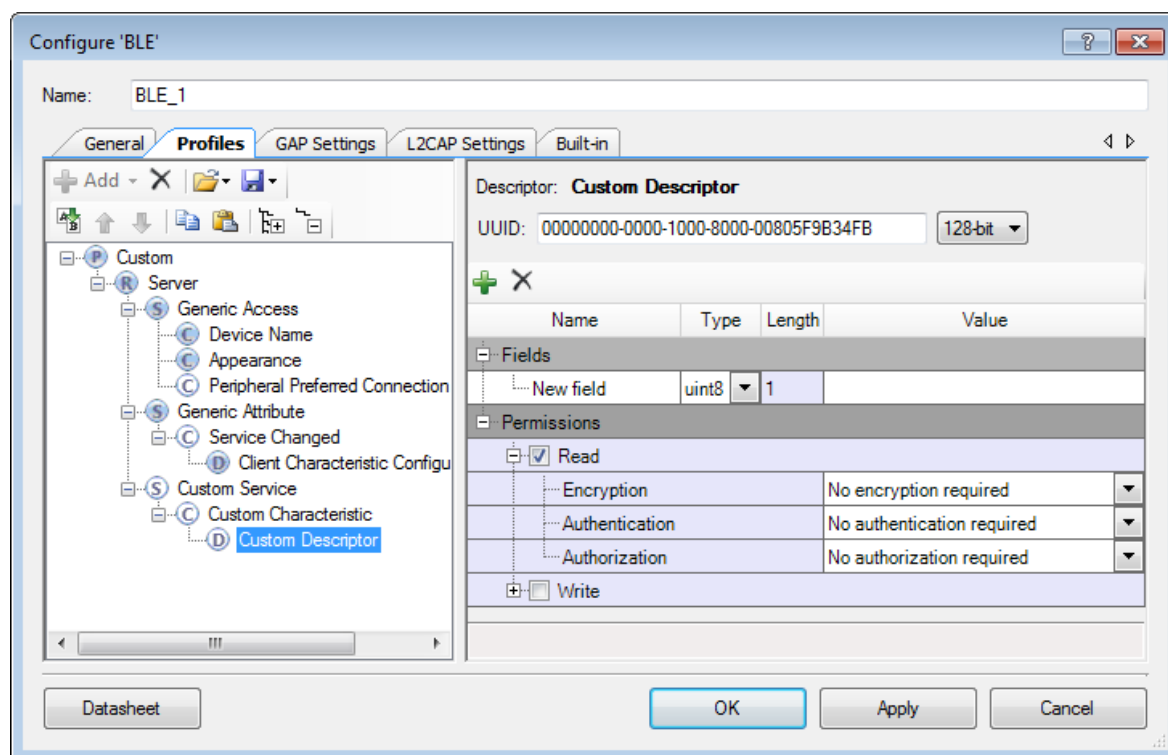

## UUID

A universally unique identifier of the Descriptor. This field is editable for Custom Descriptors.


## Fields

Fields represent a Descriptor value. The default value for each field can be set in the **Value** column. In case of the Custom Descriptor, the fields are customizable.

## Permissions

Descriptor permissions define how the Descriptor attribute can be accessed and the security level required for this access.

## Bootloader Service Configuration

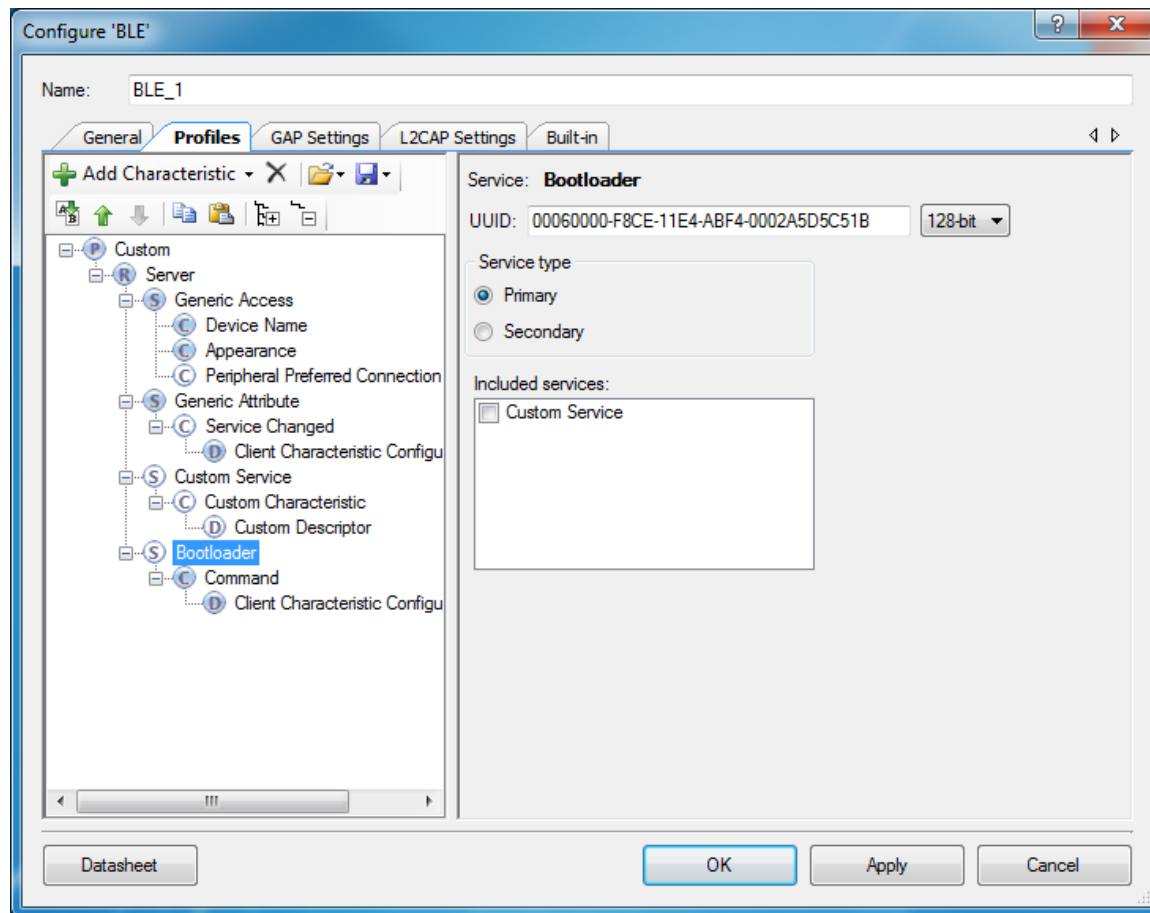

## UUID

A universally unique identifier of the service. The UUID is set to 00060000-F8CE-11E4-ABF4-0002A5D5C51B.

## Service type


- **Primary** – Represents the primary functionality of the device.
- **Secondary** – Represents an additional functionality of the device. The secondary service must be included in another service.



### Included services

- The list of the Services that can be included in the selected Service. Each Service may have one or more included Services. The included Services provide the additional functionality for the Service.

## Command Characteristic Configuration

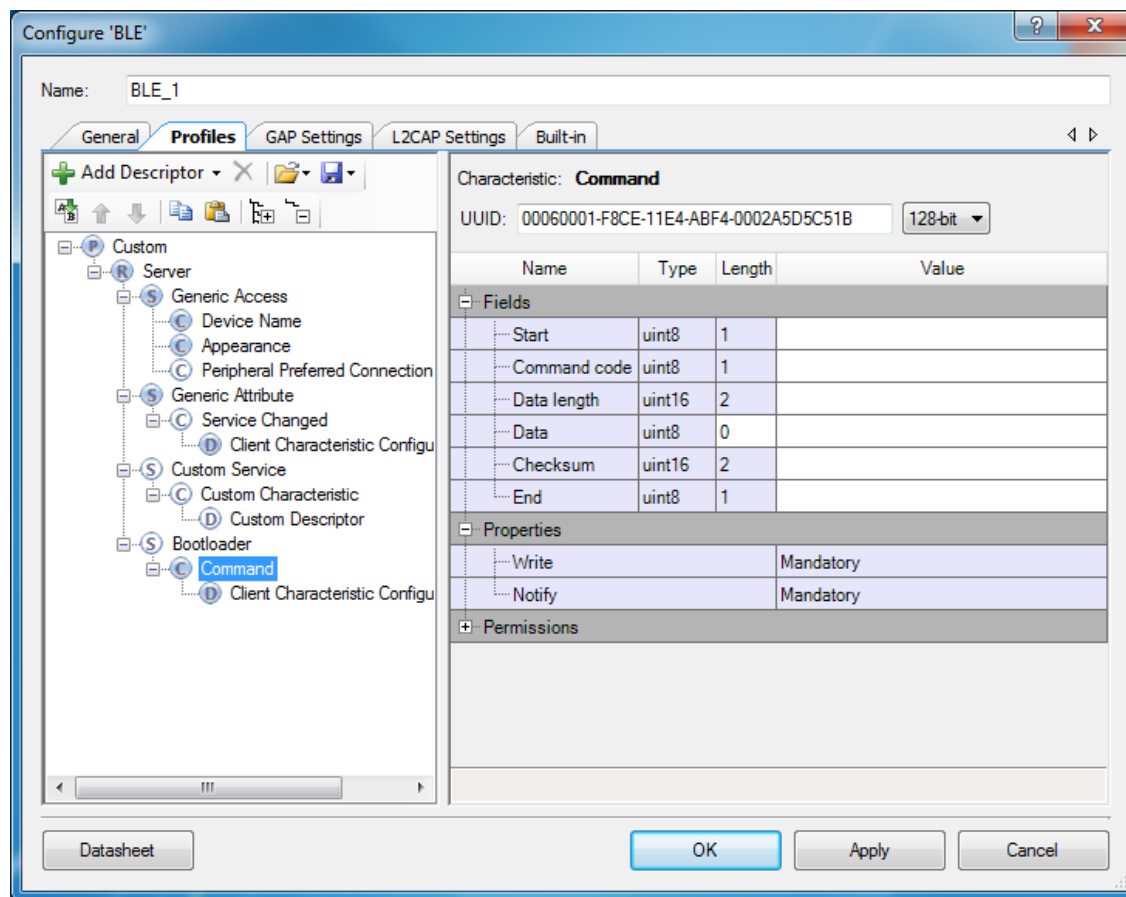

### UUID

A universally unique identifier of the Characteristic. The UUID is set to 00060001-F8CE-11E4-ABF4-0002A5D5C51B.

### Fields

Fields represent Command Characteristic values, such as the following.

- Start of packet – This constant defines the start of the bootloader packet.

- **Command** – This field defines the bootloader command. Since the bootloader commands are dependent on the revision of the Cypress Bootloader/Bootloadable component, refer to the Bootloader/ Bootloadable component datasheet for the list and description of bootloader commands.
- **Status Code** – This field defines the status code of the command.
- **Data Length** – This field defines the length of the bootloader command/response and should be set to the maximum command data length that can be used in the design. The maximum command data length should be obtained from the Bootloader component datasheet.

Per the specifics of the BLE protocol, if the command requires a response larger than 20 bytes, the attribute MTU size should be increased. To support the responses with data length set to 56 (response for **Get Metadata** command), the attribute MTU size should be set to 66. This can be seen from the following equation:

$$MTU\ size = Data\ Length + Bootloader\ command\ overhead + notification\ parameters\ overhead$$

Where:

- *Data Length* = the response data length
- *Bootloader command overhead* = 7
- *Notification parameters overhead* = 3

Not following this will result in the BLE component failing to send a response to the requested command.

- **Data** – This field defines the bootloader command data. The length of this field is specified by the Data Length field.
- **Checksum** – This field defines the checksum that is computed for the entire packet with the exception of the Checksum and End of Packet fields.
- **End of Packet** – This constant defines the end of the bootloader packet.

### Properties

The Command Characteristic can be Written or Notified.

### Permissions

Characteristic permissions define how the Characteristic Value attribute can be accessed, as well as the security level required for this access. Access permissions are set based on the Characteristic properties. Security permissions are automatically updated for all Characteristics when the **Security Mode** or **Security Level** parameters are changed on the **GAP Settings** tab.



## GAP Settings Tab


The GAP parameters define the general connection settings required when connecting Bluetooth devices. It contains various sections of parameters based on the item you select in the tree.

The **GAP Settings** tab displays the settings possible based on the GAP role selected in the **General** tab. This tab allows the default settings of the active tree item to be restored by using the **Restore Defaults** button.

The following sections show the different categories of parameters based on what item you select in the tree.

### GAP Settings Tab – General

This section contains general GAP parameters:

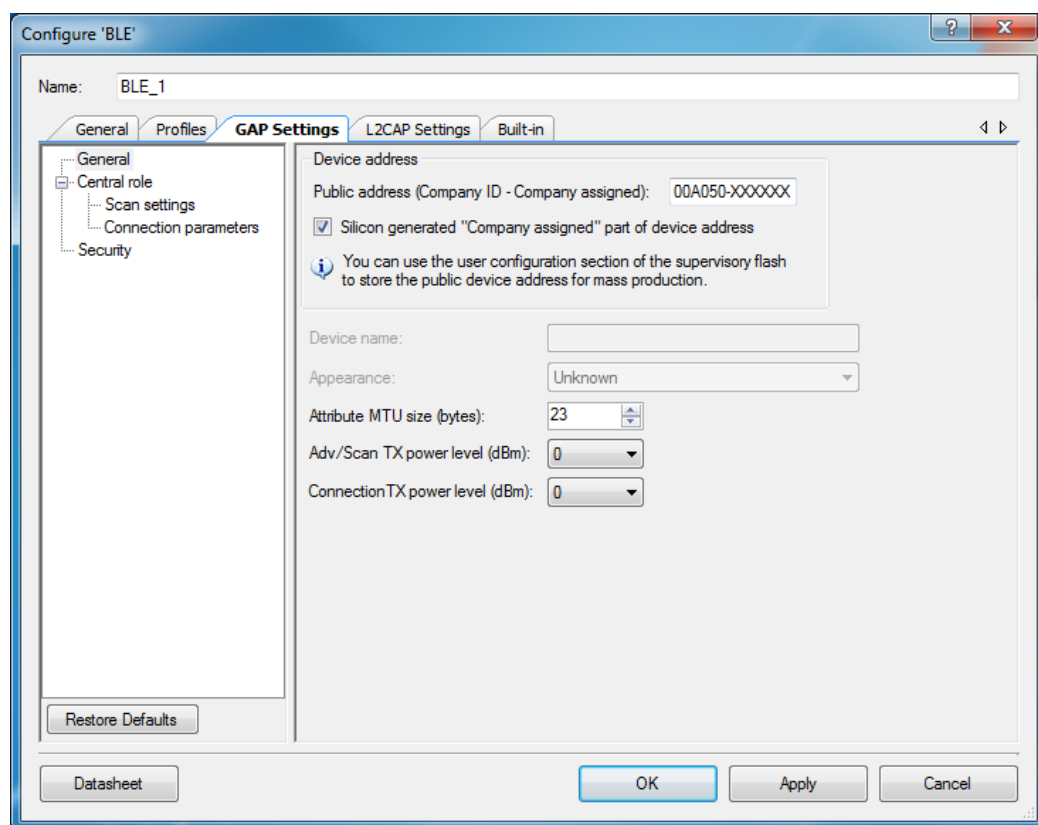

#### Public device address (Company ID – Company assigned)


This is a unique 48-bit Bluetooth public address that is used to identify the device. It is divided into the following two parts:

- **“Company ID”** part is contained in the 24 most significant bits. It is a 24-bit Organization Unique Identifier (OUI) address assigned by IEEE.



- **“Company assigned”** part is contained in the 24 least significant bits.

The address configured here is static and is designed to be used for development purposes only. This address is programmed into the device via the SWD interface. Normally this address must be programmed only once during mass production, and then never changed in-field. However, user flash can be reprogrammed in-field many times. During prototyping (FW design), this address can be programmed using MiniProg3. For that you can use the application installed in the “C:\Program Files (x86)\Cypress\Programmer\Example\Misc\PSoC4-BLE-SFLASH-Update\Executable” folder of PSoC Programmer. Enter device address structure of type **CYBLE\_GAP\_BD\_ADDR\_T** in the Row 0 line to store it in the SFLASH.

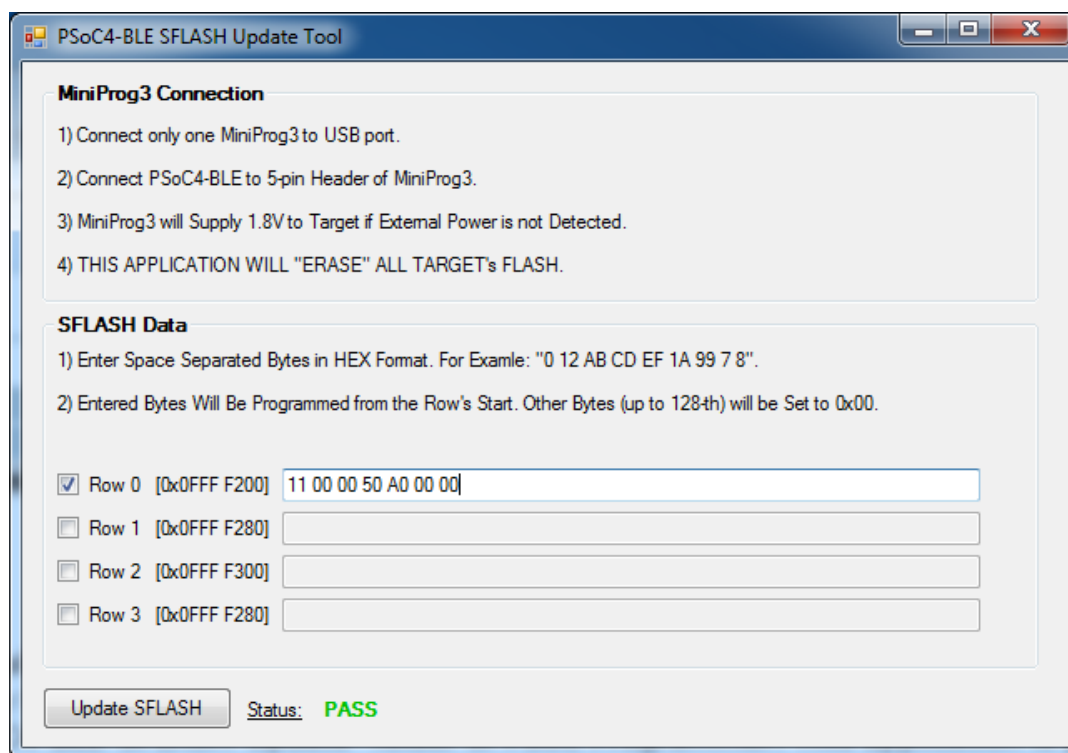

Row 1, Row 2 and Row 3 are not used by the component and available for user information storage. Note that row addresses and length (128 or 256 bytes) depend on the flash memory size of the selected device. Row 0 address is: 0x0FFF F200 for device with 128 KB Flash or 0x0FFF F400 for device with 256 KB Flash.

This application is provided in source code, and can be used as a reference example for implementation in production programmers.

#### *Silicon generated “Company assigned” part of device address*

When checked, the “Company assigned” part of the device address is generated using the wafer ID and X-Y die location on the wafer.



### *Device Name*

The device name to be displayed on the peer side. It has a read (without authentication/authorization) property associated with it by default. This parameter can be up to 248 bytes.

**Note** This parameter configures the **GAP Service Device name** Characteristic located in the **Profile Tree**. It is available for modification only when the device is a GATT Server.

### *Appearance*

The device's logo or appearance, which is a SIG defined 2-byte value. It has a read (without authentication/authorization) property associated with it by default.

**Note** This parameter configures the **GAP Service Appearance** Characteristic located in the **Profile Tree**. It is available for modification only when the device is a GATT Server.

### *Attribute MTU Size*

Maximum Transmission Unit size (Bytes) of an attribute to be used in the design. Valid range is from 23 to 512 bytes. This value is used to respond to an Exchange MTU request from the GATT Client.

### *Adv/Scan TX power level*

The initial transmitter power level (dBm) of the advertisement or scan channels upon startup. Default: 0 dBm. Possible values: -18 dBm, -12 dBm, -6 dBm, -3 dBm, -2 dBm, -1 dBm, 0 dBm, 3 dBm.


### *Connection TX power level*

The initial transmitter power level (dBm) of the connection channels upon startup. Default: 0 dBm. Possible values: -18 dBm, -12 dBm, -6 dBm, -3 dBm, -2 dBm, -1 dBm, 0 dBm, 3 dBm.

**Note** Due to hardware limitations, the 3 dBm value can be set only for both Adv/Scan TX power level and Connection TX power level simultaneously.

## GAP Settings Tab – Advertisement Settings

These parameters are available when the device is configured as "Peripheral," "Peripheral and Central," or "Broadcaster" **GAP role**.

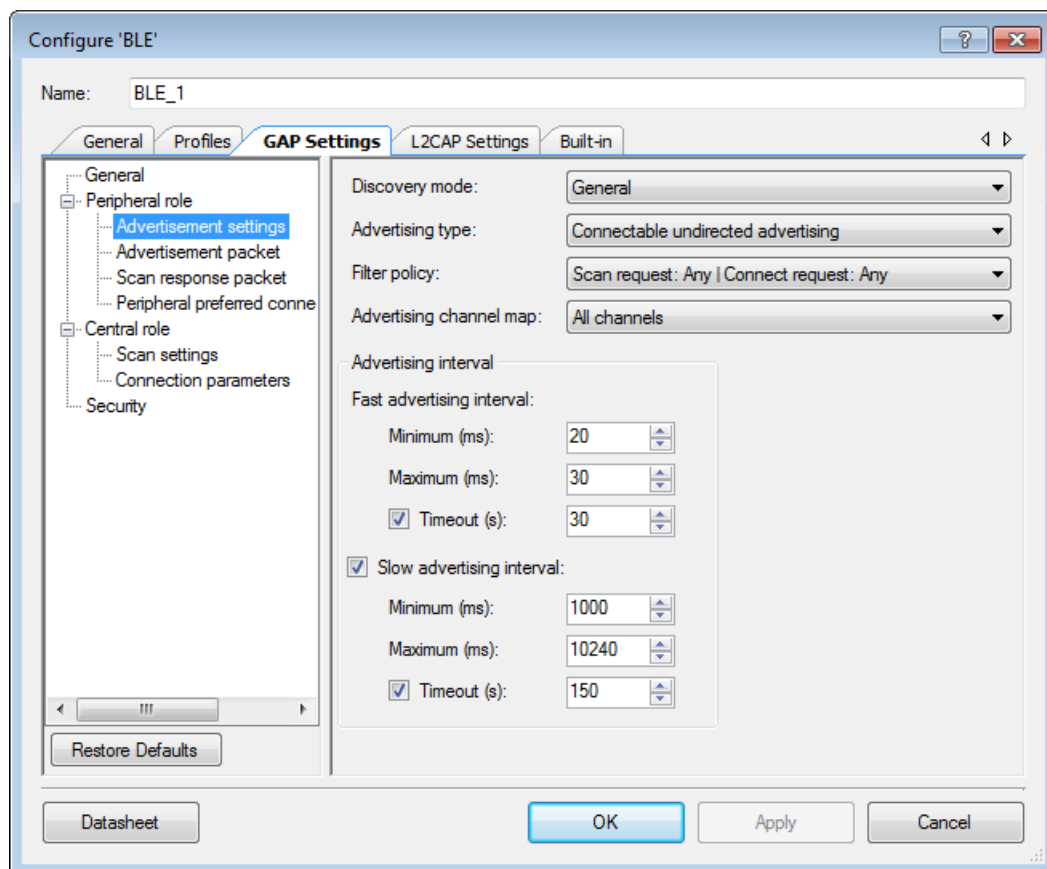

### Discovery mode

- **Non-discoverable** – In this mode, the device can't be discovered by a Central device.
- **Limited Discoverable** – This mode is used by devices that need to be discoverable only for a limited period of time, during temporary conditions, or for a specific event. The device which is advertising in Limited Discoverable mode are available for a connection to Central device which performs Limited Discovery procedure. The timeout duration is defined by the applicable advertising timeout parameter.
- **General Discoverable** – In this mode, the device should be used by devices that need to be discoverable continuously or for no specific condition. The device which is advertising in General Discoverable mode are available for a connection to Central device which performs General Discovery procedure. The timeout duration is defined by the applicable advertising timeout parameter.

### *Advertising type*

This parameter defines the advertising type to be used by the LL for an appropriate **Discovery mode**.

- **Connectable undirected advertising** – This option is used for general advertising of the advertising and scan response data. It allows any other device to connect to this device.
- **Scannable undirected advertising** – This option is used to broadcast advertising data and scan response data to active scanners.
- **Non-connectable undirected advertising** – This option is used to just broadcast advertising data.

### *Filter policy*

This parameter defines how the scan and connection requests are filtered.

- **Scan request: Any | Connect request: Any** – Process scan and connect requests from all devices.
- **Scan request: White List | Connect request: Any** – Process scan requests only from devices in the White List and connect requests from all devices.
- **Scan request: Any | Connect request: White List** – Process scan requests from all devices and connect requests only from devices in the White List.
- **Scan request: White List | Connect request: White List** – Process scan and connect requests only from devices in the White List.

### *Advertising channel map*

This parameter is used to enable a specific advertisement channel.


- **Channel 37** – enables advertisement channel #37
- **Channel 38** – enables advertisement channel #38
- **Channel 39** – enables advertisement channel #39
- **Channels 37 and 38** – enables advertisement channels #37 and #38
- **Channel 37 and 39** – enables advertisement channels #37 and #39
- **Channels 38 and 39** – enables advertisement channels #38 and #39
- **All channels** – enables all three advertisement channels

### *Advertising Interval*

This parameter defines the interval between two advertising events. Set the permissible minimum and maximum values of two Advertisement interval types: **Fast advertising interval** and **Slow advertising interval**. Typically after the device initialization, a peripheral device uses the Fast advertising interval. After the **Fast advertising interval timeout** value expires, and if a connection with a Central device is not established, then the Profile switches to Slow advertising interval to save the battery life. After the **Slow advertising interval timeout** value expires, 'CYBLE\_EVT\_GAPP\_ADVERTISEMENT\_START\_STOP' event is generated.

**Note:** The Advertising interval needs to be aligned with the selected Profile specification.


- **Fast advertising interval** – This advertisement interval results in faster LE Connection. The BLE Component uses this interval value when the connection time is between the specified minimum and maximum values of the interval.
  - Minimum: The minimum interval for advertising the data and establishing the LE Connection. The parameter is configured to increment in multiples of 0.625 ms. Valid range is from 20 ms to 10240 ms.
  - Maximum: The maximum interval for advertising the data and establishing the LE Connection. The parameter is configured to increment in multiples of 0.625 ms. Valid range is from 20 ms to 10240 ms.
  - Timeout: The timeout value of advertising with fast advertising interval parameters. When unchecked, the device is advertising continuously and slow advertising settings become unavailable. The timeout cannot occur before the advertising interval is expired, that is why if a timeout value is less than fast advertising interval minimum value, a warning is displayed.
- **Slow advertising interval** – Defines the advertising interval for slow advertising. This is an optional parameter which, if enabled, allows to implement advertising with a lower duty cycle to save battery life. The Slow advertising interval parameters are applied to the device after the internal fast advertising interval timeout occurs. The minimum and maximum values defined using this parameter allow the BLE Stack to expect the advertising to happen within these intervals.
  - Minimum: The minimum interval for advertising the data and establishing the LE Connection. The parameter is configured to increment in multiples of 0.625 ms. Valid range is from 1000 ms to 10240 ms.
  - Maximum: The maximum interval for advertising the data and establishing the LE Connection. The parameter is configured to increment in multiples of 0.625 ms. Valid range is from 1000 ms to 10240 ms.
  - Timeout: The timeout value of advertising with slow advertising interval parameters. When unchecked, the device is advertising continuously. The timeout cannot occur before the advertising interval is expired, that is why if a timeout value is less than slow advertising interval minimum value, a warning is displayed.

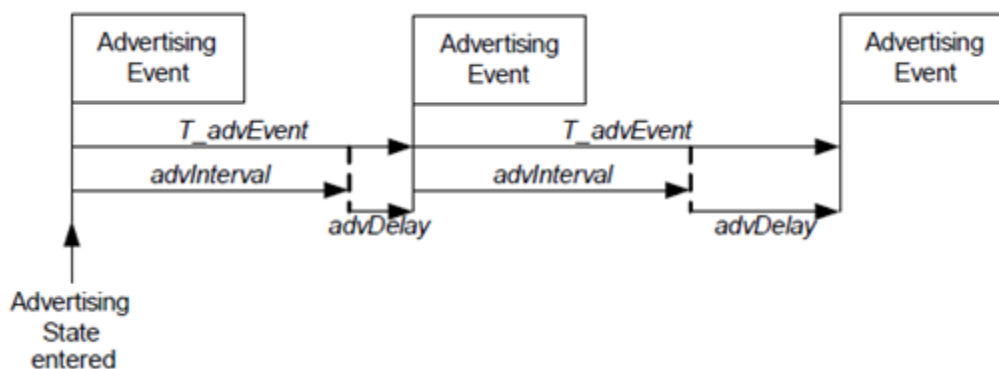

- AdvDelay is a pseudo random delay 0-10 mS.
- The complete advertising Event consists of one advertising PDU sent on each of used advertising channels.


## GAP Settings Tab – Advertisement packet

This section displays when the device is configured to contain "Peripheral," "Broadcaster," or "Peripheral and Central" **GAP role**. It is used to configure the **Advertisement data** to be used in device advertisements.

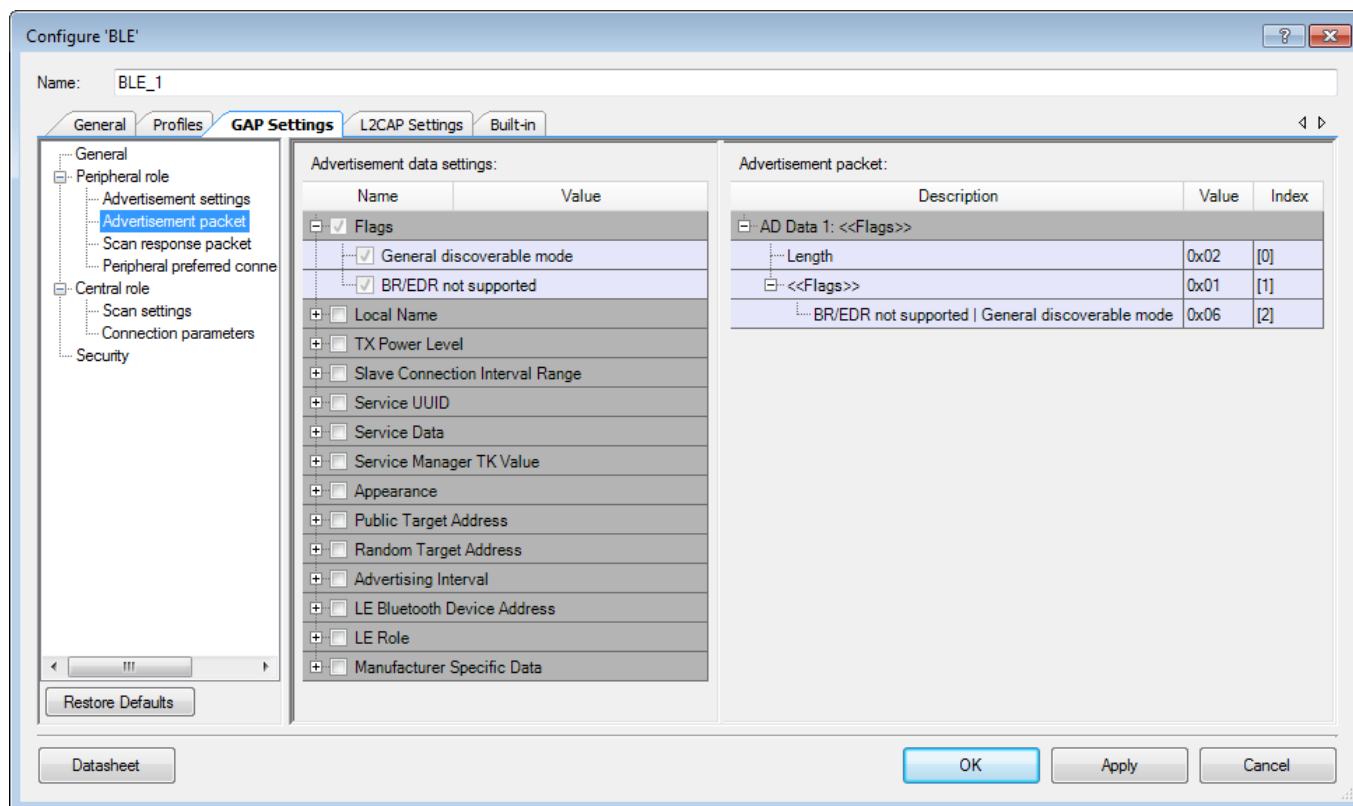

*Advertisement / Scan response data settings*

**Advertisement (AD) or Scan response data** packet is a 31 byte payload used to declare the device's BLE capability and its connection parameters. The structure of this data is shown below as specified in the Bluetooth specification.

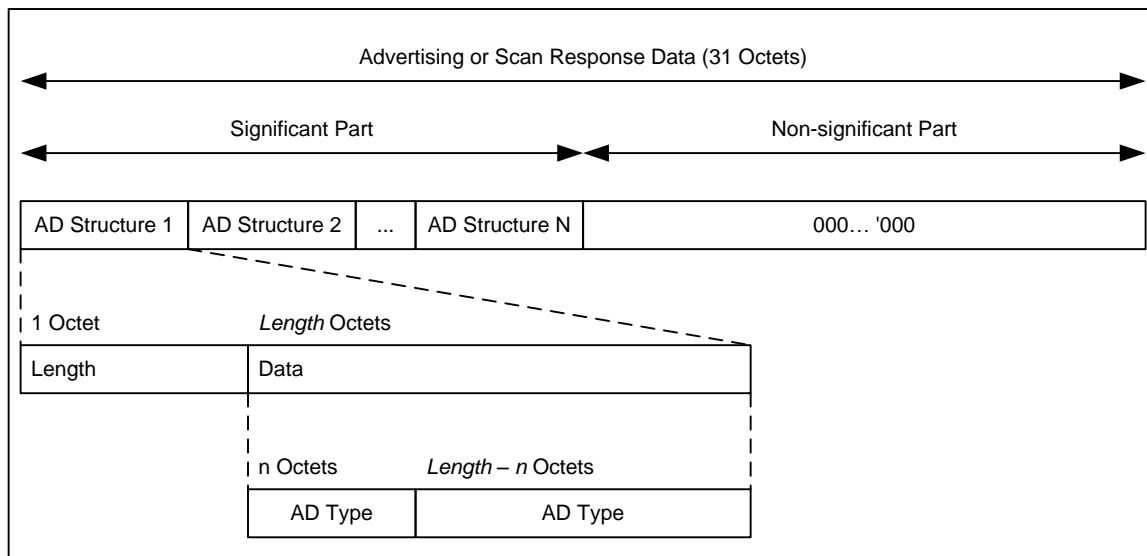

The data packet can contain a number of AD structures. Each of these structures is composed of the following parameters.

- **AD Length:** Size of the **AD Type** and **AD Data** in bytes.
- **AD Type:** The type of advertisement within the AD structure.
- **AD Data:** Data associated with the **AD Type**.

The total length of a complete Advertising packet cannot exceed 31 bytes.

An example structure for **Advertisement data** or **Scan response data** is as follows.

- AD Structure Element Definition:
  - **AD Length:** Size of **AD Type** and associated **AD Data** = 5 bytes
  - **AD Type** (1 byte): 0x03 (Service UUID)
  - **AD Data** (4 bytes): 0x180D, 0x180A (Heart Rate Service, Device Information Service)


The following table shows the **AD Types**.

AD Type	Description
Flags	Flags to broadcast underlying BLE transport capability such as Discoverable mode, LE only, etc.
Local Name	Device Name (complete or shortened). The device name value comes from the <b>Device name</b> field on the <b>GAP Settings</b> tab, under <b>General</b> .
Tx Power Level	Transmit Power Level. Taken from the <b>Adv/Scan TX power level</b> field on the <b>GAP Settings</b> tab, under <b>General</b> .
Slave Connection Interval Range	Preferred connection interval range for the device. Not available in <b>Broadcaster</b> GAP role.
Service UUID	List of Service UUIDs to be broadcasted that the device has implemented. There are different AD Type values to advertise 16-bit, 32-bit and 128-bit Service UUIDs. 16-bit and 32-bit Service UUIDs are used if they are assigned by the Bluetooth SIG. Not available in <b>Broadcaster</b> GAP role.
Service Solicitation	List of Service UUIDs from the central device that the peripheral device would like to use. There are different AD Type values to advertise 16-bit, 32-bit and 128-bit Service UUIDs. Not available in <b>Broadcaster</b> GAP role.
Service Data	2/4/16-byte Service UUID, followed by additional Service data. Not available in <b>Broadcaster</b> GAP role.
Security Manager TK value	Temporal key to be used at the time of pairing. Not available in <b>Broadcaster</b> GAP role.
Appearance	The external appearance of the device. The value comes from the <b>Appearance</b> field on the <b>GAP Settings</b> tab, under <b>General</b> .
Public Target Address	The public device address of intended recipients.
Random Target Address	The random device address of intended recipients.
Advertising Interval	The Advertising interval value that is calculated as an average of Fast advertising interval minimum and maximum values configured on the <b>GAP Settings</b> tab, under <b>Advertisement Settings</b> .
LE Bluetooth Device Address	The device address of the local device. The value comes from the <b>Public device address</b> field on the <b>GAP Settings</b> tab, under <b>General</b> .
LE Role	Supported LE roles. Not available in <b>Broadcaster</b> GAP role.
Manufacturer Specific Data	2 bytes company identifier followed by manufacturer specific data.



## GAP Settings Tab – Scan response packet


This section displays when the device is configured to contain a "Peripheral," "Broadcaster," or "Peripheral and Central" **GAP role**. It is used to configure the Scan response data packet to be used in response to device scanning performed by a GATT Client device.

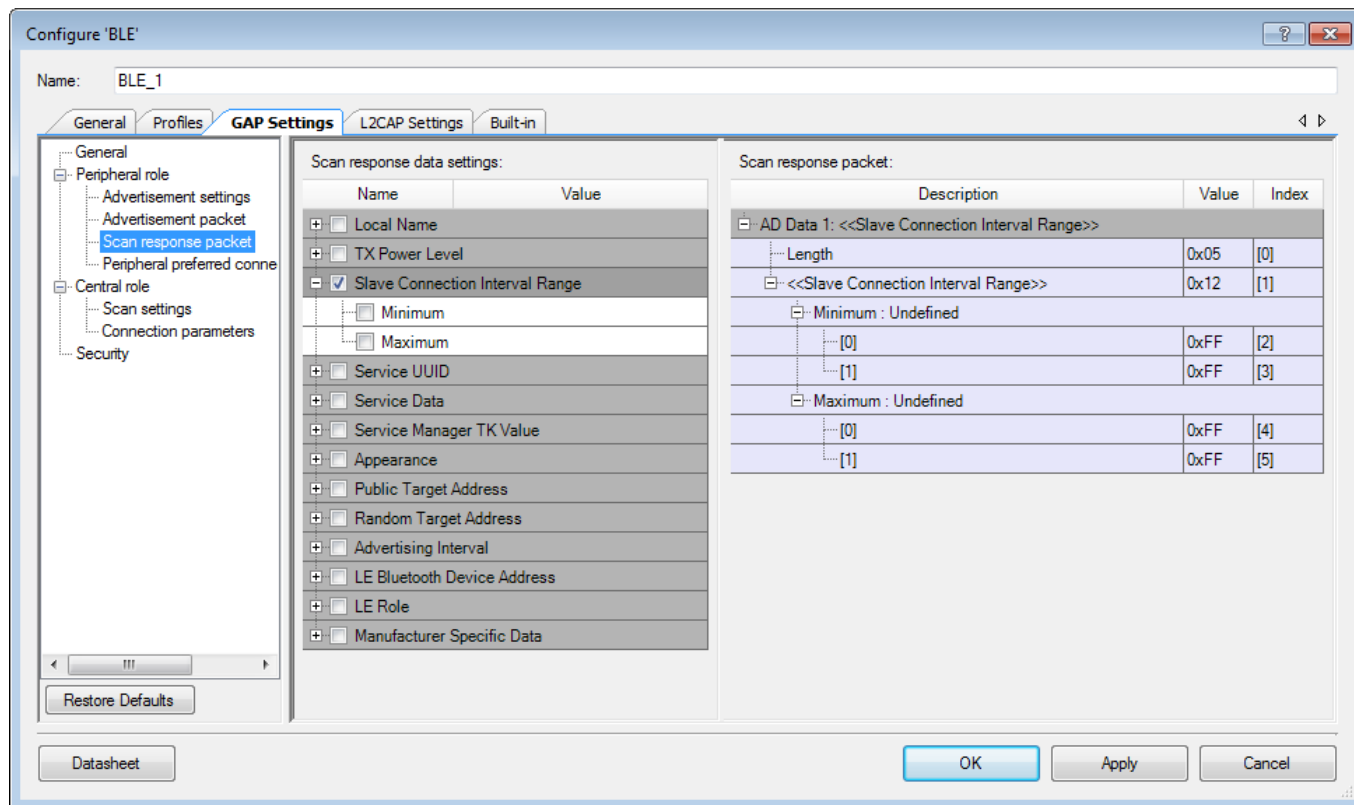

The packet structure of a Scan response packet is the same as an Advertisement packet. See [Advertisement / Scan response data settings](#) for information on configuring the Scan response packet.

## GAP Settings Tab –Peripheral preferred connection parameters

These parameters define the connection event timing for a Central device communicating with the Peripheral device. Consecutive connection events are separated by the defined Connection interval.

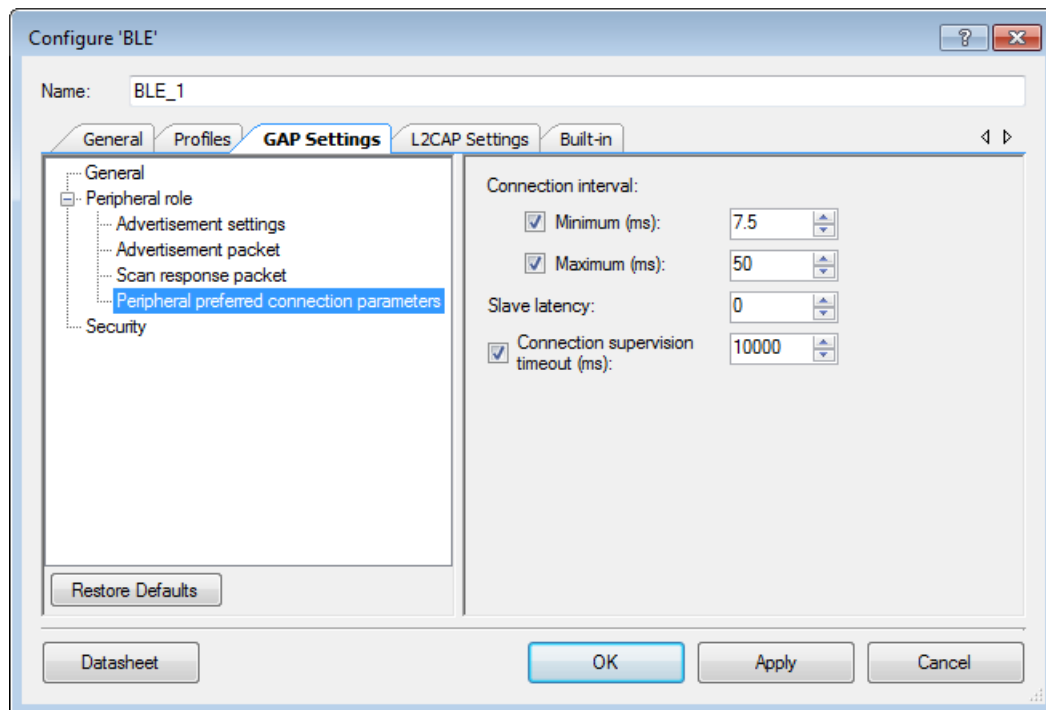

**Note** The scaled values of these parameters used internally by the BLE stack are also shown in the **Peripheral Preferred Connection Parameters** on the **Profiles** tab. These are the actual values sent over the air.

- **Connection interval** – The Central device connecting to a Peripheral device needs to define the time interval for a connection to happen.
  - **Minimum (ms):** This parameter is the minimum permissible connection time value to be used during a connection event. It is configured in steps of 1.25 ms. The range is from 7.5 ms to 4000 ms. Unchecked means no specific minimum.
  - **Maximum (ms):** This parameter is the maximum permissible connection time value to be used during a connection event. It is configured in steps of 1.25 ms. The range is from 7.5 ms to 4000 ms. Unchecked means no specific maximum.
- **Slave Latency** – Defines the latency of the slave in responding to a connection event in consecutive connection events. This is expressed in terms of multiples of connection intervals, where only one connection event is allowed per interval. The range is from 0 to 499 events.

- **Connection Supervision Timeout** – This parameter defines the LE link supervision timeout interval. It defines the timeout duration for which an LE link needs to be sustained in case of no response from peer device over the LE link. The time interval is configured in multiples of 10 ms. Unchecked means no specific value. The range is from 100 ms to 32000 ms.

**Note** that for proper operation the Connection Supervision Timeout must be larger than **(1 + Slave latency) \* Connection Interval \* 2** (ms). Refer to Bluetooth Core Specification 4.1 Volume 4, Chapter 4.5.2 for more information on Connection Supervision Timeout.

## GAP Settings Tab – Scan settings

These parameters are available when the device is configured as a "Central," "Peripheral and Central," or "Observer" **GAP role**. Typically during a device discovery, the GATT Client device initiates the scan procedure. It uses **Fast scan parameters** for a period of time, approximately 30 to 60 seconds, and then it reduces the scan frequency using the **Slow scan parameters**.

Configure 'BLE'

Name: BLE\_1

General Profiles **GAP Settings** L2CAP Settings Built-in

General  
 Central role  
 Scan settings  
 Connection parameters  
 Security

Discovery procedure: General

Scanning state: Active

Filter policy: All

☐ Duplicate filtering

Scan parameters

Fast scan parameters:

Scan window (ms): 30

Scan interval (ms): 30

☒ Scan timeout (s): 30

☒ Slow scan parameters:

Scan window (ms): 1125

Scan interval (ms): 1280

☒ Scan timeout (s): 150

Restore Defaults

Datasheet OK Apply Cancel

**Note** The scan interval needs to be aligned with the user-selected Profile specification.

### *Discovery procedure*

- **Limited** – A device performing this procedure shall discover the device doing limited discovery mode advertising only.
- **General** – A device performing this procedure shall discover the devices doing general and limited discovery advertising.

### *Scanning state*

- **Passive** – In this state a device can only listen to advertisement packets.
- **Active** – In this state a device may ask an advertiser for additional information.

### *Filter policy*

This parameter defines how the advertisement packets are filtered.

- **All** – Process all advertisement packets.
- **White List Only** – Process advertisement packets only from devices in the White List.

### *Duplicate filtering*

When enabled, this activates filtering of duplicated advertisement data. If disabled, the BLE stack will not perform filtering of advertisement data.

### *Scan parameters*


These parameters define the scanning time and interval between scanning events. Two different sets of Scan parameters are used: **Fast scan parameters** and **Slow scan parameters**.

Typically after the device initialization, a central device uses the Fast scan parameters. After the **Fast scan timeout** value expires, and if a connection with a Peripheral device is not established, then the Profile switches to Slow scan parameters to save the battery life. After the **Slow scan timeout** value expires, CYBLE\_EVT\_GAPC\_SCAN\_START\_STOP event is generated. See API documentation.

- **Fast scan parameters** – This connection type results in a faster connection between the GATT Client and Server devices than it is possible using a normal connection.
  - **Scan Window**: This parameter defines the scan window when operating in **Fast connection**. The parameter is configured to increment in multiples of 0.625 ms. Valid range is from 2.5 ms to 10240 ms. **Scan Window** must be less than the **Scan Interval**. Default: 30 ms.
  - **Scan Interval**: This parameter defines the scan interval when operating in **Fast connection**. The parameter is configured to increment in multiples of 0.625 ms. Valid range is from 2.5 ms to 10240 ms. Default: 30 ms.




- **Scan Timeout:** The timeout value of scanning with fast scan parameters. Default: 30 s. When unchecked, the device is scanning continuously. The timeout cannot occur before the scanning interval is expired, that is why if a timeout value is less than slow scanning interval minimum value, a warning is displayed.
- **Slow scan parameters** – This connection results in a slower connection between the GATT Client and GATT Server devices than is possible using a normal connection. However this method consumes less power.
  - **Scan Window:** This parameter defines the scan window when operating in **Slow Connection**. The parameter is configured to increment in multiples of 0.625ms. Valid range is from 2.5 ms to 10240 ms. **Scan Window** must be less than the **Scan Interval**. Default: 11.25 ms.
  - **Scan Interval:** This parameter defines the scan interval when operating in **Slow Connection**. The parameter is configured to increment in multiples of 0.625 ms. Valid range is from 2.5 ms to 10240 ms. Default: 1280 ms.
  - **Scan Timeout:** The timeout value of scanning with slow scan parameters. Default: 150 s. When unchecked, the device is scanning continuously. The timeout cannot occur before the scanning interval is expired, that is why if a timeout value is less than slow scanning interval minimum value, a warning is displayed.

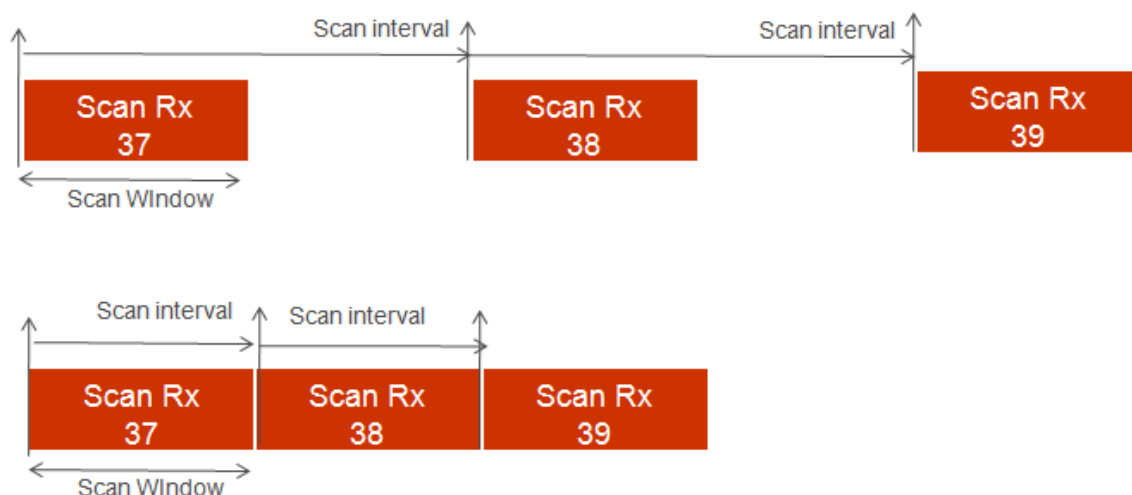


## GAP Settings Tab – Connection parameters

This section is the same as [Peripheral Preferred Connection Parameters](#) for Advertisement Settings. The only difference is that Central connection parameters will not be shown on the **Peripheral Preferred Connection parameters** on the **Profile** tab.

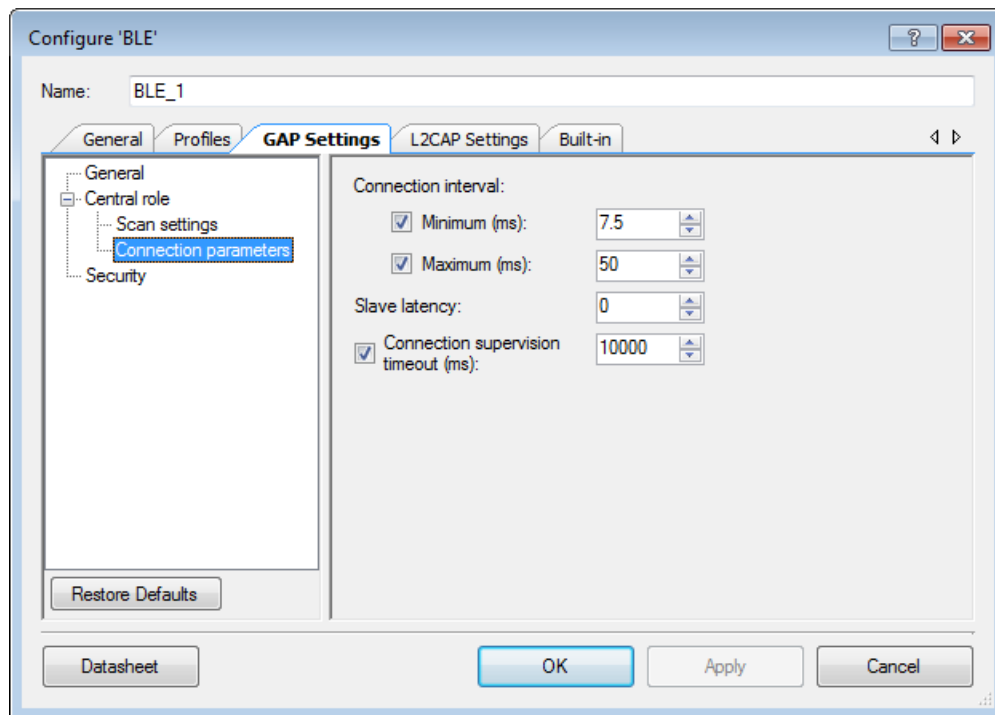

## GAP Settings Tab – Security

This section contains several parameters to configure the global security options for the Component. These parameters are configurable only in **Profile** mode. If the device is configured as a GATT Server, you can optionally set each Characteristic using its own unique security setting in the **Profile Tree**.

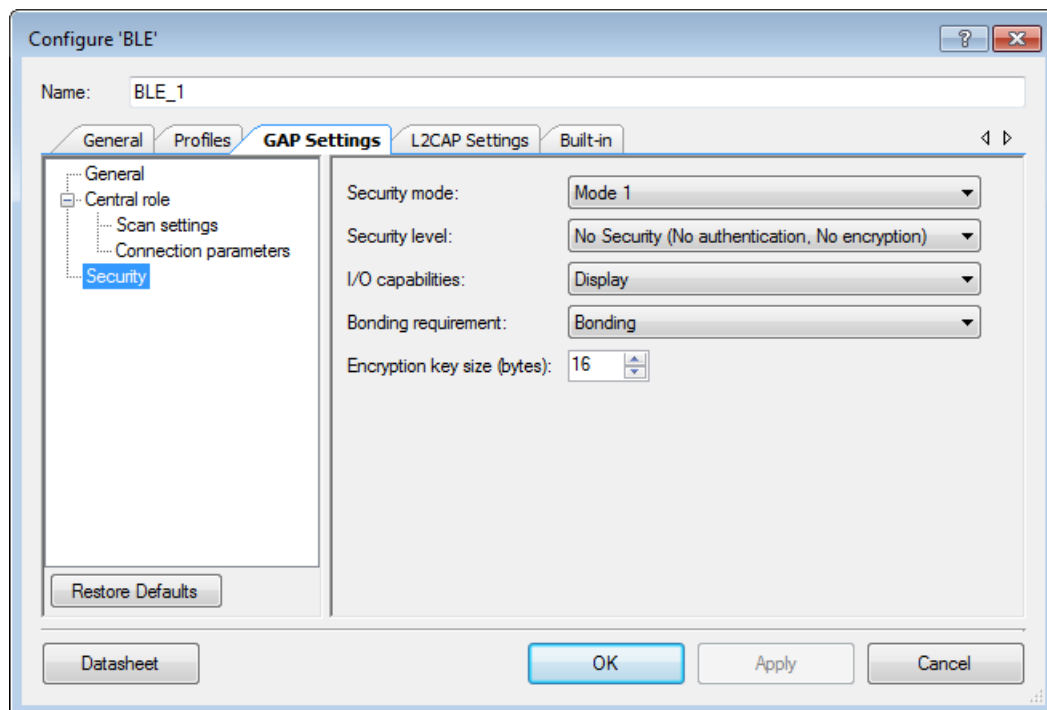

### Security mode

Defines GAP security modes for the Component. Both available modes may support authentication.

- Mode 1 – Used in designs where data encryption is required.
- Mode 2 – Used in designs where data signing is required.

### Security level

Enables different levels of security depending on the selected **Security mode**:

- If Mode1 is selected, then the following security levels are available.
  - No Security – With this level of security, the device will not use encryption or authentication.
  - Unauthenticated pairing with encryption – With this level of security, the device will send encrypted data after establishing a connection with the remote device.



- Authenticated pairing with encryption – With this level of security, the device will send encrypted data after establishing a connection with the remote device. To establish a connection, devices should perform the authenticated pairing procedure.
- If Mode 2 is selected, then the following security levels are available.
  - Unauthenticated pairing with data signing – With this level of security, the device will perform data signing prior to sending it to the remote device after they establish a connection.
  - Authenticated pairing with data signing – With this level of security, the device will perform data signing prior to sending it to the remote device after they establish a connection. To establish a connection, the devices should perform the authenticated pairing procedure.

### *I/O capabilities*

This parameter refers to the device's input and output capability that can enable or restrict a particular pairing method or security level.

- No Input No Output – Used in devices that don't have any capability to enter and display the authentication key data. Used in mouse-like devices. No GAP authentication is required.
- Display Only – Used in devices with display capability and may display authentication key data. GAP authentication is required.
- Keyboard Only – Used in devices with numeric keypad. GAP authentication is required.
- Display Yes/No – Used in devices with display and at least two input keys for Yes/No action. GAP authentication is required.
- Keyboard and Display – Used in devices like PCs and tablets. GAP authentication is required.



### *Bonding Requirement:*

This parameter is used to configure the bonding requirements. The purpose of bonding is to create a relation between two Bluetooth devices based on a common link key (a bond). The link key is created and exchanged (pairing) during the bonding procedure and is expected to be stored by both Bluetooth devices, to be used for future authentication. The maximum number of remote devices that can be bonded is four.

- **Bonding:** The device will store the link key of a connection after pairing with the remote device in the flash memory and if a connection will be lost and re-established, the devices will use the previously stored key for the connection.

**Note** Bonding information is stored in RAM and should be written to Flash if it needs to be retained during shutdown. Refer to the [Functional Description](#) section for details on bonding and Flash write usage.

- **No Bonding:** The pairing process will be performed on each connection establishment.

### *Encryption Key Size*

This parameter defines the encryption key size based on the Profile requirement. The valid values of encryption key size are 7 to 16 bytes.

## L2CAP Settings Tab

The L2CAP parameters define parameters for L2CAP connection oriented channel configuration.

The screenshot shows a software configuration window titled "Configure 'BLE'". It has a tabbed interface with tabs for "General", "Profiles", "GAP Settings", "L2CAP Settings" (which is selected), and "Built-in". The "L2CAP Settings" tab contains four configuration items, each with a text input field and a small up/down arrow button:

- Number of L2CAP logical channels: 1
- Number of PSMs: 1
- L2CAP MTU size (bytes): 23
- L2CAP MPS size (bytes): 23

At the bottom of the dialog, there are four buttons: "Datasheet", "OK", "Apply", and "Cancel".



*Number of L2CAP logical channels*

This parameter defines the number of LE L2CAP connection oriented logical channels required by the application. Valid range is from 1 to 255. Default: 1.

*Number of PSMs*

This parameter defines the number of PSMs required by the application. Valid range is from 1 to 255. Default: 1.

*L2CAP MTU size*

This parameter defines the maximum SDU size of an L2CAP packet. Valid range is from 23 to 65488 bytes. Default: 1280 bytes when **Internet Protocol Support Service** is supported and 23 bytes otherwise.

*L2CAP MPS size*

This parameter defines the maximum size of payload data that the L2CAP layer is capable of accepting. **L2CAP MPS size** should be less than or equal to the **L2CAP MTU size** parameter. Valid range is from 23 to 65488 bytes. Default: 23 bytes.

## BLE Component APIs

The BLE Component contains a comprehensive API list to allow you to configure the BLE stack, the underlying chip hardware and the BLE service specific configuration using software. You may access the GAP, GATT and L2CAP layers of the stack using these.


The APIs are broadly categorized as follows:

- [BLE Common APIs](#)
- [BLE Service-Specific APIs](#)

**Note:** All BLE Component API names begin with CyBle\_. This is a unique feature of the BLE Component, and allows only one instance of the Component to be placed in your design.

## HTML-Based API Document

Because the BLE Component has numerous APIs, Cypress has also provided a separate HTML-based API reference document (CHM file). To open this file, right-click on the BLE Component on the design canvas, and select **Open API Documentation...**

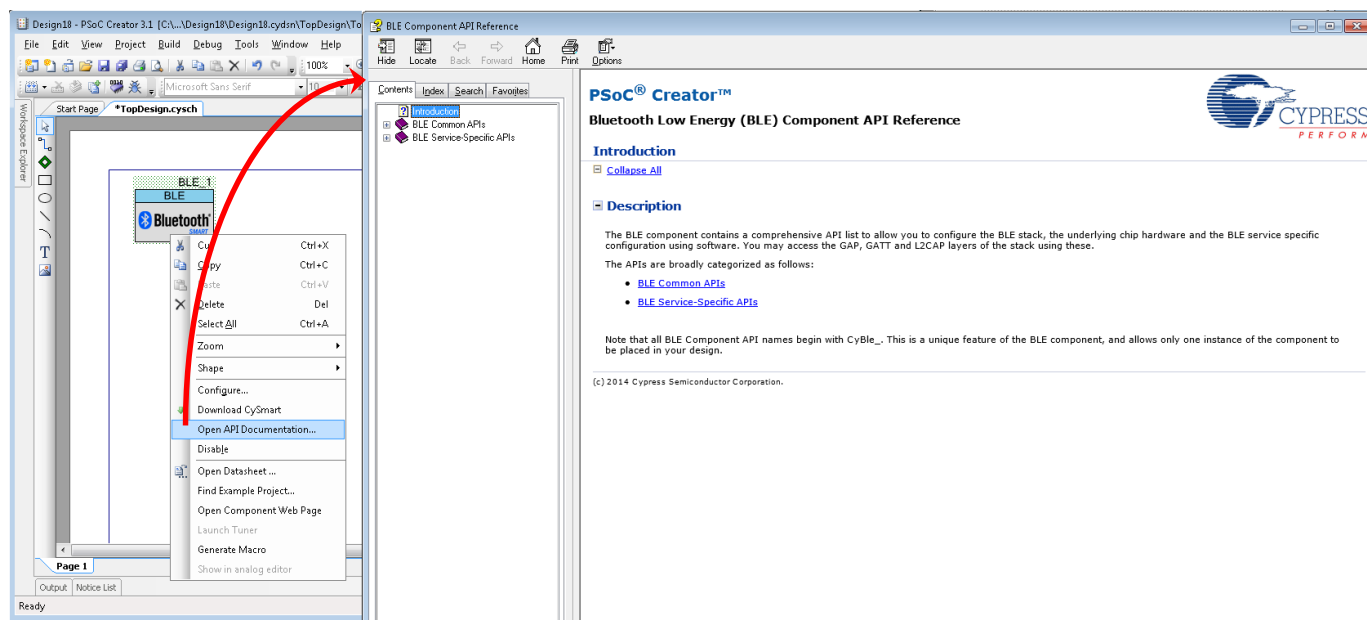

## Code snippets

PSoC Creator provides code snippets for the BLE component. These are located on the **Edit** menu.

- For the CyBle\_Start API function: `CyBle_Start( CyBle_AppCallback );`
- For an application callback: `void CyBle_AppCallback( uint32 eventCode, void *eventParam ){<all general events>}`
- For each CyBle\_<service>RegisterAttrCallback API function: `CyBle_<service>RegisterAttrCallback( CyBle_<service>CallBack );`
- For each service callback: `void CyBle_<service>CallBack( uint32 eventCode, void *eventParam ) {<all service-specific events>}`

## Sample Firmware Source Code

PSoC Creator provides numerous example projects that include schematics and example code in the Find Example Project dialog. For Component-specific examples, open the dialog from the Component Catalog or an instance of the Component in a schematic. For general examples, open the dialog from the Start Page or **File** menu. As needed, use the **Filter Options** in the dialog to narrow the list of projects available to select.

Refer to the "Find Example Project" topic in the PSoC Creator Help for more information.

## MISRA Compliance

This section describes the MISRA-C:2004 compliance and deviations for the Component. There are three types of deviations defined:

- project deviations – deviations that are applicable for all PSoC Creator Components
- Component specific deviations – deviations that are applicable only for the common part of this Component
- Profile specific deviations – deviations that are applicable only for a specific Profile of the Component

This section provides information on Component-specific deviations. Project deviations are described in the MISRA Compliance section of the *System Reference Guide* along with information on the MISRA compliance verification environment.



The BLE Component has the following specific deviations.

MISRA-C:2004 Rule	Rule Class (Required/ Advisory)	Rule Description	Description of Deviation(s)
9.3	R	In an enumerator list, the '=' construct shall not be used to explicitly initialize members other than the first, unless all items are explicitly initialized.	Violated when a specific value needs to be assigned to an enumerator item.
10.1	R	The value of an expression of integer type shall not be implicitly converted to a different underlying type under some circumstances.	An operand of essentially enum type is being converted to unsigned type as a result of an arithmetic or conditional operation. The conversion does not have any unintended effect.
11.4	A	A cast should not be performed between a pointer to object type and a different pointer to object type.	A cast involving pointers is conducted with caution that the pointers are correctly aligned for the type of object being pointed to.
13.7	R	Boolean operations whose results are invariant shall not be permitted.	A Boolean operator can yields a result that can be proven to be always "true" or always "false" in some specific configurations because of generalized implementation approach.
17.4	R	Array indexing shall be the only allowed form of pointer arithmetic.	An array subscript operator is being used to subscript an expression which is not of array type. This is perfectly legitimate in the C language providing the pointer addresses an array element.
18.4	R	Unions shall not be used.	Deviated for constructing an efficient implementation.
19.7	A	A function should be used in preference to a function-like macro.	Deviated for more efficient code.

This Component has the following embedded Components: cy\_isr, SCB. Refer to the corresponding Component datasheets for information on their MISRA compliance and specific deviations.

## API Memory Usage

The Component memory usage varies significantly, depending on the compiler, device, number of APIs used and Component configuration. The following table provides the memory usage for all APIs available in the given Component configuration.

The measurements are done with the associated compiler configured in Release mode with optimization set for Size. For a specific design, the map file generated by the compiler can be analyzed to determine the memory usage.



The Component's BLE Stack is implemented in four libraries and therefore the Component memory usage is directly dependent on the library used. The libraries are:

- HCI Library (used in HCI mode)
- Peripheral (used when the Component is configured for GAP Peripheral or GAP Broadcaster role)
- Central (used when the Component is configured for GAP Central or GAP Observer role)
- Peripheral and Central (used when the Component is configured for GAP Peripheral and Central roles)

### HCI Mode

Configuration	PSoC 4200 BLE (GCC)		
	Flash Bytes	SRAM Bytes	Stack Bytes
HCI Mode	36562	2631	2048

### Peripheral and Central Profile Mode

Configuration	PSoC 4200 BLE (GCC)		
	Flash Bytes	SRAM Bytes	Stack Bytes
Alert Notification Profile (Server)	82814	7471	2048
Find Me Profile (Find Me Target role)	82334	7401	2048
Internet Protocol Support	82000	10599	2048
Phone Alert Status	82706	7451	2048
Time	83370	7502	2048

### Central Profile Mode

Configuration	PSoC 4200 BLE (GCC)		
	Flash Bytes	SRAM Bytes	Stack Bytes
Alert Notification Profile (Server)	75962	7300	2048
Find Me Profile (Find Me Target role)	75354	7219	2048
HID over GATT Profile (Host)	80894	7416	2048
Phone Alert Status	75826	7260	2048
Proximity Profile (Proximity Reporter)	76130	7245	2048
Time	76482	7315	2048

**Peripheral Profile Mode**

Configuration	PSoC 4200 BLE (GCC)		
	Flash Bytes	SRAM Bytes	Stack Bytes
Blood Pressure	74542	7414	2048
Bootloader	73880	7288	2048
Continuous Glucose Monitoring	75756	7513	2048
Cycling Power	74980	7358	2048
Cycling Speed and Cadence	74680	7394	2048
Custom	73438	7286	2048
Environmental Sensing	78918	9017	2048
Find Me Profile (Find Me Target role)	73528	7240	2048
Glucose Profile (Glucose Sensor)	74796	7417	2048
Health Thermometer Profile (Server)	74888	7420	2048
Heart Rate Profile (Heart Rate Sensor)	74438	7358	2048
HID Over GATT Profile (HID Device)	76382	7530	2048
Internet Protocol Support	73330	10438	2048
Location and Navigation	74378	7337	2048
Proximity Profile (Proximity Reporter)	74324	7278	2048
Running Speed and Cadence	74700	7398	2048
Scan Parameters Profile (Scan Server)	73894	7262	2048
Weight Scale	79478	7912	2048
Wireless Power Transfer	74538	7412	2048

# BLE Common APIs

## Description

The common APIs act as a general interface between the BLE application and the BLE Stack module. The application may use these APIs to control the underlying hardware such as radio power, data encryption and device bonding via the stack. It may also access the GAP, GATT and L2CAP layers of the stack. These are divided into the following categories:

- [BLE Common Core Functions](#)
- [GAP Functions](#)
- [GATT Functions](#)
- [L2CAP Functions](#)

These APIs also use API specific definitions and data structures. Many of the APIs also rely on BLE Stack events. These are classified in the following subsets:

- [BLE Common Events](#)
- [BLE Common Definitions and Data Structures](#)

## Modules

- [BLE Common Core Functions](#)  
*The common core APIs are used for general BLE component configuration. These include initialization, power management, and utilities.*
- [GAP Functions](#)  
*The GAP APIs allow access to the Generic Access Profile (GAP) layer of the BLE stack. Depending on the chosen GAP role in the GUI, you may use a subset of the supported APIs.*
- [GATT Functions](#)  
*The GATT APIs allow access to the Generic Attribute Profile (GATT) layer of the BLE stack. Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.*
- [L2CAP Functions](#)  
*The L2CAP APIs allow access to the Logical link control and adaptation protocol (L2CAP) layer of the BLE stack.*
- [BLE Common Events](#)  
*The BLE stack generates events to notify the application on various status alerts concerning the stack. These can be generic stack events or can be specific to GAP, GATT or L2CAP layers. The service specific events are handled separately in [BLE Service-Specific Events](#).*
- [BLE Common Definitions and Data Structures](#)  
*Contains definitions and structures that are common to all BLE common APIs. Note that some of these are also used in Service-specific APIs.*

## BLE Common Core Functions

### Description

The common core APIs are used for general BLE component configuration. These include initialization, power management, and utilities.

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_Start \(CYBLE\\_CALLBACK\\_T callbackFunc\)](#)





- void [CyBle\\_Stop](#)(void)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_StoreBondingData](#)(uint8 isForceWrite)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_SoftReset](#)(void)
- [CYBLE\\_LP\\_MODE\\_T CyBle\\_EnterLPM](#) ([CYBLE\\_LP\\_MODE\\_T](#) pwrMode)
- [CYBLE\\_LP\\_MODE\\_T CyBle\\_ExitLPM](#)(void)
- void [CyBle\\_ProcessEvents](#)(void)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_SetDeviceAddress](#) ([CYBLE\\_GAP\\_BD\\_ADDR\\_T](#)\*bdAddr)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GetDeviceAddress](#) ([CYBLE\\_GAP\\_BD\\_ADDR\\_T](#)\*bdAddr)
- int8 [CyBle\\_GetRssi](#)(void)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GetTxPowerLevel](#) ([CYBLE\\_BLESS\\_PWR\\_IN\\_DB\\_T](#)\*bleSsPwrLvl)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_SetTxPowerLevel](#) ([CYBLE\\_BLESS\\_PWR\\_IN\\_DB\\_T](#)\*bleSsPwrLvl)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GetBleClockCfgParam](#)  
([CYBLE\\_BLESS\\_CLK\\_CFG\\_PARAMS\\_T](#)\*bleSsClockConfig)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_SetBleClockCfgParam](#)  
([CYBLE\\_BLESS\\_CLK\\_CFG\\_PARAMS\\_T](#)\*bleSsClockConfig)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GenerateRandomNumber](#)(uint8 \*randomNumber)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_AesEncrypt](#)(uint8 \*plainData, uint8 \*aesKey, uint8 \*encryptedData)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_SetCeLengthParam](#)(uint8 bdHandle, uint8 mdBit, uint16 ceLength)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_WriteAuthPayloadTimeout](#)(uint8 bdHandle, uint16 authPayloadTimeout)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_ReadAuthPayloadTimeout](#)(uint8 bdHandle, uint16 \*authPayloadTimeout)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GetStackLibraryVersion](#) ([CYBLE\\_STACK\\_LIB\\_VERSION\\_T](#)\*stackVersion)
- [CYBLE\\_BLESS\\_STATE\\_T CyBle\\_GetBleSsState](#)(void)
- void [CyBle\\_AesCcmInit](#)(void)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_AesCcmEncrypt](#)(uint8 \*key, uint8 \*nonce, uint8 \*in\_data, uint8 length, uint8 \*out\_data, uint8 \*out\_mic)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_AesCcmDecrypt](#)(uint8 \*key, uint8 \*nonce, uint8 \*in\_data, uint8 length, uint8 \*out\_data, uint8 \*in\_mic)
- void [CyBle\\_SetTxGainMode](#)(uint8 bleSsGainMode)
- void [CyBle\\_SetRxGainMode](#)(uint8 bleSsGainMode)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_StoreStackData](#)(uint8 isForceWrite)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_StoreAppData](#)(uint8 \*srcBuff, const uint8 destAddr[], uint32 buffLen, uint8 isForceWrite)

## Function Documentation

### [CYBLE\\_API\\_RESULT\\_T CyBle\\_Start](#) ([CYBLE\\_CALLBACK\\_T callbackFunc](#))

This function initializes the BLE Stack, which consists of the BLE Stack Manager, BLE Controller, and BLE Host modules. It takes care of initializing the Profile layer, schedulers, Timer and other platform related resources required for the BLE component. It also registers the callback function for BLE events that will be registered in the BLE stack.

Note that this function does not reset the BLE Stack.

For HCI-Mode of operation, this function will not initialize the BLE Host module.

Calling this function results in the generation of CYBLE\_EVT\_STACK\_ON event on successful initialization of the BLE Stack.



**Parameters:**

<i>callbackFunc</i>	Event callback function to receive events from BLE stack. CYBLE_CALLBACK_T is a function pointer type.
---------------------	--

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Error codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On passing a NULL pointer to the function when the BLE stack is not built in HCI mode. CYBLE_ERROR_INVALID_PARAMETER is never returned in HCI mode.
CYBLE_ERROR_REPEATED_ATTEMPTS	On invoking this function more than once without calling CyBle_Shutdown() function between calls to this function.
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	There is insufficient memory available.

**Global Variables**

The CyBle\_initVar variable is used to indicate initial configuration of this component. The variable is initialized to zero (0u) and set to one (1u) the first time [CyBle\\_Start\(\)](#) is called. This allows for component initialization without re-initialization in all subsequent calls to the [CyBle\\_Start\(\)](#) routine.

**void CyBle\_Stop (void )**

This function stops any ongoing operation in the BLE Stack and forces the BLE Stack to shut down. The only function that can be called after calling this function is [CyBle\\_Start\(\)](#).

**Returns:**

None

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_StoreBondingData (uint8 isForceWrite)**

This function writes the new bonding data from RAM to the dedicated Flash location as defined by the component. It performs data comparing between RAM and Flash before writing to Flash. If there is no change between RAM and Flash data, then no write is performed. It writes only one flash row in one call. Application should keep calling this function till API return CYBLE\_ERROR\_OK. This function is available only when Bonding requirement is selected in Security settings.

**Parameters:**

<i>isForceWrite</i>	If value is set to 0, then stack will check if flash write is permissible.
---------------------	--

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_FLASH_WRITE_NOT_PERMITTED	Flash Write is not complete

**Side Effects**

For BLE devices with 128K of Flash memory this API will automatically modify the clock settings for the device. Writing to flash requires changes to be done to the IMO (set to 48 MHz) and HFCLK (source set to IMO) settings. The configuration is restored before returning. This will impact the operation of most of the hardware in the device.

**Global Variables**

The BLE\_pendingFlashWrite variable is used to detect status of pending write to flash operation for stack data and CCCD. This API automatically clears pending bits after write operation complete.

**CYBLE\_API\_RESULT\_T CyBle\_SoftReset (void )**

This function resets the BLE Stack, including BLE sub-system hardware registers. BLE Stack transitions to idle mode. This function can be used to reset the BLE Stack if the BLE Stack turns unresponsive due to incomplete transfers with the peer BLE device.

This is a blocking function. No event is generated on calling this function.

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_OPERATION	This error occurs if this function is invoked before invoking CyBle_StackInit function.

**CYBLE\_LP\_MODE\_T CyBle\_EnterLPM (CYBLE\_LP\_MODE\_T pwrMode)**

This function requests the underlying BLE modules such as BLE Controller, BLE Host Stack and BLE Stack manager to enter into one of the supported low power modes. Application should use this function to put Bluetooth Low Energy Sub-System (BLESS) to Low Power Mode (LPM).

BLE Stack enters and exits low power modes based on its current state and hence the application should consider the BLE Stack LPM state before putting the CPU or the overall device into LPM. This function attempts to set the requested low power mode and if that is not possible, it tries to set the next higher low-power-mode. This behavior is due to the requirement that the application will always try to use the lowest power mode when there is nothing that it needs to process. Note that the CPU will not be able to access the BLESS registers when BLESS is in deep sleep mode.

BLE Stack has the following power modes:

1. Active
2. Sleep (Low Power Mode)
3. DeepSleep with ECO Off (Low Power Mode)
4. Hibernate (Low Power Mode)

Note that certain conditions may prevent BLE sub system from entering a particular low power mode.

**Active Mode**

Bluetooth Low Energy Sub System (BLESS) has three sub-modes in Active mode:

1. Idle
2. Transmit Mode, and
3. Receive Mode

These modes draw full current from the device and the CPU has full access to its registers.

**Sleep Mode**

The clock to the link layer engine and digital modem is gated and the (External Crystal Oscillator) ECO continues to run to maintain the link layer timing. The application cannot enter sleep mode if a Transmit or Receive is in progress.

### Deep Sleep with ECO Off Mode

The ECO is stopped and Watch Crystal Oscillator (WCO) is used to maintain link layer timing. All the regulators in the Radio Frequency (RF) transceiver are turned off to reduce leakage current and BLESS logic is kept powered ON from the System Resources Sub System (SRSS) deep-sleep regulator for retention of current BLESS state information. This mode can be entered from either Idle (Active) or Sleep mode. It should be entered when the next scheduled activity instant in time domain is greater than the Deep Sleep total wakeup time (typically 2ms).

### Hibernate mode

The application layer should invoke this function with the Hibernate Mode option to put the BLE Stack in to hibernate mode. If this mode is set, the micro-controller can be put in to Hibernate Mode by the application layer. This mode ensures that BLE Sub-system is completely idle and no procedures such as ADV, SCAN and CONNECTION are active.

The following table indicates the allowed sleep modes for the complete system (BLE Sub-system and the micro-controller). Modes marked In 'X' are the allowed combinations. The application layer should make sure that the invalid modes are not entered in to:

BLE Stack LPM / PSoC4A-BLE LPM	Active	Sleep	DeepSleep	Hibernate
Active	X			
Sleep	X	X		
DeepSleep (ECO OFF)	X	X	X	
Hibernate				X

The application layer is responsible for putting the BLE Sub-system and the micro-controller in to the desired sleep modes. Upon entering the requested sleep mode combination, the BLE Sub-system and the micro-controller are woken up by an interrupt every advertisement interval(in case of a GAP Peripheral) or connection interval (in case of GAP Central). On wakeup, if the application needs to transmit some data, appropriate function(s) including the Stack functions need to be invoked. This needs to be followed by a call to the function CyBle\_ProcessEvents, which handles all pending transmit and receive operations. The application can now put the complete system back in to one of the sleep modes. The application should ensure that the above invalid states are never encountered.

Application shall also ensure that BLE Sub-system's low power entry and low power exit interrupts are processed in realtime and not blocked. It is recommended that BLE Sub-system interrupt should be of higher priority. If BLE Sub-system interrupts are blocked for longer time ( > 200us ), BLE Sub-system can violate Bluetooth specification timing for wakeup where ECO is required to perform BLE radio operation. It can also result in race condition where BLE Stack waits for interrupt as ECO is not started correctly and BLE Sub system enters in unknown state, BLE Stack gets stuck in busy loop.

This is a blocking function. In process of entering in BLESS Deep Sleep Mode, BLE Stack puts CPU in Sleep Mode to save power while polling for entry indication to BLESS DSM. No event is generated on calling this function. Based on the return code from this function, the application layer should decide on the sleep mode for the complete system. For example, if the return code is CYBLE\_BLESS\_DEEPSLEEP, the application can choose to call system wide DeepSleep mode function.

### Parameters:

<i>pwrMode</i>	<p>The power mode that the component is intended to enter. The allowed values are,</p> <ul style="list-style-type: none"> <li>• CYBLE_BLESS_SLEEP</li> <li>• CYBLE_BLESS_DEEPSLEEP</li> </ul>
----------------	---

--	--

**Returns:**

CYBLE\_LP\_MODE\_T: The actual power mode that BLE stack is now set to.

**CYBLE\_LP\_MODE\_TCyBle\_ExitLPM (void )**

Application can asynchronously wake up the BLE Stack from low power using this function. The wake up is not performed for the entire chip. This is a blocking call and returns when BLE Stack has come out of LPM, and in process of waking up from BLESS Deep Sleep Mode, BLE Stack puts CPU in Sleep Mode to save power while polling for wakeup indication from BLESS. No event is generated on calling this function. It has no effect if it is invoked when the BLE Stack is already in active mode.

**Returns:**

CYBLE\_LP\_MODE\_T: The actual power mode that BLE stack is now set to. Expected return value is CYBLE\_BLESS\_ACTIVE.

**void CyBle\_ProcessEvents (void )**

This function checks the internal task queue in the BLE Stack, and pending operation of the BLE Stack, if any. This needs to be called at least once every interval 't' where:

1. 't' is equal to connection interval or scan interval, whichever is smaller, if the device is in GAP Central mode of operation, or
2. 't' is equal to connection interval or advertisement interval, whichever is smaller, if the device is in GAP Peripheral mode of operation.

On calling every interval 't', all pending operations of the BLE Stack are processed. This is a blocking function and returns only after processing all pending events of the BLE Stack. Care should be taken to prevent this call from any kind of starvation; on starvation, events may be dropped by the stack. All the events generated will be propagated to higher layers of the BLE Stack and to the Application layer only after making a call to this function.

Call to this function can wakeup BLESS from Low Power Mode, and in process of waking up from BLESS Deep Sleep Mode, BLE Stack puts CPU in Sleep Mode to save power while polling for wakeup indication from BLESS. This can occur if the caller function has pending data or control transactions to be performed in BLE Stack that need to be programmed to BLESS in [CyBle\\_ProcessEvents\(\)](#) context and BLESS is in Low Power Mode.

**Returns:**

None

**CYBLE\_API\_RESULT\_TCyBle\_SetDeviceAddress (CYBLE\_GAP\_BD\_ADDR\_T\* bdAddr)**

This function sets the Bluetooth device address into BLE Controller's memory. This address shall be used for BLE procedures unless explicitly indicated by BLE Host through HCI commands. The application layer needs to call this function every time an address change is required. Bluetooth 4.1 Core specification [3.12] specifies that the Bluetooth device can change its private address periodically, with the period being decided by the application; there are no limits specified on this period. The application layer should maintain its own timers in order to do this.

This is a blocking function. No event is generated on calling this function.

**Parameters:**

<i>bdAddr</i>	Bluetooth Device address retrieved from the BLE stack gets stored to a variable pointed to by this pointer. The variable is of type <a href="#">CYBLE_GAP_BD_ADDR_T</a> .
---------------	---



**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter.

### **CYBLE\_API\_RESULT\_T CyBle\_GetDeviceAddress (CYBLE\_GAP\_BD\_ADDR\_T\* *bdAddr*)**

This API reads the BD device address from BLE Controller's memory. This address shall be used for BLE procedures unless explicitly indicated by BLE Host through HCI commands. This is a blocking function and it returns immediately with the required value.

**Parameters:**

<i>bdAddr</i>	<p>Pointer to the <a href="#">CYBLE_GAP_BD_ADDR_T</a> structure variable. It has two fields where,</p> <ul style="list-style-type: none"> <li>bdAddr.addr: Bluetooth Device address buffer that is populated with the device address data from BLE stack.</li> <li>bdAddr.type: Caller function should fill the "address type" to retrieve appropriate address.</li> </ul> <p>Caller function should use bdAddr.type = 0x00 to get the "Public Device Address" which is currently set.</p> <p>Caller function use bdAddr.type = 0x01 to get the "Random Device Address" which is currently set.</p>
---------------	---

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter.

### **int8 CyBle\_GetRssi (void )**

This function reads the recorded Received Signal Strength Indicator (RSSI) value for the last successfully received packet from the BLE radio sub-system. This is a blocking function. No event is generated on calling this function.

**Returns:**

int8: The RSSI value of the responding device.

Information	Description
Range	-85 <= N <= 5
Note	The value is in dBm.

**CYBLE\_API\_RESULT\_TCyBle\_GetTxPowerLevel (CYBLE\_BLESS\_PWR\_IN\_DB\_T\* bleSsPwrLvl)**

This function reads the transmit power of the BLE radio for the given BLE sub-system channel group. This is a blocking function. No event is generated on calling this function.

**Parameters:**

<i>bleSsPwrLvl</i>	Pointer to a variable of type <a href="#">CYBLE_BLESS_PWR_IN_DB_T</a> where, <ul style="list-style-type: none"> <li>bleSsPwrLvl -&gt; blePwrLevelInDbm indicates Output Power level in dBm returned by the function.</li> <li>bleSsPwrLvl -&gt; bleSsChId indicates Channel group for which power level is to be read. This needs to be set before calling the function. The value can be advertisement channels (CYBLE_LL_ADV_CH_TYPE) or data channels (CYBLE_LL_CONN_CH_TYPE).</li> <li>If bleSsPwrLvl-&gt;blePwrLevelInDbm is greater than 0dBm, then the power level is applicable to both advertisement and connection channel.</li> </ul>
--------------------	--

**Returns:**

CYBLE\_API\_RESULT\_T: Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter

**CYBLE\_API\_RESULT\_TCyBle\_SetTxPowerLevel (CYBLE\_BLESS\_PWR\_IN\_DB\_T\* bleSsPwrLvl)**

This function sets the transmit power of the BLE radio for given BLE sub-system channel group. This is a blocking function. No event is generated on calling this function.

**Parameters:**

<i>bleSsPwrLvl</i>	Pointer to a variable of type ' <a href="#">CYBLE_BLESS_PWR_IN_DB_T</a> ' where, <ul style="list-style-type: none"> <li>bleSsPwrLvl -&gt; blePwrLevelInDbm indicates Output Power level in dBm to be set by the function.</li> <li>bleSsPwrLvl -&gt; bleSsChId indicates Channel group for which power level is to be set. The value can be advertisement channels (CYBLE_LL_ADV_CH_TYPE) or data channels (CYBLE_LL_CONN_CH_TYPE).</li> <li>If bleSsPwrLvl-&gt;blePwrLevelInDbm is greater than 0dBm, then the power level is applicable to both advertisement and connection channel.</li> </ul>
--------------------	--

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.





Errors codes	Description
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter.

### **CYBLE\_API\_RESULT\_T CyBle\_GetBleClockCfgParam (CYBLE\_BLESS\_CLK\_CFG\_PARAMS\_T \*bleSsClockConfig)**

This function reads the clock configuration parameter of BLE sub-system. This is a blocking function. No event is generated on calling this function. The following parameters related to the BLE sub-system clock are set by this function:

#### **Sleep Clock accuracy**

Sleep clock accuracy (SCA) in PPM. This parameter indicates the sleep clock accuracy in PPM as described in the following table. It is set in the BLE Stack and is used for BLE Connection operation while creating LE connection with the peer device.

Sleep Clock Accuracy Enum Field	PPM Range Translation (PPM)
CYBLE_LL_SCA_251_TO_500_PPM	251 - 500
CYBLE_LL_SCA_151_TO_250_PPM	151 - 250
CYBLE_LL_SCA_101_TO_150_PPM	101 - 150
CYBLE_LL_SCA_076_TO_100_PPM	76 - 100
CYBLE_LL_SCA_051_TO_075_PPM	51 - 75
CYBLE_LL_SCA_031_TO_050_PPM	31 - 50
CYBLE_LL_SCA_021_TO_030_PPM	21 - 30
CYBLE_LL_SCA_000_TO_020_PPM	0 - 20

Refer to Bluetooth Core Specification 4.1 Volume 6, Chapter 4.5.7 for more details on how the SCA is used.

#### **Link Layer clock divider**

This input decides the frequency of the clock to the link layer. A lower clock frequency results in lower power consumption. Default clock frequency for the operation is 24 MHz. BLESS supports 24 MHz, 12 MHz and 8 MHz clock configurations. Based on the end application requirement (how frequent the communication is expected to be), this parameter needs to be set.

**ecoXtalStartUpTime** ECO startup time specifies the value in the unit of 62.5 us (16 KHz clock cycles). This value is programmed in BLESS WAKE\_UP config register, to configure the wakeup time required by ECO. Max value for ECO startup time field can be 79u units = (79 \* 62.5) us

#### **Parameters:**

<i>bleSsClockConfig</i>	Pointer to a variable of type <a href="#">CYBLE_BLESS_CLK_CFG_PARAMS_T</a> to which the existing clock configuration is stored.
-------------------------	---

#### **Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter.





### **CYBLE\_API\_RESULT\_T CyBle\_SetBleClockCfgParam (CYBLE\_BLESS\_CLK\_CFG\_PARAMS\_T \* bleSsClockConfig)**

This function sets the clock configuration parameter of BLE sub-system. This is a blocking function. No event is generated on calling this function. The following parameters related to the BLE sub-system clock are set by this function:

#### **Sleep Clock accuracy**

Sleep clock accuracy (SCA) in PPM. This parameter indicates the sleep clock accuracy in PPM as described in the following table. It is set in the BLE Stack and is used for BLE Connection operation while creating LE connection with the peer device.

<b>Sleep Clock Accuracy Enum Field</b>	<b>PPM Range Translation (PPM)</b>
CYBLE_LL_SCA_251_TO_500_PPM	251 - 500
CYBLE_LL_SCA_151_TO_250_PPM	151 - 250
CYBLE_LL_SCA_101_TO_150_PPM	101 - 150
CYBLE_LL_SCA_076_TO_100_PPM	76 - 100
CYBLE_LL_SCA_051_TO_075_PPM	51 - 75
CYBLE_LL_SCA_031_TO_050_PPM	31 - 50
CYBLE_LL_SCA_021_TO_030_PPM	21 - 30
CYBLE_LL_SCA_000_TO_020_PPM	0 - 20

Refer to Bluetooth Core Specification 4.1 Volume 6, Chapter 4.5.7 for more details on how the SCA is used.

#### **Link Layer clock divider**

This input decides the frequency of the clock to the link layer. A lower clock frequency results in lower power consumption. Default clock frequency for the operation is 24MHz. BLESS supports 24MHz, 12MHz and 8MHz clock configurations. Based on the end application requirement (how frequent the communication is expected to be), this parameter needs to be set.

**ecoXtalStartUpTime** ECO startup time specifies the value in the unit of 62.5us (16KHz clock cycles). This value is programmed in BLESS WAKE\_UP config register, to configure the wakeup time required by ECO. Max value for ECO startup time field can be 79u units = (79 \* 62.5) us

#### **Parameters:**

<i>bleSsClockConfig</i>	Pointer to a variable of type <a href="#">CYBLE_BLESS_CLK_CFG_PARAMS_T</a> from which the existing clock configuration is taken.
-------------------------	--

#### **Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

<b>Errors codes</b>	<b>Description</b>
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter.

### **CYBLE\_API\_RESULT\_T CyBle\_GenerateRandomNumber (uint8 \* randomNumber)**

This function generates 8-byte random number which complies with pseudo random number generation in accordance with [FIPS PUB 140-2]. Random number generation function is used during security procedure documented in Bluetooth 4.1 core specification, Volume 3, Part H.

This is a blocking function. No event is generated on calling this function.



**Parameters:**

<i>randomNumber</i>	Pointer to a buffer of size 8 bytes in which the generated random number gets stored.
---------------------	---

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter.

**CYBLE\_API\_RESULT\_TCyBle\_AesEncrypt (uint8 \* *plainData*, uint8 \* *aesKey*, uint8 \* *encryptedData*)**

This function uses BLE sub-system AES engine to encrypt 128-bit of plain text using the given AES key. The output of AES processing is copied to encryptedData buffer. Refer Bluetooth 4.1 core specification, Volume 3, Part H, section 2.2 for more details on usage of AES key.

This is a blocking function. No event is generated on calling this function.

**Parameters:**

<i>plainData</i>	Pointer to the data containing plain text (128-bit) that is to be encrypted.
<i>aesKey</i>	Pointer to the AES Key (128-bit) that is to be used for AES encryption.
<i>encryptedData</i>	Pointer to the encrypted data (128-bit) that is output of AES module for given plainData and aesKey.

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter

**CYBLE\_API\_RESULT\_TCyBle\_SetCeLengthParam (uint8 *bdHandle*, uint8 *mdBit*, uint16 *ceLength*)**

This function sets the connection event duration related parameters that can result in extension or truncation of LE connection event based on more data (mdBit) bit status and 'ceLength' duration. Refer Bluetooth 4.1 core specification, Volume 6, Part B, section 4.5 for more details on connection states of BLE Link Layer.

This is a blocking function. No event is generated on calling this function.

BLE Stack uses the BLESS hardware (AES module) to encrypt/decrypt the data. BLESS must be initialized before using this function. This function can safely be used by the application in "single thread/task system" which is the case with the current implementation of the BLE Stack. For multitasking systems, this function must be used within the BLE task to ensure atomic operation.

**Parameters:**

<i>bdHandle</i>	Peer device bdHandle.
<i>mdBit</i>	'More Data' bit to select more number of data packets in BLE Stack buffer. A value of 0x01 indicates extension and a value of 0x00 indicates truncation.

<i>ceLength</i>	CE length of connection event that can extend the connection event. Details on this parameter are as given below: <ul style="list-style-type: none"> <li>Value Range = 0x0000 to 0xFFFF</li> <li>Time Calculation = <math>N \times 0.625</math> ms</li> <li>Time Range = 0 ms to 40.959 ms</li> </ul>
-----------------	---

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	One of the input parameters is invalid
CYBLE_ERROR_NO_CONNECTION	Connection does not exist

### **CYBLE\_API\_RESULT\_TCyBle\_WriteAuthPayloadTimeout (uint8 *bdHandle*, uint16 *authPayloadTimeout*)**

This function sets the Authentication Payload timeout in BLE Controller for LE\_PING feature. Refer Bluetooth 4.1 core specification, Volume 6, Part B, section 4.6.5 for LE Ping operation.

This is a blocking function. No event is generated on calling this function.

**Parameters:**

<i>bdHandle</i>	Peer device handle.
<i>authPayloadTimeout</i>	Variable containing authentication timeout value to be written to BLE Controller. Details on this parameter are as given below: <ul style="list-style-type: none"> <li>Value Range = 0x0001 to 0xFFFF</li> <li>Default Value (N) = 3000 (30 seconds)</li> <li>Time Calculation = <math>N \times 10</math> ms</li> <li>Time Range = 10 ms to 655,350 ms</li> </ul>

**Returns:**

CYBLE\_API\_RESULT\_T: Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	One of the input parameters is invalid
CYBLE_ERROR_INVALID_OPERATION	Operation is not permitted
CYBLE_ERROR_NO_CONNECTION	Connection does not exist

### **CYBLE\_API\_RESULT\_TCyBle\_ReadAuthPayloadTimeout (uint8 *bdHandle*, uint16 \* *authPayloadTimeout*)**

This function reads the Authentication Payload timeout set in BLE Controller for LE\_PING feature Refer Bluetooth 4.1 core specification, Volume 6, Part B, section 4.6.5 for LE Ping operation.



This is a blocking function. No event is generated on calling this function.

**Parameters:**

<i>bdHandle</i>	Peer device handle
<i>authPayload Timeout</i>	Pointer to a variable to which authentication timeout value, read from BLE Controller, is written.

**Returns:**

CYBLE\_API\_RESULT\_T: Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	One of the input parameters is invalid.
CYBLE_ERROR_INVALID_OPERATION	Operation is not permitted.
CYBLE_ERROR_NO_CONNECTION	Connection does not exist.

**CYBLE\_API\_RESULT\_TCyBle\_GetStackLibraryVersion (CYBLE\_STACK\_LIB\_VERSION\_T\* *stackVersion*)**

This function retrieves the version information of the BLE Stack library. This is a blocking function. No event is generated on calling this function.

**Parameters:**

<i>stackVersion</i>	Pointer to a variable of type <u>CYBLE_STACK_LIB_VERSION_T</u> containing the version information of the CYBLE Stack library.
---------------------	---

**Returns:**

CYBLE\_API\_RESULT\_T: Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	stackVersion is NULL.

**CYBLE\_BLESS\_STATE\_TCyBle\_GetBleSsState (void )**

This function gets the BLE Subsystem's current operational mode. This state can be used to manage system level power modes based on return value.

**Returns:**

CYBLE\_BLESS\_STATE\_T bleStackMode: CYBLE\_BLESS\_STATE\_T has one of the following modes

BLE Stack Mode	Description
CYBLE_BLESS_STATE_ACTIVE	BLE Sub System is in active mode, CPU can be in active mode or sleep mode.
CYBLE_BLESS_STATE_EVENT_CLOSE	BLE Sub System radio and Link Layer hardware finishes Tx/Rx. After this state application can try putting BLE to Deep Sleep State to save power in rest of the BLE transmission event.

BLE Stack Mode	Description
CYBLE_BLESS_STATE_SLEEP	BLE Sub System is in sleep mode, CPU can be in sleep mode.
CYBLE_BLESS_STATE_ECO_ON	BLE Sub System is in process of wakeup from Deep Sleep Mode and ECO(XTAL) is turned on. CPU can be put in Deep Sleep Mode.
CYBLE_BLESS_STATE_ECO_STABLE	BLE Sub System is in process of wakeup from Deep Sleep Mode and ECO(XTAL) is stable. CPU can be put in sleep mode.
CYBLE_BLESS_STATE_DEEPSLEEP	BLE Sub System is in Deep Sleep Mode. CPU can be put in Deep Sleep Mode.
CYBLE_BLESS_STATE_HIBERNATE	BLE Sub System is in Hibernate Mode. CPU can be put in Deep Sleep Mode.

### void CyBle\_AesCcmInit (void )

This function initializes the clocks and registers needed to used AEC CCM encryption / decryption functionality without initializing the complete BLE Stack. This function must be called before calling CyBle\_AesCcmEncrypt and/or CyBle\_AesCcmDecrypt function. This is a blocking function. No event is generated on calling this function.

#### Returns:

None

### **CYBLE\_API\_RESULT\_T CyBle\_AesCcmEncrypt (uint8 \* key, uint8 \* nonce, uint8 \* in\_data, uint8 length, uint8 \* out\_data, uint8 \* out\_mic)**

This function encrypts the given data. This function can only be invoked after invoking 'CyBle\_AesCcmInit' function. This is a blocking function. No event is generated on calling this function.

#### Parameters:

<i>key</i>	Pointer to an array of bytes holding the key. The array length to be allocated by the application should be 16 bytes.
<i>nonce</i>	Pointer to an array of bytes. The array length to be allocated by the application is 13 Bytes.
<i>in_data</i>	Pointer to an array of bytes to be encrypted. Size of the array should be equal to the value of 'length' parameter.
<i>length</i>	Length of the data to be encrypted, in Bytes. Valid value range is 1 to 27.
<i>out_data</i>	Pointer to an array of size 'length' where the encrypted data is stored.
<i>out_mic</i>	Pointer to an array of bytes (4 Bytes) to store the MIC value generated during encryption.

#### Returns:

CYBLE\_API\_RESULT\_T: Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	One of the inputs is a null pointer or the 'length' value is invalid



**CYBLE\_API\_RESULT\_T** **CyBle\_AesCcmDecrypt** (uint8 \* *key*, uint8 \* *nonce*, uint8 \* *in\_data*, uint8 *length*, uint8 \* *out\_data*, uint8 \* *in\_mic*)

This function decrypts the given data. This function can only be invoked after invoking 'CyBle\_AesCcmInit' function. This is a blocking function. No event is generated on calling this function.

**Parameters:**

<i>key</i>	Pointer to an array of bytes holding the key. The array length to be allocated by the application should be 16 bytes.
<i>nonce</i>	Pointer to an array of bytes. The array length to be allocated by the application is 13 Bytes.
<i>in_data</i>	Pointer to an array of bytes to be decrypted. Size of the array should be equal to the value of 'length' parameter.
<i>length</i>	Length of the data to be decrypted, in Bytes. Valid value range is 1 to 27.
<i>out_data</i>	Pointer to an array of size 'length' where the decrypted data is stored.
<i>in_mic</i>	Pointer to an array of bytes (4 Bytes) to provide the MIC value generated during encryption.

**Returns:**

CYBLE\_API\_RESULT\_T: Return value indicates if the function succeeded or failed. Following are the possible error codes.

Error codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	One of the inputs is a null pointer or the 'length' value is invalid
CYBLE_ERROR_MIC_AUTH_FAILED	Data decryption has been done successfully but MIC based authorization check has failed. This error can be ignored if MIC based authorization was not intended.

**void** **CyBle\_SetTxGainMode** (uint8 *bleSsGainMode*)

This function configures the Tx gain mode for BLESS radio for Tx operation.

**Parameters:**

<i>bleSsGainMode</i>	Gain mode setting for the output power
BLESS RD Gain Mode	Description
CYBLE_BLESS_NORMAL_GAIN_MODE	0x00u - BLESS Normal Gain Mode Tx Pwr Range -18dBm to 0 dBm Normal Rx Sensitivity
CYBLE_BLESS_HIGH_GAIN_MODE	0x01u - BLESS High Gain Mode Tx Pwr Range -18dBm to 3 dBm 3 dBm Additional Rx Sensitivity

**Returns:**

none

**void CyBle\_SetRxGainMode (uint8 bleSsGainMode)**

This function configures the Rx gain mode for BLESS radio for Rx operation.

**Parameters:**

<i>bleSsGainMode</i>	Gain mode setting for the output power
BLESS RD Gain Mode	Description
CYBLE_BLESS_NORMAL_GAIN_MODE	0x00u - BLESS Normal Gain Mode Tx Pwr Range -18dBm to 0 dBm Normal Rx Sensitivity
CYBLE_BLESS_HIGH_GAIN_MODE	0x01u - BLESS High Gain Mode Tx Pwr Range -18dBm to 3 dBm 3 dBm Additional Rx Sensitivity

**Returns:**

none

**CYBLE\_API\_RESULT\_T CyBle\_StoreStackData (uint8 isForceWrite)**

This function instructs Stack to backup Stack internal RAM data into flash. This API must be called by application to backup stack data. If this API is not called appropriately, stack internal data structure will not be available on power cycle.

**Parameters:**

<i>isForceWrite</i>	If value is set to 0, then stack will check if flash write is permissible. If value is set to 1, application should exit low power mode by calling <a href="#">CyBle_ExitLPM()</a> .
---------------------	--

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_FLASH_WRITE_NOT_PERMITTED	Flash Write is not permitted or not completely written

**CYBLE\_API\_RESULT\_T CyBle\_StoreAppData (uint8 \* srcBuff, const uint8 destAddr[], uint32 buffLen, uint8 isForceWrite)**

This function instructs the Stack to backup application specific data into flash. This API must be called by application to backup application specific data. If this API is not called appropriately, data will not be available on power cycle.

**Parameters:**

<i>srcBuff</i>	Source buffer
<i>destAddr</i>	Destination address
<i>buffLen</i>	Length of srcData
<i>isForceWrite</i>	If value is set to 0, then stack will check if flash write is permissible. If value is set to 1, application should exit low power mode by calling <a href="#">CyBle_ExitLPM()</a> .



**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_FLASH_WRITE_NOT_PERMITTED	Flash Write is not permitted

## GAP Functions

### Description

The GAP APIs allow access to the Generic Access Profile (GAP) layer of the BLE stack. Depending on the chosen GAP role in the GUI, you may use a subset of the supported APIs.

The GAP API names begin with CyBle\_Gap. In addition to this, the APIs also append the GAP role initial letter in the API name.

### Modules

- [GAP Central and Peripheral Functions](#)  
*These are APIs common to both GAP Central role and GAP Peripheral role. You may use them in either roles.*
- [GAP Central Functions](#)  
*APIs unique to designs configured as a GAP Central role.*
- [GAP Peripheral Functions](#)  
*APIs unique to designs configured as a GAP Peripheral role.*
- [GAP Definitions and Data Structures](#)  
*Contains the GAP specific definitions and data structures used in the GAP APIs.*

## GAP Central and Peripheral Functions

### Description

These are APIs common to both GAP Central role and GAP Peripheral role. You may use them in either roles.

No letter is appended to the API name: CyBle\_Gap

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapSetLocalName](#)(const char8 name[])
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapGetLocalName](#)(char8 name[])
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapSetIoCap](#) (CYBLE\_GAP\_IOCAP\_T ioCap)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapSetOobData](#)(uint8 bdHandle, uint8 oobFlag, uint8 \*key, uint8 \*oobData, uint8 \*oobDataLen)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapGetPeerBdAddr](#)(uint8 bdHandle, CYBLE\_GAP\_BD\_ADDR\_T \*peerBdAddr)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapGetPeerBdHandle](#)(uint8 \*bdHandle, CYBLE\_GAP\_BD\_ADDR\_T \*peerBdAddr)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapGetPeerDevSecurity](#)(uint8 bdHandle, CYBLE\_GAP\_AUTH\_INFO\_T \*security)



- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapDisconnect](#)(uint8 bdHandle)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapGetPeerDevSecurityKeyInfo](#)(uint8 bdHandle, uint8 \*keysFlag, [CYBLE\\_GAP\\_SMP\\_KEY\\_DIST\\_T](#)\*keyInfo)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapGenerateDeviceAddress](#) ([CYBLE\\_GAP\\_BD\\_ADDR\\_T](#)\*bdAddr, [CYBLE\\_GAP\\_ADDR\\_TYPE\\_T](#)addrType, uint8 \*irk)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapSetSecurityKeys](#)(uint8 keysFlag, [CYBLE\\_GAP\\_SMP\\_KEY\\_DIST\\_T](#)\*keyInfo)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapGenerateKeys](#)(uint8 keysFlag, [CYBLE\\_GAP\\_SMP\\_KEY\\_DIST\\_T](#)\*keyInfo)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapAuthReq](#)(uint8 bdHandle, [CYBLE\\_GAP\\_AUTH\\_INFO\\_T](#)\*authInfo)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapAuthPassKeyReply](#)(uint8 bdHandle, uint32 passkey, uint8 accept)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapRemoveDeviceFromWhiteList](#) ([CYBLE\\_GAP\\_BD\\_ADDR\\_T](#)\*bdAddr)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapAddDeviceToWhiteList](#) ([CYBLE\\_GAP\\_BD\\_ADDR\\_T](#)\*bdAddr)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapGetBondedDevicesList](#) ([CYBLE\\_GAP\\_BONDED\\_DEV\\_ADDR\\_LIST\\_T](#)\*bondedDevList)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapRemoveOldestDeviceFromBondedList](#)(void)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapGetDevSecurityKeyInfo](#)(uint8 \*keyFlags, [CYBLE\\_GAP\\_SMP\\_KEY\\_DIST\\_T](#)\*keys)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapGetDevicesFromWhiteList](#)(uint8 \*count, [CYBLE\\_GAP\\_BD\\_ADDR\\_T](#)\*addr)

## Function Documentation

### [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapSetLocalName](#) (const char8 *name*[])

This API is used to set the local device name - a Characteristic of the GAP Service. If the characteristic length entered in the component customizer is shorter than the string specified by the "name" parameter, the local device name will be cut to the length specified in the customizer.

#### Parameters:

<i>name</i>	The local device name string. The name string to be written as the local device name. It represents a UTF-8 encoded User Friendly Descriptive Name for the device. The length of the local device string is entered into the component customizer and it can be set to a value from 0 to 248 bytes. If the name contained in the parameter is shorter than the length from the customizer, the end of the name is indicated by a NULL octet (0x00).
-------------	---

#### Returns:

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	Function completed successfully.
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter

### [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapGetLocalName](#) (char8 *name*[])

This API is used to read the local device name - a Characteristic of the GAP Service.



**Parameters:**

<i>name</i>	The local device name string. Used to read the local name to the given string array. It represents a UTF-8 encoded User Friendly Descriptive Name for the device. The length of the local device string is entered into the component customizer and it can be set to a value from 0 to 248 bytes. If the name contained in the parameter is shorter than the length from the customizer, the end of the name is indicated by a NULL octet (0x00).
-------------	--

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	Function completed successfully.
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter

**CYBLE\_API\_RESULT\_T CyBle\_GapSetIoCap (CYBLE\_GAP\_IOCAP\_T ioCap)**

This function sets the input and output capability of the BLE Device that is used during authentication procedure. This is a blocking function. No event is generated on calling this function. The input capabilities are described in the following table:

Capability	Description
No input	Device does not have the ability to indicate "yes" or "no"
Yes/No	Device has at least two buttons that can be easily mapped to "yes" and "no" or the device has a mechanism whereby the user can indicate either "yes" or "no".
Keyboard	Device has a numeric keyboard that can input the numbers "0" through "9" and a confirmation. Device also has at least two buttons that can be easily mapped to "yes" and "no" or the device has a mechanism whereby the user can indicate either "yes" or "no".

The output capabilities are described in the following table:

Capability	Description
No output	Device does not have the ability to display or communicate a 6 digit decimal number.
Numeric output	Device has the ability to display or communicate a 6 digit decimal number.

Combined capability is defined in the following table:

Input Capability	No Output	Numeric Output
No input	NoInputNoOutput	DisplayOnly

Input Capability	No Output	Numeric Output
Yes/No	NoInputNoOutput	DisplayYesNo
Keyboard	KeyboardOnly	KeyboardDisplay

Refer Bluetooth 4.1 core specification, Volume 3, Part C, section 5.2.2.4 for more details on the IO capabilities. IO capabilities of the BLE devices are used to determine the pairing method. Please refer Bluetooth 4.1 core specification, Volume 3, Part H, section 2.3.5.1 for more details on the impact of IO capabilities on the pairing method chosen.

**Parameters:**

<i>io_cap</i>	IO Capability of type CYBLE_GAP_IOCAP_T.
---------------	--

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	On specifying invalid input parameter

### **CYBLE\_API\_RESULT\_T CyBle\_GapSetOobData (uint8 *bdHandle*, uint8 *oobFlag*, uint8 \* *key*, uint8 \* *oobData*, uint8 \* *oobDataLen*)**

This function sets OOB presence flag and data. This function should be used by the application layer if it wants to enable OOB bonding procedure for any specific device identified by "bdHandle". This function should be called before initiating authentication or before responding to authentication request to set OOB flag and data. For more details on OOB, please refer Bluetooth 4.1 core specification, Volume 1, Part A, section 5.2.4.3. This is a blocking function. No event is generated on calling this function.

**Parameters:**

<i>bdHandle</i>	Peer device for which the Out Of Band signaling (OOB) configuration is to be used.
<i>oobFlag</i>	OOB data presence flag. Allowed value are, <ul style="list-style-type: none"> <li>• CYBLE_GAP_OOB_DISABLE</li> <li>• CYBLE_GAP_OOB_ENABLE</li> </ul>
<i>key</i>	16 Octet Temporary Key, to be used for OOB authentication.
<i>oobData</i>	Pointer to OOB data.
<i>oobDataLen</i>	Pointer to a variable to store OOB data length.

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter
CYBLE_ERROR_NO_DEVICE_ENTITY	'bdHandle' does not represent known device



Errors codes	Description
TY	entity

**CYBLE\_API\_RESULT\_T CyBle\_GapGetPeerBdAddr (uint8 *bdHandle*, CYBLE\_GAP\_BD\_ADDR\_T\* *peerBdAddr*)**

This function reads the peer Bluetooth device address which has already been fetched by the BLE Stack. 'peerBdAddr' stores the peer's Bluetooth device address identified with 'bdHandle'. This is a blocking function. No event is generated on calling this function.

**Parameters:**

<i>bdHandle</i>	Peer device handle.
<i>peerBdAddr</i>	Empty buffer where the Bluetooth device address gets stored.

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter for 'peerBdAddr'.
CYBLE_ERROR_NO_DEVICE_ENTITY	Specified device handle does not map to any device handle entry in BLE stack.

**CYBLE\_API\_RESULT\_T CyBle\_GapGetPeerBdHandle (uint8 \* *bdHandle*, CYBLE\_GAP\_BD\_ADDR\_T\* *peerBdAddr*)**

This function reads the device handle of the remote Bluetooth device using 'peerBdAddr', which has already been fetched by the BLE Stack. 'bdHandle' stores the peer device handle. This is a blocking function. No event is generated on calling this function.

**Parameters:**

<i>bdHandle</i>	Pointer to a variable to store peer device handle
<i>peerBdAddr</i>	Pointer to Bluetooth device address of peer device of type <u>CYBLE_GAP_BD_ADDR_T</u> , to be provided to this function as an input

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter for 'peerBdAddr' or 'bdHandle'.
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed.
CYBLE_ERROR_NO_DEVICE_ENTITY	Specified device handle does not map to any device handle entry in BLE stack.

### **CYBLE\_API\_RESULT\_T CyBle\_GapGetPeerDevSecurity (uint8 *bdHandle*, CYBLE\_GAP\_AUTH\_INFO\_T\* *security*)**

This function enables the application to get the device security of the peer device, which has already been fetched by the BLE Stack, identified using 'bdHandle' when the peer device is in the trusted list. This is a blocking function. No event is generated on calling this function.

#### **Parameters:**

<i>bdHandle</i>	Peer device handle
<i>security</i>	Pointer to a buffer into which security information will be written. security level of the peer device is provided in CYBLE_GAP_AUTH_INFO_T->security. It ignores LE Security mode. Security should be interpreted as MITM and no MITM as encryption is always supported if pairing is performed between two devices.

#### **Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter for 'security'.
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed.
CYBLE_ERROR_NO_DEVICE_ENTRY	Specified device handle does not map to any device handle entry in BLE stack.

### **CYBLE\_API\_RESULT\_T CyBle\_GapDisconnect (uint8 *bdHandle*)**

This function disconnects the peer device. It is to be used by the device in GAP Central mode and may be used by a GAP Peripheral device to send a disconnect request. This is a non-blocking function. On disconnection, the following events are generated, in order.

- CYBLE\_EVT\_GATT\_DISCONNECT\_IND
- CYBLE\_EVT\_GAP\_DEVICE\_DISCONNECTED

#### **Parameters:**

<i>bdHandle</i>	Peer device handle
-----------------	--------------------

#### **Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Error codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	No device to be disconnected. The specified device handle does not map to any device entry in the BLE Stack.
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed.



**CYBLE\_API\_RESULT\_T CyBle\_GapGetPeerDevSecurityKeyInfo (uint8 *bdHandle*, uint8 \* *keysFlag*, CYBLE\_GAP\_SMP\_KEY\_DIST\_T \* *keyInfo*)**

This function enables the application to know the keys shared by a given peer device upon completion of the security sequence (already fetched by the BLE Stack). The keys are shared by the peer device on initiation of authentication which is performed using the [CyBle\\_GapAuthReq\(\)](#) or [CyBle\\_GapAuthReqReply\(\)](#) function.

This is a blocking function. No event is generated on calling this function.

**Parameters:**

<i>bdHandle</i>	Peer device handle.
<i>keysFlag</i>	Indicates the keys to be retrieved from peer device. The following bit fields indicate the presence or absence of the keys distributed. <b>Negotiated Local/Peer Key distribution</b> <ul style="list-style-type: none"> <li>• Bit 0. Encryption information (LTK and MID Information)</li> <li>• Bit 1. Identity information</li> <li>• Bit 2. Signature Key</li> <li>• Bit 3-7. Reserved</li> </ul>
<i>key_info</i>	Pointer to variable of type <a href="#">CYBLE_GAP_SMP_KEY_DIST_T</a> to copy the stored keys of the peer device identified by 'bdHandle'

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter for 'keyInfo'.
CYBLE_ERROR_INVALID_OPERATION	An error occurred in BLE stack.

**CYBLE\_API\_RESULT\_T CyBle\_GapGenerateDeviceAddress (CYBLE\_GAP\_BD\_ADDR\_T \* *bdAddr*, CYBLE\_GAP\_ADDR\_TYPE\_T *addrType*, uint8 \* *irk*)**

This function generates either public or random address based on 'type' field of [CYBLE\\_GAP\\_BD\\_ADDR\\_T](#) structure. It uses BLE Controller's random number generator to generate the random part of the Bluetooth device address.

The parameter 'addrType' specifies further sub-classification within the public and random address types.

This is a blocking function. No event is generated on calling this function.

**Parameters:**

<i>bdAddr</i>	Bluetooth device address is generated and populated in the structure pointed to by this pointer. The structure is of type <a href="#">CYBLE_GAP_BD_ADDR_T</a> .
<i>addrType</i>	Specifies the type of address. This can take one of the values from the enumerated data type CYBLE_GAP_ADDR_TYPE_T.
<i>irk</i>	Pointer to buffer containing 128-bit 'IRK' data. This parameter is only used when CYBLE_GAP_RANDOM_PRIV_RESOLVABLE_ADDR is the value set to 'addrType'. For other values of 'addrType', this parameter is not used.



**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter.

**CYBLE\_API\_RESULT\_T CyBle\_GapSetSecurityKeys (uint8 *keysFlag*, CYBLE\_GAP\_SMP\_KEY\_DIST\_T\* *keyInfo*)**

This function sets the security keys that are to be exchanged with peer device during key exchange stage of authentication procedure and sets it in the BLE Stack. This is a blocking function. No event is generated on calling this function.

**Parameters:**

<i>keysFlag</i>	<p>This parameter indicates which keys get exchanged with peer device. The following is the bit field mapping for the keys.</p> <p><b>First 4 bits. Initiator's Key distribution</b></p> <ul style="list-style-type: none"> <li>• Bit 0. Encryption information (LTK and MID Information)</li> <li>• Bit 1. Identity information</li> <li>• Bit 2. Signature Key</li> <li>• Bit 3. Reserved</li> </ul> <p><b>Next 4 bits. Responder's Key distribution</b></p> <ul style="list-style-type: none"> <li>• Bit 4. Encryption information (LTK and MID Information)</li> <li>• Bit 5. Identity information</li> <li>• Bit 6. Signature Key</li> <li>• Bit 7. Reserved</li> </ul>
<i>keyInfo</i>	<p>Pointer to a variable containing the keys to be set, of type '<u>CYBLE_GAP_SMP_KEY_DIST_T</u>'. idAddrInfo param of '<u>CYBLE_GAP_SMP_KEY_DIST_T</u>' will be ignored. 'CyBle_SetDeviceAddress' api needs to be used to set bd address.</p>

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter for 'keyInfo'



### **CYBLE\_API\_RESULT\_T CyBle\_GapGenerateKeys (uint8 *keysFlag*, CYBLE\_GAP\_SMP\_KEY\_DIST\_T\* *keyInfo*)**

This function generates the security keys that are to be exchanged with peer device during key exchange stage of authentication procedure and sets it in the BLE Stack. This is a blocking function. No event is generated on calling this function.

#### **Parameters:**

<i>keysFlag</i>	<p>This parameter indicates which keys get exchanged with peer device. The following is the bit field mapping for the keys.</p> <p><b>First 4 bits. Initiator's Key distribution</b></p> <ul style="list-style-type: none"> <li>• Bit 0. Encryption information (LTK and MID Information)</li> <li>• Bit 1. Identity information</li> <li>• Bit 2. Signature Key</li> <li>• Bit 3. Reserved</li> </ul> <p><b>Next 4 bits. Responder's Key distribution</b></p> <ul style="list-style-type: none"> <li>• Bit 4. Encryption information (LTK and MID Information)</li> <li>• Bit 5. Identity information</li> <li>• Bit 6. Signature Key</li> <li>• Bit 7. Reserved</li> </ul>
<i>keyInfo</i>	<p>Pointer to a variable containing the returned keys, of type <u>CYBLE_GAP_SMP_KEY_DIST_T</u></p>

#### **Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter for 'keyInfo'

### **CYBLE\_API\_RESULT\_T CyBle\_GapAuthReq (uint8 *bdHandle*, CYBLE\_GAP\_AUTH\_INFO\_T\* *authInfo*)**

This function starts authentication/pairing procedure with the peer device. It is a non-blocking function.

If the local device is a GAP Central, the pairing request is sent to the GAP Peripheral device. On receiving CYBLE\_EVT\_GAP\_AUTH\_REQ event, the GAP Peripheral is expected to respond by invoking the [CyBle\\_GapAuthReqReply\(\)](#) function.

If the local device is GAP Peripheral, a Security Request is sent to GAP Central device. On receiving CYBLE\_EVT\_GAP\_AUTH\_REQ event, the GAP Central device is expected to respond by invoking 'CyBle\_GapAuthReq ()' function.

#### **Parameters:**

<i>bdHandle</i>	Peer device handle
<i>authInfo</i>	<p>Pointer to security information of the device of type <u>CYBLE_GAP_AUTH_INFO_T</u>. The 'authErr' parameter in <u>CYBLE_GAP_AUTH_INFO_T</u> should be ignored as it is not used in this function.</p>



**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Error codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On specifying null pointer for 'advInfo' or if any of the element of this structure has an invalid value.
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed
CYBLE_ERROR_NO_DEVICE_ENTITY	Device identified using 'bdHandle' does not exist.
CYBLE_ERROR_INSUFFICIENT_RESOURCES	On bonded device is full and application tries to initiate pairing with bonding enable.

### **CYBLE\_API\_RESULT\_T CyBle\_GapAuthPassKeyReply (uint8 *bdHandle*, uint32 *passkey*, uint8 *accept*)**

This function sends passkey for authentication. It is a non-blocking function.

It should be invoked in reply to the authentication request event CYBLE\_EVT\_GAP\_PASSKEY\_ENTRY\_REQUEST received by the BLE Stack. This function is used to accept the passkey request and send the passkey or reject the passkey request.

- If the authentication operation succeeds, CYBLE\_EVT\_GAP\_AUTH\_COMPLETE is generated. If the authentication process times out, CYBLE\_EVT\_TIMEOUT event is generated.
- If the authentication fails, CYBLE\_EVT\_GAP\_AUTH\_FAILED event is generated.

**Parameters:**

<i>bdHandle</i>	Peer device handle
<i>passkey</i>	6-digit decimal number (authentication passkey)
<i>accept</i>	Accept or reject passkey entry request. Allowed values are, <ul style="list-style-type: none"> <li>• CYBLE_GAP_REJECT_PASSKEY_REQ</li> <li>• CYBLE_GAP_ACCEPT_PASSKEY_REQ</li> </ul>

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	Invalid parameter.
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed.
CYBLE_ERROR_NO_DEVICE_ENTITY	Device identified using 'bdHandle' does not exist.



**CYBLE\_API\_RESULT\_T CyBle\_GapRemoveDeviceFromWhiteList (CYBLE\_GAP\_BD\_ADDR\_T\* *bdAddr*)**

This function marks the device specified by the handle as untrusted. It removes the bonding information of the device and removes it from the white list. More details on 'bonding' and 'trusted devices' is available in Bluetooth 4.1 core specification, Volume 3, Part C, section 9.4.4.

This is a blocking function. No event is generated on calling this function.

**Parameters:**

<i>bdAddr</i>	Pointer to peer device address, of type <u>CYBLE_GAP_BD_ADDR_T</u> . If device address is set to 0, then all devices shall be removed from trusted list and white list.
---------------	---

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter for 'bdAddr'.
CYBLE_ERROR_INVALID_OPERATION	Whitelist is already in use.
CYBLE_ERROR_NO_DEVICE_ENTITY	Device does not exist in the whitelist.

**CYBLE\_API\_RESULT\_T CyBle\_GapAddDeviceToWhiteList (CYBLE\_GAP\_BD\_ADDR\_T\* *bdAddr*)**

This function adds the device to the whitelist. Maximum number of devices that can be added to the whitelist is eight including CYBLE\_GAP\_MAX\_BONDED\_DEVICE. Refer to Bluetooth 4.1 core specification, Volume 3, Part C, section 9.3.5 for more details on whitelist.

This is a blocking function. No event is generated on calling this function.

**Parameters:**

<i>bdAddr</i>	Peer device address, of type <u>CYBLE_GAP_BD_ADDR_T</u> .
---------------	---

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Error codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter for 'bdAddr' or 'bdAddr->type' has an invalid value
CYBLE_ERROR_INVALID_OPERATION	Whitelist is already in use
CYBLE_ERROR_INSUFFICIENT_RESOURCES	WhitelistMemory is full
CYBLE_ERROR_DEVICE_ALREADY_EXISTS	Matching device already exists in the whitelist

### **CYBLE\_API\_RESULT\_T CyBle\_GapGetBondedDevicesList (CYBLE\_GAP\_BONDED\_DEV\_ADDR\_LIST\_T\* bondedDevList)**

This function returns the count and Bluetooth device address of the devices in the bonded device list. This is a blocking function. No event is generated on calling this function.

Application invoking this function should allocate sufficient memory for the structure CYBLE\_GAP\_BONDED\_DEV\_ADDR\_LIST\_T, where the complete list of bonded devices along with count can be written. Maximum devices bonded are specified by CYBLE\_GAP\_MAX\_BONDED\_DEVICE, which is a pre processing time parameter for the BLE Stack. Hence, the bonded device count will be less than or equal to CYBLE\_GAP\_MAX\_BONDED\_DEVICE.

Refer Bluetooth 4.1 core specification, Volume 3, Part C, section 9.4.4 for details on bonded devices.

#### **Parameters:**

<i>bondedDevList</i>	Buffer to which list of bonded device list will be stored of type <u>CYBLE_GAP_BONDED_DEV_ADDR_LIST_T</u> .
----------------------	---

#### **Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter.

### **CYBLE\_API\_RESULT\_T CyBle\_GapRemoveOldestDeviceFromBondedList (void )**

This function removes the oldest device from the bonded and while lists. This api should not be called while in connected state. If device is connected to the oldest device, and this API is called, it will remove the device which is oldest and not connected.

#### **Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded (0x0000) or failed. Following are the possible error codes returned -

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_MAX	On failure operation.

### **CYBLE\_API\_RESULT\_T CyBle\_GapGetDevSecurityKeyInfo (uint8 \* *keyFlags*, CYBLE\_GAP\_SMP\_KEY\_DIST\_T\* *keys*)**

This function gets the local device's Keys and key flags. The IRK received from this function should be used as the input IRK for the function 'CyBle\_GapGenerateDeviceAddress' to generate Random Private Resolvable address. This is a blocking function. No event is generated on calling this function.

#### **Parameters:**

<i>keyFlags</i>	Pointer to a byte where the key flags are stored. Based on the flag bits, the calling application can determine if the returned value is valid (1) or not (0). Key distribution flag <ul style="list-style-type: none"> <li>• Bit 0: Local Encryption information</li> <li>• Bit 1: Local Identity information</li> <li>• Bit 2: Local Signature Key</li> </ul>
-----------------	---



	<ul style="list-style-type: none"> <li>Bit 3 - Bit 7: Reserved</li> </ul>
<i>keys</i>	Pointer to a structure of type <a href="#">CYBLE_GAP_SMP_KEY_DIST_T</a> where the keys get stored

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameters

### **CYBLE\_API\_RESULT\_T CyBle\_GapGetDevicesFromWhiteList (uint8 \* *count*, CYBLE\_GAP\_BD\_ADDR\_T\* *addr*)**

This function extracts the list of devices added to the white list. This is a blocking function. No events are generated on calling this function. There is no HCI command defined for this operation as the application is expected to keep track of the devices added to the white list. This function has been provided to facilitate testing of the Cypress BLE Hardware using CySmart tool. The prototype of this function has been specified in CyBle\_UtilityFunctions.h. This file should not be used by the BLE Component team.

**Parameters:**

<i>count</i>	Pointer to a variable to hold the number of enabled addresses in the white list. This is an output parameter.
<i>addr</i>	Pointer to a variable of type ' <a href="#">CYBLE_GAP_BD_ADDR_T</a> ' which holds Address type and Address of the device.

The function invoking this should allocate memory for the variables pointed to by the above pointers. 'addr' should point to an array of type [CYBLE\\_GAP\\_BD\\_ADDR\\_T](#) and size equal to the maximum number of white list devices supported by the BLE Stack (CYBLE\_MAX\_WHITELIST\_ENTRIES).

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter(s)

## **GAP Central Functions**

**Description**

APIs unique to designs configured as a GAP Central role.

A letter 'c' is appended to the API name: CyBle\_Gapc

**Functions**

- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_GapcStartScan](#)(uint8 scanningIntervalType)



- void [CyBle\\_GapcStopScan](#)(void)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapcConnectDevice](#)(const [CYBLE\\_GAP\\_BD\\_ADDR\\_T](#)\*address)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapcCancelDeviceConnection](#)(void)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapcStartDiscovery](#) ([CYBLE\\_GAPC\\_DISC\\_INFO\\_T](#)\*scanInfo)
- void [CyBle\\_GapcStopDiscovery](#)(void)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapcInitConnection](#) ([CYBLE\\_GAPC\\_CONN\\_PARAM\\_T](#)\*connParam)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapcCancelConnection](#)(void)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapcResolveDevice](#)(const uint8 \*bdAddr, const uint8 \*irk)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapcConnectionParamUpdateRequest](#)(uint8 bdHandle, [CYBLE\\_GAP\\_CONN\\_UPDATE\\_PARAM\\_T](#)\*connParam)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapcSetHostChannelClassification](#)(uint8 \*channelMap)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapcSetRemoteAddr](#)(uint8 bdHandle, [CYBLE\\_GAP\\_BD\\_ADDR\\_T](#)remoteAddr)

## Function Documentation

### [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapcStartScan](#) (uint8 *scanningIntervalType*)

This function is used for discovering GAP peripheral devices that are available for connection. It performs the scanning routine using the parameters entered in the component's customizer.

As soon as the discovery operation starts, CYBLE\_EVT\_GAPC\_SCAN\_START\_STOP event is generated. The CYBLE\_EVT\_GAPC\_SCAN\_PROGRESS\_RESULT event is generated when a GAP peripheral device is located. There are three discovery procedures can be selected in the customizer's GUI:

- Observation procedure: A device performing the observer role receives only advertisement data from devices irrespective of their discoverable mode settings. Advertisement data received is provided by the event, CYBLE\_EVT\_GAPC\_SCAN\_PROGRESS\_RESULT. This procedure requires the scanType sub parameter to be passive scanning.
- Limited Discovery procedure: A device performing the limited discovery procedure receives advertisement data and scan# response data from devices in the limited discoverable mode only. Received data is provided by the event, CYBLE\_EVT\_GAPC\_SCAN\_PROGRESS\_RESULT. This procedure requires the scanType sub-parameter to be active scanning.
- General Discovery procedure: A device performing the general discovery procedure receives the advertisement data and scan response data from devices in both limited discoverable mode and the general discoverable mode. Received data is provided by the event, CYBLE\_EVT\_GAPC\_SCAN\_PROGRESS\_RESULT. This procedure requires the scanType sub-parameter to be active scanning.

Every Advertisement / Scan response packet received results in a new event, CYBLE\_EVT\_GAPC\_SCAN\_PROGRESS\_RESULT. If 'scanTo' sub-parameter is a non-zero value, then upon commencement of discovery procedure and elapsed time = 'scanTo', CYBLE\_EVT\_TIMEOUT event is generated with the event parameter indicating CYBLE\_GAP\_SCAN\_TO. Possible generated events are:

- CYBLE\_EVT\_GAPC\_SCAN\_START\_STOP: If a device started or stopped scanning. Use [CyBle\\_GetState\(\)](#) to determine the state. Sequential scanning could be started when CYBLE\_STATE\_DISCONNECTED state is returned.
- CYBLE\_EVT\_GAPC\_SCAN\_PROGRESS\_RESULT
- CYBLE\_EVT\_TIMEOUT (CYBLE\_GAP\_SCAN\_TO)

#### Parameters:

<i>scanningIntervalType</i>	Fast or slow scanning interval with timings entered in Scan settings section of the customizer.
-----------------------------	---



	<ul style="list-style-type: none"> <li>• CYBLE_SCANNING_FAST 0x00u</li> <li>• CYBLE_SCANNING_SLOW 0x01u</li> <li>• CYBLE_SCANNING_CUSTOM 0x02u</li> </ul>
--	---

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_STACK_INTERNAL	An error occurred in the BLE stack.
CYBLE_ERROR_INVALID_PARAMETER	On passing an invalid parameter.

**void CyBle\_GapcStopScan (void )**

This function used to stop the discovery of devices. On stopping discovery operation, CYBLE\_EVT\_GAPC\_SCAN\_START\_STOP event is generated. Application layer needs to keep track of the function call made before receiving this event to associate this event with either the start or stop discovery function.

Possible events generated are:

- CYBLE\_EVT\_GAPC\_SCAN\_START\_STOP

**Returns:**

None

**CYBLE\_API\_RESULT\_T CyBle\_GapcConnectDevice (const CYBLE\_GAP\_BD\_ADDR\_T\* address)**

This function is used to send a connection request to the remote device with the connection parameters set in the component customizer. This function needs to be called only once after the target device is discovered by [CyBle\\_GapcStartScan\(\)](#) and further scanning has stopped. Scanning is successfully stopped on invoking [CyBle\\_GapcStopScan\(\)](#) and then receiving the event CYBLE\_EVT\_GAPC\_SCAN\_START\_STOP with sub-parameter 'success' = 0x01u.

On successful connection, the following events are generated at the GAP Central device (as well as the GAP Peripheral device), in the following order.

- CYBLE\_EVT\_GATT\_CONNECT\_IND
- CYBLE\_EVT\_GAP\_DEVICE\_CONNECTED

A procedure is considered to have timed out if a connection response packet is not received within time set by cyble\_connectingTimeout global variable (30 seconds by default). CYBLE\_EVT\_TIMEOUT event with CYBLE\_GENERIC\_TO parameter will indicate about connection procedure timeout. Connection will automatically be canceled and state will be changed to CYBLE\_STATE\_DISCONNECTED.

**Parameters:**

<i>address</i>	The device address of the remote device to connect to.
<i>timeout</i>	Timeout for which timer to be started in seconds.

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
--------------	-------------



Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_STACK_INTERNAL	On error occurred in the BLE stack.
CYBLE_ERROR_INVALID_PARAMETER	On passing an invalid parameter.
CYBLE_ERROR_INVALID_STATE	On calling this API not in Disconnected state.

### **CYBLE\_API\_RESULT\_T CyBle\_GapcCancelDeviceConnection (void )**

This function cancels a previously initiated connection with the remote device. It is a blocking function. No event is generated on calling this function. If the devices are already connected then this function should not be used. If you intend to disconnect from an existing connection, the function [CyBle\\_GapDisconnect\(\)](#) should be used.

#### **Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_STACK_INTERNAL	An error occurred in the BLE stack.
CYBLE_ERROR_INVALID_OPERATION	Device is already connected.

### **CYBLE\_API\_RESULT\_T CyBle\_GapcStartDiscovery (CYBLE\_GAPC\_DISC\_INFO\_T\* scanInfo)**

This function starts the discovery of devices which are advertising. This is a non-blocking function. As soon as the discovery operation starts, CYBLE\_EVT\_GAPC\_SCAN\_START\_STOP event is generated.

Every Advertisement / Scan response packet received results in a new event, CYBLE\_EVT\_GAPC\_SCAN\_PROGRESS\_RESULT. If 'scanInfo->scanTo' is a non-zero value, upon commencement of discovery procedure and elapsed time = 'scanInfo->scanTo', CYBLE\_EVT\_TIMEOUT event is generated with the event parameter indicating CYBLE\_GAP\_SCAN\_TO.

If 'scanInfo->scanTo' is equal to zero, the scanning operation is performed until the [CyBle\\_GapcStopDiscovery\(\)](#) function is invoked.

There are three discovery procedures that can be specified as a parameter to this function.

#### **Observation procedure**

A device performing the observer role receives only advertisement data from devices irrespective of their discoverable mode settings. Advertisement data received is provided by the event,

CYBLE\_EVT\_GAPC\_SCAN\_PROGRESS\_RESULT

'scanInfo->scanType' should be set as passive scanning (0x00).

#### **Limited Discovery procedure**

A device performing the limited discovery procedure receives advertisement data and scan response data from devices in the limited discoverable mode only. Received data is provided by the event,

CYBLE\_EVT\_GAPC\_SCAN\_PROGRESS\_RESULT

'scanInfo->scanType' should be set as active scanning (0x01).

#### **General Discovery procedure**

A device performing the general discovery procedure receives the advertisement data and scan response data from devices in both limited discoverable mode and the general discoverable mode. Received data is provided by the event,





**CYBLE\_EVT\_GAPC\_SCAN\_PROGRESS\_RESULT**

'scanInfo->scanType' should be set as active scanning (0x01).

**Parameters:**

<i>scanInfo</i>	Pointer to a variable of type <a href="#">CYBLE_GAPC_DISC_INFO_T</a>
-----------------	--

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Error codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter for 'scanInfo' or if any element within 'scanInfo' has an invalid value.
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed.

**void CyBle\_GapcStopDiscovery (void )**

This function stops the discovery of devices. This is a non-blocking function. On stopping discovery operation, CYBLE\_EVT\_GAPC\_SCAN\_START\_STOP event is generated. Application layer needs to keep track of the function call made before receiving this event to associate this event with either the start or stop discovery function.

**Returns:**

None

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_GapcInitConnection ([CYBLE\\_GAPC\\_CONN\\_PARAM\\_T](#)\* *connParam*)**

This function instructs BLE Stack to initiate connection request to the remote device with required connection parameters. Connection request from application is acknowledged by BLE Controller as 'CYBLE\_EVT\_GAP\_DEVICE\_CONNECTED'. That means, request is correct, permitted and all parameters as part of the request are correct. If the parameter validation or request is not permitted, then BLE controller throws 'CYBLE\_EVT\_HCI\_STATUS' event with error code instead of CYBLE\_EVT\_GAP\_DEVICE\_CONNECTED. For positive condition, controller can issue connect request to peer. Once connection is done, no more event is required but if fails to establish connection, 'CYBLE\_EVT\_GAP\_DEVICE\_DISCONNECTED' is passed to application.

This is a non-blocking function. This function needs to be called after successfully stopping scanning. Scanning is successfully stopped on invoking the [CyBle\\_GapcStopDiscovery\(\)](#) function and receiving the event CYBLE\_EVT\_GAPC\_SCAN\_START\_STOP with the event data of '0x01', indicating success.

For details related to connection modes and procedures, refer to Bluetooth 4.1 Core Specification, Volume 3, Part C, Section 9.3.

**Parameters:**

<i>connParam</i>	Structure of type ' <a href="#">CYBLE_GAPC_CONN_PARAM_T</a> ' which contains the connection parameters.  <b>Note</b> Any parameter of structure type <a href="#">CYBLE_GAPC_CONN_PARAM_T</a> , if not required by a specific Bluetooth Low Energy profile, may be ignored.
------------------	--

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.





Error codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter for 'connParam' or if any element within 'connParam' has an invalid value.
CYBLE_ERROR_INVALID_OPERATION	Device already connected.
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed.

### **CYBLE\_API\_RESULT\_TCyBle\_GapcCancelConnection (void )**

Description: This function cancels a previously initiated connection with the peer device. This is a blocking function. No event is generated on calling this function.

If the devices are already connected, then this function should not be used. To disconnect from an existing connection, use the function [CyBle\\_GapDisconnect\(\)](#).

#### **Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_OPERATION	Device already connected.
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed.

### **CYBLE\_API\_RESULT\_TCyBle\_GapcResolveDevice (const uint8 \* *bdAddr*, const uint8 \* *irk*)**

This function enables the application to start resolution procedure for a device that is connected using resolvable private address. This is a blocking function. Application should use this function when in GAP Central mode.

Refer to Bluetooth 4.1 Core specification, Volume 3, Part C, section 10.8.2.3 Resolvable Private Address Resolution Procedure to understand the usage of Private addresses.

#### **Parameters:**

<i>bdAddr</i>	Pointer to peer Bluetooth device address of length 6 bytes, not NULL terminated.
<i>irk</i>	Pointer to 128-bit IRK to be used for resolving the peer's private resolvable address.

#### **Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Error codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter for 'bdAddr' or 'irk'.
CYBLE_ERROR_INVALID_OPERATION	No device to be resolved. The specified device



Error codes	Description
ON	handle does not map to any device entry in the BLE Stack.

### **CYBLE\_API\_RESULT\_T CyBle\_GapcConnectionParamUpdateRequest (uint8 *bdHandle*, CYBLE\_GAP\_CONN\_UPDATE\_PARAM\_T\* *connParam*)**

This function sends the connection parameter update command to local controller. This function can only be used from device connected in GAP Central role. Note: Connection parameter update procedure, defined as part of Bluetooth spec 4.1, is not supported. This function will allow GAP Central application to update connection parameter for local controller and local controller will follow the procedure as defined in Bluetooth Core specification 4.0.

#### **Parameters:**

<i>bdHandle</i>	Peer device handle
<i>connParam</i>	Pointer to a structure of type <a href="#"><u>CYBLE_GAP_CONN_UPDATE_PARAM_T</u></a> containing connection parameter updates

#### **Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation 'connParam' is NULL
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed

### **CYBLE\_API\_RESULT\_T CyBle\_GapcSetHostChannelClassification (uint8 \* *channelMap*)**

This function sets channel classification for data channels. This classification persists until it is overwritten by a subsequent call to this function or the controller is reset. If this command is used, updates should be sent within 10 seconds of the BLE Host knowing that the channel classification has changed. The interval between two successive commands sent will be at least one second. This command will only be used when the local device supports the Master role.

For details, refer to Bluetooth core specification 4.1, Volume 2, part E, section 7.8.19.

This is a non blocking function. Application should look for 'CYBLE\_EVT\_HCI\_STATUS' for any error condition.

#### **Parameters:**

<i>channelMap</i>	<p>This parameter contains five octet byte stream (Least Significant Byte having the bit fields 0 to 7, most significant byte having the bit fields 32 to 36). The nth such field (in the range 0 to 36) contains the value for the link layer channel index n. Allowed values and their interpretation are,</p> <ul style="list-style-type: none"> <li>Channel 'n' is disabled = 0x00u</li> <li>Channel 'n' is enabled = 0x01u</li> </ul> <p>The most significant bits (37 to 39) are reserved and will be set to 0. At least one channel will be marked as unknown.</p>
-------------------	---

For example- expected pattern = XX XX XX XX 1F not expected = XX XX XX XX 10, XX XX XX XX 2f MSB 3 bits should be not set. (1f is most significant bytes in this case)

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On specifying NULL as input parameter for 'channelMap'.
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed.

### **CYBLE\_API\_RESULT\_T CyBle\_GapcSetRemoteAddr (uint8 bdHandle, CYBLE\_GAP\_BD\_ADDR\_T remoteAddr)**

This function allows application to set the new address of remote device identified by bdHandle. This API should be used when:

1. If peer device is previously bonded with public address and changes its bd address to resolvable private address. Application should resolve the device by calling '[CyBle\\_GapcResolveDevice\(\)](#)' api and set the new address if successfully resolved.
2. If device is previously bonded with random, application should call this api to set the new address (public/random).

**Parameters:**

<i>bdHandle</i>	Peer device handle
<i>remoteAddr</i>	Peer device address, of type <a href="#">CYBLE_GAP_BD_ADDR_T</a> .

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On invalid bdHandle

## **GAP Peripheral Functions**

### **Description**

APIs unique to designs configured as a GAP Peripheral role.

A letter 'p' is appended to the API name: CyBle\_Gapp

### **Functions**

- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_GappStartAdvertisement](#)(uint8 advertisingIntervalType)
- void [CyBle\\_GappStopAdvertisement](#)(void)
- void [CyBle\\_ChangeAdDeviceAddress](#)(const [CYBLE\\_GAP\\_BD\\_ADDR\\_T](#)\*bdAddr, uint8 dest)
- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_GappEnterDiscoveryMode](#) ([CYBLE\\_GAPP\\_DISC\\_MODE\\_INFO\\_T](#)\*advInfo)
- void [CyBle\\_GappExitDiscoveryMode](#)(void)
- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_GappAuthReqReply](#)(uint8 bdHandle, [CYBLE\\_GAP\\_AUTH\\_INFO\\_T](#)\*authInfo)



- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GapUpdateAdvData \(CYBLE\\_GAPP\\_DISC\\_DATA\\_T\\*advDiscData, CYBLE\\_GAPP\\_SCAN\\_RSP\\_DATA\\_T\\*advScanRespData\)](#)

## Function Documentation

### **CYBLE\_API\_RESULT\_T CyBle\_GappStartAdvertisement (uint8 *advertisingIntervalType*)**

This function is used to start the advertisement using the advertisement data set in the component customizer's GUI. After invoking this API, the device will be available for connection by the devices configured for GAP central role. It is only included if the device is configured for GAP Peripheral or GAP Peripheral + Central role.

On start of advertisement, GAP Peripheral receives the CYBLE\_EVT\_GAPP\_ADVERTISEMENT\_START\_STOP event. The following events are possible on invoking this function:

- CYBLE\_EVT\_GAP\_DEVICE\_CONNECTED: If the device connects to remote GAP Central device
- CYBLE\_EVT\_TIMEOUT: If no device in GAP Central mode connects to this device within the specified timeout limit. Stack automatically initiate stop advertising when Slow advertising was initiated, or starts Slow advertising after Fast advertising timeout occur.
- CYBLE\_EVT\_GAPP\_ADVERTISEMENT\_START\_STOP: If device started or stopped advertising. Use CyBle\_GetState() to determine the state. Sequential advertising could be started when CYBLE\_STATE\_DISCONNECTED state is returned.

#### Parameters:

<i>advertisingIntervalType</i>	Fast or slow advertising interval with timings entered in Advertising settings section of the customizer. <ul style="list-style-type: none"> <li>• CYBLE_ADVERTISING_FAST 0x00u</li> <li>• CYBLE_ADVERTISING_SLOW 0x01u</li> <li>• CYBLE_ADVERTISING_CUSTOM 0x02u</li> </ul>
--------------------------------	--

#### Returns:

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On passing an invalid parameter.
CYBLE_ERROR_INVALID_STATE	On calling this API not in Disconnected state.

### **void CyBle\_GappStopAdvertisement (void )**

This function can be used to exit from discovery mode. After the execution of this function, there will no longer be any advertisements. On stopping advertising, GAP Peripheral receives CYBLE\_EVT\_GAPP\_ADVERTISEMENT\_START\_STOP event. It is expected that the application layer tracks the function call performed before occurrence of this event as this event can occur on making a call to CyBleGappStartAdvertisement(), [CyBle\\_GappEnterDiscoveryMode\(\)](#), or [CyBle\\_GappStartAdvertisement\(\)](#) functions as well.

The following event occurs on invoking this function:

- CYBLE\_EVT\_GAPP\_ADVERTISEMENT\_START\_STOP

**Returns:**

None

**void CyBle\_ChangeAdDeviceAddress (const [CYBLE\\_GAP\\_BD\\_ADDR\\_T](#)\* *bdAddr*, uint8 *dest*)**

This API is used to set the Bluetooth device address into the advertisement or scan response data structure.

**Parameters:**

<i>bdAddr</i>	Bluetooth Device address. The variable is of type <a href="#">CYBLE_GAP_BD_ADDR_T</a>
<i>dest</i>	0 - selects advertisement structure, not zero value selects scan response structure.

**Returns:**

None

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_GappEnterDiscoveryMode ([CYBLE\\_GAPP\\_DISC\\_MODE\\_INFO\\_T](#)\* *advInfo*)**

This function sets the device into discoverable mode. In the discoverable mode, based on the parameters passed to this function, the BLE Device starts advertisement and can respond to scan requests. This is a non-blocking function. It is to be used by the device in 'GAP Peripheral' mode of operation to set parameters essential for starting advertisement procedure.

On start of advertisement, the GAP Peripheral receives CYBLE\_EVT\_GAPP\_ADVERTISEMENT\_START\_STOP event. The following two events can occur on invoking this function.

- CYBLE\_EVT\_GAP\_DEVICE\_CONNECTED - If the device connects to a GAP Central.
- CYBLE\_EVT\_TIMEOUT - If no device in 'GAP Central' mode connects to this device within the specified timeout limit. This event can occur if 'advInfo -> discMode' is equal to CYBLE\_GAPP\_LTD\_DISC\_MODE or CYBLE\_GAPP\_GEN\_DISC\_MODE. 'advInfo-> advTo' specifies the timeout duration. Set the 'advInfo-> advTo' to 0 when 'advInfo -> discMode' is set to CYBLE\_GAPP\_GEN\_DISC\_MODE so that the timeout event does not occur and the advertisement continues until the [CyBle\\_GappExitDiscoveryMode\(\)](#) function is invoked.

**Parameters:**

<i>advInfo</i>	Structure of type <a href="#">CYBLE_GAPP_DISC_MODE_INFO_T</a> , which contains the advertisement parameters
----------------	---

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Error codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On specifying null pointer for 'advInfo' or if any of the elements of this structure have invalid values.

**void CyBle\_GappExitDiscoveryMode (void )**

This function is used to exit from discoverable mode. This is a non-blocking function. After the execution of this function, the device stops advertising.

On stopping advertising, GAP Peripheral receives CYBLE\_EVT\_GAPP\_ADVERTISEMENT\_START\_STOP event. It is expected that the application layer keeps track of the function call performed before occurrence of this event, as this event can occur on making a call to the CyBle\_GappEnterDiscoveryMode () function as well.



**Returns:**

None

**CYBLE\_API\_RESULT\_T CyBle\_GappAuthReqReply (uint8 *bdHandle*, CYBLE\_GAP\_AUTH\_INFO\_T\* *authInfo*)**

This function is used to pass security information for authentication in reply to an authentication request from the master device. It should be invoked on receiving CYBLE\_EVT\_GAP\_AUTH\_REQ event. Events shown in the following table may be received by the application based on the authentication result.

Event Parameter	Description
CYBLE_EVT_TIMEOUT	With error code CYBLE_GAP_PAIRING_PROCESS_TO on invoking <a href="#">CyBle_GappAuthReqReply()</a> or <a href="#">CyBle_GappAuthReq()</a> if there is no response from the peer device
CYBLE_EVT_GAP_AUTH_COMPLETE	Pointer to structure of type ' <a href="#">CYBLE_GAP_AUTH_INFO_T</a> ' is returned as parameter to both the peer devices on successful authentication.
CYBLE_EVT_GAP_AUTH_FAILED	Received by both GAP Central and Peripheral devices (peers) on authentication failure. Data is of type CYBLE_GAP_AUTH_FAILED_REASON_T.
CYBLE_ERROR_INSUFFICIENT_RESOURCES	On bonded device is full and application tries to initiate pairing with bonding enable.

**Parameters:**

<i>bdHandle</i>	Peer device handle.
<i>authInfo</i>	Pointer to a variable containing security information of the device of type <a href="#">CYBLE_GAP_AUTH_INFO_T</a> .

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Error codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On specifying null pointer for 'advInfo' or if any of the element of this structure has an invalid value.
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed
CYBLE_ERROR_NO_DEVICE_EXIST	Device identified using 'bdHandle' does not exist.
CYBLE_ERROR_INSUFFICIENT_RESOURCES	On bonded device is full and application tries to initiate pairing with bonding enable.

### **CYBLE\_API\_RESULT\_T CyBle\_GapUpdateAdvData (CYBLE\_GAPP\_DISC\_DATA\_T\* *advDiscData*, CYBLE\_GAPP\_SCAN\_RSP\_DATA\_T\* *advScanRespData*)**

This function allows setting the ADV data and SCAN response data while advertising is ongoing. Application shall preserve Bluetooth Spec 4.1 mandated AD flags fields corresponding to the type of discovery mode the device is in and only change the rest of the data. This API must be called when API [CyBle\\_GetBleSsState\(\)](#) returns CYBLE\_BLESS\_STATE\_EVENT\_CLOSE state. If API is called in any of the BLESS Low Power Modes, it will force exit BLESS from Low Power Mode state to update ADV Data.

#### **Parameters:**

<i>advData</i>	Pointer to a structure of <a href="#">CYBLE_GAPP_DISC_DATA_T</a> . It has two fields <i>advData</i> field representing the data and <i>advDataLen</i> indicating the length of present data. Application can pass length as 0 if the ADV data doesn't need to be changed.
<i>scanRespData</i>	Pointer to a structure of type <a href="#">CYBLE_GAPP_SCAN_RSP_DATA_T</a> . It has two fields <i>scanRspData</i> field representing the data and <i>scanRspDataLen</i> indicating the length of present data. Application can pass length as 0 if the SCAN RESP data doesn't need to be changed.

#### **Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On NULL pointer, Data length in input parameter exceeds 31 bytes.
CYBLE_ERROR_INVALID_OPERATION	ADV Event is not closed, BLESS is active or ADV is not enabled.

## **GAP Definitions and Data Structures**

### **Description**

Contains the GAP specific definitions and data structures used in the GAP APIs.

### **Data Structures**

- struct [CYBLE\\_GAPC\\_T](#)
- struct [CYBLE\\_GAP\\_BD\\_ADDR\\_T](#)
- struct [CYBLE\\_GAP\\_AUTH\\_INFO\\_T](#)
- struct [CYBLE\\_GAP\\_BONDED\\_DEV\\_ADDR\\_LIST\\_T](#)
- struct [CYBLE\\_GAP\\_SMP\\_KEY\\_DIST\\_T](#)
- struct [CYBLE\\_GAPP\\_DISC\\_PARAM\\_T](#)
- struct [CYBLE\\_GAPP\\_DISC\\_DATA\\_T](#)
- struct [CYBLE\\_GAPP\\_SCAN\\_RSP\\_DATA\\_T](#)
- struct [CYBLE\\_GAPP\\_DISC\\_MODE\\_INFO\\_T](#)
- struct [CYBLE\\_GAPC\\_DISC\\_INFO\\_T](#)
- struct [CYBLE\\_GAPC\\_CONN\\_PARAM\\_T](#)
- struct [CYBLE\\_GAPC\\_ADV\\_REPORT\\_T](#)





- struct [CYBLE\\_GAP\\_PASSKEY\\_DISP\\_INFO\\_T](#)
- struct [CYBLE\\_GAP\\_CONN\\_UPDATE\\_PARAM\\_T](#)
- struct [CYBLE\\_GAP\\_CONN\\_PARAM\\_UPDATED\\_IN\\_CONTROLLER\\_T](#)

## Enumerations

- enum [CYBLE\\_GAP\\_ADV\\_ASSIGN\\_NUMBERS](#){ [CYBLE\\_GAP\\_ADV\\_FLAGS](#)= 0x01u, [CYBLE\\_GAP\\_ADV\\_INCOMPL\\_16UUID](#), [CYBLE\\_GAP\\_ADV\\_COMPL\\_16UUID](#), [CYBLE\\_GAP\\_ADV\\_INCOMPL\\_32\\_UUID](#), [CYBLE\\_GAP\\_ADV\\_COMPL\\_32\\_UUID](#), [CYBLE\\_GAP\\_ADV\\_INCOMPL\\_128\\_UUID](#), [CYBLE\\_GAP\\_ADV\\_COMPL\\_128\\_UUID](#), [CYBLE\\_GAP\\_ADV\\_SHORT\\_NAME](#), [CYBLE\\_GAP\\_ADV\\_COMPL\\_NAME](#), [CYBLE\\_GAP\\_ADV\\_TX\\_PWR\\_LVL](#), [CYBLE\\_GAP\\_ADV\\_CLASS\\_OF\\_DEVICE](#)= 0x0Du, [CYBLE\\_GAP\\_ADV\\_SMPL\\_PAIR\\_HASH\\_C](#), [CYBLE\\_GAP\\_ADV\\_SMPL\\_PAIR\\_RANDOM\\_R](#), [CYBLE\\_GAP\\_ADV\\_DEVICE\\_ID](#), [CYBLE\\_GAP\\_ADV\\_SCRT\\_MNGR\\_TK\\_VAL](#)= 0x10u, [CYBLE\\_GAP\\_ADV\\_SCRT\\_MNGR\\_OOB\\_FLAGS](#), [CYBLE\\_GAP\\_ADV\\_SLAVE\\_CONN\\_INTRV\\_RANGE](#), [CYBLE\\_GAP\\_ADV\\_SOLICIT\\_16UUID](#)= 0x14u, [CYBLE\\_GAP\\_ADV\\_SOLICIT\\_128UUID](#), [CYBLE\\_GAP\\_ADV\\_SRVC\\_DATA\\_16UUID](#), [CYBLE\\_GAP\\_ADV\\_PUBLIC\\_TARGET\\_ADDR](#), [CYBLE\\_GAP\\_ADV\\_RANDOM\\_TARGET\\_ADDR](#), [CYBLE\\_GAP\\_ADV\\_APPEARANCE](#), [CYBLE\\_GAP\\_ADV\\_ADVERT\\_INTERVAL](#), [CYBLE\\_GAP\\_ADV\\_LE\\_BT\\_DEVICE\\_ADDR](#), [CYBLE\\_GAP\\_ADV\\_LE\\_ROLE](#), [CYBLE\\_GAP\\_ADV\\_SMPL\\_PAIR\\_HASH\\_C256](#), [CYBLE\\_GAP\\_ADV\\_SMPL\\_PAIR\\_RANDOM\\_R256](#), [CYBLE\\_GAP\\_ADV\\_SOLICIT\\_32UUID](#), [CYBLE\\_GAP\\_ADV\\_SRVC\\_DATA\\_32UUID](#), [CYBLE\\_GAP\\_ADV\\_SRVC\\_DATA\\_128UUID](#), [CYBLE\\_GAP\\_ADV\\_3D\\_INFO\\_DATA](#)= 0x3D}
- enum [CYBLE\\_GAPP\\_ADV\\_T](#){ [CYBLE\\_GAPP\\_CONNECTABLE\\_UNDIRECTED\\_ADV](#)= 0x00u, [CYBLE\\_GAPP\\_CONNECTABLE\\_HIGH\\_DC\\_DIRECTED\\_ADV](#), [CYBLE\\_GAPP\\_SCANNABLE\\_UNDIRECTED\\_ADV](#), [CYBLE\\_GAPP\\_NON\\_CONNECTABLE\\_UNDIRECTED\\_ADV](#), [CYBLE\\_GAPP\\_CONNECTABLE\\_LOW\\_DC\\_DIRECTED\\_ADV](#)}
- enum [CYBLE\\_GAPC\\_ADV\\_EVENT\\_T](#){ [CYBLE\\_GAPC\\_CONN\\_UNDIRECTED\\_ADV](#)= 0x00u, [CYBLE\\_GAPC\\_CONN\\_DIRECTED\\_ADV](#), [CYBLE\\_GAPC\\_SCAN\\_UNDIRECTED\\_ADV](#), [CYBLE\\_GAPC\\_NON\\_CONN\\_UNDIRECTED\\_ADV](#), [CYBLE\\_GAPC\\_SCAN\\_RSP](#)}
- enum [CYBLE\\_GAP\\_SEC\\_LEVEL\\_T](#){ [CYBLE\\_GAP\\_SEC\\_LEVEL\\_1](#)= 0x00u, [CYBLE\\_GAP\\_SEC\\_LEVEL\\_2](#), [CYBLE\\_GAP\\_SEC\\_LEVEL\\_3](#), [CYBLE\\_GAP\\_SEC\\_LEVEL\\_MASK](#)=0x0Fu}
- enum [CYBLE\\_GAP\\_IOCTL\\_T](#){ [CYBLE\\_GAP\\_IOCTL\\_DISPLAY\\_ONLY](#)=0x00u, [CYBLE\\_GAP\\_IOCTL\\_DISPLAY\\_YESNO](#), [CYBLE\\_GAP\\_IOCTL\\_KEYBOARD\\_ONLY](#), [CYBLE\\_GAP\\_IOCTL\\_NOINPUT\\_NOOUTPUT](#), [CYBLE\\_GAP\\_IOCTL\\_KEYBOARD\\_DISPLAY](#)}
- enum [CYBLE\\_GAP\\_AUTH\\_FAILED\\_REASON\\_T](#){ [CYBLE\\_GAP\\_AUTH\\_ERROR\\_NONE](#)= 0x00u, [CYBLE\\_GAP\\_AUTH\\_ERROR\\_PASSKEY\\_ENTRY\\_FAILED](#), [CYBLE\\_GAP\\_AUTH\\_ERROR\\_OOB\\_DATA\\_NOT\\_AVAILABLE](#), [CYBLE\\_GAP\\_AUTH\\_ERROR\\_AUTHENTICATION\\_REQ\\_NOT\\_MET](#), [CYBLE\\_GAP\\_AUTH\\_ERROR\\_CONFIRM\\_VALUE\\_NOT\\_MATCH](#), [CYBLE\\_GAP\\_AUTH\\_ERROR\\_PAIRING\\_NOT\\_SUPPORTED](#), [CYBLE\\_GAP\\_AUTH\\_ERROR\\_INSUFFICIENT\\_ENCRYPTION\\_KEY\\_SIZE](#), [CYBLE\\_GAP\\_AUTH\\_ERROR\\_COMMAND\\_NOT\\_SUPPORTED](#), [CYBLE\\_GAP\\_AUTH\\_ERROR\\_UNSPECIFIED\\_REASON](#), [CYBLE\\_GAP\\_AUTH\\_ERROR\\_REPEATED\\_ATTEMPTS](#), [CYBLE\\_GAP\\_AUTH\\_ERROR\\_INVALID\\_PARAMETERS](#)= 0x0Au, [CYBLE\\_GAP\\_AUTH\\_ERROR\\_AUTHENTICATION\\_TIMEOUT](#)= 0x15u, [CYBLE\\_GAP\\_AUTH\\_ERROR\\_LINK\\_DISCONNECTED](#)= 0x18u}
- enum [CYBLE\\_GAP\\_ADDR\\_TYPE\\_T](#){ [CYBLE\\_GAP\\_RANDOM\\_PRIV\\_NON\\_RESOLVABLE\\_ADDR](#)= 0x00u, [CYBLE\\_GAP\\_RANDOM\\_PRIV\\_RESOLVABLE\\_ADDR](#)= 0x01u, [CYBLE\\_GAP\\_PUBLIC\\_ADDR](#)= 0x02u, [CYBLE\\_GAP\\_RANDOM\\_STATIC\\_ADDR](#)= 0x03u}



## Enumeration Type Documentation

### enum [CYBLE\\_GAP\\_ADV\\_ASSIGN\\_NUMBERS](#)

Stack mode defines Advertisement SIG assigned numbers

#### Enumerator

**CYBLE\_GAP\_ADV\_FLAGS** Flags

**CYBLE\_GAP\_ADV\_INCOMPL\_16UUID** Incomplete List of 16-bit Service Class UUIDs

**CYBLE\_GAP\_ADV\_COMPL\_16UUID** Complete List of 16-bit Service Class UUIDs

**CYBLE\_GAP\_ADV\_INCOMPL\_32\_UUID** Incomplete List of 32-bit Service Class UUIDs

**CYBLE\_GAP\_ADV\_COMPL\_32\_UUID** Complete List of 32-bit Service Class UUIDs

**CYBLE\_GAP\_ADV\_INCOMPL\_128\_UUID** Incomplete List of 128-bit Service Class UUIDs

**CYBLE\_GAP\_ADV\_COMPL\_128\_UUID** Complete List of 128-bit Service Class UUIDs

**CYBLE\_GAP\_ADV\_SHORT\_NAME** Shortened Local Name

**CYBLE\_GAP\_ADV\_COMPL\_NAME** Complete Local Name

**CYBLE\_GAP\_ADV\_TX\_PWR\_LVL** Tx Power Level

**CYBLE\_GAP\_ADV\_CLASS\_OF\_DEVICE** Class of Device

**CYBLE\_GAP\_ADV\_SMPL\_PAIR\_HASH\_C** Simple Pairing Hash C

**CYBLE\_GAP\_ADV\_SMPL\_PAIR\_RANDOM\_R** Simple Pairing Randomizer R

**CYBLE\_GAP\_ADV\_DEVICE\_ID** Device ID

**CYBLE\_GAP\_ADV\_SCRT\_MNGR\_TK\_VAL** Security Manager TK Value

**CYBLE\_GAP\_ADV\_SCRT\_MNGR\_OOB\_FLAGS** Security Manager Out of Band Flags

**CYBLE\_GAP\_ADV\_SLAVE\_CONN\_INTRV\_RANGE** Slave Connection Interval Range

**CYBLE\_GAP\_ADV\_SOLICIT\_16UUID** List of 16-bit Service Solicitation UUIDs

**CYBLE\_GAP\_ADV\_SOLICIT\_128UUID** List of 128-bit Service Solicitation UUIDs

**CYBLE\_GAP\_ADV\_SRVC\_DATA\_16UUID** Service Data - 16-bit UUID

**CYBLE\_GAP\_ADV\_PUBLIC\_TARGET\_ADDR** Public Target Address

**CYBLE\_GAP\_ADV\_RANDOM\_TARGET\_ADDR** Random Target Address

**CYBLE\_GAP\_ADV\_APPEARANCE** Appearance

**CYBLE\_GAP\_ADV\_ADVERT\_INTERVAL** Advertising Interval

**CYBLE\_GAP\_ADV\_LE\_BT\_DEVICE\_ADDR** LE Bluetooth Device Address

**CYBLE\_GAP\_ADV\_LE\_ROLE** LE Role

**CYBLE\_GAP\_ADV\_SMPL\_PAIR\_HASH\_C256** Simple Pairing Hash C-256

**CYBLE\_GAP\_ADV\_SMPL\_PAIR\_RANDOM\_R256** Simple Pairing Randomizer R-256

**CYBLE\_GAP\_ADV\_SOLICIT\_32UUID** List of 32-bit Service Solicitation UUIDs

**CYBLE\_GAP\_ADV\_SRVC\_DATA\_32UUID** Service Data - 32-bit UUID

**CYBLE\_GAP\_ADV\_SRVC\_DATA\_128UUID** Service Data - 128-bit UUID

**CYBLE\_GAP\_ADV\_3D\_INFO\_DATA** 3D Information Data

### enum [CYBLE\\_GAPP\\_ADV\\_T](#)

Advertisement type

#### Enumerator

**CYBLE\_GAPP\_CONNECTABLE\_UNDIRECTED\_ADV** Connectable undirected advertising

**CYBLE\_GAPP\_CONNECTABLE\_HIGH\_DC\_DIRECTED\_ADV** Connectable high duty cycle directed advertising



***CYBLE\_GAPP\_SCANNABLE\_UNDIRECTED\_ADV*** Scannable undirected advertising

***CYBLE\_GAPP\_NON\_CONNECTABLE\_UNDIRECTED\_ADV*** Non connectable undirected advertising

***CYBLE\_GAPP\_CONNECTABLE\_LOW\_DC\_DIRECTED\_ADV*** Connectable low duty cycle directed advertising

#### enum **CYBLE\_GAPC\_ADV\_EVENT\_T**

Advertisement event type

##### Enumerator

***CYBLE\_GAPC\_CONN\_UNDIRECTED\_ADV*** Connectable undirected advertising

***CYBLE\_GAPC\_CONN\_DIRECTED\_ADV*** Connectable directed advertising

***CYBLE\_GAPC\_SCAN\_UNDIRECTED\_ADV*** Scannable undirected advertising

***CYBLE\_GAPC\_NON\_CONN\_UNDIRECTED\_ADV*** Non connectable undirected advertising

***CYBLE\_GAPC\_SCAN\_RSP*** Scan Response

#### enum **CYBLE\_GAP\_SEC\_LEVEL\_T**

Security Levels

##### Enumerator

***CYBLE\_GAP\_SEC\_LEVEL\_1*** Level 1 Mode 1 - No Security (No Authentication & No Encryption) Mode 2 - N/A

***CYBLE\_GAP\_SEC\_LEVEL\_2*** Level 2 Mode 1 - Unauthenticated pairing with encryption (No MITM) Mode 2 - Unauthenticated pairing with data signing (No MITM)

***CYBLE\_GAP\_SEC\_LEVEL\_3*** Level 3 Mode 1 - Authenticated pairing with encryption (With MITM) Mode 2 - Authenticated pairing with data signing (With MITM)

***CYBLE\_GAP\_SEC\_LEVEL\_MASK*** LE Security Level Mask

#### enum **CYBLE\_GAP\_IOCAPH\_T**

IO capability

##### Enumerator

***CYBLE\_GAP\_IOCAPH\_DISPLAY\_ONLY*** Platform supports only a mechanism to display or convey only 6 digit number to user.

***CYBLE\_GAP\_IOCAPH\_DISPLAY\_YESNO*** The device has a mechanism whereby the user can indicate 'yes' or 'no'.

***CYBLE\_GAP\_IOCAPH\_KEYBOARD\_ONLY*** Platform supports a numeric keyboard that can input the numbers '0' through '9' and a confirmation key(s) for 'yes' and 'no'.

***CYBLE\_GAP\_IOCAPH\_NOINPUT\_NOOUTPUT*** Platform does not have the ability to display or communicate a 6 digit decimal number.

***CYBLE\_GAP\_IOCAPH\_KEYBOARD\_DISPLAY*** Platform supports a mechanism through which 6 digit numeric value can be displayed and numeric keyboard that can input the numbers '0' through '9'.

#### enum **CYBLE\_GAP\_AUTH\_FAILED\_REASON\_T**

Authentication Failed Error Codes

##### Enumerator

***CYBLE\_GAP\_AUTH\_ERROR\_NONE*** No Error

***CYBLE\_GAP\_AUTH\_ERROR\_PASSKEY\_ENTRY\_FAILED*** User input of passkey failed, for example, the user cancelled the operation

***CYBLE\_GAP\_AUTH\_ERROR\_OOB\_DATA\_NOT\_AVAILABLE*** Out Of Band data is not available, applicable if NFC is supported



**CYBLE\_GAP\_AUTH\_ERROR\_AUTHENTICATION\_REQ\_NOT\_MET** Pairing procedure cannot be performed as authentication requirements cannot be met due to IO capabilities of one or both devices.

**CYBLE\_GAP\_AUTH\_ERROR\_CONFIRM\_VALUE\_NOT\_MATCH** Confirm value does not match the calculated compare value

**CYBLE\_GAP\_AUTH\_ERROR\_PAIRING\_NOT\_SUPPORTED** Pairing is not supported by the device

**CYBLE\_GAP\_AUTH\_ERROR\_INSUFFICIENT\_ENCRYPTION\_KEY\_SIZE** Insufficient key size for the security requirements of this device

**CYBLE\_GAP\_AUTH\_ERROR\_COMMAND\_NOT\_SUPPORTED** command received is not supported

**CYBLE\_GAP\_AUTH\_ERROR\_UNSPECIFIED\_REASON** Pairing failed due to an unspecified reason

**CYBLE\_GAP\_AUTH\_ERROR\_REPEATED\_ATTEMPTS** Pairing or authentication procedure is disallowed because too little time has elapsed since last pairing request or security request.

**CYBLE\_GAP\_AUTH\_ERROR\_INVALID\_PARAMETERS** Invalid Parameters in Request - Invalid Command length and Parameter value outside range

**CYBLE\_GAP\_AUTH\_ERROR\_AUTHENTICATION\_TIMEOUT** Authentication process timeout, if pairing timeout happens for first time, application can choose to re-initiate the pairing procedure. If timeout occurs again, app may choose to disconnect peer device.

**CYBLE\_GAP\_AUTH\_ERROR\_LINK\_DISCONNECTED** Link disconnected

#### enum [CYBLE\\_GAP\\_ADDR\\_TYPE\\_T](#)

GAP address type

Enumerator

**CYBLE\_GAP\_RANDOM\_PRIV\_NON\_RESOLVABLE\_ADDR** Random private non-resolvable address

**CYBLE\_GAP\_RANDOM\_PRIV\_RESOLVABLE\_ADDR** Random private resolvable address

**CYBLE\_GAP\_PUBLIC\_ADDR** Public address

**CYBLE\_GAP\_RANDOM\_STATIC\_ADDR** Random static address

## GATT Functions

### Description

The GATT APIs allow access to the Generic Attribute Profile (GATT) layer of the BLE stack. Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The GATT API names begin with CyBle\_Gatt. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [GATT Client and Server Functions](#)

*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*

- [GATT Client Functions](#)

*APIs unique to designs configured as a GATT Client role.*

- [GATT Server Functions](#)

*APIs unique to designs configured as a GATT Server role.*

- [GATT Definitions and Data Structures](#)

*Contains the GATT specific definitions and data structures used in the GATT APIs.*



## GATT Client and Server Functions

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles. No letter is appended to the API name: CyBle\_Gatt

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattGetMtuSize](#)(uint16 \*mtu)

### Function Documentation

#### [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattGetMtuSize](#) (uint16 \* mtu)

This function provides the correct GATT MTU used by BLE stack. If function is called after GATT MTU configuration procedure, it will provide the final negotiated GATT MTU else default MTU (23 Bytes).

#### Parameters:

<i>mtu</i>	buffer where Size of GATT MTU will be stored.
------------	---

#### Returns:

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	If invalid parameter passed

## GATT Client Functions

### Description

APIs unique to designs configured as a GATT Client role.

A letter 'c' is appended to the API name: CyBle\_Gattc

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattcStartDiscovery](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle)
- void [CyBle\\_GattcStopCmd](#)(void)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattcExchangeMtuReq](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, uint16 mtu)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattcDiscoverAllPrimaryServices](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattcDiscoverPrimaryServiceByUuid](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_GATT\\_VALUE\\_T](#) value)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattcFindIncludedServices](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_GATT\\_ATTR\\_HANDLE\\_RANGE\\_T](#) \*range)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattcDiscoverAllCharacteristics](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_GATT\\_ATTR\\_HANDLE\\_RANGE\\_T](#) range)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattcDiscoverCharacteristicByUuid](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_GATTC\\_READ\\_BY\\_TYPE\\_REQ\\_T](#) \*readByTypeReqParam)

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattcDiscoverAllCharacteristicDescriptors](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_GATTC\\_FIND\\_INFO\\_REQ\\_T](#) \*findInfoReqParam)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattcReadCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_GATTC\\_READ\\_REQ\\_T](#) readReqParam)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattcReadUsingCharacteristicUuid](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_GATTC\\_READ\\_BY\\_TYPE\\_REQ\\_T](#) \*readByTypeReqParam)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattcReadLongCharacteristicValues](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_GATTC\\_READ\\_BLOB\\_REQ\\_T](#) \*readBlobReqParam)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattcReadMultipleCharacteristicValues](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_GATTC\\_READ\\_MULT\\_REQ\\_T](#) \*readMultiReqParam)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattcWriteWithoutResponse](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_GATTC\\_WRITE\\_CMD\\_REQ\\_T](#) \*writeCmdReqParam)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattcSignedWriteWithoutRsp](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_GATTC\\_SIGNED\\_WRITE\\_CMD\\_REQ\\_T](#) \*signedWriteWithoutRspParam)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattcWriteCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_GATTC\\_WRITE\\_REQ\\_T](#) \*writeReqParam)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattcWriteLongCharacteristicValues](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_GATTC\\_PREP\\_WRITE\\_REQ\\_T](#) \*writePrepReqParam)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattcReliableWrites](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_GATTC\\_PREP\\_WRITE\\_REQ\\_T](#) \*writePrepReqParam, uint8 numOfRequests)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattcConfirmation](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattcReadCharacteristicDescriptors](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_GATTC\\_READ\\_REQ\\_T](#) readReqParam)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattcReadLongCharacteristicDescriptors](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_GATTC\\_READ\\_BLOB\\_REQ\\_T](#) \*readBlobReqParam)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattcWriteCharacteristicDescriptors](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_GATTC\\_WRITE\\_REQ\\_T](#) \*writeReqParam)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattcWriteLongCharacteristicDescriptors](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_GATTC\\_PREP\\_WRITE\\_REQ\\_T](#) \*writePrepReqParam)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattcReadByTypeReq](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_GATTC\\_READ\\_BY\\_TYPE\\_REQ\\_T](#) \*readByTypeReqParam)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattcSendExecuteWriteReq](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, uint8 flag)

## Function Documentation

### [CYBLE\\_API\\_RESULT\\_T](#) CyBle\_GattcStartDiscovery ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle)

Starts the automatic server discovery process. Two events may be generated after calling this function - CYBLE\_EVT\_GATTC\_DISCOVERY\_COMPLETE or CYBLE\_EVT\_GATTC\_ERROR\_RSP. The CYBLE\_EVT\_GATTC\_DISCOVERY\_COMPLETE event is generated when the remote device was successfully discovered. The CYBLE\_EVT\_GATTC\_ERROR\_RSP is generated if the device discovery is failed.

#### Parameters:

connHandle	The handle which consists of the device ID and ATT connection ID.
------------	---

#### Returns:

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.



Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry.
CYBLE_ERROR_INVALID_OPERATION	The operation is not permitted
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed
CYBLE_ERROR_INVALID_STATE	If the function is called in any state except connected or discovered

### void CyBle\_GattcStopCmd (void )

This function is used by the GATT Client to stop any of the following ongoing GATT procedures:

1. [CyBle\\_GattcDiscoverAllPrimaryServices\(\)](#)
2. [CyBle\\_GattcDiscoverPrimaryServiceByUuid\(\)](#)
3. [CyBle\\_GattcFindIncludedServices\(\)](#)
4. [CyBle\\_GattcDiscoverAllCharacteristics\(\)](#)
5. [CyBle\\_GattcDiscoverCharacteristicByUuid\(\)](#)
6. [CyBle\\_GattcDiscoverAllCharacteristicDescriptors\(\)](#)
7. [CyBle\\_GattcReadLongCharacteristicValues\(\)](#)
8. [CyBle\\_GattcWriteLongCharacteristicValues\(\)](#)
9. [CyBle\\_GattcReliableWrites\(\)](#)
10. [CyBle\\_GattcReadLongCharacteristicDescriptors\(\)](#)
11. [CyBle\\_GattcWriteLongCharacteristicDescriptors\(\)](#)

If none of the above procedures is ongoing, then this command will be ignored. This function has no effect on ATT procedures other than those listed above.

If the user intends to start a new GATT procedure including those listed above and there is an ongoing GATT procedure (any one from the above list), the user needs to call this function to stop the ongoing GATT procedure and then invoke the desired GATT procedure. This is a blocking function. No event is generated on calling this function.

#### Returns:

None

### **CYBLE\_API\_RESULT\_T CyBle\_GattcExchangeMtuReq (CYBLE\_CONN\_HANDLE\_T connHandle, uint16 mtu)**

This function is used by the GATT Client to send Maximum Transmitted Unit (GATT MTU) supported by the GATT Client. This is a non-blocking function.

Default GATT MTU size as per Bluetooth 4.1 core specification is 23 bytes. If the GATT Client supports a size greater than the default, it has to invoke this function with the desired GATT MTU size. This function should only be initiated once during a connection.

Refer to Bluetooth 4.1 core specification, Volume 3, Part G, section 4.3.1 for more details on GATT MTU exchange operation.

This function call results in CYBLE\_EVT\_GATTS\_XCNHG\_MTU\_REQ event at the GATT Server's end in response to which the GATT Server is expected to send its GATT MTU size.

The CYBLE\_EVT\_GATTC\_XCHNG\_MTU\_RSP event is generated at the GATT Client's end on receiving GATT MTU response from the GATT Server.





**Parameters:**

<i>connHandle</i>	Connection handle to identify the peer GATT entity of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
<i>mtu</i>	Size of GATT MTU. Max GATT MTU supported by BLE stack is 256 Bytes.

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Error codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack or, 'mtu' has a value which is greater than that set on calling CyBle_StackInit function
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_GattcDiscoverAllPrimaryServices ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle)**

This function is used by the GATT Client to discover all the primary services on a GATT Server to which it is connected. This is a non-blocking function.

Internally, this function initiates multiple Read By Group Type Requests to the peer device in response to which it receives Read By Group Type Responses. Each Read By Group Type Response results in CYBLE\_EVT\_GATTC\_READ\_BY\_GROUP\_TYPE\_RSP event, which is propagated to the application layer for handling.

Primary service discovery is complete when Error Response (CYBLE\_EVT\_GATTC\_ERROR\_RSP) is received and the Error Code is set to Attribute Not Found or when the End Group Handle in the Read by Group Type Response is 0xFFFF. Completion of this operation is notified to the upper layer(s) using CYBLE\_EVT\_GATTC\_ERROR\_RSP with error code updated appropriately.

It is permitted to end the above stated sequence of operations early if the desired primary service is found prior to discovering all the primary services on the GATT Server. This can be achieved by calling the [CyBle\\_GattcStopCmd\(\)](#) function.

Refer to Bluetooth 4.1 core specification, Volume 3, Part G, section 4.4.1 for more details on this sequence of operations.

**Parameters:**

<i>connHandle</i>	Connection handle to identify the peer GATT entity of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
-------------------	--

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack



Errors codes	Description
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed

**CYBLE\_API\_RESULT\_T CyBle\_GattcDiscoverPrimaryServiceByUuid (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_GATT\_VALUE\_T value)**

This function is used by the GATT Client to discover a specific primary service on a GATT Server, to which it is connected, when only the Service UUID is known. This is a non-blocking function.

Internally, this function initiates multiple Find By Type Value Requests with the Attribute Type parameter set to the UUID for Primary Service and the Attribute Value set to the 16-bit Bluetooth UUID or 128-bit UUID for the specific primary service. Each Find By Type Value Response received from the peer device is passed to the application as CYBLE\_EVT\_GATTC\_FIND\_BY\_TYPE\_VALUE\_RSP event.

The sequence of operations is complete when the Error Response is received and the Error Code is set to Attribute Not Found or when the End Group Handle in the Find By Type Value Response is 0xFFFF. Completion of this function is notified to upper layer using CYBLE\_EVT\_GATTC\_ERROR\_RSP event with the error code updated appropriately.

It is permitted to end the function early by calling the [CyBle\\_GattcStopCmd\(\)](#) function if a desired primary service is found prior to discovery of all the primary services of the specified service UUID supported on the GATT Server.

Refer to Bluetooth 4.1 core specification, Volume 3, Part G, section 4.4.2 for more details on this sequence of operations.

**Parameters:**

<i>connHandle</i>	Connection handle to identify the peer GATT entity of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
<i>value</i>	Parameter is of type <a href="#">CYBLE_GATT_VALUE_T</a> , where, <ol style="list-style-type: none"> <li>'value.val' should point to uint8 array containing the UUID to look for. UUID can be 16 or 128 bit.</li> <li>'value.len' should be set to 2 if the 16 bit UUID is to be found. The length should be set to 16 if 128 bit UUID is to be found.</li> <li>'value.actualLen' is an unused parameter and should be ignored as it is unused.</li> </ol>

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted



**CYBLE\_API\_RESULT\_T CyBle\_GattcFindIncludedServices (CYBLE\_CONN\_HANDLE\_T *connHandle*, CYBLE\_GATT\_ATTR\_HANDLE\_RANGE\_T\* *range*)**

This function is used by the GATT Client to find Included Service declarations within a GATT Service to which it is connected. This is a non-blocking function.

Internally, multiple Read By Type Requests are sent to the peer device in response to which Read By Type Responses are received (CYBLE\_EVT\_GATTC\_READ\_BY\_TYPE\_RSP) and passed to the application layer.

When Read By Type Response data does not contain the service UUID, indicating the service UUID is a 128-bit UUID, the application layer can choose to get the service UUID by performing the following steps:

1. Stop ongoing GATT operation by invoking [CyBle\\_GattcStopCmd\(\)](#)
2. Send Read Request by invoking the function [CyBle\\_GattcReadCharacteristicValue\(\)](#) with the read request handle set to the attribute handle of the included service. Handle associated events.
3. Re-initiate [CyBle\\_GattcFindIncludedServices](#) function, setting the start handle to the attribute handle which is placed next to the one used in the above step.

It is permitted to end the function early if a desired included service is found prior to discovering all the included services of the specified service supported on the server by calling the [CyBle\\_GattcStopCmd\(\)](#) function. If the [CyBle\\_GattcStopCmd\(\)](#) function is not invoked, completion of this function is notified to the upper layer using CYBLE\_EVT\_GATTC\_ERROR\_RSP.

Refer to Bluetooth 4.1 core specification, Volume 3, Part G, section 4.5.1 for more details on the sequence of operations.

**Parameters:**

<i>connHandle</i>	Connection handle to identify the peer GATT entity of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
<i>range</i>	Pointer to the handle range of type <a href="#">CYBLE_GATT_ATTR_HANDLE_RANGE_T</a> for which relationship discovery has to be performed

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed

**CYBLE\_API\_RESULT\_T CyBle\_GattcDiscoverAllCharacteristics (CYBLE\_CONN\_HANDLE\_T *connHandle*, CYBLE\_GATT\_ATTR\_HANDLE\_RANGE\_T *range*)**

This function is used by the GATT Client to find all characteristic declarations within a service definition on a GATT Server connect to it when only the service handle range is known. This is a non-blocking function.

Internally, multiple Read By Type Requests are sent to the GATT Server in response to which Read By Type Responses are received. Each response results in the event CYBLE\_EVT\_GATTC\_READ\_BY\_TYPE\_RSP, which is passed to the application layer for handling.



It is permitted to end the function early by calling the [CyBle\\_GattcStopCmd\(\)](#) function if a desired characteristic is found prior to discovering all the characteristics of the specified service supported on the GATT Server. Completion of this function is notified to upper layer using CYBLE\_EVT\_GATTC\_ERROR\_RSP event.

Refer to Bluetooth 4.1 core specification, Volume 3, Part G, section 4.6.1 for more details on the sequence of operations.

**Parameters:**

<i>connHandle</i>	Connection handle to identify the peer GATT entity of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
<i>range</i>	Parameter is of type <a href="#">CYBLE_GATT_ATTR_HANDLE_RANGE_T</a> where: <ol style="list-style-type: none"> <li>'range.startHandle' can be set to the start handle of the desired primary service.</li> <li>'range.endHandle' can be set to the end handle of the desired primary service.</li> </ol>

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed

**[CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_GattcDiscoverCharacteristicByUuid](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_GATTC\\_READ\\_BY\\_TYPE\\_REQ\\_T](#)\* *readByTypeReqParam*)**

This function is used by the GATT Client to discover service characteristics on a GATT Server when only the service handle ranges are known and the characteristic UUID is known. This is a non-blocking function.

Internally, multiple Read By Type Requests are sent to the peer device in response to which Read By Type Responses are received. Each of these responses results in the event CYBLE\_EVT\_GATTC\_READ\_BY\_TYPE\_RSP, which is passed to the application layer for further processing.

It is permitted to end the function early by calling the [CyBle\\_GattcStopCmd\(\)](#) function if a desired characteristic is found prior to discovering all the characteristics for the specified service supported on the GATT Server. Completion of this function is notified to upper layer using CYBLE\_EVT\_GATTC\_ERROR\_RSP event.

Refer to Bluetooth 4.1 core specification, Volume 3, Part G, section 4.6.2 for more details on the sequence of operations.

**Parameters:**

<i>connHandle</i>	Connection handle to identify the peer GATT entity of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
<i>readByTypeReqParam</i>	Pointer to a variable of type <a href="#">CYBLE_GATTC_READ_BY_TYPE_REQ_T</a> .

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed

**CYBLE\_API\_RESULT\_T CyBle\_GattcDiscoverAllCharacteristicDescriptors (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_GATTC\_FIND\_INFO\_REQ\_T\* findInfoReqParam)**

This function is used by the GATT Client to find all the characteristic descriptors. This is a non-blocking function. Internally, multiple Find Information Requests are sent to the peer device in response to which Find Information Responses are received by the GATT Client. Each of these responses generate CYBLE\_EVT\_GATTC\_FIND\_INFO\_RSP event at the GATT Client end which is propagated to the application layer for further processing.

It is permitted to end the function early by calling the [CyBle\\_GattcStopCmd\(\)](#) function if desired Characteristic Descriptor is found prior to discovering all the characteristic descriptors of the specified characteristic. Completion of this function is notified to upper layer using CYBLE\_EVT\_GATTC\_ERROR\_RSP event.

Refer to Bluetooth 4.1 core specification, Volume 3, Part G, section 4.7.1 for more details on the sequence of operations.

**Parameters:**

connHandle	Connection handle to identify the peer GATT entity of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
findInfoReqParam	Pointer to a variable of type CYBLE_GATTC_FIND_INFO_REQ_T.

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed

**CYBLE\_API\_RESULT\_T CyBle\_GattcReadCharacteristicValue (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_GATTC\_READ\_REQ\_T readReqParam)**

This function reads a Characteristic Value from a GATT Server when the GATT Client knows the Characteristic Value Handle. This is a non-blocking function.



Internally, Read Request is sent to the peer device in response to which Read Response is received. This response results in CYBLE\_EVT\_GATTC\_READ\_RSP event which is propagated to the application for handling the event data. An Error Response (CYBLE\_EVT\_GATTC\_ERROR\_RSP event at the GATT Client's end) is sent by the GATT Server in response to the Read Request on insufficient authentication or insufficient authorization or insufficient encryption key size is caused by the GATT Client, or if a read operation is not permitted on the Characteristic Value. The Error Code parameter is set as specified in the Attribute Protocol.

Refer to Bluetooth 4.1 core specification, Volume 3, Part G, section 4.8.1 for more details on the sequence of operations.

#### Parameters:

<i>connHandle</i>	Connection handle to identify the peer GATT entity of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
<i>readReqParam</i>	Pointer to a variable of type CYBLE_GATTC_READ_REQ_T.

#### Returns:

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed

#### [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_GattcReadUsingCharacteristicUuid](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_GATTC\\_READ\\_BY\\_TYPE\\_REQ\\_T](#)\* *readByTypeReqParam*)

This function reads a Characteristic Value from the GATT Server when the GATT Client only knows the characteristic UUID and does not know the handle of the characteristic. This is a non-blocking function.

Internally, Read By Type Request is sent to the peer device in response to which Read By Type Response is received by the GATT Client. This results in CYBLE\_EVT\_GATTC\_READ\_BY\_TYPE\_RSP event, which is propagated to the application layer for further handling.

Refer to Bluetooth 4.1 core specification, Volume 3, Part G, section 4.8.2 for more details on the sequence of operations.

#### Parameters:

<i>connHandle</i>	Connection handle to identify the peer GATT entity of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
<i>readByTypeReqParam</i>	Parameter is of type <a href="#">CYBLE_GATTC_READ_BY_TYPE_REQ_T</a> .

#### Returns:

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any

Errors codes	Description
TER	existing entry in the Stack
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed

**CYBLE\_API\_RESULT\_T CyBle\_GattcReadLongCharacteristicValues (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_GATTC\_READ\_BLOB\_REQ\_T\* readBlobReqParam)**

This function reads a Characteristic Value from the GATT Server when the GATT Client knows the Characteristic Value Handle and the length of the Characteristic Value is longer than can be sent in a single Read Response Attribute Protocol message. This is a non-blocking function.

Internally multiple Read Blob Requests are sent to the peer device in response to which Read Blob Responses are received. For each Read Blob Request, a Read Blob Response event is received (CYBLE\_EVT\_GATTC\_READ\_BLOB\_RSP) with a portion of the Characteristic Value contained in the Part Attribute Value parameter. These events are propagated to the application layer for further processing. Each read blob response will return up to (GATT MTU-1) bytes of data. If the size of characteristic value field is an integral multiple of (GATT MTU-1) then the operation terminates with an error response event, where the error code is CYBLE\_GATT\_ERR\_INVALID\_OFFSET. If the size of the characteristic value field is not an integral multiple of (GATT MTU-1), the last read blob response will return data bytes which are less than (GATT MTU-1). The application needs to monitor these two conditions before proceeding with the initiation of any other GATT operation.

An Error Response event (CYBLE\_EVT\_GATTC\_ERROR\_RSP) is sent by the GATT Server in response to the Read Blob Request if insufficient authentication, insufficient authorization, insufficient encryption key size is used by the client, or if a read operation is not permitted on the Characteristic Value. The Error Code parameter is set as specified in the Attribute Protocol.

If the Characteristic Value is not longer than (GATT MTU - 1), an Error Response with the Error Code set to Attribute Not Long is received by the GATT Client on the first Read Blob Request.

Refer to Bluetooth 4.1 core specification, Volume 3, Part G, section 4.8.3 for more details on the sequence of operations.

**Parameters:**

<i>connHandle</i>	Connection handle to identify the peer GATT entity, of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
<i>readblobReqParam</i>	Pointer to a variable of type <a href="#">CYBLE_GATTC_READ_BLOB_REQ_T</a> .

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed



### **CYBLE\_API\_RESULT\_T CyBle\_GattcReadMultipleCharacteristicValues (CYBLE\_CONN\_HANDLE\_T *connHandle*, CYBLE\_GATTC\_READ\_MULT\_REQ\_T\* *readMultiReqParam*)**

This function reads multiple Characteristic Values from a GATT Server when the GATT Client knows the Characteristic Value Handles. This is a non-blocking function.

Internally, Read Multiple Request is sent to the peer device in response to which Read Multiple Response is received. This results in CYBLE\_EVT\_GATTC\_READ\_MULTI\_RSP event, which is propagated to the application layer.

An Error Response event is sent by the server (CYBLE\_EVT\_GATTC\_ERROR\_RSP) in response to the Read Multiple Request if insufficient authentication, insufficient authorization, insufficient encryption key size is used by the client, or if a read operation is not permitted on any of the Characteristic Values. The Error Code parameter is set as specified in the Attribute Protocol.

Refer to Bluetooth 4.1 core specification, Volume 3, Part G, section 4.8.4 for more details on the sequence of operations.

#### **Parameters:**

<i>connHandle</i>	Connection handle to identify the peer GATT entity, of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
<i>readMultiReqParam</i>	Pointer to a variable of type CYBLE_GATTC_READ_MULT_REQ_T.

#### **Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed

### **CYBLE\_API\_RESULT\_T CyBle\_GattcWriteWithoutResponse (CYBLE\_CONN\_HANDLE\_T *connHandle*, CYBLE\_GATTC\_WRITE\_CMD\_REQ\_T\* *writeCmdReqParam*)**

This function writes a Characteristic Value to a GATT Server when the GATT Client knows the Characteristic Value Handle and the client does not need an acknowledgement that the write was successfully performed. This is a blocking function. No event is generated on calling this function.

Internally, Write Command is sent to the GATT Server and nothing is received in response from the GATT Server.

Refer Bluetooth 4.1 core specification, Volume 3, Part G, section 4.9.1 for more details on the sequence of operations.

#### **Parameters:**

<i>connHandle</i>	Connection handle to identify the peer GATT entity, of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
<i>writeCmdReqParam</i>	Pointer to a variable of type CYBLE_GATTC_WRITE_CMD_REQ_T.



**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed

**CYBLE\_API\_RESULT\_T CyBle\_GattcSignedWriteWithoutRsp (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_GATTC\_SIGNED\_WRITE\_CMD\_REQ\_T\* signedWriteWithoutRspParam)**

This function writes a Characteristic Value to a server when the client knows the Characteristic Value Handle and the ATT Bearer is not encrypted. This procedure shall only be used if the Characteristic Properties authenticated bit is enabled and the client and server device share a bond as defined in Bluetooth Spec4.1 [Vol. 3] Part C, Generic Access Profile.

This function only writes the first (ATT\_MTU - 15) octets of an Attribute Value. This function cannot be used to write a long Attribute.

Internally, Signed Write Command is used. Refer Bluetooth Spec4.1 Security Manager [Vol. 3] Part H, Section 2.4.5.

If the authenticated Characteristic Value that is written is the wrong size, has an invalid value as defined by the profile, or the signed value does not authenticate the client, then the write shall not succeed and no error shall be generated by the server.

**Parameters:**

<i>connHandle</i>	Connection handle to identify the peer GATT entity, of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
<i>signedWriteWithoutRspParam</i>	Pointer to a variable of type CYBLE_GATTC_SIGNED_WRITE_CMD_REQ_T

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted
CYBLE_ERROR_INSUFFICIENT_RESOURCES	BLE stack out of resource





**CYBLE\_API\_RESULT\_T CyBle\_GattcWriteCharacteristicValue (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_GATTC\_WRITE\_REQ\_T\* writeReqParam)**

This function writes a Characteristic Value to a GATT Server when the GATT Client knows the Characteristic Value Handle. This is a non-blocking function.

Internally, Write Request is sent to the GATT Server in response to which Write Response is received. This results in the event CYBLE\_EVT\_GATTC\_WRITE\_RSP, which indicates that the write operation succeeded.

An Error Response event (CYBLE\_EVT\_GATTC\_ERROR\_RSP) is sent by the server in response to the Write Request if insufficient authentication, insufficient authorization, insufficient encryption key size is used by the client, or if a write operation is not permitted on the Characteristic Value. The Error Code parameter is set as specified in the Attribute Protocol.

Refer to Bluetooth 4.1 core specification, Volume 3, Part G, section 4.9.3 for more details on the sequence of operations.

**Parameters:**

connHandle	Connection handle to identify the peer GATT entity, of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
writeReqParam	Pointer to a variable of type CYBLE_GATTC_WRITE_REQ_T.

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed

**CYBLE\_API\_RESULT\_T CyBle\_GattcWriteLongCharacteristicValues (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_GATTC\_PREP\_WRITE\_REQ\_T\* writePrepReqParam)**

This function writes a Characteristic Value to a GATT Server when the GATT Client knows the Characteristic Value Handle but the length of the Characteristic Value is longer than GATT MTU size and cannot be sent in a single Write Request Attribute Protocol message. This is a non-blocking function.

Internally, multiple Prepare Write Requests are sent to the GATT Server in response to which Prepare Write Responses are received. No events are generated by the BLE Stack during these operations.

Prepare Write Requests are repeated until the complete Characteristic Value has been transferred to the GATT Server, after which an Execute Write Request is sent to the GATT Server to write the initially transferred value at the GATT Server's end. This generates CYBLE\_EVT\_GATTS\_EXEC\_WRITE\_REQ at the GATT Server's end.

Once the GATT Server responds, CYBLE\_EVT\_GATTC\_EXEC\_WRITE\_RSP event is generated at the GATT Client's end. The value associated with this event has to be checked by the application layer to confirm that the long write operation succeeded.

An Error Response event CYBLE\_EVT\_GATTC\_ERROR\_RSP is received by the GATT Client in response to the Prepare Write Request if insufficient authentication, insufficient authorization, insufficient encryption key size is used by the client, or if a write operation is not permitted on the Characteristic Value. The Error Code parameter is set as specified in the Attribute Protocol.





Refer to Bluetooth 4.1 core specification, Volume 3, Part G, section 4.9.4 for more details on the sequence of operations.

**Parameters:**

<i>connHandle</i>	Connection handle to identify the peer GATT entity, of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
<i>writePrepReqParam</i>	Pointer to a variable of type CYBLE_GATTC_PREP_WRITE_REQ_T, where 'writePrepReqParam->value.val' points to the actual data to be written. 'writePrepReqParam' and all associated variables need to be retained in memory by the calling application until the GATT Write Long Characteristic Value operation is completed successfully.

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed

**CYBLE\_API\_RESULT\_T CyBle\_GattcReliableWrites (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_GATTC\_PREP\_WRITE\_REQ\_T\* writePrepReqParam, uint8 numOfRequests)**

This function writes a Characteristic Value to a GATT Server when the GATT Client knows the Characteristic Value Handle, and assurance is required that the correct Characteristic Value is going to be written by transferring the Characteristic Value to be written in both directions before the write is performed. This is a non-blocking function.

Internally, multiple Prepare Write Requests are sent to the GATT Server in response to which Prepare Write Responses are received. No events are generated by the BLE Stack during these operations.

Prepare Write Requests are repeated until the complete Characteristic Value has been transferred to the GATT Server, after which an Execute Write Request is sent to the GATT Server to write the initially transferred value at the GATT Server's end. This generates CYBLE\_EVT\_GATTS\_EXEC\_WRITE\_REQ at the GATT Server's end.

Once the GATT Server responds, a CYBLE\_EVT\_GATTC\_EXEC\_WRITE\_RSP event is generated at the GATT Client's end. The value associated with this event has to be checked by the application layer to confirm that the long write operation succeeded. An Error Response event CYBLE\_EVT\_GATTC\_ERROR\_RSP is received by the GATT Client in response to the Prepare Write Request if insufficient authentication, insufficient authorization, insufficient encryption key size is used by the client, or if a write operation is not permitted on the Characteristic Value. The Error Code parameter is set as specified in the Attribute Protocol.

Refer to Bluetooth 4.1 core specification, Volume 3, Part G, section 4.9.5 for more details on the sequence of operations.

**Parameters:**

<i>connHandle</i>	Connection handle to identify the peer GATT entity, of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
<i>writePrepReqParam</i>	Pointer to a variable of type CYBLE_GATTC_PREP_WRITE_REQ_T. Since more than one writes are performed as part of this function, the



	first array element of the array of type CYBLE_GATTC_PREP_WRITE_REQ_T, which contains the values to be written, has to be specified. 'writePrepReqParam' and all associated variables need to be retained in memory by the calling application until the GATT Reliable Write operation is completed successfully.
<i>numOfRequests</i>	Number of requests. That is, the count of array of structures of type CYBLE_GATTC_PREP_WRITE_REQ_T. Each array element represents a value and the attribute to which the value has to be written.

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed

**CYBLE\_API\_RESULT\_TCyBle\_GattcConfirmation (CYBLE\_CONN\_HANDLE\_T connHandle)**

This function sends confirmation to the GATT Server on receiving Handle Value Indication event CYBLE\_EVT\_GATTC\_HANDLE\_VALUE\_IND at the GATT Client's end. This is a non-blocking function.

This function call results in CYBLE\_EVT\_GATTS\_HANDLE\_VALUE\_CNF event at the GATT Server's end.

Refer to Bluetooth 4.1 core specification, Volume 3, Part G, section 4.11.1 for more details on the sequence of operations.

**Parameters:**

<i>connHandle</i>	Connection handle to identify the peer GATT entity, of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
-------------------	---

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed

### **CYBLE\_API\_RESULT\_T CyBle\_GattcReadCharacteristicDescriptors (CYBLE\_CONN\_HANDLE\_T *connHandle*, CYBLE\_GATT\_READ\_REQ\_T *readReqParam*)**

This function reads a characteristic descriptor from a GATT Server when the GATT Client knows the Attribute handle from the characteristic descriptor declaration. This is a non-blocking function.

Internally, Read Request is sent to the peer device in response to which Read Response is received. This response results in CYBLE\_EVT\_GATTC\_READ\_RSP event, which is propagated to the application for handling the event data.

An Error Response (CYBLE\_EVT\_GATTC\_ERROR\_RSP event at the GATT Client's end) is sent by the GATT Server in response to the Read Request on insufficient authentication or insufficient authorization or insufficient encryption key size is caused by the GATT Client, or if a read operation is not permitted on the Characteristic Value. The Error Code parameter is set as specified in the Attribute Protocol.

Refer to Bluetooth 4.1 core specification, Volume 3, Part G, section 4.12.1 for more details on the sequence of operations.

#### **Parameters:**

<i>connHandle</i>	Connection handle to identify the peer GATT entity, of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
<i>readReqParam</i>	Pointer to a variable of type CYBLE_GATT_READ_REQ_T.

#### **Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed

### **CYBLE\_API\_RESULT\_T CyBle\_GattcReadLongCharacteristicDescriptors (CYBLE\_CONN\_HANDLE\_T *connHandle*, CYBLE\_GATT\_READ\_BLOB\_REQ\_T\* *readBlobReqParam*)**

This function reads a characteristic descriptor from a GATT Server when the GATT Client knows the Attribute handle from the characteristic descriptor declaration and the length of the characteristic descriptor declaration is longer than what can be sent in a single Read Response Attribute Protocol message. This is a non-blocking function.

Internally multiple Read Blob Requests are sent to the peer device in response to which Read Blob Responses are received. For each Read Blob Request, a Read Blob Response event is received (CYBLE\_EVT\_GATTC\_READ\_BLOB\_RSP) with a portion of the Characteristic Value contained in the Part Attribute Value parameter. These events are propagated to the application layer for further processing. Each read blob response will return up to (GATT MTU-1) bytes of data. If the size of characteristic descriptor field is an integral multiple of (GATT MTU-1) then the operation terminates with an error response event, where the error code is CYBLE\_GATT\_ERR\_INVALID\_OFFSET. If the size of the characteristic descriptor field is not an integral multiple of (GATT MTU-1), the last read blob response will return data bytes which are less than (GATT MTU-1). The application needs to monitor these two conditions before proceeding with the initiation of any other GATT operation.



An Error Response event (CYBLE\_EVT\_GATTC\_ERROR\_RSP) is sent by the GATT Server in response to the Read Blob Request if insufficient authentication, insufficient authorization, insufficient encryption key size is used by the client, or if a read operation is not permitted on the Characteristic Value. The Error Code parameter is set as specified in the Attribute Protocol. If the Characteristic Value is not longer than (GATT MTU - 1) an Error Response with the Error Code set to Attribute Not Long is received by the GATT Client on the first Read Blob Request.

Refer to Bluetooth 4.1 core specification, Volume 3, Part G, section 4.12.2 for more details on the sequence of operations.

**Parameters:**

<i>connHandle</i>	Connection handle to identify the peer GATT entity, of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
<i>readBlonReqParam</i>	Pointer to a variable of type <a href="#">CYBLE_GATTC_READ_BLOB_REQ_T</a>

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_GattcWriteCharacteristicDescriptors ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_GATTC\\_WRITE\\_REQ\\_T](#)\* *writeReqParam*)**

This function writes a characteristic descriptor value to a GATT Server when the GATT Client knows the characteristic descriptor handle. This is a non-blocking function.

Internally, Write Request is sent to the GATT Server in response to which Write Response is received. This results in the event CYBLE\_EVT\_GATTC\_WRITE\_RSP, which indicates that the write operation succeeded.

An Error Response event (CYBLE\_EVT\_GATTC\_ERROR\_RSP) is sent by the server in response to the Write Request if insufficient authentication, insufficient authorization, insufficient encryption key size is used by the client, or if a write operation is not permitted on the Characteristic Value. The Error Code parameter is set as specified in the Attribute Protocol.

Refer to Bluetooth 4.1 core specification, Volume 3, Part G, section 4.12.3 for more details on the sequence of operations.

**Parameters:**

<i>connHandle</i>	Connection handle to identify the peer GATT entity, of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
<i>writeReqParam</i>	Pointer to a variable of type CYBLE_GATTC_WRITE_REQ_T

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.



Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed

**CYBLE\_API\_RESULT\_T CyBle\_GattcWriteLongCharacteristicDescriptors (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_GATT\_CPREP\_WRITE\_REQ\_T \* writePrepReqParam)**

This function writes a characteristic descriptor value to a GATT Server when the GATT Client knows the characteristic descriptor handle but the length of the characteristic descriptor value is longer than what can be sent in a single Write Request Attribute Protocol message. This is a non-blocking function.

Internally, multiple Prepare Write Requests are sent to the GATT Server in response to which Prepare Write Responses are received. No events are generated by the BLE Stack during these operations.

Prepare Write Requests are repeated until the complete Characteristic Descriptor Value has been transferred to the GATT Server, after which an Execute Write Request is sent to the GATT Server to write the initially transferred value at the GATT Server's end. This generates CYBLE\_EVT\_GATTS\_EXEC\_WRITE\_REQ at the GATT Server's end.

Once the GATT Server responds, CYBLE\_EVT\_GATTC\_EXEC\_WRITE\_RSP' event is generated at the GATT Client's end. The value associated with this event has to be checked by the application layer to confirm that the long write operation succeeded.

An Error Response event CYBLE\_EVT\_GATTC\_ERROR\_RSP is received by the GATT Client in response to the Prepare Write Request if insufficient authentication, insufficient authorization, insufficient encryption key size is used by the client, or if a write operation is not permitted on the Characteristic Value. The Error Code parameter is set as specified in the Attribute Protocol.

Refer Bluetooth 4.1 core specification, Volume 3, Part G, section 4.12.4 for more details on the sequence of operations.

**Parameters:**

<i>connHandle</i>	Connection handle to identify the peer GATT entity, of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
<i>writePrepReqParam</i>	Pointer to a variable of type CYBLE_GATTC_PREP_WRITE_REQ_T, where 'writePrepReqParam->value.val' points to the actual data to be written. 'writePrepReqParam' and all associated variables need to be retained in memory by the calling application until the GATT Write Long Characteristic Descriptor operation is completed successfully.

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted



Errors codes	Description
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed

**CYBLE\_API\_RESULT\_T CyBle\_GattcReadByTypeReq (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_GATT\_READ\_BY\_TYPE\_REQ\_T\* readByTypeReqParam)**

This function allows the user to send Read by type request to peer server

Refer to Bluetooth 4.1 core specification, Volume 3, Part G, section 4.5.1 for more details on the sequence of operations.

**Parameters:**

<i>connHandle</i>	Connection handle to identify the peer GATT entity of type <a href="#">CYBLE_CONN_HANDLE_T</a> . readByTypeReqParam : Pointer to a variable of type <a href="#">CYBLE_GATT_READ_BY_TYPE_REQ_T</a> , Where, the following needs to be set: readByTypeReqParam->range.startHandle readByTypeReqParam->range.endHandle readByTypeReqParam->uuidFormat (CYBLE_GATT_16_BIT_UUID_FORMAT or CYBLE_GATT_128_BIT_UUID_FORMAT) readByTypeReqParam->uuid.uuid16 or readByTypeReqParam->uuid.uuid128 based on the uuidFormat
-------------------	--

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed

**CYBLE\_API\_RESULT\_T CyBle\_GattcSendExecuteWriteReq (CYBLE\_CONN\_HANDLE\_T connHandle, uint8 flag)**

This function allows the user to send execute write request to remote server. This function should be called if client has previously initiated long/reliable write operation and remote has send error response. Based on error response application may choose to execute all pending requests or cancel the request.

**Parameters:**

<i>connHandle</i>	Connection handle to identify the peer GATT entity of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
<i>flag</i>	Indicates whether Queued Write is to be executed (0x01) or canceled (0x00)

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.



Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed

## GATT Server Functions

### Description

APIs unique to designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_Gatts

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattsReInitGattDb](#)(void)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattsDbRegister](#)(const [CYBLE\\_GATTS\\_DB\\_T](#)\*gattDbPtr, uint16 gattDbTotalEntries, uint16 gattDbMaxValue)
- [CYBLE\\_GATT\\_ERR\\_CODE\\_T CyBle\\_GattsWriteAttributeValue](#) ([CYBLE\\_GATT\\_HANDLE\\_VALUE\\_PAIR\\_T](#)\*handleValuePair, uint16 offset, [CYBLE\\_CONN\\_HANDLE\\_T](#)\*connHandle, uint8 flags)
- [CYBLE\\_GATT\\_ERR\\_CODE\\_T CyBle\\_GattsReadAttributeValue](#) ([CYBLE\\_GATT\\_HANDLE\\_VALUE\\_PAIR\\_T](#)\*handleValuePair, [CYBLE\\_CONN\\_HANDLE\\_T](#)\*connHandle, uint8 flags)
- [CYBLE\\_GATT\\_ERR\\_CODE\\_T CyBle\\_GattsEnableAttribute](#) ([CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#)attrHandle)
- [CYBLE\\_GATT\\_ERR\\_CODE\\_T CyBle\\_GattsDisableAttribute](#) ([CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#)attrHandle)
- [CYBLE\\_GATT\\_ERR\\_CODE\\_T CyBle\\_GattsDbAuthorize](#)(uint8 yesNo)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattsNotification](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#)connHandle, [CYBLE\\_GATTS\\_HANDLE\\_VALUE\\_NTF\\_T](#)\*ntfParam)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattsIndication](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#)connHandle, [CYBLE\\_GATTS\\_HANDLE\\_VALUE\\_IND\\_T](#)\*indParam)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattsErrorRsp](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#)connHandle, [CYBLE\\_GATTS\\_ERR\\_PARAM\\_T](#)\*errRspParam)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattsExchangeMtuRsp](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#)connHandle, uint16 mtu)
- void [CyBle\\_GattsPrepWriteReqSupport](#)(uint8 prepWriteSupport)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattsWriteRsp](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#)connHandle)

### Function Documentation

#### [CYBLE\\_API\\_RESULT\\_T CyBle\\_GattsReInitGattDb](#) (void )

Reinitializes the GATT database.

#### Returns:

CYBLE\_API\_RESULT\_T: An API result states if the API succeeded or failed with error codes:





- CYBLE\_ERROR\_OK: GATT database was reinitialized successfully
- CYBLE\_ERROR\_INVALID\_STATE: If the function is called in any state except CYBLE\_STATE\_DISCONNECTED.
- Any of the [CyBle\\_GattsDbRegister\(\)](#) stack API function return values.

**CYBLE\_API\_RESULT\_T CyBle\_GattsDbRegister (const CYBLE\_GATTS\_DB\_T\* *gattDbPtr*, uint16 *gattDbTotalEntries*, uint16 *gattDbMaxValue*)**

This function registers the GATT database for the GATT Server. The GATT database stores all the attributes used by the GATT server, along with their permissions. This is a blocking function. No event is generated on calling this function.

**Parameters:**

<i>gattDbPtr</i>	Pointer to the GATT database of type <a href="#">CYBLE_GATTS_DB_T</a> .
<i>gattDbTotalEntries</i>	Total number of entries in the GATT database.
<i>gattDbMaxValue</i>	Maximum characteristic value length

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	If the Database has zero entries or is a NULL pointer

**CYBLE\_GATT\_ERR\_CODE\_T CyBle\_GattsWriteAttributeValue (CYBLE\_GATT\_HANDLE\_VALUE\_PAIR\_T\* *handleValuePair*, uint16 *offset*, CYBLE\_CONN\_HANDLE\_T\* *connHandle*, uint8 *flags*)**

This function is used to write to the value field of the specified attribute in the GATT database of a GATT Server. This is a blocking function. No event is generated on calling this function.

If a peer device connected to the GATT Server initiates a write operation, this function is executed on the GATT Server. During such a call, the function checks for the attribute permissions (flags) before executing the write operation.

**Parameters:**

<i>handleValuePair</i>	Pointer to handle value pair of type <a href="#">CYBLE_GATT_HANDLE_VALUE_PAIR_T</a> . <ul style="list-style-type: none"> <li>• 'handleValuePair.attrHandle' is an input for which value has to be written.</li> <li>• 'handleValuePair.value.len' is an input parameter for the length to be written.</li> <li>• 'handleValuePair.value.val' is an input parameter for data buffer.</li> <li>• 'handleValuePair.actualLen' has to be ignored as it is unused in this function.</li> </ul>
<i>offset</i>	Offset at which the data (length in number of bytes) is written.
<i>connHandle</i>	Pointer to the attribute instance handle, of type



	<a href="#">CYBLE_CONN_HANDLE_T</a> .
<i>flags</i>	Attribute permissions. Allowed values are, <ul style="list-style-type: none"> <li>• CYBLE_GATT_DB_LOCALLY_INITIATED</li> <li>• CYBLE_GATT_DB_PEER_INITIATED</li> </ul>

**Returns:**

CYBLE\_GATT\_ERR\_CODE\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_GATT_ERR_NONE	On successful operation
CYBLE_GATT_ERR_INVALID_HANDLE	'handleValuePair.attrHandle' is not valid
CYBLE_GATT_ERR_WRITE_NOT_PERMITTED	Write operation is not permitted on this attribute
CYBLE_GATT_ERR_INVALID_OFFSET	Offset value is invalid
CYBLE_GATT_ERR_UNLIKELY_ERROR	Some other error occurred

**[CYBLE\\_GATT\\_ERR\\_CODE\\_T](#) [CyBle\\_GattsReadAttributeValue](#) ([CYBLE\\_GATT\\_HANDLE\\_VALUE\\_PAIR\\_T](#) \*  
[handleValuePair](#), [CYBLE\\_CONN\\_HANDLE\\_T](#) \* [connHandle](#), uint8 [flags](#))**

This function is used to read the value field of the specified attribute from the GATT database in a GATT Server. This is a blocking function. No event is generated on calling this function.

Peer initiated call to this function results in the function checking for attribute permissions before performing this operation.

**Parameters:**

<i>handleValuePair</i>	Pointer to handle value pair of type <a href="#">CYBLE_GATT_HANDLE_VALUE_PAIR_T</a> . <ul style="list-style-type: none"> <li>• 'handleValuePair.attrHandle' is an input for which value has to be read.</li> <li>• 'handleValuePair.value.len' is an input parameter, the characteristic value is read based on length.</li> <li>• 'handleValuePair.value.val' is an output parameter for data buffer.</li> <li>• 'handleValuePair.actualLen' has to be ignored as it is unused in this function.</li> </ul>
<i>connHandle</i>	Pointer to the attribute instance handle, of type <a href="#">CYBLE_CONN_HANDLE_T</a> . <i>connHandle</i> can be NULL if flags field is set to CYBLE_GATT_DB_LOCALLY_INITIATED.
<i>flags</i>	Attribute permissions. Allowed values are, <ul style="list-style-type: none"> <li>• CYBLE_GATT_DB_LOCALLY_INITIATED</li> <li>• CYBLE_GATT_DB_PEER_INITIATED</li> </ul>



**Returns:**

CYBLE\_GATT\_ERR\_CODE\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_GATT_ERR_NONE	On successful operation
CYBLE_GATT_ERR_INVALID_HANDLE	'handleValuePair.attrHandle' is not valid
CYBLE_GATT_ERR_READ_NOT_PERMITTED	Read operation is not permitted on this attribute
CYBLE_GATT_ERR_UNLIKELY_ERROR	Invalid arguments passed

### **CYBLE\_GATT\_ERR\_CODE\_TCyBle\_GattsEnableAttribute (CYBLE\_GATT\_DB\_ATTR\_HANDLE\_T attrHandle)**

This function enables the attribute entry for service or characteristic logical group in the GATT database registered in BLE Stack. This is a blocking function. No event is generated on calling this function.

This function returns an error if the attribute does not belong to any service or characteristic logical group. If the attribute entry is already enabled, then this function returns status CYBLE\_GATT\_ERR\_NONE.

**Parameters:**

<i>attrHandle</i>	Attribute handle of the registered GATT Database to enable particular attribute entry, of type CYBLE_GATT_DB_ATTR_HANDLE_T.
-------------------	---

**Returns:**

CYBLE\_GATT\_ERR\_CODE\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_GATT_ERR_NONE	On successful operation
CYBLE_GATT_ERR_INVALID_HANDLE	'attrHandle' is not valid

### **CYBLE\_GATT\_ERR\_CODE\_TCyBle\_GattsDisableAttribute (CYBLE\_GATT\_DB\_ATTR\_HANDLE\_T attrHandle)**

This function disables the attribute entry for service or characteristic logical group in the GATT database registered in the BLE Stack. This is a blocking function. No event is generated on calling this function.

This function returns error if the attribute does not belong to a service or a characteristic logical group. If attribute entry is already disabled then it returns CYBLE\_GATT\_ERR\_NONE as status. All the attribute entries are enabled in GATT database during stack initialization.

**Parameters:**

<i>attrHandle</i>	Attribute handle of the registered GATT Database to disable particular attribute entry, of type 'CYBLE_GATT_DB_ATTR_HANDLE_T'
-------------------	---

**Returns:**

CYBLE\_GATT\_ERR\_CODE\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_GATT_ERR_NONE	On successful operation

Errors codes	Description
CYBLE_GATT_ERR_INVALID_HANDLE	'attrHandle' is not valid

### **CYBLE\_GATT\_ERR\_CODE\_T CyBle\_GattsDbAuthorize (uint8 yesNo)**

This Function sets or clears authorization permission for the GATT database

#### **Parameters:**

<i>yesNo</i>	: Setting this to '0' turns off authorization on the entire GATT database and all attributes marked as authorize will return authorization error. Setting this to any non-zero value will authorize the entire GATT database and all attributes marked as authorize can be read / written based on other allowed permissions.
--------------	---

#### **Returns:**

CYBLE\_GATT\_ERR\_CODE\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_GATT_ERR_NONE	On successful operation

### **CYBLE\_API\_RESULT\_T CyBle\_GattsNotification (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_GATTS\_HANDLE\_VALUE\_NTF\_T\* ntfParam)**

This function sends a notification to the peer device when the GATT Server is configured to notify a Characteristic Value to the GATT Client without expecting any Attribute Protocol layer acknowledgment that the notification was successfully received. This is a non-blocking function.

On enabling notification successfully for a specific attribute, if the GATT server has an updated value to be notified to the GATT Client, it sends out a 'Handle Value Notification' which results in CYBLE\_EVT\_GATTC\_HANDLE\_VALUE\_NTF event at the GATT Client's end.

Refer to Bluetooth 4.1 core specification, Volume 3, Part G, section 4.10 for more details on notifications.

#### **Parameters:**

<i>connHandle</i>	Connection handle to identify the peer GATT entity, of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
<i>ntfParam</i>	Pointer to structure of type CYBLE_GATTS_HANDLE_VALUE_NTF_T which is same as <a href="#">CYBLE_GATT_HANDLE_VALUE_PAIR_T</a> .

#### **Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted as BLE Stack is busy processing previous requests.
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed



### **CYBLE\_API\_RESULT\_T CyBle\_GattsIndication (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_GATTS\_HANDLE\_VALUE\_IND\_T\* indParam)**

This function sends an indication to the peer device when the GATT Server is configured to indicate a Characteristic Value to the GATT Client and expects an Attribute Protocol layer acknowledgement that the indication was successfully received. This is a non-blocking function.

On enabling indication successfully, if the GATT server has an updated value to be indicated to the GATT Client, it sends out a 'Handle Value Indication' which results in CYBLE\_EVT\_GATTC\_HANDLE\_VALUE\_IND event at the GATT Client's end.

Refer to Bluetooth 4.1 core specification, Volume 3, Part G, section 4.11 for more details on Indications.

#### **Parameters:**

<i>connHandle</i>	Connection handle to identify the peer GATT entity, of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
<i>indParam</i>	Pointer to structure of type CYBLE_GATTS_HANDLE_VALUE_IND_T which is same as <a href="#">CYBLE_GATT_HANDLE_VALUE_PAIR_T</a> .

#### **Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed

### **CYBLE\_API\_RESULT\_T CyBle\_GattsErrorRsp (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_GATTS\_ERR\_PARAM\_T\* errRspParam)**

This function sends an error response to the peer device. The Error Response is used to state that a given request cannot be performed, and to provide the reason as defined in 'CYBLE\_GATT\_ERR\_CODE\_T'. This is a non-blocking function.

Note that the 'Write Command' initiated by GATT Client does not generate an 'Error Response' from the GATT Server's end. The GATT Client gets CYBLE\_EVT\_GATTC\_ERROR\_RSP event on receiving error response.

Refer Bluetooth 4.1 core specification, Volume 3, Part F, section 3.4.1.1 for more details on Error Response operation.

#### **Parameters:**

<i>connHandle</i>	Connection handle to identify the peer GATT entity, of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
<i>errRspParam</i>	Pointer to structure of type <a href="#">CYBLE_GATTS_ERR_PARAM_T</a> .

#### **Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation

Errors codes	Description
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed

### **CYBLE\_API\_RESULT\_T CyBle\_GattsExchangeMtuRsp (CYBLE\_CONN\_HANDLE\_T connHandle, uint16 mtu)**

This function sends the GATT Server's GATT MTU size to the GATT Client. This function has to be invoked in response to an Exchange GATT MTU Request received from the GATT Client. The GATT Server's GATT MTU size should be greater than or equal to the default GATT MTU size (23 bytes). This is a non-blocking function.

The peer GATT Client receives CYBLE\_EVT\_GATTC\_XCHNG\_MTU\_RSP event on executing this function on the GATT Server.

Refer to Bluetooth 4.1 core specification, Volume 3, Part G, section 4.3.1 for more details on exchange of GATT MTU.

#### **Parameters:**

<i>connHandle</i>	Connection handle to identify the peer GATT entity, of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
<i>mtu</i>	Size of GATT MTU, of type uint16

#### **Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Error codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	If 'l2capPsm' is 0
CYBLE_ERROR_INSUFFICIENT_RESOURCES	Cannot register more than one PSM
CYBLE_ERROR_L2CAP_PSM_WRONG_ENCODING	PSM value must be an odd number and the Most Significant Byte must have Least Significant Bit value set to '0'. If PSM does not follow this guideline, this return code is generated.
CYBLE_ERROR_L2CAP_PSM_ALREADY_REGISTERED	PSM already Registered

### **void CyBle\_GattsPrepWriteReqSupport (uint8 prepWriteSupport)**

This API needs to be called after getting CYBLE\_EVT\_GATTS\_PREP\_WRITE\_REQ event from the BLE Stack to support prepare write request operation. This API should be called only once during one Long/reliable write session. This needs to be called from the same event call back context. This is a non-blocking function.

On receiving CYBLE\_EVT\_GATTS\_PREP\_WRITE\_REQ, returning from the event handler without calling this function will result in prepare write response being sent to the peer device rejecting the prepare write operation. CYBLE\_GATT\_ERR\_REQUEST\_NOT\_SUPPORTED error code will be sent to client.



**Parameters:**

<i>prepWriteSupport</i>	<p>If prepare write operation is supported by the application then the application layer should set this variable to CYBLE_GATTS_PREP_WRITE_SUPPORT. Any other value will result in the device rejecting the prepare write operation. Allowed values for this parameter</p> <ul style="list-style-type: none"> <li>• CYBLE_GATTS_PREP_WRITE_SUPPORT</li> <li>• CYBLE_GATTS_PREP_WRITE_NOT_SUPPORT</li> </ul>
-------------------------	--

**Returns:**

None

**CYBLE\_API\_RESULT\_T CyBle\_GattsWriteResp (CYBLE\_CONN\_HANDLE\_T connHandle)**

This function sends a Write Response from a GATT Server to the GATT Client. This is a non-blocking function. This function has to be invoked in response to a valid Write Request event from the GATT Client (CYBLE\_EVT\_GATTS\_WRITE\_REQ) to acknowledge that the attribute has been successfully written.

The Write Response has to be sent after the attribute value is written or saved by the GATT Server. Write Response results in CYBLE\_EVT\_GATTC\_WRITE\_RSP event at the GATT Client's end.

**Parameters:**

<i>connHandle</i>	Connection handle to identify the peer GATT entity, of type <a href="#">CYBLE_CONN_HANDLE_T</a> .
-------------------	---

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	'connHandle' value does not represent any existing entry in the Stack
CYBLE_ERROR_INVALID_OPERATION	This operation is not permitted
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed

## GATT Definitions and Data Structures

### Description

Contains the GATT specific definitions and data structures used in the GATT APIs.

### Data Structures

- struct [CYBLE\\_DISC\\_SRVC\\_INFO\\_T](#)
- struct [CYBLE\\_DISC\\_SRVC128\\_INFO\\_T](#)
- struct [CYBLE\\_DISC\\_INCL\\_INFO\\_T](#)
- struct [CYBLE\\_DISC\\_CHAR\\_INFO\\_T](#)
- struct [CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#)

- struct [CYBLE\\_DISC\\_DESCR\\_INFO\\_T](#)
- struct [CYBLE\\_GATTS\\_T](#)
- struct [CYBLE\\_GATTC\\_T](#)
- struct [CY\\_BLE\\_FLASH\\_STORAGE](#)
- struct [CYBLE\\_GATT\\_VALUE\\_T](#)
- struct [CYBLE\\_GATT\\_HANDLE\\_VALUE\\_PAIR\\_T](#)
- struct [CYBLE\\_GATT\\_ATTR\\_HANDLE\\_RANGE\\_T](#)
- struct [CYBLE\\_GATT\\_XCHG\\_MTU\\_PARAM\\_T](#)
- struct [CYBLE\\_GATT\\_HANDLE\\_VALUE\\_OFFSET\\_PARAM\\_T](#)
- struct [CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)
- struct [CYBLE\\_GATTC\\_READ\\_BY\\_TYPE\\_REQ\\_T](#)
- struct [CYBLE\\_GATTC\\_READ\\_BLOB\\_REQ\\_T](#)
- struct [CYBLE\\_GATTC\\_HANDLE\\_LIST\\_T](#)
- struct [CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)
- struct [CYBLE\\_GATTC\\_HANDLE\\_VALUE\\_NTF\\_PARAM\\_T](#)
- struct [CYBLE\\_GATTC\\_GRP\\_ATTR\\_DATA\\_LIST\\_T](#)
- struct [CYBLE\\_GATTC\\_READ\\_BY\\_GRP\\_RSP\\_PARAM\\_T](#)
- struct [CYBLE\\_GATTC\\_FIND\\_BY\\_TYPE\\_RSP\\_PARAM\\_T](#)
- struct [CYBLE\\_GATTC\\_HANDLE\\_UUID\\_LIST\\_PARAM\\_T](#)
- struct [CYBLE\\_GATTC\\_FIND\\_INFO\\_RSP\\_PARAM\\_T](#)
- struct [CYBLE\\_GATTC\\_FIND\\_BY\\_TYPE\\_VALUE\\_REQ\\_T](#)
- struct [CYBLE\\_GATTC\\_EXEC\\_WRITE\\_RSP\\_T](#)
- struct [CYBLE\\_GATTS\\_ATT\\_GEN\\_VAL\\_LEN\\_T](#)
- struct [CYBLE\\_GATTS\\_ATT\\_PACK\\_VAL\\_LEN\\_T](#)
- union [CYBLE\\_GATTS\\_ATT\\_VALUE\\_T](#)
- struct [CYBLE\\_GATTS\\_DB\\_T](#)
- struct [CYBLE\\_GATTS\\_ERR\\_PARAM\\_T](#)
- struct [CYBLE\\_GATTS\\_PREP\\_WRITE\\_REQ\\_PARAM\\_T](#)
- struct [CYBLE\\_GATTS\\_EXEC\\_WRITE\\_REQ\\_T](#)
- struct [CYBLE\\_GATTS\\_WRITE\\_REQ\\_PARAM\\_T](#)
- struct [CYBLE\\_GATTS\\_CHAR\\_VAL\\_READ\\_REQ\\_T](#)

## Typedefs

- typedef uint16 [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#)
- typedef [CYBLE\\_GATT\\_ATTR\\_HANDLE\\_RANGE\\_T](#) [CYBLE\\_GATTC\\_FIND\\_INFO\\_REQ\\_T](#)
- typedef [CYBLE\\_GATT\\_HANDLE\\_VALUE\\_PAIR\\_T](#) [CYBLE\\_GATTC\\_SIGNED\\_WRITE\\_CMD\\_REQ\\_T](#)
- typedef [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_GATTC\\_READ\\_REQ\\_T](#)
- typedef [CYBLE\\_GATTC\\_HANDLE\\_LIST\\_T](#) [CYBLE\\_GATTC\\_READ\\_MULT\\_REQ\\_T](#)
- typedef [CYBLE\\_GATT\\_HANDLE\\_VALUE\\_PAIR\\_T](#) [CYBLE\\_GATTC\\_WRITE\\_CMD\\_REQ\\_T](#)
- typedef [CYBLE\\_GATT\\_HANDLE\\_VALUE\\_PAIR\\_T](#) [CYBLE\\_GATTC\\_WRITE\\_REQ\\_T](#)
- typedef [CYBLE\\_GATT\\_HANDLE\\_VALUE\\_OFFSET\\_PARAM\\_T](#) [CYBLE\\_GATTC\\_PREP\\_WRITE\\_REQ\\_T](#)





- typedef [CYBLE\\_GATTC\\_HANDLE\\_VALUE\\_NTF\\_PARAM\\_T](#)  
[CYBLE\\_GATTC\\_HANDLE\\_VALUE\\_IND\\_PARAM\\_T](#)
- typedef [CYBLE\\_GATTC\\_READ\\_BY\\_GRP\\_RSP\\_PARAM\\_T](#)  
[CYBLE\\_GATTC\\_READ\\_BY\\_TYPE\\_RSP\\_PARAM\\_T](#)
- typedef [CYBLE\\_GATT\\_HANDLE\\_VALUE\\_PAIR\\_T](#) [CYBLE\\_GATTS\\_HANDLE\\_VALUE\\_NTF\\_T](#)
- typedef [CYBLE\\_GATT\\_HANDLE\\_VALUE\\_PAIR\\_T](#) [CYBLE\\_GATTS\\_HANDLE\\_VALUE\\_IND\\_T](#)
- typedef [CYBLE\\_GATT\\_VALUE\\_T](#) [CYBLE\\_GATTS\\_READ\\_RSP\\_PARAM\\_T](#)
- typedef [CYBLE\\_GATTS\\_WRITE\\_REQ\\_PARAM\\_T](#) [CYBLE\\_GATTS\\_WRITE\\_CMD\\_REQ\\_PARAM\\_T](#)
- typedef [CYBLE\\_GATTS\\_WRITE\\_REQ\\_PARAM\\_T](#) [CYBLE\\_GATTS\\_SIGNED\\_WRITE\\_CMD\\_REQ\\_PARAM\\_T](#)
- typedef [CYBLE\\_GATT\\_HANDLE\\_VALUE\\_OFFSET\\_PARAM\\_T](#)  
[CYBLE\\_GATTS\\_PREP\\_WRITE\\_RSP\\_PARAM\\_T](#)

## Enumerations

- enum [CYBLE\\_GATT\\_PDU\\_T](#){ [CYBLE\\_GATT\\_ERROR\\_RSP](#)= 0x01u, [CYBLE\\_GATT\\_XCNHG\\_MTU\\_REQ](#),  
[CYBLE\\_GATT\\_XCHNG\\_MTU\\_RSP](#), [CYBLE\\_GATT\\_FIND\\_INFO\\_REQ](#), [CYBLE\\_GATT\\_FIND\\_INFO\\_RSP](#),  
[CYBLE\\_GATT\\_FIND\\_BY\\_TYPE\\_VALUE\\_REQ](#), [CYBLE\\_GATT\\_FIND\\_BY\\_TYPE\\_VALUE\\_RSP](#),  
[CYBLE\\_GATT\\_READ\\_BY\\_TYPE\\_REQ](#), [CYBLE\\_GATT\\_READ\\_BY\\_TYPE\\_RSP](#), [CYBLE\\_GATT\\_READ\\_REQ](#),  
[CYBLE\\_GATT\\_READ\\_RSP](#), [CYBLE\\_GATT\\_READ\\_BLOB\\_REQ](#), [CYBLE\\_GATT\\_READ\\_BLOB\\_RSP](#),  
[CYBLE\\_GATT\\_READ\\_MULTIPLE\\_REQ](#), [CYBLE\\_GATT\\_READ\\_MULTIPLE\\_RSP](#),  
[CYBLE\\_GATT\\_READ\\_BY\\_GROUP\\_REQ](#), [CYBLE\\_GATT\\_READ\\_BY\\_GROUP\\_RSP](#),  
[CYBLE\\_GATT\\_WRITE\\_REQ](#), [CYBLE\\_GATT\\_WRITE\\_RSP](#), [CYBLE\\_GATT\\_WRITE\\_CMD](#)= 0x52u,  
[CYBLE\\_GATT\\_PREPARE\\_WRITE\\_REQ](#)= 0x16u, [CYBLE\\_GATT\\_PREPARE\\_WRITE\\_RSP](#),  
[CYBLE\\_GATT\\_EXECUTE\\_WRITE\\_REQ](#), [CYBLE\\_GATT\\_EXECUTE\\_WRITE\\_RSP](#),  
[CYBLE\\_GATT\\_HANDLE\\_VALUE\\_NTF](#)= 0x1Bu, [CYBLE\\_GATT\\_HANDLE\\_VALUE\\_IND](#)= 0x1Du,  
[CYBLE\\_GATT\\_HANDLE\\_VALUE\\_CNF](#)= 0x1Eu, [CYBLE\\_GATT\\_SIGNED\\_WRITE\\_CMD](#)= 0xD2,  
[CYBLE\\_GATT\\_UNKNOWN\\_PDU\\_IND](#)= 0xFFu}
- enum [CYBLE\\_GATT\\_ERR\\_CODE\\_T](#){ [CYBLE\\_GATT\\_ERR\\_NONE](#)= 0x00u,  
[CYBLE\\_GATT\\_ERR\\_INVALID\\_HANDLE](#), [CYBLE\\_GATT\\_ERR\\_READ\\_NOT\\_PERMITTED](#),  
[CYBLE\\_GATT\\_ERR\\_WRITE\\_NOT\\_PERMITTED](#), [CYBLE\\_GATT\\_ERR\\_INVALID\\_PDU](#),  
[CYBLE\\_GATT\\_ERR\\_INSUFFICIENT\\_AUTHENTICATION](#),  
[CYBLE\\_GATT\\_ERR\\_REQUEST\\_NOT\\_SUPPORTED](#), [CYBLE\\_GATT\\_ERR\\_INVALID\\_OFFSET](#),  
[CYBLE\\_GATT\\_ERR\\_INSUFFICIENT\\_AUTHORIZATION](#),  
[CYBLE\\_GATT\\_ERR\\_PREPARE\\_WRITE\\_QUEUE\\_FULL](#), [CYBLE\\_GATT\\_ERR\\_ATTRIBUTE\\_NOT\\_FOUND](#),  
[CYBLE\\_GATT\\_ERR\\_ATTRIBUTE\\_NOT\\_LONG](#), [CYBLE\\_GATT\\_ERR\\_INSUFFICIENT\\_ENC\\_KEY\\_SIZE](#),  
[CYBLE\\_GATT\\_ERR\\_INVALID\\_ATTRIBUTE\\_LEN](#), [CYBLE\\_GATT\\_ERR\\_UNLIKELY\\_ERROR](#),  
[CYBLE\\_GATT\\_ERR\\_INSUFFICIENT\\_ENCRYPTION](#), [CYBLE\\_GATT\\_ERR\\_UNSUPPORTED\\_GROUP\\_TYPE](#),  
[CYBLE\\_GATT\\_ERR\\_INSUFFICIENT\\_RESOURCE](#)= 0x11,  
[CYBLE\\_GATT\\_ERR\\_HEART\\_RATE\\_CONTROL\\_POINT\\_NOT\\_SUPPORTED](#)= 0x80u,  
[CYBLE\\_GATT\\_ERR\\_USER\\_DATA\\_ACCESS\\_NOT\\_PERMITTED](#)= 0x80u,  
[CYBLE\\_GATT\\_ERR\\_CPS\\_INAPPROPRIATE\\_CONNECTION\\_PARAMETERS](#)= 0x80u,  
[CYBLE\\_GATT\\_ERR HTS OUT OF RANGE](#)= 0x80u,  
[CYBLE\\_GATTS\\_ERR\\_PROCEDURE\\_ALREADY\\_IN\\_PROGRESS](#)= 0x80u,  
[CYBLE\\_GATT\\_ERR\\_OP\\_CODE\\_NOT\\_SUPPORTED](#)= 0x80u, [CYBLE\\_GATT\\_ERR\\_MISSING\\_CRC](#)= 0x80u,  
[CYBLE\\_GATTS\\_ERR\\_CCCD\\_IMPROPERLY\\_CONFIGURED](#)= 0x81u,  
[CYBLE\\_GATTS\\_ERR\\_OPERATION\\_FAILED](#)= 0x81u, [CYBLE\\_GATT\\_ERR\\_INVALID\\_CRC](#)= 0x81u,  
[CYBLE\\_GATT\\_ERR\\_ANS\\_COMMAND\\_NOT\\_SUPPORTED](#)= 0xA0u,  
[CYBLE\\_GATT\\_ERR\\_ANCS\\_UNKNOWN\\_COMMAND](#)= 0xA0u,  
[CYBLE\\_GATT\\_ERR\\_ANCS\\_INVALID\\_COMMAND](#)= 0xA1u,  
[CYBLE\\_GATT\\_ERR\\_ANCS\\_INVALID\\_PARAMETER](#)= 0xA2u, [CYBLE\\_GATT\\_ERR\\_ANCS\\_ACTION\\_FAILED](#)=  
0xA3u, [CYBLE\\_GATT\\_ERR\\_CCCD\\_IMPROPERLY\\_CONFIGURED](#)= 0xFD u,



CYBLE\_GATT\_ERR\_PROCEDURE\_ALREADY\_IN\_PROGRESS = 0xFEu,  
CYBLE\_GATT\_ERR\_OUT\_OF\_RANGE = 0xFFu}

## Typedef Documentation

**typedef uint16 CYBLE\_GATT\_DB\_ATTR\_HANDLE\_T**

GATT BD Attribute Handle Type

**typedef CYBLE\_GATT\_ATTR\_HANDLE\_RANGE\_T CYBLE\_GATTC\_FIND\_INFO\_REQ\_T**

GATT find info request to be sent to Server

**typedef CYBLE\_GATT\_HANDLE\_VALUE\_PAIR\_T CYBLE\_GATTC\_SIGNED\_WRITE\_CMD\_REQ\_T**

Signed Write command request to be sent to Server

**typedef CYBLE\_GATT\_DB\_ATTR\_HANDLE\_T CYBLE\_GATTC\_READ\_REQ\_T**

Read request to be sent to Server

**typedef CYBLE\_GATTC\_HANDLE\_LIST\_T CYBLE\_GATTC\_READ\_MULT\_REQ\_T**

Read multiple request to be sent to Server

**typedef CYBLE\_GATT\_HANDLE\_VALUE\_PAIR\_T CYBLE\_GATTC\_WRITE\_CMD\_REQ\_T**

Write command request to be sent to Server

**typedef CYBLE\_GATT\_HANDLE\_VALUE\_PAIR\_T CYBLE\_GATTC\_WRITE\_REQ\_T**

Write request to be sent to Server

**typedef CYBLE\_GATT\_HANDLE\_VALUE\_OFFSET\_PARAM\_T CYBLE\_GATTC\_PREP\_WRITE\_REQ\_T**

Prepare write request to be sent to Server

**typedef CYBLE\_GATTC\_HANDLE\_VALUE\_NTF\_PARAM\_T  
CYBLE\_GATTC\_HANDLE\_VALUE\_IND\_PARAM\_T**

GATT handle value indication parameter received from server type

**typedef CYBLE\_GATTC\_READ\_BY\_GRP\_RSP\_PARAM\_T CYBLE\_GATTC\_READ\_BY\_TYPE\_RSP\_PARAM\_T**

GATT read by type response received from server

**typedef CYBLE\_GATT\_HANDLE\_VALUE\_PAIR\_T CYBLE\_GATTS\_HANDLE\_VALUE\_NTF\_T**

Handle value notification data to be sent to Client

**typedef CYBLE\_GATT\_HANDLE\_VALUE\_PAIR\_T CYBLE\_GATTS\_HANDLE\_VALUE\_IND\_T**

GATT handle value indication parameter type

**typedef CYBLE\_GATT\_VALUE\_T CYBLE\_GATTS\_READ\_RSP\_PARAM\_T**

Read response parameter to be sent to Client

**typedef CYBLE\_GATTS\_WRITE\_REQ\_PARAM\_T CYBLE\_GATTS\_WRITE\_CMD\_REQ\_PARAM\_T**

Write command request parameter received from Client



**typedef CYBLE\_GATTS\_WRITE\_REQ\_PARAM\_T CYBLE\_GATTS\_SIGNED\_WRITE\_CMD\_REQ\_PARAM\_T**

Signed Write command request parameter received from Client

**typedef CYBLE\_GATT\_HANDLE\_VALUE\_OFFSET\_PARAM\_T  
CYBLE\_GATTS\_PREP\_WRITE\_RSP\_PARAM\_T**

Prepare write response parameter to be sent to Client

## Enumeration Type Documentation

**enum CYBLE\_GATT\_PDU\_T**

Opcode which has resulted in error

### Enumerator

***CYBLE\_GATT\_ERROR\_RSP*** Error Response PDU  
***CYBLE\_GATT\_XCNHG\_MTU\_REQ*** Exchange GATT MTU Request PDU  
***CYBLE\_GATT\_XCHNG\_MTU\_RSP*** Exchange GATT MTU Response PDU  
***CYBLE\_GATT\_FIND\_INFO\_REQ*** Find Information Request PDU  
***CYBLE\_GATT\_FIND\_INFO\_RSP*** Find Information Response PDU  
***CYBLE\_GATT\_FIND\_BY\_TYPE\_VALUE\_REQ*** Find By Type Value Request PDU  
***CYBLE\_GATT\_FIND\_BY\_TYPE\_VALUE\_RSP*** Find By Type Value Response PDU  
***CYBLE\_GATT\_READ\_BY\_TYPE\_REQ*** Read By Type Request PDU  
***CYBLE\_GATT\_READ\_BY\_TYPE\_RSP*** Read By Type Response PDU  
***CYBLE\_GATT\_READ\_REQ*** Read Request PDU  
***CYBLE\_GATT\_READ\_RSP*** Read Response PDU  
***CYBLE\_GATT\_READ\_BLOB\_REQ*** Read Blob Request PDU  
***CYBLE\_GATT\_READ\_BLOB\_RSP*** Read Blob Response PDU  
***CYBLE\_GATT\_READ\_MULTIPLE\_REQ*** Read Multiple Request PDU  
***CYBLE\_GATT\_READ\_MULTIPLE\_RSP*** Read Multiple Response PDU  
***CYBLE\_GATT\_READ\_BY\_GROUP\_REQ*** Read Group Type Request PDU  
***CYBLE\_GATT\_READ\_BY\_GROUP\_RSP*** Read Group Type Response PDU  
***CYBLE\_GATT\_WRITE\_REQ*** Write Request PDU  
***CYBLE\_GATT\_WRITE\_RSP*** Write Response PDU  
***CYBLE\_GATT\_WRITE\_CMD*** Write Command PDU  
***CYBLE\_GATT\_PREPARE\_WRITE\_REQ*** Prepare Write Request PDU  
***CYBLE\_GATT\_PREPARE\_WRITE\_RSP*** Prepare Write Response PDU  
***CYBLE\_GATT\_EXECUTE\_WRITE\_REQ*** Execute Write Request PDU  
***CYBLE\_GATT\_EXECUTE\_WRITE\_RSP*** Execute Write Response PDU  
***CYBLE\_GATT\_HANDLE\_VALUE\_NTF*** Handle Value Notification PDU  
***CYBLE\_GATT\_HANDLE\_VALUE\_IND*** Handle Value Indication PDU  
***CYBLE\_GATT\_HANDLE\_VALUE\_CNF*** Handle Value Confirmation PDU  
***CYBLE\_GATT\_SIGNED\_WRITE\_CMD*** Signed Write Command PDU  
***CYBLE\_GATT\_UNKNOWN\_PDU\_IND*** Unknown or Unhandled PDU

**enum CYBLE\_GATT\_ERR\_CODE\_T**

GATT profile error codes

### Enumerator



**CYBLE\_GATT\_ERR\_NONE** No Error

**CYBLE\_GATT\_ERR\_INVALID\_HANDLE** Invalid Handle error code is used in the case when the ATT handle in the ATT request PDU is invalid.

**CYBLE\_GATT\_ERR\_READ\_NOT\_PERMITTED** Read Not Permitted error code is used in the case when the permission to read the value of an ATT handle is not permitted on the ATT server.

**CYBLE\_GATT\_ERR\_WRITE\_NOT\_PERMITTED** Write Not Permitted error code is used in the case when the permission to write the value of an ATT handle is not permitted on the ATT server.

**CYBLE\_GATT\_ERR\_INVALID\_PDU** Invalid PDU error code is used in the case when the format of the PDU sent from the ATT Client is incorrect.

**CYBLE\_GATT\_ERR\_INSUFFICIENT\_AUTHENTICATION** Insufficient Authentication error code is used in the case when an access to a handle is attempted on a un-authenticated link but the attribute requires that the link be authenticated before any client can access it.

**CYBLE\_GATT\_ERR\_REQUEST\_NOT\_SUPPORTED** Request not supported error code is used in the case when the server does not support the processing of an ATT request sent from the client.

**CYBLE\_GATT\_ERR\_INVALID\_OFFSET** Invalid Offset error code is used in the case when the offset sent by the client in the Read blob/Prepare Write Request is invalid with respect to the length of the value in the server.

**CYBLE\_GATT\_ERR\_INSUFFICIENT\_AUTHORIZATION** Insufficient Authorization error code is used in the case when the ATT server does not Authorize the client and hence prohibiting the client from reading the handle value.

**CYBLE\_GATT\_ERR\_PREPARE\_WRITE\_QUEUE\_FULL** Write queue full error code is used when there is no more space left in the prepare write queue on the server to entertain any more prepare writes from a client.

**CYBLE\_GATT\_ERR\_ATTRIBUTE\_NOT\_FOUND** Attribute not found error is used when the ATT server cannot find any handles that belong to the Attribute type in the given range of handles that the client specified in its request. This error code can be sent to the client in response to the following request PDUs - Find Information, Find by Type Value, Read by Type, Read by Group Type requests.

**CYBLE\_GATT\_ERR\_ATTRIBUTE\_NOT\_LONG** Attribute Not Long error code is used when the client tries to read or write a Attribute handle's value which cannot be read or written through Read Blob or multiple prepare write requests.

**CYBLE\_GATT\_ERR\_INSUFFICIENT\_ENC\_KEY\_SIZE** Insufficient encryption key size error code is used when the client tries to access an Attribute Handle's Value for which the link need to be encrypted with a key of certain minimum key size and the current link is encrypted with a key of lesser size than the minimum required.

**CYBLE\_GATT\_ERR\_INVALID\_ATTRIBUTE\_LEN** Invalid Attribute length error code is used when the Attribute value's length is not correct to process the request containing the value.

**CYBLE\_GATT\_ERR\_UNLIKELY\_ERROR** Unlikely error is used when the processing of the Attribute request has encountered an error that is not covered by any other error code.

**CYBLE\_GATT\_ERR\_INSUFFICIENT\_ENCRYPTION** Insufficient encryption error code is used when the client tries to read or write an Attribute handle which requires the link to be encrypted and the link is currently not encrypted.

**CYBLE\_GATT\_ERR\_UNSUPPORTED\_GROUP\_TYPE** Unsupported Group Type error code is used when the Attribute type requested in the Read by Group Type request is not a valid grouping attribute on the server.

**CYBLE\_GATT\_ERR\_INSUFFICIENT\_RESOURCE** Insufficient Resources error code is used when the ATT server does not have enough resources such as memory etc. to process the request from the client.

**CYBLE\_GATT\_ERR\_HEART\_RATE\_CONTROL\_POINT\_NOT\_SUPPORTED** Other Error Groups for ATT - GATT Reserved: GATT-ATT Error codes 0x12 to 0x7F are reserved for Application Specific Error Code Range: 0x80 to 0x9F Reserved: 0xA0 to 0xDF Common Profile & Service Error Code : 0xE0 to 0xFF



Heart Rate Control Point Not Supported error code is used when a unsupported code is written into Heart Rate service Control Point characteristic.

**CYBLE\_GATT\_ERR\_USER\_DATA\_ACCESS\_NOT\_PERMITTED** The user data access is not permitted (i.e. the user has not given consent in order to access these data).

**CYBLE\_GATT\_ERR\_CPS\_INAPPROPRIATE\_CONNECTION\_PARAMETERS** The notifications of the Cycling Power Vector characteristic cannot be sent due to inappropriate connection parameters.

**CYBLE\_GATT\_ERR HTS\_OUT\_OF\_RANGE** The value is considered invalid and outside of the range allowed by the characteristic.

**CYBLE\_GATTS\_ERR\_PROCEDURE\_ALREADY\_IN\_PROGRESS** Procedure Already in Progress error code is used when a profile or service request cannot be serviced because an operation that has been previously triggered is still in progress.

**CYBLE\_GATT\_ERR\_OP\_CODE\_NOT\_SUPPORTED** The Op Code Not Supported error code is used when a unsupported Op Code is written into Control Point characteristic.

**CYBLE\_GATT\_ERR\_MISSING\_CRC** The Missing CRC error code is used when the CRC is missed in the incoming characteristic value.

**CYBLE\_GATTS\_ERR\_CCCD\_IMPROPERLY\_CONFIGURED** Client Characteristic Configuration Descriptor Improperly Configured error code is used when a Client Characteristic Configuration descriptor is not configured according to the requirements of the profile or service.

**CYBLE\_GATTS\_ERR\_OPERATION\_FAILED** The Operation Failed error code is used when the device is unable to complete a procedure for any reason.

**CYBLE\_GATT\_ERR\_INVALID\_CRC** The Invalid CRC error code is used when the CRC is invalid in the incoming characteristic value.

**CYBLE\_GATT\_ERR\_ANS\_COMMAND\_NOT\_SUPPORTED** Command Not Supported used by the Alert Notification Server when the Client sends incorrect value of the Command ID or Category ID of to the Alert Notification Control Point Characteristic.

**CYBLE\_GATT\_ERR\_ANCS\_UNKNOWN\_COMMAND** Unknown command error code used by the Apple Notification Center Server when the Client sends unknown command value of the Apple Notification Center Service Control Point Characteristic.

**CYBLE\_GATT\_ERR\_ANCS\_INVALID\_COMMAND** Invalid command error code used by the Apple Notification Center Server when the Client sends invalid command value of the Apple Notification Center Service Control Point Characteristic.

**CYBLE\_GATT\_ERR\_ANCS\_INVALID\_PARAMETER** Invalid parameter error code used by the Apple Notification Center Server when the Client sends invalid parameter value of the Apple Notification Center Service Control Point Characteristic.

**CYBLE\_GATT\_ERR\_ANCS\_ACTION\_FAILED** Action failed error code used by the Apple Notification Center Server when some Apple Notification Center Service Control Point Characteristic command processing goes wrong

**CYBLE\_GATT\_ERR\_CCCD\_IMPROPERLY\_CONFIGURED** Client Characteristic Configuration Descriptor Improperly Configured error code is used when a Client Characteristic Configuration descriptor is not configured according to the requirements of the profile or service.

**CYBLE\_GATT\_ERR\_PROCEDURE\_ALREADY\_IN\_PROGRESS** The Procedure Already in Progress error code is used when a profile or service request cannot be serviced because an operation that has been previously triggered is still in progress.

**CYBLE\_GATT\_ERR\_OUT\_OF\_RANGE** Out of Range error code is used when an attribute value is out of range as defined by a profile or service specification.

## L2CAP Functions

### Description

The L2CAP APIs allow access to the Logical link control and adaptation protocol (L2CAP) layer of the BLE stack. The L2CAP API names begin with CyBle\_L2cap.

### Modules

- [L2CAP Definitions and Data Structures](#)  
*Contains the L2CAP specific definitions and data structures used in the L2CAP APIs.*

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_L2capCbfcRegisterPsm](#)(uint16 l2capPsm, uint16 creditLwm)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_L2capCbfcUnregisterPsm](#)(uint16 l2capPsm)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_L2capCbfcConnectReq](#)(uint8 bdHandle, uint16 remotePsm, uint16 localPsm, [CYBLE\\_L2CAP\\_CBFC\\_CONNECT\\_PARAM\\_T](#)\*param)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_L2capCbfcConnectRsp](#)(uint16 localCid, uint16 response, [CYBLE\\_L2CAP\\_CBFC\\_CONNECT\\_PARAM\\_T](#)\*param)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_L2capCbfcSendFlowControlCredit](#)(uint16 localCid, uint16 credit)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_L2capChannelDataWrite](#)(uint8 bdHandle, uint16 localCid, uint8 \*buffer, uint16 bufferLen)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_L2capDisconnectReq](#)(uint16 localCid)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_L2capLeConnectionParamUpdateRequest](#)(uint8 bdHandle, [CYBLE\\_GAP\\_CONN\\_UPDATE\\_PARAM\\_T](#)\*connParam)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_L2capLeConnectionParamUpdateResponse](#)(uint8 bdHandle, uint16 result)

### Function Documentation

#### **[CYBLE\\_API\\_RESULT\\_T CyBle\\_L2capCbfcRegisterPsm](#) (uint16 l2capPsm, uint16 creditLwm)**

This function registers a new upper layer protocol or PSM to L2CAP, along with the set of callbacks for the L2CAP Credit Based Flow Control mode. This is a blocking function. No event is generated on calling this function.

Refer Bluetooth 4.1 core specification, Volume 3, Part A, section 3.4 for more details about credit based flow control mode of operation.

#### Parameters:

<i>l2capPsm</i>	PSM value of the higher-level protocol
<i>creditLwm</i>	Upper Layer defined Receive Credit Low Mark

#### Returns:

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Error codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	If 'l2capPsm' is 0
CYBLE_ERROR_INSUFFICIENT_RESOURCES	Cannot register more than one PSM



Error codes	Description
CYBLE_ERROR_L2CAP_PSM_WRONG_ENCODING	PSM value must be an odd number and the Most Significant Byte must have Least Significant Bit value set to '0'. If PSM does not follow this guideline, this return code is generated.
CYBLE_ERROR_L2CAP_PSM_ALREADY_REGISTERED	PSM already Registered

### **CYBLE\_API\_RESULT\_T CyBle\_L2capCbfcUnregisterPsm (uint16 l2capPsm)**

This function de-registers an upper layer protocol or LE\_PSM from L2CAP for the L2CAP Credit Based Flow Control mode. This is a blocking function. No event is generated on calling this function.

#### **Parameters:**

<i>l2capPsm</i>	PSM value of the higher-level protocol
-----------------	--

#### **Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed
CYBLE_ERROR_L2CAP_PSM_WRONG_ENCODING	L2CAP PSM value specified is incorrect or does not exist

### **CYBLE\_API\_RESULT\_T CyBle\_L2capCbfcConnectReq (uint8 bdHandle, uint16 remotePsm, uint16 localPsm, CYBLE\_L2CAP\_CBFC\_CONNECT\_PARAM\_T\* param)**

This L2CAP function initiates L2CAP channel establishment procedure in Credit Based Flow Control (CBFC) mode. Connection establishment is initiated to the specified remote Bluetooth device, for the specified PSM representing an upper layer protocol above L2CAP. This is a non-blocking function.

At the receiver's end, CYBLE\_EVT\_L2CAP\_CBFC\_CONN\_IND event is generated. In response to this call, CYBLE\_EVT\_L2CAP\_CBFC\_CONN\_CNF event is generated at the sender's end.

Refer to Bluetooth 4.1 core specification, Volume 3, Part A, section 4.22 for more details about this operation.

#### **Parameters:**

<i>bdHandle</i>	Peer device handle.
<i>remotePsm</i>	Remote PSM, representing the upper layer protocol above L2CAP.
<i>localPsm</i>	Local PSM, representing the upper layer protocol above L2CAP.
<i>param</i>	This parameter must be a pointer to the <a href="#">CYBLE_L2CAP_CBFC_CONNECT_PARAM_T</a> variable containing the connection parameters for the L2CAP channel.

#### **Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
--------------	-------------





Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	If "param" is NULL
CYBLE_ERROR_INSUFFICIENT_RESOURCES	Insufficient resources
CYBLE_L2CAP_PSM_NOT_REGISTERED	PSM not Registered

**CYBLE\_API\_RESULT\_T CyBle\_L2capCbfcConnectRsp (uint16 *localCid*, uint16 *response*, CYBLE\_L2CAP\_CBFC\_CONNECT\_PARAM\_T\* *param*)**

This L2CAP function enables an upper layer protocol to respond to L2CAP connection request for LE Credit Based Flow Control mode of the specified PSM from the specified remote Bluetooth device. This is a non-blocking function. It is mandatory that the upper layer PSM always responds back by calling this function upon receiving CBFC Connection Request (CYBLE\_EVT\_L2CAP\_CBFC\_CONN\_IND) event.

The channel is established (opened) only when the PSM concerned responds back with an event indicating success (CYBLE\_EVT\_L2CAP\_CBFC\_CONN\_CNF, at the peer device's end). Otherwise, the channel establishment request from the peer will be rejected by L2CAP with appropriate result and status as received from the upper layer PSM.

Refer to Bluetooth 4.1 core specification, Volume 3, Part A, section 4.23 for more details about this operation.

**Parameters:**

<i>localCid</i>	This parameter specifies the local L2CAP channel end-point for this new L2CAP channel. On receipt of L2CAP Connect Request command from the peer, local L2CAP will temporarily create a channel. This parameter identifies the new channel. If the upper layer PSM chooses to reject this connection, this temporary channel will be closed.
<i>response</i>	This parameter specifies the response of the upper layer for the new L2CAP channel establishment request from the peer. It must be set to a value as specified in L2CAP Connect Result Codes. Refer to Bluetooth 4.1 core specification, Volume 3, Part A, section 4.23 for more details.
<i>param</i>	This parameter must be a pointer to the <a href="#">CYBLE_L2CAP_CBFC_CONNECT_PARAM_T</a> variable containing the connection parameters for the L2CAP channel.

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	If "param" is NULL
CYBLE_ERROR_L2CAP_CONNECT_ENTITY_NOT_FOUND	Connection entity is not found



**CYBLE\_API\_RESULT\_T CyBle\_L2capCbfcSendFlowControlCredit (uint16 *localCid*, uint16 *credit*)**

This L2CAP function enables an upper layer protocol to send LE Flow Control Credit packet to peer Bluetooth device, when it is capable of receiving additional LE-frames. This is a non-blocking function.

This function is invoked when the device is expecting more data from the peer device and it gets an event indicating that the peer device is low on credits CYBLE\_EVT\_L2CAP\_CBFC\_RX\_CREDIT\_IND for which it needs to respond by sending credits by invoking this function. Once the peer device receives these credits, it gets CYBLE\_EVT\_L2CAP\_CBFC\_TX\_CREDIT\_IND event indicating the same. It is the responsibility of the application layer of the device sending the credit to keep track of the total number of credits and making sure that it does not exceed 65535.

Refer to Bluetooth 4.1 core specification, Volume 3, Part A, section 4.24 for more details about this operation.

**Parameters:**

<i>localCid</i>	This parameter specifies the local channel end-point for the L2CAP channel. For the initiator of L2CAP channel establishment, this must be set to the value indicated by the CYBLE_EVT_L2CAP_CBFC_CONN_CNF event. For the responder, the upper layer protocol obtains this value when it receives the event CYBLE_EVT_L2CAP_CBFC_CONN_IND.
<i>credit</i>	The credit value field represents number of credits the receiving device can increment. The credit value field is a number between 1 and 65535.

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed
CYBLE_L2CAP_CONNECTION_ENTITY_NOT_FOUND	L2CAP connection instance is not present

**CYBLE\_API\_RESULT\_T CyBle\_L2capChannelDataWrite (uint8 *bdHandle*, uint16 *localCid*, uint8 \* *buffer*, uint16 *bufferLen*)**

This function sends a data packet on the L2CAP CBFC channel. This is a blocking function.

This API generates 'CYBLE\_EVT\_L2CAP\_CBFC\_DATA\_WRITE\_IND' event which is kept for backward compatibility and the user should handle CYBLE\_API\_RESULT\_T to determine whether the last data packet was sent out properly.

Refer to Bluetooth 4.1 core specification, Volume 3, Part A, section 3.4 for more details about this operation.

**Parameters:**

<i>bdHandle</i>	Peer device handle.
<i>localCid</i>	This parameter specifies the local channel end-point for the L2CAP channel. For the initiator of L2CAP channel establishment, this must be set to the value indicated by the CYBLE_EVT_L2CAP_CBFC_CONN_CNF event. For the responder, the upper layer protocol obtains this value when it receives the event CYBLE_EVT_L2CAP_CBFC_CONN_IND.
<i>buffer</i>	Buffer containing packet to be sent.





<i>bufferLen</i>	L2CAP Data Packet length. It shall be of lesser than the size of both local L2CAP MTU & peer L2CAP MTU size.
------------------	--

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	If "buffer" is NULL
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed
CYBLE_ERROR_NO_CONNECTION	No Link Layer connection is present
CYBLE_L2CAP_CHANNEL_NOT_FOUND	No L2ACP channel found corresponding to CID
CYBLE_L2CAP_NOT_ENOUGH_CREDITS	Not Enough Credits to transfer data

**CYBLE\_API\_RESULT\_T CyBle\_L2capDisconnectReq (uint16 localCid)**

This function initiates sending of an L2CAP Disconnect Request (CYBLE\_EVT\_L2CAP\_CBFC\_DISCONN\_IND event received by the peer device) command to the remote L2CAP entity to initiate disconnection of the referred L2CAP channel. This is a non-blocking function.

Disconnection of the L2CAP channel always succeeds - either by reception of the L2CAP Disconnect Response from the peer, or by timeout. In any case, L2CAP will confirm disconnection of the channel, by calling the CYBLE\_EVT\_L2CAP\_CBFC\_DISCONN\_CNF event.

Refer to Bluetooth 4.1 core specification, Volume 3, Part A, section 4.6 for more details about this operation.

**Parameters:**

<i>localCid</i>	<p>This parameter specifies the local channel end-point for the L2CAP channel.</p> <ul style="list-style-type: none"> <li>For initiator of L2CAP channel establishment, this must be set to the value indicated by the event CYBLE_EVT_L2CAP_CBFC_CONN_CNF.</li> <li>For the responder, the upper layer protocol obtains this value when it receives the event CYBLE_EVT_L2CAP_CBFC_CONN_IND.</li> </ul>
-----------------	--

**Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_OPERATION	No Link Layer connection is present
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed
CYBLE_L2CAP_CONNECTION_ENTITY	No connection entity found which can be



Errors codes	Description
ITY_NOT_FOUND	disconnected

### **CYBLE\_API\_RESULT\_T CyBle\_L2capLeConnectionParamUpdateRequest (uint8 *bdHandle*, CYBLE\_GAP\_CONN\_UPDATE\_PARAM\_T\* *connParam*)**

This function sends the connection parameter update request to the Master of the link. This is a non-blocking function. This function can only be used from device connected in LE slave role.

To send connection parameter update request from the master to the slave, use [CyBle\\_GapcConnectionParamUpdateRequest\(\)](#) function. This function results in CYBLE\_EVT\_L2CAP\_CONN\_PARAM\_UPDATE\_REQ event at the Master's end.

Refer to Bluetooth 4.1 core specification, Volume 3, Part A, section 4.20 for more details about this operation.

#### **Parameters:**

<i>bdHandle</i>	Peer device handle
<i>connParam</i>	Pointer to a variable of type <a href="#">CYBLE_GAP_CONN_UPDATE_PARAM_T</a> which indicates the response to the Connection Parameter Update Request

#### **Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	If "connParam" is NULL
CYBLE_ERROR_INVALID_OPERATION	Connection Parameter Update Request is not allowed
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed
CYBLE_ERROR_NO_CONNECTION	No Link Layer connection is present

### **CYBLE\_API\_RESULT\_T CyBle\_L2capLeConnectionParamUpdateResponse (uint8 *bdHandle*, uint16 *result*)**

This API sends the connection parameter update response to slave. This API can only be used from device connected in LE master role.

#### **Parameters:**

<i>bdHandle</i>	Peer device handle
<i>result</i>	This field indicates the response to the Connection Parameter Update Request

#### **Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation
CYBLE_ERROR_INVALID_PARAMETER	If 'result' is invalid (greater than connection parameter reject code i.e., 0x0001)

Errors codes	Description
CYBLE_ERROR_MEMORY_ALLOCATION_FAILED	Memory allocation failed
CYBLE_ERROR_NO_CONNECTION	No Link Layer connection is present

## L2CAP Definitions and Data Structures

### Description

Contains the L2CAP specific definitions and data structures used in the L2CAP APIs.

### Data Structures

- struct [CYBLE\\_L2CAP\\_CBFC\\_CONNECT\\_PARAM\\_T](#)
- struct [CYBLE\\_L2CAP\\_CBFC\\_CONN\\_IND\\_PARAM\\_T](#)
- struct [CYBLE\\_L2CAP\\_CBFC\\_CONN\\_CNF\\_PARAM\\_T](#)
- struct [CYBLE\\_L2CAP\\_CBFC\\_DISCONN\\_CNF\\_PARAM\\_T](#)
- struct [CYBLE\\_L2CAP\\_CBFC\\_RX\\_PARAM\\_T](#)
- struct [CYBLE\\_L2CAP\\_CBFC\\_LOW\\_RX\\_CREDIT\\_PARAM\\_T](#)
- struct [CYBLE\\_L2CAP\\_CBFC\\_LOW\\_TX\\_CREDIT\\_PARAM\\_T](#)
- struct [CYBLE\\_L2CAP\\_CBFC\\_DATA\\_WRITE\\_PARAM\\_T](#)

### Enumerations

- enum [CYBLE\\_L2CAP\\_COMMAND\\_REJ\\_REASON\\_T](#){ [CYBLE\\_L2CAP\\_COMMAND\\_NOT\\_UNDERSTOOD](#)= 0x0000u, [CYBLE\\_L2CAP\\_SIGNALLING\\_MTU\\_EXCEEDED](#), [CYBLE\\_L2CAP\\_INVALID\\_CID\\_IN\\_REQUEST](#)}
- enum [CYBLE\\_L2CAP\\_RESULT\\_PARAM\\_T](#){ [CYBLE\\_L2CAP\\_RESULT\\_SUCCESS](#)= 0x0000u, [CYBLE\\_L2CAP\\_RESULT\\_COMMAND\\_TIMEOUT](#)= 0x2318u, [CYBLE\\_L2CAP\\_RESULT\\_INCORRECT\\_SDU\\_LENGTH](#)= 0x2347u, [CYBLE\\_L2CAP\\_RESULT\\_NOT\\_ENOUGH\\_CREDITS](#)= 0x2371u, [CYBLE\\_L2CAP\\_RESULT\\_CREDIT\\_OVERFLOW](#)= 0x2373u, [CYBLE\\_L2CAP\\_RESULT\\_UNACCEPTABLE\\_CREDIT\\_VALUE](#)= 0x2374u}

### Enumeration Type Documentation

#### enum [CYBLE\\_L2CAP\\_COMMAND\\_REJ\\_REASON\\_T](#)

Reason for command reject event - CYBLE\_EVT\_L2CAP\_COMMAND\_REJ

##### Enumerator

**[CYBLE\\_L2CAP\\_COMMAND\\_NOT\\_UNDERSTOOD](#)** Command Not Understood

**[CYBLE\\_L2CAP\\_SIGNALLING\\_MTU\\_EXCEEDED](#)** Signaling L2CAP MTU exceeded

**[CYBLE\\_L2CAP\\_INVALID\\_CID\\_IN\\_REQUEST](#)** Invalid Connection Identifier in request

#### enum [CYBLE\\_L2CAP\\_RESULT\\_PARAM\\_T](#)

The result code of call back structures for L2CAP

##### Enumerator

**[CYBLE\\_L2CAP\\_RESULT\\_SUCCESS](#)** Operation Successful

**[CYBLE\\_L2CAP\\_RESULT\\_COMMAND\\_TIMEOUT](#)** Command timeout, if l2cap signaling channel timeout occurs, app should disconnect.



**CYBLE\_L2CAP\_RESULT\_INCORRECT\_SDU\_LENGTH** Invalid sdu length

**CYBLE\_L2CAP\_RESULT\_NOT\_ENOUGH\_CREDITS** Not enough credit to perform this operation

**CYBLE\_L2CAP\_RESULT\_CREDIT\_OVERFLOW** Credit overflow. Total credit exceeded 65535 (maximum)

**CYBLE\_L2CAP\_RESULT\_UNACCEPTABLE\_CREDIT\_VALUE** Invalid credit value, receive credit is Zero

## BLE Common Events

### Description

The BLE stack generates events to notify the application on various status alerts concerning the stack. These can be generic stack events or can be specific to GAP, GATT or L2CAP layers. The service specific events are handled separately in [BLE Service-Specific Events](#).

### Enumerations

- enum [CYBLE\\_EVENT\\_T](#) { [CYBLE\\_EVT\\_HOST\\_INVALID](#)= 0x00u, [CYBLE\\_EVT\\_STACK\\_ON](#)= 0x01u, [CYBLE\\_EVT\\_TIMEOUT](#), [CYBLE\\_EVT\\_HARDWARE\\_ERROR](#), [CYBLE\\_EVT\\_HCI\\_STATUS](#), [CYBLE\\_EVT\\_STACK\\_BUSY\\_STATUS](#), [CYBLE\\_EVT\\_GAPC\\_SCAN\\_PROGRESS\\_RESULT](#)= 0x20u, [CYBLE\\_EVT\\_GAP\\_AUTH\\_REQ](#), [CYBLE\\_EVT\\_GAP\\_PASSKEY\\_ENTRY\\_REQUEST](#), [CYBLE\\_EVT\\_GAP\\_PASSKEY\\_DISPLAY\\_REQUEST](#), [CYBLE\\_EVT\\_GAP\\_AUTH\\_COMPLETE](#), [CYBLE\\_EVT\\_GAP\\_AUTH\\_FAILED](#), [CYBLE\\_EVT\\_GAPP\\_ADVERTISEMENT\\_START\\_STOP](#), [CYBLE\\_EVT\\_GAP\\_DEVICE\\_CONNECTED](#), [CYBLE\\_EVT\\_GAP\\_DEVICE\\_DISCONNECTED](#), [CYBLE\\_EVT\\_GAP\\_ENCRYPT\\_CHANGE](#), [CYBLE\\_EVT\\_GAP\\_CONNECTION\\_UPDATE\\_COMPLETE](#), [CYBLE\\_EVT\\_GAPC\\_SCAN\\_START\\_STOP](#), [CYBLE\\_EVT\\_GAP\\_KEYINFO\\_EXCHNGE\\_CMPLT](#), [CYBLE\\_EVT\\_GATTC\\_ERROR\\_RSP](#)= 0x40u, [CYBLE\\_EVT\\_GATT\\_CONNECT\\_IND](#), [CYBLE\\_EVT\\_GATT\\_DISCONNECT\\_IND](#), [CYBLE\\_EVT\\_GATTS\\_XCNHG\\_MTU\\_REQ](#), [CYBLE\\_EVT\\_GATTC\\_XCHNG\\_MTU\\_RSP](#), [CYBLE\\_EVT\\_GATTC\\_READ\\_BY\\_GROUP\\_TYPE\\_RSP](#), [CYBLE\\_EVT\\_GATTC\\_READ\\_BY\\_TYPE\\_RSP](#), [CYBLE\\_EVT\\_GATTC\\_FIND\\_INFO\\_RSP](#), [CYBLE\\_EVT\\_GATTC\\_FIND\\_BY\\_TYPE\\_VALUE\\_RSP](#), [CYBLE\\_EVT\\_GATTC\\_READ\\_RSP](#), [CYBLE\\_EVT\\_GATTC\\_READ\\_BLOB\\_RSP](#), [CYBLE\\_EVT\\_GATTC\\_READ\\_MULTI\\_RSP](#), [CYBLE\\_EVT\\_GATTS\\_WRITE\\_REQ](#), [CYBLE\\_EVT\\_GATTC\\_WRITE\\_RSP](#), [CYBLE\\_EVT\\_GATTS\\_WRITE\\_CMD\\_REQ](#), [CYBLE\\_EVT\\_GATTS\\_PREP\\_WRITE\\_REQ](#), [CYBLE\\_EVT\\_GATTS\\_EXEC\\_WRITE\\_REQ](#), [CYBLE\\_EVT\\_GATTC\\_EXEC\\_WRITE\\_RSP](#), [CYBLE\\_EVT\\_GATTC\\_HANDLE\\_VALUE\\_NTF](#), [CYBLE\\_EVT\\_GATTC\\_HANDLE\\_VALUE\\_IND](#), [CYBLE\\_EVT\\_GATTS\\_HANDLE\\_VALUE\\_CNF](#), [CYBLE\\_EVT\\_GATTS\\_DATA\\_SIGNED\\_CMD\\_REQ](#), [CYBLE\\_EVT\\_GATTC\\_STOP\\_CMD\\_COMPLETE](#), [CYBLE\\_EVT\\_GATTS\\_READ\\_CHAR\\_VAL\\_ACCESS\\_REQ](#), [CYBLE\\_EVT\\_L2CAP\\_CONN\\_PARAM\\_UPDATE\\_REQ](#)= 0x70u, [CYBLE\\_EVT\\_L2CAP\\_CONN\\_PARAM\\_UPDATE\\_RSP](#), [CYBLE\\_EVT\\_L2CAP\\_COMMAND\\_REQ](#), [CYBLE\\_EVT\\_L2CAP\\_CBFC\\_CONN\\_IND](#), [CYBLE\\_EVT\\_L2CAP\\_CBFC\\_CONN\\_CNF](#), [CYBLE\\_EVT\\_L2CAP\\_CBFC\\_DISCONN\\_IND](#), [CYBLE\\_EVT\\_L2CAP\\_CBFC\\_DISCONN\\_CNF](#), [CYBLE\\_EVT\\_L2CAP\\_CBFC\\_DATA\\_READ](#), [CYBLE\\_EVT\\_L2CAP\\_CBFC\\_RX\\_CREDIT\\_IND](#), [CYBLE\\_EVT\\_L2CAP\\_CBFC\\_TX\\_CREDIT\\_IND](#), [CYBLE\\_EVT\\_L2CAP\\_CBFC\\_DATA\\_WRITE\\_IND](#), [CYBLE\\_EVT\\_PENDING\\_FLASH\\_WRITE](#)= 0xFA, [CYBLE\\_EVT\\_LE\\_PING\\_AUTH\\_TIMEOUT](#)= 0xFB, [CYBLE\\_EVT\\_MAX](#)= 0xFF }

### Enumeration Type Documentation

#### enum [CYBLE\\_EVENT\\_T](#)

Host stack events. Generic events: 0x01 to 0x1F GAP events: 0x20 to 0x3F GATT events: 0x40 to 0x6F L2CAP events: 0x70 to 0x7F Future use: 0x80 to 0xFF

#### Enumerator



**CYBLE\_EVT\_HOST\_INVALID** This event is triggered by BLE stack when stack is in a bad state, Restarting stack is the only way to get out of the state

**CYBLE\_EVT\_STACK\_ON** This event is received when BLE stack is initialized and turned ON by invoking `CyBle_StackInit ()` function.

**CYBLE\_EVT\_TIMEOUT** This event is received when there is a timeout and application needs to handle the event. Timeout reason is defined by `CYBLE_TO_REASON_CODE_T`.

**CYBLE\_EVT\_HARDWARE\_ERROR** This event indicates that some internal hardware error has occurred. Reset of the hardware may be required.

**CYBLE\_EVT\_HCI\_STATUS** This event is triggered by 'Host Stack' if 'Controller' responds with an error code for any HCI command. Event parameter returned will be an HCI error code as defined in Bluetooth 4.1 core specification, Volume 2, Part D, section 1.3. This event will be received only if there is an error.

**CYBLE\_EVT\_STACK\_BUSY\_STATUS** This event is triggered by host stack if BLE stack is busy or not. Event Parameter corresponding to this event will indicate the state of BLE stack's internal protocol buffers for the application to safely initiate data transactions (GATT, GAP Security, and L2CAP transactions) with the peer BLE device.

`CYBLE_STACK_STATE_BUSY (0x01) = CYBLE_STACK_STATE_BUSY` indicates application that BLE stack's internal buffers are about to be filled, and the remaining buffers are required to respond peer BLE device After this event, application shall not initiate (GATT, GAP Security and L2CAP data transactions). However application shall respond to peer initiated transactions to prevent BLE protocol timeouts to occur. Application initiated data transactions can be resumed after `CYBLE_EVT_STACK_BUSY_STATUS` event with parameter 'CYBLE\_STACK\_STATE\_FREE' is received.

`CYBLE_STACK_STATE_FREE (0x00) = CYBLE_STACK_STATE_FREE` indicates application that pending transactions are completed and sufficient buffers are available to process application initiated transactions. The 'CYBLE\_EVT\_STACK\_BUSY\_STATUS' event with 'CYBLE\_STACK\_STATE\_FREE' is indicated to application if BLE Stack's internal buffer state has transitioned from 'CYBLE\_STACK\_STATE\_BUSY' to 'CYBLE\_STACK\_STATE\_FREE'.

**CYBLE\_EVT\_GAPC\_SCAN\_PROGRESS\_RESULT** This event is triggered every time a device is discovered; pointer to structure of type [CYBLE\\_GAPC\\_ADV\\_REPORT\\_T](#) is returned as the event parameter.

**CYBLE\_EVT\_GAP\_AUTH\_REQ** This event is received by Peripheral and Central devices. When it is received by Peripheral, peripheral needs to Call [CyBle\\_GappAuthReqReply\(\)](#) to reply to authentication request from Central.

When this event is received by Central, that means the slave has requested Central to initiate authentication procedure. Central needs to call `CyBle_GappAuthReq()` to initiate authentication procedure. Pointer to structure of type [CYBLE\\_GAP\\_AUTH\\_INFO\\_T](#) is returned as the event parameter.

**CYBLE\_EVT\_GAP\_PASSKEY\_ENTRY\_REQUEST** This event indicates that the device has to send passkey to be used during the pairing procedure. [CyBle\\_GapAuthPassKeyReply\(\)](#) is required to be called with valid parameters on receiving this event.

Refer to Bluetooth Core Spec. 4.1, Part H, Section 2.3.5.1 Selecting STK Generation Method.

Nothing is returned as part of the event parameter.

**CYBLE\_EVT\_GAP\_PASSKEY\_DISPLAY\_REQUEST** This event indicates that the device needs to display passkey during the pairing procedure.

Refer to Bluetooth Core Spec. 4.1, Part H, Section 2.3.5.1 Selecting STK Generation Method.

Pointer to data of type 'uint32' is returned as part of the event parameter. Passkey can be any 6-decimal-digit value.

**CYBLE\_EVT\_GAP\_AUTH\_COMPLETE** This event indicates that the authentication procedure has been completed.

The event parameter contains the security information as defined by [CYBLE\\_GAP\\_AUTH\\_INFO\\_T](#). This event is generated at the end of the following three operations: Authentication is initiated with a newly connected device Encryption is initiated with a connected device that is already bonded Re-Encryption is



initiated with a connected device with link already encrypted. During encryption/re-encryption, the Encryption Information exchanged during the pairing process is used to encrypt/re-encrypt the link. As this does not modify any of the authentication parameters with which the devices were paired, this event is generated with NULL event data and the result of the encryption operation.

**CYBLE\_EVT\_GAP\_AUTH\_FAILED** Authentication process failed between two devices. The return value of type `CYBLE_GAP_AUTH_FAILED_REASON_T` indicates the reason for failure.

**CYBLE\_EVT\_GAPP\_ADVERTISEMENT\_START\_STOP** Peripheral device has started/stopped advertising. This event is generated after making a call to `CyBle_GappEnterDiscoveryMode` and `CyBle_GappExitDiscoveryMode` functions. The event parameter contains the status which is of type 'uint8'.

If the data is '0x00', it indicates 'success'; Anything else indicates 'failure'.

**CYBLE\_EVT\_GAP\_DEVICE\_CONNECTED** This event is generated at the GAP Peripheral end after connection is completed with peer Central device. For GAP Central device, this event is generated as in acknowledgment of receiving this event successfully by BLE Controller. Once connection is done, no more event is required but if fails to establish connection, 'CYBLE\_EVT\_GAP\_DEVICE\_DISCONNECTED' is passed to application. Event parameter is a pointer to a structure of type [CYBLE\\_GAP\\_CONN\\_PARAM\\_UPDATED\\_IN\\_CONTROLLER\\_T](#).

**CYBLE\_EVT\_GAP\_DEVICE\_DISCONNECTED** Disconnected from remote device or failed to establish connection. Parameter returned with the event contains pointer to the reason for disconnection, which is of type uint8. For details refer core spec 4.2, vol2, part D

**CYBLE\_EVT\_GAP\_ENCRYPT\_CHANGE** Encryption change event for active connection. 'evParam' can be decoded as evParam[0] = 0x00 -> Encryption OFF evParam[0] = 0x01 -> Encryption ON Any other value of evParam[0] -> Error

This is an informative event for application when there is a change in encryption. Application may choose to ignore it.

**CYBLE\_EVT\_GAP\_CONNECTION\_UPDATE\_COMPLETE** This event is generated at the GAP Central and the Peripheral end after connection parameter update is requested from the host to the controller. Event parameter is a pointer to a structure of type [CYBLE\\_GAP\\_CONN\\_PARAM\\_UPDATED\\_IN\\_CONTROLLER\\_T](#).

**CYBLE\_EVT\_GAPC\_SCAN\_START\_STOP** Central device has started/stopped scanning. This event is generated after making a call to `CyBle_GapcStartDiscovery` and `CyBle_GapcStopDiscovery` APIs. The event parameter contains the status, which is of type 'uint8'.

If the data is '0x00', it indicates 'success'; Anything else indicates 'failure'.

**CYBLE\_EVT\_GAP\_KEYINFO\_EXCHANGE\_CMPLT** Indication that the SMP keys exchange with peer device is complete, the event handler is expected to store the peer device keys, especially IRK which is used to resolve the peer device after the connection establishment.

Event parameter returns data of type [CYBLE\\_GAP\\_SMP\\_KEY\\_DIST\\_T](#) containing the peer device keys.

**CYBLE\_EVT\_GATTC\_ERROR\_RSP** The event is received by the Client when the Server cannot perform the requested operation and sends out an error response. Event parameter is a pointer to a structure of type [CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#).

**CYBLE\_EVT\_GATT\_CONNECT\_IND** This event is generated at the GAP Peripheral end after connection is completed with peer Central device. For GAP Central device, this event is generated as in acknowledgment of receiving this event successfully by BLE Controller. Once connection is done, no more event is required but if fails to establish connection, 'CYBLE\_EVT\_GATT\_DISCONNECT\_IND' is passed to application. Event parameter is a pointer to a structure of type [CYBLE\\_GAP\\_CONN\\_PARAM\\_UPDATED\\_IN\\_CONTROLLER\\_T](#).

**CYBLE\_EVT\_GATT\_DISCONNECT\_IND** GATT is disconnected. Nothing is returned as part of the event parameter.

**CYBLE\_EVT\_GATTS\_XCNHG\_MTU\_REQ** 'MTU Exchange Request' received from GATT client device. Event parameter contains the MTU size of type [CYBLE\\_GATT\\_XCHG\\_MTU\\_PARAM\\_T](#).





**CYBLE\_EVT\_GATTC\_XCHNG\_MTU\_RSP** 'MTU Exchange Response' received from server device. Event parameter is a pointer to a structure of type [CYBLE\\_GATT\\_XCHG\\_MTU\\_PARAM\\_T](#).

**CYBLE\_EVT\_GATTC\_READ\_BY\_GROUP\_TYPE\_RSP** 'Read by Group Type Response' received from server device. Event parameter is a pointer to a structure of type [CYBLE\\_GATTC\\_READ\\_BY\\_GRP\\_RSP\\_PARAM\\_T](#).

**CYBLE\_EVT\_GATTC\_READ\_BY\_TYPE\_RSP** 'Read by Type Response' received from server device. Event parameter is a pointer to a structure of type [CYBLE\\_GATTC\\_READ\\_BY\\_TYPE\\_RSP\\_PARAM\\_T](#).

**CYBLE\_EVT\_GATTC\_FIND\_INFO\_RSP** 'Find Information Response' received from server device. Event parameter is a pointer to a structure of type [CYBLE\\_GATTC\\_FIND\\_INFO\\_RSP\\_PARAM\\_T](#).

**CYBLE\_EVT\_GATTC\_FIND\_BY\_TYPE\_VALUE\_RSP** 'Find by Type Value Response' received from server device. Event parameter is a pointer to a structure of type [CYBLE\\_GATTC\\_FIND\\_BY\\_TYPE\\_RSP\\_PARAM\\_T](#).

**CYBLE\_EVT\_GATTC\_READ\_RSP** 'Read Response' from server device. Event parameter is a pointer to a structure of type [CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#).

**CYBLE\_EVT\_GATTC\_READ\_BLOB\_RSP** 'Read Blob Response' from server. Event parameter is a pointer to a structure of type [CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#).

**CYBLE\_EVT\_GATTC\_READ\_MULTI\_RSP** 'Read Multiple Responses' from server. Event parameter is a pointer to a structure of type [CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#). The 'actualLen' field should be ignored as it is unused in this event response.

**CYBLE\_EVT\_GATTS\_WRITE\_REQ** 'Write Request' from client device. Event parameter is a pointer to a structure of type [CYBLE\\_GATTS\\_WRITE\\_REQ\\_PARAM\\_T](#).

**CYBLE\_EVT\_GATTC\_WRITE\_RSP** 'Write Response' from server device. Event parameter is a pointer to a structure of type [CYBLE\\_CONN\\_HANDLE\\_T](#).

**CYBLE\_EVT\_GATTS\_WRITE\_CMD\_REQ** 'Write Command' Request from client device. Event parameter is a pointer to a structure of type [CYBLE\\_GATTS\\_WRITE\\_CMD\\_REQ\\_PARAM\\_T](#).

**CYBLE\_EVT\_GATTS\_PREP\_WRITE\_REQ** 'Prepare Write' Request from client device. Event parameter is a pointer to a structure of type [CYBLE\\_GATTS\\_PREP\\_WRITE\\_REQ\\_PARAM\\_T](#).

**CYBLE\_EVT\_GATTS\_EXEC\_WRITE\_REQ** 'Execute Write' request from client device. Event parameter is a pointer to a structure of type [CYBLE\\_GATTS\\_EXEC\\_WRITE\\_REQ\\_T](#). This event will be triggered before GATT DB is modified. GATT Db will be updated only if there is no error condition provided by application. In case of error condition triggered during stack validation, partial write will occur. Write will be cancelled from that handle where error has occurred and error response corresponding to that handle will be sent to remote. If at any point of time 'CYBLE\_GATT\_EXECUTE\_WRITE\_CANCEL\_FLAG' is received in execWriteFlag fields of 'CYBLE\_GATTS\_EXEC\_WRITE\_REQ\_T' structure, then all previous writes are cancelled. For execute cancel scenario, all elements of 'CYBLE\_GATTS\_EXEC\_WRITE\_REQ\_T' should be ignored except execWriteFlag and connHandle.

**CYBLE\_EVT\_GATTC\_EXEC\_WRITE\_RSP** 'Execute Write' response from server device. Event parameter is a pointer to a structure of type [CYBLE\\_GATTC\\_EXEC\\_WRITE\\_RSP\\_T](#).

**CYBLE\_EVT\_GATTC\_HANDLE\_VALUE\_NTF** Notification data received from server device. Event parameter is a pointer to a structure of type [CYBLE\\_GATTC\\_HANDLE\\_VALUE\\_NTF\\_PARAM\\_T](#).

**CYBLE\_EVT\_GATTC\_HANDLE\_VALUE\_IND** Indication data received from server device. Event parameter is a pointer to a structure of type [CYBLE\\_GATTC\\_HANDLE\\_VALUE\\_IND\\_PARAM\\_T](#).

**CYBLE\_EVT\_GATTS\_HANDLE\_VALUE\_CNF** Confirmation to indication response from client device. Event parameter is a pointer to a structure of type [CYBLE\\_CONN\\_HANDLE\\_T](#).

**CYBLE\_EVT\_GATTS\_DATA\_SIGNED\_CMD\_REQ** Confirmation to indication response from client device. Event parameter is a pointer to a structure of type [CYBLE\\_GATTS\\_SIGNED\\_WRITE\\_CMD\\_REQ\\_PARAM\\_T](#). If value.val parameter is set to Zero, then signature is not matched and ignored by stack.

**CYBLE\_EVT\_GATTC\_STOP\_CMD\_COMPLETE** Event indicating that GATT group procedure has stopped or completed, this event occurs only if application has called CyBle\_GattcStopCmd API. Event parameters shall be ignored

**CYBLE\_EVT\_GATTS\_READ\_CHAR\_VAL\_ACCESS\_REQ** Event parameters for characteristic read value access event generated by BLE Stack upon an access of Characteristic value read for the characteristic definition which has CYBLE\_GATT\_DB\_ATTR\_CHAR\_VAL\_RD\_EVENT property set.

**CYBLE\_EVT\_L2CAP\_CONN\_PARAM\_UPDATE\_REQ** This event indicates the connection parameter update received from the remote device. The application is expected to reply to L2CAP using the [CyBle\\_L2capLeConnectionParamUpdateResponse\(\)](#) function to respond to the remote device, whether parameters are accepted or rejected.

Event Parameter pointer points to data of type '[CYBLE\\_GAP\\_CONN\\_UPDATE\\_PARAM\\_T](#)'

**CYBLE\_EVT\_L2CAP\_CONN\_PARAM\_UPDATE\_RSP** This event indicates the connection parameter update response received from the master. Event Parameter pointer points to data with two possible values: Accepted = 0x0000 Rejected = 0x0001

Data is of type unit16.

**CYBLE\_EVT\_L2CAP\_COMMAND\_REJ** This event indicates that the request send over l2cap signaling has been rejected. Event parameter is a pointer to a structure of type CYBLE\_L2CAP\_COMMAND\_REJ\_REASON\_T.

**CYBLE\_EVT\_L2CAP\_CBFC\_CONN\_IND** This event is used to inform application of the incoming L2CAP CBFC Connection Request. Event parameter is a pointer to a structure of type [CYBLE\\_L2CAP\\_CBFC\\_CONN\\_IND\\_PARAM\\_T](#) is returned.

**CYBLE\_EVT\_L2CAP\_CBFC\_CONN\_CNF** This event is used to inform application of the L2CAP CBFC Connection Response/Confirmation. Event parameter is a pointer to a structure of type [CYBLE\\_L2CAP\\_CBFC\\_CONN\\_CNF\\_PARAM\\_T](#) is returned.

**CYBLE\_EVT\_L2CAP\_CBFC\_DISCONN\_IND** This event is used to inform application of the L2CAP CBFC Disconnection Request received from the Peer device. Event parameter is a pointer to Local CID of type unit16.

**CYBLE\_EVT\_L2CAP\_CBFC\_DISCONN\_CNF** This event is used to inform application of the L2CAP CBFC Disconnection confirmation/Response received from the Peer device. Event parameter is a pointer to a structure of type [CYBLE\\_L2CAP\\_CBFC\\_DISCONN\\_CNF\\_PARAM\\_T](#).

**CYBLE\_EVT\_L2CAP\_CBFC\_DATA\_READ** This event is used to inform application of data received over L2CAP CBFC channel. Event parameter is a pointer to a structure of type [CYBLE\\_L2CAP\\_CBFC\\_RX\\_PARAM\\_T](#).

**CYBLE\_EVT\_L2CAP\_CBFC\_RX\_CREDIT\_IND** This event is used to inform the application of receive credits reached low mark. After receiving L2CAP data/payload from peer device for a specification Channel, the available credits are calculated.

If the credit count goes below the low mark, this event is called to inform the application of the condition, so that if the application wants it can send more credits to the peer device.

Event parameter is a pointer to a structure of type [CYBLE\\_L2CAP\\_CBFC\\_LOW\\_RX\\_CREDIT\\_PARAM\\_T](#).

**CYBLE\_EVT\_L2CAP\_CBFC\_TX\_CREDIT\_IND** This event is used to inform application of having received transmit credits. This event is called on receiving LE Flow Control Credit from peer device.

Event parameter is a pointer to a structure of type [CYBLE\\_L2CAP\\_CBFC\\_LOW\\_TX\\_CREDIT\\_PARAM\\_T](#).

If the 'result' field of the received data is non-zero, this indicates an error. If the sum of 'credit' field value and the previously available credit at the peer device receiving credit information exceeds 65535, it indicates a 'credit overflow' error.

In case of error, the peer device receiving this event should initiate disconnection of the L2CAP channel by invoking CyBle\_L2capDisconnectReq () function.

**CYBLE\_EVT\_L2CAP\_CBFC\_DATA\_WRITE\_IND** This event is used to inform application of data transmission completion over L2CAP CBFC channel. Event parameter is of type





'[CYBLE\\_L2CAP\\_CBFC\\_DATA\\_WRITE\\_PARAM\\_T](#)' This event will be deprecated in future. It is only kept for backward compatibility. It is not recommended to be used by new design

**CYBLE\_EVT\_PENDING\_FLASH\_WRITE** This event is used to inform application that flash write is pending Stack internal data structures are modified and require backup .

**CYBLE\_EVT\_LE\_PING\_AUTH\_TIMEOUT** LE PING Authentication Timeout Event to indicate that peer device has not responded with the valid MIC packet within the application configured ping authentication time.

**CYBLE\_EVT\_MAX** Maximum value of CYBLE\_EVENT\_T type

## BLE Common Definitions and Data Structures

### Description

Contains definitions and structures that are common to all BLE common APIs. Note that some of these are also used in Service-specific APIs.

### Data Structures

- struct [CYBLE\\_BLESS\\_PWR\\_IN\\_DB\\_T](#)
- struct [CYBLE\\_BLESS\\_CLK\\_CFG\\_PARAMS\\_T](#)
- struct [CYBLE\\_STACK\\_LIB\\_VERSION\\_T](#)
- struct [CYBLE\\_STK\\_APP\\_DATA\\_BUFF\\_T](#)
- struct [CYBLE\\_UUID128\\_T](#)
- union [CYBLE\\_UUID\\_T](#)
- struct [CYBLE\\_CONN\\_HANDLE\\_T](#)

### Typedefs

- typedef void(\* [CYBLE\\_CALLBACK\\_T](#)) (uint32 eventCode, void \*eventParam)
- typedef void(\* [CYBLE\\_APP\\_CB\\_T](#)) (uint8 event, void \*evParam)
- typedef uint16 [CYBLE\\_UUID16](#)

### Enumerations

- enum [CYBLE\\_CLIENT\\_STATE\\_T](#){ [CYBLE\\_CLIENT\\_STATE\\_CONNECTED](#), [CYBLE\\_CLIENT\\_STATE\\_SRVC\\_DISCOVERING](#), [CYBLE\\_CLIENT\\_STATE\\_INCL\\_DISCOVERING](#), [CYBLE\\_CLIENT\\_STATE\\_CHAR\\_DISCOVERING](#), [CYBLE\\_CLIENT\\_STATE\\_DESCR\\_DISCOVERING](#), [CYBLE\\_CLIENT\\_STATE\\_DISCOVERED](#), [CYBLE\\_CLIENT\\_STATE\\_DISCONNECTING](#), [CYBLE\\_CLIENT\\_STATE\\_DISCONNECTED\\_DISCOVERED](#), [CYBLE\\_CLIENT\\_STATE\\_DISCONNECTED](#)}
- enum [CYBLE\\_API\\_RESULT\\_T](#){ [CYBLE\\_ERROR\\_OK](#)= 0x00u, [CYBLE\\_ERROR\\_INVALID\\_PARAMETER](#), [CYBLE\\_ERROR\\_INVALID\\_OPERATION](#), [CYBLE\\_ERROR\\_MEMORY\\_ALLOCATION\\_FAILED](#), [CYBLE\\_ERROR\\_INSUFFICIENT\\_RESOURCES](#), [CYBLE\\_ERROR\\_OOB\\_NOT\\_AVAILABLE](#), [CYBLE\\_ERROR\\_NO\\_CONNECTION](#), [CYBLE\\_ERROR\\_NO\\_DEVICE\\_ENTITY](#), [CYBLE\\_ERROR\\_REPEATED\\_ATTEMPTS](#), [CYBLE\\_ERROR\\_GAP\\_ROLE](#), [CYBLE\\_ERROR\\_TX\\_POWER\\_READ](#), [CYBLE\\_ERROR\\_BT\\_ON\\_NOT\\_COMPLETED](#), [CYBLE\\_ERROR\\_SEC\\_FAILED](#), [CYBLE\\_ERROR\\_L2CAP\\_PSM\\_WRONG\\_ENCODING](#)= 0x0Du, [CYBLE\\_ERROR\\_L2CAP\\_PSM\\_ALREADY\\_REGISTERED](#), [CYBLE\\_ERROR\\_L2CAP\\_PSM\\_NOT\\_REGISTERED](#), [CYBLE\\_ERROR\\_L2CAP\\_CONNECTION\\_ENTITY\\_NOT\\_FOUND](#), [CYBLE\\_ERROR\\_L2CAP\\_CHANNEL\\_NOT\\_FOUND](#), [CYBLE\\_ERROR\\_L2CAP\\_PSM\\_NOT\\_IN\\_RANGE](#), [CYBLE\\_ERROR\\_GATT\\_DB\\_INVALID\\_ATTR\\_HANDLE](#), [CYBLE\\_ERROR\\_DEVICE\\_ALREADY\\_EXISTS](#)= 0x27u, [CYBLE\\_ERROR\\_FLASH\\_WRITE\\_NOT\\_PERMITTED](#)= 0x28u, [CYBLE\\_ERROR\\_MIC\\_AUTH\\_FAILED](#)=



0x29u, [CYBLE\\_ERROR\\_MAX](#)= 0xFFu, [CYBLE\\_ERROR\\_NTF\\_DISABLED](#), [CYBLE\\_ERROR\\_IND\\_DISABLED](#), [CYBLE\\_ERROR\\_INVALID\\_STATE](#)}

- enum [CYBLE\\_LP\\_MODE\\_T](#){ [CYBLE\\_BLESS\\_ACTIVE](#)= 0x01u, [CYBLE\\_BLESS\\_SLEEP](#), [CYBLE\\_BLESS\\_DEEPSLEEP](#), [CYBLE\\_BLESS\\_HIBERNATE](#), [CYBLE\\_BLESS\\_INVALID](#)= 0xFFu}
- enum [CYBLE\\_BLESS\\_STATE\\_T](#){ [CYBLE\\_BLESS\\_STATE\\_ACTIVE](#) = 0x01, [CYBLE\\_BLESS\\_STATE\\_EVENT\\_CLOSE](#), [CYBLE\\_BLESS\\_STATE\\_SLEEP](#), [CYBLE\\_BLESS\\_STATE\\_ECO\\_ON](#), [CYBLE\\_BLESS\\_STATE\\_ECO\\_STABLE](#), [CYBLE\\_BLESS\\_STATE\\_DEEPSLEEP](#), [CYBLE\\_BLESS\\_STATE\\_HIBERNATE](#), [CYBLE\\_BLESS\\_STATE\\_INVALID](#) = 0xFFu}
- enum [CYBLE\\_BLESS\\_PWR\\_LVL\\_T](#){ [CYBLE\\_LL\\_PWR\\_LVL\\_NEG\\_18\\_DBM](#)= 0x01u, [CYBLE\\_LL\\_PWR\\_LVL\\_NEG\\_12\\_DBM](#), [CYBLE\\_LL\\_PWR\\_LVL\\_NEG\\_6\\_DBM](#), [CYBLE\\_LL\\_PWR\\_LVL\\_NEG\\_3\\_DBM](#), [CYBLE\\_LL\\_PWR\\_LVL\\_NEG\\_2\\_DBM](#), [CYBLE\\_LL\\_PWR\\_LVL\\_NEG\\_1\\_DBM](#), [CYBLE\\_LL\\_PWR\\_LVL\\_0\\_DBM](#), [CYBLE\\_LL\\_PWR\\_LVL\\_3\\_DBM](#), [CYBLE\\_LL\\_PWR\\_LVL\\_MAX](#)}
- enum [CYBLE\\_BLESS\\_PHY\\_CH\\_GRP\\_ID\\_T](#){ [CYBLE\\_LL\\_ADV\\_CH\\_TYPE](#)= 0x00u, [CYBLE\\_LL\\_CONN\\_CH\\_TYPE](#), [CYBLE\\_LL\\_MAX\\_CH\\_TYPE](#)}
- enum [CYBLE\\_BLESS\\_WCO\\_SCA\\_CFG\\_T](#){ [CYBLE\\_LL\\_SCA\\_251\\_TO\\_500\\_PPM](#) = 0x00u, [CYBLE\\_LL\\_SCA\\_151\\_TO\\_250\\_PPM](#), [CYBLE\\_LL\\_SCA\\_101\\_TO\\_150\\_PPM](#), [CYBLE\\_LL\\_SCA\\_076\\_TO\\_100\\_PPM](#), [CYBLE\\_LL\\_SCA\\_051\\_TO\\_075\\_PPM](#), [CYBLE\\_LL\\_SCA\\_031\\_TO\\_050\\_PPM](#), [CYBLE\\_LL\\_SCA\\_021\\_TO\\_030\\_PPM](#), [CYBLE\\_LL\\_SCA\\_000\\_TO\\_020\\_PPM](#), [CYBLE\\_LL\\_SCA\\_IN\\_PPM\\_INVALID](#)}
- enum [CYBLE\\_BLESS\\_ECO\\_CLK\\_DIV\\_T](#){ [CYBLE\\_LL\\_ECO\\_CLK\\_DIV\\_1](#)= 0x00u, [CYBLE\\_LL\\_ECO\\_CLK\\_DIV\\_2](#), [CYBLE\\_LL\\_ECO\\_CLK\\_DIV\\_4](#), [CYBLE\\_LL\\_ECO\\_CLK\\_DIV\\_8](#), [CYBLE\\_LL\\_ECO\\_CLK\\_DIV\\_INVALID](#)}
- enum [CYBLE\\_TO\\_REASON\\_CODE\\_T](#){ [CYBLE\\_GAP\\_ADV\\_MODE\\_TO](#)= 0x01u, [CYBLE\\_GAP\\_SCAN\\_TO](#), [CYBLE\\_GATT\\_RSP\\_TO](#), [CYBLE\\_GENERIC\\_TO](#)}

## Typedef Documentation

**typedef void(\* CYBLE\_CALLBACK\_T)(uint32 eventCode, void \*eventParam)**

Event callback function prototype to receive events from BLE component

**typedef void(\* CYBLE\_APP\_CB\_T)(uint8 event, void \*evParam)**

event callback function prototype to receive events from stack

**typedef uint16 [CYBLE\\_UUID16](#)**

GATT 16 Bit UUID

## Enumeration Type Documentation

enum [CYBLE\\_CLIENT\\_STATE\\_T](#)

Client State type

**Enumerator**

**[CYBLE\\_CLIENT\\_STATE\\_CONNECTED](#)** Server device is connected

**[CYBLE\\_CLIENT\\_STATE\\_SRVC\\_DISCOVERING](#)** Server services are being discovered

**[CYBLE\\_CLIENT\\_STATE\\_INCL\\_DISCOVERING](#)** Server included services are being discovered

**[CYBLE\\_CLIENT\\_STATE\\_CHAR\\_DISCOVERING](#)** Server characteristics are being discovered

**[CYBLE\\_CLIENT\\_STATE\\_DESCR\\_DISCOVERING](#)** Server char. descriptors are being discovered

**[CYBLE\\_CLIENT\\_STATE\\_DISCOVERED](#)** Server is discovered



**CYBLE\_CLIENT\_STATE\_DISCONNECTING** Server is disconnecting

**CYBLE\_CLIENT\_STATE\_DISCONNECTED\_DISCOVERED** Server is disconnected but discovered

**CYBLE\_CLIENT\_STATE\_DISCONNECTED** Essentially initial client state

#### enum **CYBLE\_API\_RESULT\_T**

Common error codes received as API result

##### Enumerator

**CYBLE\_ERROR\_OK** No Error occurred

**CYBLE\_ERROR\_INVALID\_PARAMETER** At least one of the input parameters is invalid

**CYBLE\_ERROR\_INVALID\_OPERATION** Operation is not permitted

**CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED** An internal error occurred in the stack

**CYBLE\_ERROR\_INSUFFICIENT\_RESOURCES** Insufficient resources to perform requested operation

**CYBLE\_ERROR\_OOB\_NOT\_AVAILABLE** OOB data not available

**CYBLE\_ERROR\_NO\_CONNECTION** Connection is required to perform requested operation. Connection not present

**CYBLE\_ERROR\_NO\_DEVICE\_ENTITY** No device entity to perform requested operation

**CYBLE\_ERROR\_REPEATED\_ATTEMPTS** Attempted repeat operation is not allowed

**CYBLE\_ERROR\_GAP\_ROLE** GAP role is incorrect

**CYBLE\_ERROR\_TX\_POWER\_READ** Error reading TC power

**CYBLE\_ERROR\_BT\_ON\_NOT\_COMPLETED** BLE Initialization failed

**CYBLE\_ERROR\_SEC\_FAILED** Security operation failed

**CYBLE\_ERROR\_L2CAP\_PSM\_WRONG\_ENCODING** L2CAP error codes L2CAP PSM encoding is incorrect

**CYBLE\_ERROR\_L2CAP\_PSM\_ALREADY\_REGISTERED** L2CAP PSM has already been registered

**CYBLE\_ERROR\_L2CAP\_PSM\_NOT\_REGISTERED** L2CAP PSM has not been registered

**CYBLE\_ERROR\_L2CAP\_CONNECTION\_ENTITY\_NOT\_FOUND** L2CAP connection entity not found

**CYBLE\_ERROR\_L2CAP\_CHANNEL\_NOT\_FOUND** L2CAP channel not found

**CYBLE\_ERROR\_L2CAP\_PSM\_NOT\_IN\_RANGE** Specified PSM is out of range

**CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE** GATT DB error codes Invalid attribute handle

**CYBLE\_ERROR\_DEVICE\_ALREADY\_EXISTS** Device cannot be added to whitelist as it has already been added

**CYBLE\_ERROR\_FLASH\_WRITE\_NOT\_PERMITTED** Write to flash is not permitted

**CYBLE\_ERROR\_MIC\_AUTH\_FAILED** MIC Authentication failure

**CYBLE\_ERROR\_MAX** All other errors not covered in the above list map to this error code

**CYBLE\_ERROR\_NTF\_DISABLED** Characteristic notifications disabled

**CYBLE\_ERROR\_IND\_DISABLED** Characteristic indications disabled

**CYBLE\_ERROR\_INVALID\_STATE** The state is not valid for current operation

#### enum **CYBLE\_LP\_MODE\_T**

BLE power modes

##### Enumerator

**CYBLE\_BLESS\_ACTIVE** Link Layer engine and Digital modem clocked from ECO. The CPU can access the BLE Sub-System (BLESS) registers. This mode collectively denotes Tx Mode, Rx Mode, and Idle mode of BLESS.



**CYBLE\_BLESS\_SLEEP** The clock to the link layer engine and digital modem is gated. The ECO continues to run to maintain the link layer timing.

**CYBLE\_BLESS\_DEEPSLEEP** The ECO is stopped and WCO is used to maintain link layer timing. RF transceiver is turned off completely to reduce leakage current. BLESS logic is kept powered ON from the SRSS deep sleep regulator for retention.

**CYBLE\_BLESS\_HIBERNATE** External power is available but all internal LDOs are turned off.

**CYBLE\_BLESS\_INVALID** Invalid mode

#### enum [CYBLE\\_BLESS\\_STATE\\_T](#)

BLESS Power enum reflecting power states supported by BLESS radio

#### enum [CYBLE\\_BLESS\\_PWR\\_LVL\\_T](#)

BLESS Power enum reflecting power level values supported by BLESS radio

##### Enumerator

**CYBLE\_LL\_PWR\_LVL\_NEG\_18\_DBM** ABS PWR = -18dBm, PA\_Gain = 0x01

**CYBLE\_LL\_PWR\_LVL\_NEG\_12\_DBM** ABS PWR = -12dBm, PA\_Gain = 0x02

**CYBLE\_LL\_PWR\_LVL\_NEG\_6\_DBM** ABS PWR = -6dBm, PA\_Gain = 0x03

**CYBLE\_LL\_PWR\_LVL\_NEG\_3\_DBM** ABS PWR = -3dBm, PA\_Gain = 0x04

**CYBLE\_LL\_PWR\_LVL\_NEG\_2\_DBM** ABS PWR = -2dBm, PA\_Gain = 0x05

**CYBLE\_LL\_PWR\_LVL\_NEG\_1\_DBM** ABS PWR = -1dBm, PA\_Gain = 0x06

**CYBLE\_LL\_PWR\_LVL\_0\_DBM** ABS PWR = 0dBm, PA\_Gain = 0x07

**CYBLE\_LL\_PWR\_LVL\_3\_DBM** ABS PWR = 3dBm, PA\_Gain = 0x07, PWR\_GAIN level is same as 0 dBm, but the ABS\_PWR is amplified and applied for both Connection and Advertising channel.

**CYBLE\_LL\_PWR\_LVL\_MAX** ABS PWR = 3dBm, PA\_Gain = 0x07

#### enum [CYBLE\\_BLESS\\_PHY\\_CH\\_GRP\\_ID\\_T](#)

BLE channel group ID

##### Enumerator

**CYBLE\_LL\_ADV\_CH\_TYPE** Advertisement channel type

**CYBLE\_LL\_CONN\_CH\_TYPE** Connection channel type

**CYBLE\_LL\_MAX\_CH\_TYPE** Maximum value of CYBLE\_BLESS\_PHY\_CH\_GRP\_ID\_T type

#### enum [CYBLE\\_BLESS\\_WCO\\_SCA\\_CFG\\_T](#)

BLE WCO sleep clock accuracy configuration

#### enum [CYBLE\\_BLESS\\_ECO\\_CLK\\_DIV\\_T](#)

BLE ECO clock divider

##### Enumerator

**CYBLE\_LL\_ECO\_CLK\_DIV\_1** Link Layer clock divider = 1

**CYBLE\_LL\_ECO\_CLK\_DIV\_2** Link Layer clock divider = 2

**CYBLE\_LL\_ECO\_CLK\_DIV\_4** Link Layer clock divider = 4

**CYBLE\_LL\_ECO\_CLK\_DIV\_8** Link Layer clock divider = 8

**CYBLE\_LL\_ECO\_CLK\_DIV\_INVALID** Invalid Link Layer clock divider

#### enum [CYBLE\\_TO\\_REASON\\_CODE\\_T](#)

##### Enumerator



**CYBLE\_GAP\_ADV\_MODE\_TO** Advertisement time set by application has expired

**CYBLE\_GAP\_SCAN\_TO** Scan time set by application has expired

**CYBLE\_GATT\_RSP\_TO** GATT procedure timeout

**CYBLE\_GENERIC\_TO** Generic timeout

## BLE Service-Specific APIs

### Description

This section describes BLE Service-specific APIs. The Service APIs are only included in the design if the Service is added to the selected Profile in the component GUI. These are interfaces for the BLE application to use during BLE connectivity. The service specific APIs internally use the BLE Stack APIs to achieve the Service use case.

Refer to the [Special Interest Group Web Site](#) for links to the latest specifications and other documentation.

Many of the APIs will generate Service-specific events. The events are also used in the Service-specific callback functions. These are documented in:

- [BLE Service-Specific Events](#)

### Modules

- [BLE Service-Specific Events](#)  
*The BLE stack generates service-specific events to notify the application that a service specific status change needs attention. For general stack events, refer to [BLE Common Events](#).*
- [Apple Notification Center Service \(ANCS\)](#)  
*The Apple Notification Center Service provides iOS notifications from Apple devices for accessories.*
- [Alert Notification Service \(ANS\)](#)  
*The Alert Notification Service exposes alert information in a device.*
- [Battery Service BAS](#)  
*The Battery Service exposes the battery level of a single battery or set of batteries in a device.*
- [Body Composition Service \(BCS\)](#)  
*The Environmental Sensing Service exposes data related to body composition from a body composition analyzer (Server) intended for consumer healthcare as well as sports/fitness applications.*
- [Blood Pressure Service \(BLS\)](#)  
*The Blood Pressure Service exposes blood pressure and other data related to a non-invasive blood pressure monitor for consumer and professional healthcare applications.*
- [Bond Management Service \(BMS\)](#)  
*The Bond Management Service defines how a peer Bluetooth device can manage the storage of bond information, especially the deletion of it, on the Bluetooth device supporting this service.*
- [Continuous Glucose Monitoring Service \(CGMS\)](#)  
*The Continuous Glucose Monitoring Service exposes glucose measurement and other data related to a personal CGM sensor for healthcare applications.*
- [Cycling Power Service \(CPS\)](#)  
*The Cycling Power Service (CPS) exposes power- and force-related data and optionally speed- and cadence-related data from a Cycling Power sensor (GATT Server) intended for sports and fitness applications.*
- [Cycling Speed and Cadence Service \(CSCS\)](#)  
*The Cycling Speed and Cadence (CSC) Service exposes speed-related data and/or cadence-related data while using the Cycling Speed and Cadence sensor (Server).*
- [Current Time Service \(CTS\)](#)



*Current Time Service defines how a Bluetooth device can expose time information to other Bluetooth devices.*

- [Device Information Service \(DIS\)](#)

*The Device Information Service exposes manufacturer and/or vendor information about a device.*

- [Environmental Sensing Service \(ESS\)](#)

*The Environmental Sensing Service exposes measurement data from an environmental sensor intended for sports and fitness applications.*

- [Glucose Service \(GLS\)](#)

*The Glucose Service exposes glucose and other data related to a personal glucose sensor for consumer healthcare applications and is not designed for clinical use.*

- [HID Service \(HIDS\)](#)

*The HID Service exposes data and associated formatting for HID Devices and HID Hosts.*

- [Heart Rate Service \(HRS\)](#)

*The Heart Rate Service exposes heart rate and other data related to a heart rate sensor intended for fitness applications.*

- [Health Thermometer Service \(HTS\)](#)

*The Health Thermometer Service exposes temperature and other data related to a thermometer used for healthcare applications.*

- [Immediate Alert Service \(IAS\)](#)

*The Immediate Alert Service exposes a control point to allow a peer device to cause the device to immediately alert.*

- [Link Loss Service \(LLS\)](#)

*The Link Loss Service uses the Alert Level Characteristic to cause an alert in the device when the link is lost.*

- [Location and Navigation Service \(LNS\)](#)

*The Location and Navigation Service exposes location and navigation-related data from a Location and Navigation sensor (Server) intended for outdoor activity applications.*

- [Next DST Change Service \(NDCS\)](#)

*This Service enables a BLE device that has knowledge about the next occurrence of a DST change to expose this information to another Bluetooth device. The Service uses the "Time with DST" Characteristic and the functions exposed in this Service are used to interact with that Characteristic.*

- [Phone Alert Status Service \(PASS\)](#)

*The Phone Alert Status Service uses the Alert Status Characteristic and Ringer Setting Characteristic to expose the phone alert status and uses the Ringer Control Point Characteristic to control the phone's ringer into mute or enable.*

- [Running Speed and Cadence Service \(RSCS\)](#)

*The Running Speed and Cadence (RSC) Service exposes speed, cadence and other data related to fitness applications such as the stride length and the total distance the user has travelled while using the Running Speed and Cadence sensor (Server).*

- [Reference Time Update Service \(RTUS\)](#)

*This Service enables a Bluetooth device that can update the system time using the reference time such as a GPS receiver to expose a control point and expose the accuracy (drift) of the local system time compared to the reference time source.*

- [Scan Parameters Service \(ScPS\)](#)

*The Scan Parameters Service enables a Server device to expose a Characteristic for the GATT Client to write its scan interval and scan window on the Server device, and enables a Server to request a refresh of the GATT Client scan interval and scan window.*

- [TX Power Service \(TPS\)](#)





The Tx Power Service uses the Tx Power Level Characteristic to expose the current transmit power level of a device when in a connection.

- [User Data Service \(UDS\)](#)

The User Data Service exposes user-related data in the sports and fitness environment. This allows remote access and update of user data by a Client as well as the synchronization of user data between a Server and a Client.

- [Wireless Power Transfer Service \(WPTS\)](#)

The Wireless Power Transfer Service enables communication between Power Receiver Unit and Power Transmitter Unit in the Wireless Power Transfer systems.

- [Weight Scale Service \(WSS\)](#)

The Weight Scale Service exposes weight and related data from a weight scale (Server) intended for consumer healthcare as well as sports/fitness applications.

- [Custom Service](#)

This section contains the [CYBLE\\_CUSTOMS\\_INFO\\_T](#) and [CYBLE\\_CUSTOMS\\_T](#) structs used for Custom Services.

## BLE Service-Specific Events

### Description

The BLE stack generates service-specific events to notify the application that a service specific status change needs attention. For general stack events, refer to [BLE Common Events](#).

### Enumerations

- enum [CYBLE\\_EVT\\_T](#){ [CYBLE\\_EVT\\_GATTS\\_INDICATION\\_ENABLED](#),  
[CYBLE\\_EVT\\_GATTS\\_INDICATION\\_DISABLED](#), [CYBLE\\_EVT\\_GATTC\\_INDICATION](#),  
[CYBLE\\_EVT\\_GATTC\\_SRVC\\_DISCOVERY\\_FAILED](#), [CYBLE\\_EVT\\_GATTC\\_INCL\\_DISCOVERY\\_FAILED](#),  
[CYBLE\\_EVT\\_GATTC\\_CHAR\\_DISCOVERY\\_FAILED](#), [CYBLE\\_EVT\\_GATTC\\_DESCR\\_DISCOVERY\\_FAILED](#),  
[CYBLE\\_EVT\\_GATTC\\_SRVC\\_DUPLICATION](#), [CYBLE\\_EVT\\_GATTC\\_CHAR\\_DUPLICATION](#),  
[CYBLE\\_EVT\\_GATTC\\_DESCR\\_DUPLICATION](#), [CYBLE\\_EVT\\_GATTC\\_SRVC\\_DISCOVERY\\_COMPLETE](#),  
[CYBLE\\_EVT\\_GATTC\\_INCL\\_DISCOVERY\\_COMPLETE](#),  
[CYBLE\\_EVT\\_GATTC\\_CHAR\\_DISCOVERY\\_COMPLETE](#), [CYBLE\\_EVT\\_GATTC\\_DISCOVERY\\_COMPLETE](#),  
[CYBLE\\_EVT\\_ANCSS\\_NOTIFICATION\\_ENABLED](#), [CYBLE\\_EVT\\_ANCSS\\_NOTIFICATION\\_DISABLED](#),  
[CYBLE\\_EVT\\_ANCSS\\_WRITE\\_CHAR](#), [CYBLE\\_EVT\\_ANCSC\\_NOTIFICATION](#),  
[CYBLE\\_EVT\\_ANCSC\\_READ\\_CHAR\\_RESPONSE](#), [CYBLE\\_EVT\\_ANCSC\\_WRITE\\_CHAR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_ANCSC\\_READ\\_DESCR\\_RESPONSE](#), [CYBLE\\_EVT\\_ANCSC\\_WRITE\\_DESCR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_ANCSC\\_ERROR\\_RESPONSE](#), [CYBLE\\_EVT\\_ANSS\\_NOTIFICATION\\_ENABLED](#),  
[CYBLE\\_EVT\\_ANSS\\_NOTIFICATION\\_DISABLED](#), [CYBLE\\_EVT\\_ANSS\\_CHAR\\_WRITE](#),  
[CYBLE\\_EVT\\_ANSC\\_NOTIFICATION](#), [CYBLE\\_EVT\\_ANSC\\_READ\\_CHAR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_ANSC\\_WRITE\\_CHAR\\_RESPONSE](#), [CYBLE\\_EVT\\_ANSC\\_READ\\_DESCR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_ANSC\\_WRITE\\_DESCR\\_RESPONSE](#), [CYBLE\\_EVT\\_BASS\\_NOTIFICATION\\_ENABLED](#),  
[CYBLE\\_EVT\\_BASS\\_NOTIFICATION\\_DISABLED](#), [CYBLE\\_EVT\\_BASC\\_NOTIFICATION](#),  
[CYBLE\\_EVT\\_BASC\\_READ\\_CHAR\\_RESPONSE](#), [CYBLE\\_EVT\\_BASC\\_READ\\_DESCR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_BASC\\_WRITE\\_DESCR\\_RESPONSE](#), [CYBLE\\_EVT\\_BCSS\\_INDICATION\\_ENABLED](#),  
[CYBLE\\_EVT\\_BCSS\\_INDICATION\\_DISABLED](#), [CYBLE\\_EVT\\_BCSS\\_INDICATION\\_CONFIRMED](#),  
[CYBLE\\_EVT\\_BCSC\\_INDICATION](#), [CYBLE\\_EVT\\_BCSC\\_READ\\_CHAR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_BCSC\\_READ\\_DESCR\\_RESPONSE](#), [CYBLE\\_EVT\\_BCSC\\_WRITE\\_DESCR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_BLSS\\_INDICATION\\_ENABLED](#), [CYBLE\\_EVT\\_BLSS\\_INDICATION\\_DISABLED](#),  
[CYBLE\\_EVT\\_BLSS\\_INDICATION\\_CONFIRMED](#), [CYBLE\\_EVT\\_BLSS\\_NOTIFICATION\\_ENABLED](#),  
[CYBLE\\_EVT\\_BLSS\\_NOTIFICATION\\_DISABLED](#), [CYBLE\\_EVT\\_BLSC\\_INDICATION](#),  
[CYBLE\\_EVT\\_BLSC\\_NOTIFICATION](#), [CYBLE\\_EVT\\_BLSC\\_READ\\_CHAR\\_RESPONSE](#),





[CYBLE\\_EVT\\_BLSC\\_READ\\_DESCR\\_RESPONSE](#), [CYBLE\\_EVT\\_BLSC\\_WRITE\\_DESCR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_BMSS\\_WRITE\\_CHAR](#), [CYBLE\\_EVT\\_BMSC\\_READ\\_CHAR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_BMSC\\_WRITE\\_CHAR\\_RESPONSE](#), [CYBLE\\_EVT\\_BMSC\\_READ\\_DESCR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_CGMSS\\_INDICATION\\_ENABLED](#), [CYBLE\\_EVT\\_CGMSS\\_INDICATION\\_DISABLED](#),  
[CYBLE\\_EVT\\_CGMSS\\_INDICATION\\_CONFIRMED](#), [CYBLE\\_EVT\\_CGMSS\\_NOTIFICATION\\_ENABLED](#),  
[CYBLE\\_EVT\\_CGMSS\\_NOTIFICATION\\_DISABLED](#), [CYBLE\\_EVT\\_CGMSS\\_WRITE\\_CHAR](#),  
[CYBLE\\_EVT\\_CGMSC\\_INDICATION](#), [CYBLE\\_EVT\\_CGMSC\\_NOTIFICATION](#),  
[CYBLE\\_EVT\\_CGMSC\\_READ\\_CHAR\\_RESPONSE](#), [CYBLE\\_EVT\\_CGMSC\\_WRITE\\_CHAR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_CGMSC\\_READ\\_DESCR\\_RESPONSE](#), [CYBLE\\_EVT\\_CGMSC\\_WRITE\\_DESCR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_CPSS\\_NOTIFICATION\\_ENABLED](#), [CYBLE\\_EVT\\_CPSS\\_NOTIFICATION\\_DISABLED](#),  
[CYBLE\\_EVT\\_CPSS\\_INDICATION\\_ENABLED](#), [CYBLE\\_EVT\\_CPSS\\_INDICATION\\_DISABLED](#),  
[CYBLE\\_EVT\\_CPSS\\_INDICATION\\_CONFIRMED](#), [CYBLE\\_EVT\\_CPSS\\_BROADCAST\\_ENABLED](#),  
[CYBLE\\_EVT\\_CPSS\\_BROADCAST\\_DISABLED](#), [CYBLE\\_EVT\\_CPSS\\_CHAR\\_WRITE](#),  
[CYBLE\\_EVT\\_CPSC\\_NOTIFICATION](#), [CYBLE\\_EVT\\_CPSC\\_INDICATION](#),  
[CYBLE\\_EVT\\_CPSC\\_READ\\_CHAR\\_RESPONSE](#), [CYBLE\\_EVT\\_CPSC\\_WRITE\\_CHAR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_CPSC\\_READ\\_DESCR\\_RESPONSE](#), [CYBLE\\_EVT\\_CPSC\\_WRITE\\_DESCR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_CPSC\\_SCAN\\_PROGRESS\\_RESULT](#), [CYBLE\\_EVT\\_CSCSS\\_NOTIFICATION\\_ENABLED](#),  
[CYBLE\\_EVT\\_CSCSS\\_NOTIFICATION\\_DISABLED](#), [CYBLE\\_EVT\\_CSCSS\\_INDICATION\\_ENABLED](#),  
[CYBLE\\_EVT\\_CSCSS\\_INDICATION\\_DISABLED](#), [CYBLE\\_EVT\\_CSCSS\\_INDICATION\\_CONFIRMATION](#),  
[CYBLE\\_EVT\\_CSCSS\\_CHAR\\_WRITE](#), [CYBLE\\_EVT\\_CSCSC\\_NOTIFICATION](#),  
[CYBLE\\_EVT\\_CSCSC\\_INDICATION](#), [CYBLE\\_EVT\\_CSCSC\\_READ\\_CHAR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_CSCSC\\_WRITE\\_CHAR\\_RESPONSE](#), [CYBLE\\_EVT\\_CSCSC\\_READ\\_DESCR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_CSCSC\\_WRITE\\_DESCR\\_RESPONSE](#), [CYBLE\\_EVT\\_CTSS\\_NOTIFICATION\\_ENABLED](#),  
[CYBLE\\_EVT\\_CTSS\\_NOTIFICATION\\_DISABLED](#), [CYBLE\\_EVT\\_CTSS\\_CHAR\\_WRITE](#),  
[CYBLE\\_EVT\\_CTSC\\_NOTIFICATION](#), [CYBLE\\_EVT\\_CTSC\\_READ\\_CHAR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_CTSC\\_READ\\_DESCR\\_RESPONSE](#), [CYBLE\\_EVT\\_CTSC\\_WRITE\\_DESCR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_CTSC\\_WRITE\\_CHAR\\_RESPONSE](#), [CYBLE\\_EVT\\_DISC\\_READ\\_CHAR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_ESSS\\_NOTIFICATION\\_ENABLED](#), [CYBLE\\_EVT\\_ESSS\\_NOTIFICATION\\_DISABLED](#),  
[CYBLE\\_EVT\\_ESSS\\_INDICATION\\_ENABLED](#), [CYBLE\\_EVT\\_ESSS\\_INDICATION\\_DISABLED](#),  
[CYBLE\\_EVT\\_ESSS\\_INDICATION\\_CONFIRMATION](#), [CYBLE\\_EVT\\_ESSS\\_CHAR\\_WRITE](#),  
[CYBLE\\_EVT\\_ESSS\\_EXEC\\_WRITE\\_REQ](#), [CYBLE\\_EVT\\_ESSS\\_DESCR\\_WRITE](#),  
[CYBLE\\_EVT\\_ESSC\\_NOTIFICATION](#), [CYBLE\\_EVT\\_ESSC\\_INDICATION](#),  
[CYBLE\\_EVT\\_ESSC\\_READ\\_CHAR\\_RESPONSE](#), [CYBLE\\_EVT\\_ESSC\\_WRITE\\_CHAR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_ESSC\\_READ\\_DESCR\\_RESPONSE](#), [CYBLE\\_EVT\\_ESSC\\_WRITE\\_DESCR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_GLSS\\_INDICATION\\_ENABLED](#), [CYBLE\\_EVT\\_GLSS\\_INDICATION\\_DISABLED](#),  
[CYBLE\\_EVT\\_GLSS\\_INDICATION\\_CONFIRMED](#), [CYBLE\\_EVT\\_GLSS\\_NOTIFICATION\\_ENABLED](#),  
[CYBLE\\_EVT\\_GLSS\\_NOTIFICATION\\_DISABLED](#), [CYBLE\\_EVT\\_GLSS\\_WRITE\\_CHAR](#),  
[CYBLE\\_EVT\\_GLSC\\_INDICATION](#), [CYBLE\\_EVT\\_GLSC\\_NOTIFICATION](#),  
[CYBLE\\_EVT\\_GLSC\\_READ\\_CHAR\\_RESPONSE](#), [CYBLE\\_EVT\\_GLSC\\_WRITE\\_CHAR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_GLSC\\_READ\\_DESCR\\_RESPONSE](#), [CYBLE\\_EVT\\_GLSC\\_WRITE\\_DESCR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_HIDSS\\_NOTIFICATION\\_ENABLED](#), [CYBLE\\_EVT\\_HIDSS\\_NOTIFICATION\\_DISABLED](#),  
[CYBLE\\_EVT\\_HIDSS\\_BOOT\\_MODE\\_ENTER](#), [CYBLE\\_EVT\\_HIDSS\\_REPORT\\_MODE\\_ENTER](#),  
[CYBLE\\_EVT\\_HIDSS\\_SUSPEND](#), [CYBLE\\_EVT\\_HIDSS\\_EXIT\\_SUSPEND](#),  
[CYBLE\\_EVT\\_HIDSS\\_REPORT\\_CHAR\\_WRITE](#), [CYBLE\\_EVT\\_HIDSC\\_NOTIFICATION](#),  
[CYBLE\\_EVT\\_HIDSC\\_READ\\_CHAR\\_RESPONSE](#), [CYBLE\\_EVT\\_HIDSC\\_WRITE\\_CHAR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_HIDSC\\_READ\\_DESCR\\_RESPONSE](#), [CYBLE\\_EVT\\_HIDSC\\_WRITE\\_DESCR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_HRSS\\_ENERGY\\_EXPENDED\\_RESET](#), [CYBLE\\_EVT\\_HRSS\\_NOTIFICATION\\_ENABLED](#),  
[CYBLE\\_EVT\\_HRSS\\_NOTIFICATION\\_DISABLED](#), [CYBLE\\_EVT\\_HRSC\\_NOTIFICATION](#),  
[CYBLE\\_EVT\\_HRSC\\_READ\\_CHAR\\_RESPONSE](#), [CYBLE\\_EVT\\_HRSC\\_WRITE\\_CHAR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_HRSC\\_READ\\_DESCR\\_RESPONSE](#), [CYBLE\\_EVT\\_HRSC\\_WRITE\\_DESCR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_HTSS\\_NOTIFICATION\\_ENABLED](#), [CYBLE\\_EVT\\_HTSS\\_NOTIFICATION\\_DISABLED](#),  
[CYBLE\\_EVT\\_HTSS\\_INDICATION\\_ENABLED](#), [CYBLE\\_EVT\\_HTSS\\_INDICATION\\_DISABLED](#),  
[CYBLE\\_EVT\\_HTSS\\_INDICATION\\_CONFIRMED](#), [CYBLE\\_EVT\\_HTSS\\_CHAR\\_WRITE](#),  
[CYBLE\\_EVT\\_HTSC\\_NOTIFICATION](#), [CYBLE\\_EVT\\_HTSC\\_INDICATION](#),

[CYBLE\\_EVT\\_HTSC\\_READ\\_CHAR\\_RESPONSE](#), [CYBLE\\_EVT\\_HTSC\\_WRITE\\_CHAR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_HTSC\\_READ\\_DESCR\\_RESPONSE](#), [CYBLE\\_EVT\\_HTSC\\_WRITE\\_DESCR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_IASS\\_WRITE\\_CHAR\\_CMD](#), [CYBLE\\_EVT\\_LLSS\\_WRITE\\_CHAR\\_REQ](#),  
[CYBLE\\_EVT\\_LLSC\\_READ\\_CHAR\\_RESPONSE](#), [CYBLE\\_EVT\\_LLSC\\_WRITE\\_CHAR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_LNSS\\_INDICATION\\_ENABLED](#), [CYBLE\\_EVT\\_LNSS\\_INDICATION\\_DISABLED](#),  
[CYBLE\\_EVT\\_LNSS\\_INDICATION\\_CONFIRMED](#), [CYBLE\\_EVT\\_LNSS\\_NOTIFICATION\\_ENABLED](#),  
[CYBLE\\_EVT\\_LNSS\\_NOTIFICATION\\_DISABLED](#), [CYBLE\\_EVT\\_LNSS\\_WRITE\\_CHAR](#),  
[CYBLE\\_EVT\\_LNSC\\_INDICATION](#), [CYBLE\\_EVT\\_LNSC\\_NOTIFICATION](#),  
[CYBLE\\_EVT\\_LNSC\\_READ\\_CHAR\\_RESPONSE](#), [CYBLE\\_EVT\\_LNSC\\_WRITE\\_CHAR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_LNSC\\_READ\\_DESCR\\_RESPONSE](#), [CYBLE\\_EVT\\_LNSC\\_WRITE\\_DESCR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_NDCSC\\_READ\\_CHAR\\_RESPONSE](#), [CYBLE\\_EVT\\_PASSS\\_NOTIFICATION\\_ENABLED](#),  
[CYBLE\\_EVT\\_PASSS\\_NOTIFICATION\\_DISABLED](#), [CYBLE\\_EVT\\_PASSS\\_WRITE\\_CHAR](#),  
[CYBLE\\_EVT\\_PASSC\\_NOTIFICATION](#), [CYBLE\\_EVT\\_PASSC\\_READ\\_CHAR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_PASSC\\_WRITE\\_CHAR\\_RESPONSE](#), [CYBLE\\_EVT\\_PASSC\\_READ\\_DESCR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_PASSC\\_WRITE\\_DESCR\\_RESPONSE](#), [CYBLE\\_EVT\\_RSCSS\\_NOTIFICATION\\_ENABLED](#),  
[CYBLE\\_EVT\\_RSCSS\\_NOTIFICATION\\_DISABLED](#), [CYBLE\\_EVT\\_RSCSS\\_INDICATION\\_ENABLED](#),  
[CYBLE\\_EVT\\_RSCSS\\_INDICATION\\_DISABLED](#), [CYBLE\\_EVT\\_RSCSS\\_INDICATION\\_CONFIRMATION](#),  
[CYBLE\\_EVT\\_RSCSS\\_CHAR\\_WRITE](#), [CYBLE\\_EVT\\_RSCSC\\_NOTIFICATION](#),  
[CYBLE\\_EVT\\_RSCSC\\_INDICATION](#), [CYBLE\\_EVT\\_RSCSC\\_READ\\_CHAR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_RSCSC\\_WRITE\\_CHAR\\_RESPONSE](#), [CYBLE\\_EVT\\_RSCSC\\_READ\\_DESCR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_RSCSC\\_WRITE\\_DESCR\\_RESPONSE](#), [CYBLE\\_EVT\\_RTUSS\\_WRITE\\_CHAR\\_CMD](#),  
[CYBLE\\_EVT\\_RTUSC\\_READ\\_CHAR\\_RESPONSE](#), [CYBLE\\_EVT\\_SCPSS\\_NOTIFICATION\\_ENABLED](#),  
[CYBLE\\_EVT\\_SCPSS\\_NOTIFICATION\\_DISABLED](#), [CYBLE\\_EVT\\_SCPSS\\_SCAN\\_INT\\_WIN\\_CHAR\\_WRITE](#),  
[CYBLE\\_EVT\\_SCPSC\\_NOTIFICATION](#), [CYBLE\\_EVT\\_SCPSC\\_READ\\_DESCR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_SCPSC\\_WRITE\\_DESCR\\_RESPONSE](#), [CYBLE\\_EVT\\_TPSS\\_NOTIFICATION\\_ENABLED](#),  
[CYBLE\\_EVT\\_TPSS\\_NOTIFICATION\\_DISABLED](#), [CYBLE\\_EVT\\_TPSC\\_NOTIFICATION](#),  
[CYBLE\\_EVT\\_TPSC\\_READ\\_CHAR\\_RESPONSE](#), [CYBLE\\_EVT\\_TPSC\\_READ\\_DESCR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_TPSC\\_WRITE\\_DESCR\\_RESPONSE](#), [CYBLE\\_EVT\\_UDSS\\_INDICATION\\_ENABLED](#),  
[CYBLE\\_EVT\\_UDSS\\_INDICATION\\_DISABLED](#), [CYBLE\\_EVT\\_UDSS\\_INDICATION\\_CONFIRMED](#),  
[CYBLE\\_EVT\\_UDSS\\_NOTIFICATION\\_ENABLED](#), [CYBLE\\_EVT\\_UDSS\\_NOTIFICATION\\_DISABLED](#),  
[CYBLE\\_EVT\\_UDSS\\_READ\\_CHAR](#), [CYBLE\\_EVT\\_UDSS\\_WRITE\\_CHAR](#), [CYBLE\\_EVT\\_UDSC\\_INDICATION](#),  
[CYBLE\\_EVT\\_UDSC\\_NOTIFICATION](#), [CYBLE\\_EVT\\_UDSC\\_READ\\_CHAR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_UDSC\\_WRITE\\_CHAR\\_RESPONSE](#), [CYBLE\\_EVT\\_UDSC\\_READ\\_DESCR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_UDSC\\_WRITE\\_DESCR\\_RESPONSE](#), [CYBLE\\_EVT\\_UDSC\\_ERROR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_WPTSS\\_NOTIFICATION\\_ENABLED](#), [CYBLE\\_EVT\\_WPTSS\\_NOTIFICATION\\_DISABLED](#),  
[CYBLE\\_EVT\\_WPTSS\\_INDICATION\\_ENABLED](#), [CYBLE\\_EVT\\_WPTSS\\_INDICATION\\_DISABLED](#),  
[CYBLE\\_EVT\\_WPTSS\\_INDICATION\\_CONFIRMED](#), [CYBLE\\_EVT\\_WPTSS\\_WRITE\\_CHAR](#),  
[CYBLE\\_EVT\\_WPTSC\\_NOTIFICATION](#), [CYBLE\\_EVT\\_WPTSC\\_INDICATION](#),  
[CYBLE\\_EVT\\_WPTSC\\_WRITE\\_CHAR\\_RESPONSE](#), [CYBLE\\_EVT\\_WPTSC\\_READ\\_CHAR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_WPTSC\\_READ\\_DESCR\\_RESPONSE](#), [CYBLE\\_EVT\\_WPTSC\\_WRITE\\_DESCR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_WSSS\\_INDICATION\\_ENABLED](#), [CYBLE\\_EVT\\_WSSS\\_INDICATION\\_DISABLED](#),  
[CYBLE\\_EVT\\_WSSS\\_INDICATION\\_CONFIRMED](#), [CYBLE\\_EVT\\_WSSC\\_INDICATION](#),  
[CYBLE\\_EVT\\_WSSC\\_READ\\_CHAR\\_RESPONSE](#), [CYBLE\\_EVT\\_WSSC\\_READ\\_DESCR\\_RESPONSE](#),  
[CYBLE\\_EVT\\_WSSC\\_WRITE\\_DESCR\\_RESPONSE](#), **CYBLE\_DEBUG\_EVT\_BLESS\_INT = 0xE000u}**

## Enumeration Type Documentation

### enum [CYBLE\\_EVT\\_T](#)

Service specific events

#### Enumerator

**[CYBLE\\_EVT\\_GATTS\\_INDICATION\\_ENABLED](#)** GATT Server - Notifications for GATT Service's "Service Changed" Characteristic were enabled. The parameter of this event is a structure of [CYBLE\\_GATTS\\_WRITE\\_REQ\\_PARAM\\_T](#) type.



**CYBLE\_EVT\_GATTS\_INDICATION\_DISABLED** GATT Server - Notifications for GATT Service's "Service Changed" Characteristic were disabled. The parameter of this event is a structure of [CYBLE\\_GATTS\\_WRITE\\_REQ\\_PARAM\\_T](#) type.

**CYBLE\_EVT\_GATTC\_INDICATION** GATT Client - GATT Service's "Service Changed" Characteristic Indications were received. The parameter of this event is a structure of [CYBLE\\_GATTC\\_HANDLE\\_VALUE\\_IND\\_PARAM\\_T](#) type.

**CYBLE\_EVT\_GATTC\_SRVC\_DISCOVERY\_FAILED** GATT Client - Service discovery procedure failed. This event may be generated on calling [CyBle\\_GattcDiscoverAllPrimaryServices\(\)](#). No parameters passed for this event.

**CYBLE\_EVT\_GATTC\_INCL\_DISCOVERY\_FAILED** GATT Client - Discovery of included services failed. This event may be generated on calling [CyBle\\_GattcFindIncludedServices\(\)](#). No parameters passed for this event.

**CYBLE\_EVT\_GATTC\_CHAR\_DISCOVERY\_FAILED** GATT Client - Discovery of service's characteristics failed. This event may be generated on calling [CyBle\\_GattcDiscoverAllCharacteristics\(\)](#) or [CyBle\\_GattcReadUsingCharacteristicUuid\(\)](#). No parameters passed for this event.

**CYBLE\_EVT\_GATTC\_DESCR\_DISCOVERY\_FAILED** GATT Client - Discovery of service's characteristics failed. This event may be generated on calling [CyBle\\_GattcDiscoverAllCharacteristicDescriptors\(\)](#). No parameters passed for this event.

**CYBLE\_EVT\_GATTC\_SRVC\_DUPLICATION** GATT Client - Duplicate service record was found during server device discovery. The parameter of this event is a structure of uint16 (UUID16) type.

**CYBLE\_EVT\_GATTC\_CHAR\_DUPLICATION** GATT Client - Duplicate service's characteristic record was found during server device discovery. The parameter of this event is a structure of uint16 (UUID16) type.

**CYBLE\_EVT\_GATTC\_DESCR\_DUPLICATION** GATT Client - Duplicate service's characteristic descriptor record was found during server device discovery. The parameter of this event is a structure of uint16 (UUID16) type.

**CYBLE\_EVT\_GATTC\_SRVC\_DISCOVERY\_COMPLETE** GATT Client - Service discovery procedure completed successfully. This event may be generated on calling [CyBle\\_GattcDiscoverAllPrimaryServices\(\)](#). No parameters passed for this event.

**CYBLE\_EVT\_GATTC\_INCL\_DISCOVERY\_COMPLETE** GATT Client - Included services discovery is completed successfully. This event may be generated on calling [CyBle\\_GattcFindIncludedServices\(\)](#). No parameters passed for this event.

**CYBLE\_EVT\_GATTC\_CHAR\_DISCOVERY\_COMPLETE** GATT Client - Discovery of service's characteristics discovery is completed successfully. This event may be generated on calling [CyBle\\_GattcDiscoverAllCharacteristics\(\)](#) or [CyBle\\_GattcReadUsingCharacteristicUuid\(\)](#). No parameters passed for this event.

**CYBLE\_EVT\_GATTC\_DISCOVERY\_COMPLETE** GATT Client - Discovery of remote device completed successfully. No parameters passed for this event.

**CYBLE\_EVT\_ANCSS\_NOTIFICATION\_ENABLED** ANCS Server - Notifications for Apple Notification Center Service Characteristic were enabled. The parameter of this event is a structure of [CYBLE\\_ANCS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_ANCSS\_NOTIFICATION\_DISABLED** ANCS Server - Notifications for Apple Notification Center Service Characteristic were disabled. The parameter of this event is a structure of [CYBLE\\_ANCS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_ANCSS\_WRITE\_CHAR** ANCS Server - Write Request for Apple Notification Center Service Characteristic was received. The parameter of this event is a structure of [CYBLE\\_ANCS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_ANCSC\_NOTIFICATION** ANCS Client - Apple Notification Center Characteristic Service Notification was received. The parameter of this event is a structure of [CYBLE\\_ANCS\\_CHAR\\_VALUE\\_T](#) type.



***CYBLE\_EVT\_ANCS\_READ\_CHAR\_RESPONSE*** ANCS Client - Read Response for Apple Notification Center Service Characteristic Value. The parameter of this event is a structure of [CYBLE\\_ANCS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_ANCS\_WRITE\_CHAR\_RESPONSE*** ANCS Client - Write Response for Write Request for Apple Notification Center Service Characteristic Value. The parameter of this event is a structure of [CYBLE\\_ANCS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_ANCS\_READ\_DESCR\_RESPONSE*** ANCS Client - Read Response for Read Request for Apple Notification Center Service Characteristic Descriptor Read Request. The parameter of this event is a structure of [CYBLE\\_ANCS\\_DESCR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_ANCS\_WRITE\_DESCR\_RESPONSE*** ANCS Client - Write Response for Write Request for Apple Notification Center Service Client Characteristic Configuration Descriptor Value. The parameter of this event is a structure of [CYBLE\\_ANCS\\_DESCR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_ANCS\_ERROR\_RESPONSE*** ANCS Client - Error Response for Write Request for Apple Notification Center Service Characteristic Value. The parameter of this event is a structure of [CYBLE\\_ANCS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_ANSS\_NOTIFICATION\_ENABLED*** ANS Server - Notifications for Alert Notification Service Characteristic were enabled. The parameter of this event is a structure of [CYBLE\\_ANS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_ANSS\_NOTIFICATION\_DISABLED*** ANS Server - Notifications for Alert Notification Service Characteristic were disabled. The parameter of this event is a structure of [CYBLE\\_ANS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_ANSS\_CHAR\_WRITE*** ANS Server - Write Request for Alert Notification Service Characteristic was received. The parameter of this event is a structure of [CYBLE\\_ANS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_ANSC\_NOTIFICATION*** ANS Client - Alert Notification Characteristic Service Notification was received. The parameter of this event is a structure of [CYBLE\\_ANS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_ANSC\_READ\_CHAR\_RESPONSE*** ANS Client - Read Response for Alert Notification Service Characteristic Value. The parameter of this event is a structure of [CYBLE\\_ANS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_ANSC\_WRITE\_CHAR\_RESPONSE*** ANS Client - Write Response for Write Request for Alert Notification Service Characteristic Value. The parameter of this event is a structure of [CYBLE\\_ANS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_ANSC\_READ\_DESCR\_RESPONSE*** ANS Client - Read Response for Read Request for Alert Notification Service Characteristic Descriptor Read Request. The parameter of this event is a structure of [CYBLE\\_ANS\\_DESCR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_ANSC\_WRITE\_DESCR\_RESPONSE*** ANS Client - Write Response for Write Request for Alert Notification Service Client Characteristic Configuration Descriptor Value. The parameter of this event is a structure of [CYBLE\\_ANS\\_DESCR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_BASS\_NOTIFICATION\_ENABLED*** BAS Server - Notifications for Battery Level Characteristic were enabled. The parameter of this event is a structure of [CYBLE\\_BAS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_BASS\_NOTIFICATION\_DISABLED*** BAS Server - Notifications for Battery Level Characteristic were disabled. The parameter of this event is a structure of [CYBLE\\_BAS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_BASC\_NOTIFICATION*** BAS Client - Battery Level Characteristic Notification was received. The parameter of this event is a structure of [CYBLE\\_BAS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_BASC\_READ\_CHAR\_RESPONSE*** BAS Client - Read Response for Battery Level Characteristic Value. The parameter of this event is a structure of [CYBLE\\_BAS\\_CHAR\\_VALUE\\_T](#) type.



**CYBLE\_EVT\_BASC\_READ\_DESCR\_RESPONSE** BAS Client - Read Response for Battery Level Characteristic Descriptor Read Request. The parameter of this event is a structure of [CYBLE\\_BAS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_BASC\_WRITE\_DESCR\_RESPONSE** BAS Client - Write Response for Battery Level Client Characteristic Configuration Descriptor Value. The parameter of this event is a structure of [CYBLE\\_BAS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_BCSS\_INDICATION\_ENABLED** BCS Server - Indication for Body Composition Service Characteristic was enabled. The parameter of this event is a structure of [CYBLE\\_BCS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_BCSS\_INDICATION\_DISABLED** BCS Server - Indication for Body Composition Service Characteristic was disabled. The parameter of this event is a structure of [CYBLE\\_BCS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_BCSS\_INDICATION\_CONFIRMED** BCS Server - Body Composition Service Characteristic Indication was confirmed. The parameter of this event is a structure of [CYBLE\\_BCS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_BCSC\_INDICATION** BCS Client - Body Composition Service Characteristic Indication was received. The parameter of this event is a structure of [CYBLE\\_BCS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_BCSC\_READ\_CHAR\_RESPONSE** BCS Client - Read Response for Read Request of Body Composition Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_BCS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_BCSC\_READ\_DESCR\_RESPONSE** BCS Client - Read Response for Read Request of Body Composition Service Characteristic Descriptor Read request. The parameter of this event is a structure of [CYBLE\\_BCS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_BCSC\_WRITE\_DESCR\_RESPONSE** BCS Client - Write Response for Write Request of Body Composition Service Characteristic Configuration Descriptor value. The parameter of this event is a structure of [CYBLE\\_BCS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_BLSS\_INDICATION\_ENABLED** BLS Server - Indication for Blood Pressure Service Characteristic was enabled. The parameter of this event is a structure of [CYBLE\\_BLS\\_CHAR\\_VALUE\\_T](#) type

**CYBLE\_EVT\_BLSS\_INDICATION\_DISABLED** BLS Server - Indication for Blood Pressure Service Characteristic was disabled. The parameter of this event is a structure of [CYBLE\\_BLS\\_CHAR\\_VALUE\\_T](#) type

**CYBLE\_EVT\_BLSS\_INDICATION\_CONFIRMED** BLS Server - Blood Pressure Service Characteristic Indication was confirmed. The parameter of this event is a structure of [CYBLE\\_BLS\\_CHAR\\_VALUE\\_T](#) type

**CYBLE\_EVT\_BLSS\_NOTIFICATION\_ENABLED** BLS Server - Notifications for Blood Pressure Service Characteristic were enabled. The parameter of this event is a structure of [CYBLE\\_BLS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_BLSS\_NOTIFICATION\_DISABLED** BLS Server - Notifications for Blood Pressure Service Characteristic were disabled. The parameter of this event is a structure of [CYBLE\\_BLS\\_CHAR\\_VALUE\\_T](#) type

**CYBLE\_EVT\_BLSC\_INDICATION** BLS Client - Blood Pressure Service Characteristic Indication was received. The parameter of this event is a structure of [CYBLE\\_BLS\\_CHAR\\_VALUE\\_T](#) type

**CYBLE\_EVT\_BLSC\_NOTIFICATION** BLS Client - Blood Pressure Service Characteristic Notification was received. The parameter of this event is a structure of [CYBLE\\_BLS\\_CHAR\\_VALUE\\_T](#) type

**CYBLE\_EVT\_BLSC\_READ\_CHAR\_RESPONSE** BLS Client - Read Response for Read Request of Blood Pressure Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_BLS\\_CHAR\\_VALUE\\_T](#) type

**CYBLE\_EVT\_BLSC\_READ\_DESCR\_RESPONSE** BLS Client - Read Response for Read Request of Blood Pressure Service Characteristic Descriptor Read request. The parameter of this event is a structure of [CYBLE\\_BLS\\_DESCR\\_VALUE\\_T](#) type





**CYBLE\_EVT\_BLSC\_WRITE\_DESCR\_RESPONSE** BLS Client - Write Response for Write Request of Blood Pressure Service Characteristic Configuration Descriptor value. The parameter of this event is a structure of [CYBLE\\_BLS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_BMSS\_WRITE\_CHAR** BMS Server - Write Request for Bond Management was received. The parameter of this event is a structure of [CYBLE\\_BMS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_BMSC\_READ\_CHAR\_RESPONSE** BMS Client - Read Response for Read Request of Bond Management Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_BMS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_BMSC\_WRITE\_CHAR\_RESPONSE** BMS Client - Write Response for Write Request of Bond Management Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_BMS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_BMSC\_READ\_DESCR\_RESPONSE** BMS Client - Read Response for Read Request of Bond Management Service Characteristic Descriptor Read request. The parameter of this event is a structure of [CYBLE\\_BMS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_CGMSS\_INDICATION\_ENABLED** CGMS Server - Indication for Continuous Glucose Monitoring Service Characteristic was enabled. The parameter of this event is a structure of [CYBLE\\_CGMS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_CGMSS\_INDICATION\_DISABLED** CGMS Server - Indication for Continuous Glucose Monitoring Service Characteristic was disabled. The parameter of this event is a structure of [CYBLE\\_CGMS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_CGMSS\_INDICATION\_CONFIRMED** CGMS Server - Continuous Glucose Monitoring Service Characteristic Indication was confirmed. The parameter of this event is a structure of [CYBLE\\_CGMS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_CGMSS\_NOTIFICATION\_ENABLED** CGMS Server - Notifications for Continuous Glucose Monitoring Service Characteristic was enabled. The parameter of this event is a structure of [CYBLE\\_CGMS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_CGMSS\_NOTIFICATION\_DISABLED** CGMS Server - Notifications for Continuous Glucose Monitoring Service Characteristic were disabled. The parameter of this event is a structure of [CYBLE\\_CGMS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_CGMSS\_WRITE\_CHAR** CGMS Server - Write Request for Continuous Glucose Monitoring Service was received. The parameter of this event is a structure of [CYBLE\\_CGMS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_CGMSC\_INDICATION** CGMS Client - Continuous Glucose Monitoring Service Characteristic Indication was received. The parameter of this event is a structure of [CYBLE\\_CGMS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_CGMSC\_NOTIFICATION** CGMS Client - Continuous Glucose Monitoring Service Characteristic Notification was received. The parameter of this event is a structure of [CYBLE\\_CGMS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_CGMSC\_READ\_CHAR\_RESPONSE** CGMS Client - Read Response for Read Request of Continuous Glucose Monitoring Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_CGMS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_CGMSC\_WRITE\_CHAR\_RESPONSE** CGMS Client - Write Response for Write Request of Continuous Glucose Monitoring Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_CGMS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_CGMSC\_READ\_DESCR\_RESPONSE** CGMS Client - Read Response for Read Request of Continuous Glucose Monitoring Service Characteristic Descriptor Read request. The parameter of this event is a structure of [CYBLE\\_CGMS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_CGMSC\_WRITE\_DESCR\_RESPONSE** CGMS Client - Write Response for Write Request of Continuous Glucose Monitoring Service Characteristic Configuration Descriptor value. The parameter of this event is a structure of [CYBLE\\_CGMS\\_DESCR\\_VALUE\\_T](#) type.



**CYBLE\_EVT\_CPSS\_NOTIFICATION\_ENABLED** CPS Server - Notifications for Cycling Power Service Characteristic was enabled. The parameter of this event is a structure of [CYBLE\\_CPS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_CPSS\_NOTIFICATION\_DISABLED** CPS Server - Notifications for Cycling Power Service Characteristic were disabled. The parameter of this event is a structure of [CYBLE\\_CPS\\_CHAR\\_VALUE\\_T](#) type

**CYBLE\_EVT\_CPSS\_INDICATION\_ENABLED** CPS Server - Indication for Cycling Power Service Characteristic was enabled. The parameter of this event is a structure of [CYBLE\\_CPS\\_CHAR\\_VALUE\\_T](#) type

**CYBLE\_EVT\_CPSS\_INDICATION\_DISABLED** CPS Server - Indication for Cycling Power Service Characteristic was disabled. The parameter of this event is a structure of [CYBLE\\_CPS\\_CHAR\\_VALUE\\_T](#) type

**CYBLE\_EVT\_CPSS\_INDICATION\_CONFIRMED** CPS Server - Cycling Power Service Characteristic Indication was confirmed. The parameter of this event is a structure of [CYBLE\\_CPS\\_CHAR\\_VALUE\\_T](#) type

**CYBLE\_EVT\_CPSS\_BROADCAST\_ENABLED** CPS Server - Broadcast for Cycling Power Service Characteristic was enabled. The parameter of this event is a structure of [CYBLE\\_CPS\\_CHAR\\_VALUE\\_T](#) type

**CYBLE\_EVT\_CPSS\_BROADCAST\_DISABLED** CPS Server - Broadcast for Cycling Power Service Characteristic was disabled. The parameter of this event is a structure of [CYBLE\\_CPS\\_CHAR\\_VALUE\\_T](#) type

**CYBLE\_EVT\_CPSS\_CHAR\_WRITE** CPS Server - Write Request for Cycling Power Service Characteristic was received. The parameter of this event is a structure of [CYBLE\\_CPS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_CPSC\_NOTIFICATION** CPS Client - Cycling Power Service Characteristic Notification was received. The parameter of this event is a structure of [CYBLE\\_CPS\\_CHAR\\_VALUE\\_T](#) type

**CYBLE\_EVT\_CPSC\_INDICATION** CPS Client - Cycling Power Service Characteristic Indication was received. The parameter of this event is a structure of [CYBLE\\_CPS\\_CHAR\\_VALUE\\_T](#) type

**CYBLE\_EVT\_CPSC\_READ\_CHAR\_RESPONSE** CPS Client - Read Response for Read Request of Cycling Power Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_CPS\\_CHAR\\_VALUE\\_T](#) type

**CYBLE\_EVT\_CPSC\_WRITE\_CHAR\_RESPONSE** CPS Client - Write Response for Write Request of Cycling Power Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_CPS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_CPSC\_READ\_DESCR\_RESPONSE** CPS Client - Read Response for Read Request of Cycling Power Service Characteristic Descriptor Read request. The parameter of this event is a structure of [CYBLE\\_CPS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_CPSC\_WRITE\_DESCR\_RESPONSE** CPS Client - Write Response for Write Request of Cycling Power Service Characteristic Configuration Descriptor value. The parameter of this event is a structure of [CYBLE\\_CPS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_CPSC\_SCAN\_PROGRESS\_RESULT** CPS Client - This event is triggered every time a device receive non-connectable undirected advertising event. The parameter of this event is a structure of [CYBLE\\_CPS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_CSCSS\_NOTIFICATION\_ENABLED** CSCS Server - Notifications for Cycling Speed and Cadence Service Characteristic were enabled. The parameter of this event is a structure of [CYBLE\\_CSCS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_CSCSS\_NOTIFICATION\_DISABLED** CSCS Server - Notifications for Cycling Speed and Cadence Service Characteristic were disabled. The parameter of this event is a structure of [CYBLE\\_CSCS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_CSCSS\_INDICATION\_ENABLED** CSCS Server - Indication for Cycling Speed and Cadence Service Characteristic was enabled. The parameter of this event is a structure of [CYBLE\\_CSCS\\_CHAR\\_VALUE\\_T](#) type.





***CYBLE\_EVT\_CSCSS\_INDICATION\_DISABLED*** CSCS Server - Indication for Cycling Speed and Cadence Service Characteristic was disabled. The parameter of this event is a structure of [CYBLE\\_CSCS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_CSCSS\_INDICATION\_CONFIRMATION*** CSCS Server - Cycling Speed and Cadence Service Characteristic Indication was confirmed. The parameter of this event is a structure of [CYBLE\\_CSCS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_CSCSS\_CHAR\_WRITE*** CSCS Server - Write Request for Cycling Speed and Cadence Service Characteristic was received. The parameter of this event is a structure of [CYBLE\\_CSCS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_CSCSC\_NOTIFICATION*** CSCS Client - Cycling Speed and Cadence Service Characteristic Notification was received. The parameter of this event is a structure of [CYBLE\\_CSCS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_CSCSC\_INDICATION*** CSCS Client - Cycling Speed and Cadence Service Characteristic Indication was received. The parameter of this event is a structure of [CYBLE\\_CSCS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_CSCSC\_READ\_CHAR\_RESPONSE*** CSCS Client - Read Response for Read Request of Cycling Speed and Cadence Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_CSCS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_CSCSC\_WRITE\_CHAR\_RESPONSE*** CSCS Client - Write Response for Write Request of Cycling Speed and Cadence Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_CSCS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_CSCSC\_READ\_DESCR\_RESPONSE*** CSCS Client - Read Response for Read Request of Cycling Speed and Cadence Service Characteristic Descriptor Read request. The parameter of this event is a structure of [CYBLE\\_CSCS\\_DESCR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_CSCSC\_WRITE\_DESCR\_RESPONSE*** CSCS Client - Write Response for Write Request of Cycling Speed and Cadence Service Characteristic Configuration Descriptor value. The parameter of this event is a structure of [CYBLE\\_CSCS\\_DESCR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_CTSS\_NOTIFICATION\_ENABLED*** CTS Server - Notification for Current Time Characteristic was enabled. The parameter of this event is a structure of [CYBLE\\_CTS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_CTSS\_NOTIFICATION\_DISABLED*** CTS Server - Notification for Current Time Characteristic was disabled. The parameter of this event is a structure of [CYBLE\\_CTS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_CTSS\_CHAR\_WRITE*** CTS Server - Write Request for Current Time Service Characteristic was received. The parameter of this event is a structure of [CYBLE\\_CTS\\_CHAR\\_VALUE\\_T](#) type. When this event is received the user is responsible for performing any kind of data verification and writing the data to the GATT database in case of successful verification or setting the error using CyBle\_SetGattError() in case of data verification failure.

***CYBLE\_EVT\_CTSC\_NOTIFICATION*** CTS Client - Current Time Characteristic Notification was received. The parameter of this event is a structure of [CYBLE\\_CTS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_CTSC\_READ\_CHAR\_RESPONSE*** CTS Client - Read Response for Current Time Characteristic Value Read Request. The parameter of this event is a structure of [CYBLE\\_CTS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_CTSC\_READ\_DESCR\_RESPONSE*** CTS Client - Read Response for Current Time Client Characteristic Configuration Descriptor Value Read Request. The parameter of this event is a structure of [CYBLE\\_CTS\\_DESCR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_CTSC\_WRITE\_DESCR\_RESPONSE*** CTS Client - Write Response for Current Time Characteristic Configuration Descriptor Value. The parameter of this event is a structure of [CYBLE\\_CTS\\_DESCR\\_VALUE\\_T](#) type.



**CYBLE\_EVT\_CTSC\_WRITE\_CHAR\_RESPONSE** CTS Client - Write Response for Current Time or Local Time Information Characteristic Value. The parameter of this event is a structure of [CYBLE\\_CTS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_DISC\_READ\_CHAR\_RESPONSE** DIS Client - Read Response for a Read Request for a Device Information Service Characteristic. The parameter of this event is a structure of [CYBLE\\_DIS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_ESSS\_NOTIFICATION\_ENABLED** ESS Server - Notifications for Environmental Sensing Service Characteristic were enabled. The parameter of this event is a structure of [CYBLE\\_ESS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_ESSS\_NOTIFICATION\_DISABLED** ESS Server - Notifications for Environmental Sensing Service Characteristic were disabled. The parameter of this event is a structure of [CYBLE\\_ESS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_ESSS\_INDICATION\_ENABLED** ESS Server - Indication for Environmental Sensing Service Characteristic was enabled. The parameter of this event is a structure of [CYBLE\\_ESS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_ESSS\_INDICATION\_DISABLED** ESS Server - Indication for Environmental Sensing Service Characteristic was disabled. The parameter of this event is a structure of [CYBLE\\_ESS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_ESSS\_INDICATION\_CONFIRMATION** ESS Server - Environmental Sensing Service Characteristic Indication was confirmed. The parameter of this event is a structure of [CYBLE\\_ESS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_ESSS\_CHAR\_WRITE** ESS Server - Write Request for Environmental Sensing Service Characteristic was received. The parameter of this event is a structure of [CYBLE\\_ESS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_ESSS\_EXEC\_WRITE\_REQ** ESS Server - Execute Write Request for Environmental Sensing Service Characteristic was received. The parameter of this event is a structure of [CYBLE\\_ESS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_ESSS\_DESCR\_WRITE** ESS Server - Write Request for Environmental Sensing Service Characteristic Descriptor was received. The parameter of this event is a structure of [CYBLE\\_ESS\\_DESCR\\_VALUE\\_T](#) type. This event is generated only when write for CYBLE\_ESS\_CHAR\_USER\_DESCRIPTION\_DESCR, CYBLE\_ESS\_ES\_TRIGGER\_SETTINGS\_DESCR or CYBLE\_ESS\_ES\_CONFIG\_DESCR occurred.

**CYBLE\_EVT\_ESSC\_NOTIFICATION** ESS Client - Environmental Sensing Service Characteristic Notification was received. The parameter of this event is a structure of [CYBLE\\_ESS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_ESSC\_INDICATION** ESS Client - Environmental Sensing Service Characteristic Indication was received. The parameter of this event is a structure of [CYBLE\\_ESS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_ESSC\_READ\_CHAR\_RESPONSE** ESS Client - Read Response for Read Request of Environmental Sensing Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_ESS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_ESSC\_WRITE\_CHAR\_RESPONSE** ESS Client - Write Response for Write Request of Environmental Sensing Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_ESS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_ESSC\_READ\_DESCR\_RESPONSE** ESS Client - Read Response for Read Request of Environmental Sensing Service Characteristic Descriptor Read request. The parameter of this event is a structure of [CYBLE\\_ESS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_ESSC\_WRITE\_DESCR\_RESPONSE** ESS Client - Write Response for Write Request of Environmental Sensing Service Characteristic Configuration Descriptor value. The parameter of this event is a structure of [CYBLE\\_ESS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_GLSS\_INDICATION\_ENABLED** GLS Server - Indication for Glucose Service Characteristic was enabled. The parameter of this event is a structure of [CYBLE\\_GLS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_GLSS\_INDICATION\_DISABLED** GLS Server - Indication for Glucose Service Characteristic was disabled. The parameter of this event is a structure of [CYBLE\\_GLS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_GLSS\_INDICATION\_CONFIRMED** GLS Server - Glucose Service Characteristic Indication was confirmed. The parameter of this event is a structure of [CYBLE\\_GLS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_GLSS\_NOTIFICATION\_ENABLED** GLS Server - Notifications for Glucose Service Characteristic was enabled. The parameter of this event is a structure of [CYBLE\\_GLS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_GLSS\_NOTIFICATION\_DISABLED** GLS Server - Notifications for Glucose Service Characteristic were disabled. The parameter of this event is a structure of [CYBLE\\_GLS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_GLSS\_WRITE\_CHAR** GLS Server - Write Request for Glucose Service was received. The parameter of this event is a structure of [CYBLE\\_GLS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_GLSC\_INDICATION** GLS Client - Glucose Service Characteristic Indication was received. The parameter of this event is a structure of [CYBLE\\_GLS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_GLSC\_NOTIFICATION** GLS Client - Glucose Service Characteristic Notification was received. The parameter of this event is a structure of [CYBLE\\_GLS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_GLSC\_READ\_CHAR\_RESPONSE** GLS Client - Read Response for Read Request of Glucose Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_GLS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_GLSC\_WRITE\_CHAR\_RESPONSE** GLS Client - Write Response for Write Request of Glucose Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_GLS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_GLSC\_READ\_DESCR\_RESPONSE** GLS Client - Read Response for Read Request of Glucose Service Characteristic Descriptor Read request. The parameter of this event is a structure of [CYBLE\\_GLS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_GLSC\_WRITE\_DESCR\_RESPONSE** GLS Client - Write Response for Write Request of Glucose Service Characteristic Configuration Descriptor value. The parameter of this event is a structure of [CYBLE\\_GLS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_HIDSS\_NOTIFICATION\_ENABLED** HIDS Server - Notifications for HID service were enabled. The parameter of this event is a structure of [CYBLE\\_HIDS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_HIDSS\_NOTIFICATION\_DISABLED** HIDS Server - Notifications for HID service were disabled. The parameter of this event is a structure of [CYBLE\\_HIDS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_HIDSS\_BOOT\_MODE\_ENTER** HIDS Server - Enter boot mode request. The parameter of this event is a structure of [CYBLE\\_HIDS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_HIDSS\_REPORT\_MODE\_ENTER** HIDS Server - Enter report mode request. The parameter of this event is a structure of [CYBLE\\_HIDS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_HIDSS\_SUSPEND** HIDS Server - Enter suspend mode request. The parameter of this event is a structure of [CYBLE\\_HIDS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_HIDSS\_EXIT\_SUSPEND** HIDS Server - Exit suspend mode request. The parameter of this event is a structure of [CYBLE\\_HIDS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_HIDSS\_REPORT\_CHAR\_WRITE** HIDS Server - Write Report characteristic request. The parameter of this event is a structure of [CYBLE\\_HIDSS\\_REPORT\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_HIDSC\_NOTIFICATION** HIDS Client - HID Service Characteristic Notification was received. The parameter of this event is a structure of [CYBLE\\_HIDS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_HIDSC\_READ\_CHAR\_RESPONSE** HIDS Client - Read Response for Read Request of HID Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_HIDS\\_DESCR\\_VALUE\\_T](#) type.



***CYBLE\_EVT\_HIDSC\_WRITE\_CHAR\_RESPONSE*** HIDS Client - Write Response for Write Request of HID Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_HIDS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_HIDSC\_READ\_DESCR\_RESPONSE*** HIDS Client - Read Response for Read Request of HID Service Characteristic Descriptor Read request. The parameter of this event is a structure of [CYBLE\\_HIDS\\_DESCR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_HIDSC\_WRITE\_DESCR\_RESPONSE*** HIDS Client - Write Response for Write Request of HID Service Characteristic Configuration Descriptor value. The parameter of this event is a structure of [CYBLE\\_HIDS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_HRSS\_ENERGY\_EXPENDED\_RESET*** HRS Server - Reset Energy Expended. The parameter of this event is a structure of [CYBLE\\_HRS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_HRSS\_NOTIFICATION\_ENABLED*** HRS Server - Notification for Heart Rate Measurement Characteristic was enabled. The parameter of this event is a structure of [CYBLE\\_HRS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_HRSS\_NOTIFICATION\_DISABLED*** HRS Server - Notification for Heart Rate Measurement Characteristic was disabled. The parameter of this event is a structure of [CYBLE\\_HRS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_HRSC\_NOTIFICATION*** HRS Client - Heart Rate Measurement Characteristic Notification was received. The parameter of this event is a structure of [CYBLE\\_HRS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_HRSC\_READ\_CHAR\_RESPONSE*** HRS Client - Read Response for Read Request of HRS Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_HRS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_HRSC\_WRITE\_CHAR\_RESPONSE*** HRS Client - Write Response for Write Request of HRS Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_HRS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_HRSC\_READ\_DESCR\_RESPONSE*** HRS Client - Read Response for Read Request of HRS Service Characteristic Descriptor Read request. The parameter of this event is a structure of [CYBLE\\_HRS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_HRSC\_WRITE\_DESCR\_RESPONSE*** HRS Client - Write Response for Write Request of HRS Service Characteristic Configuration Descriptor value. The parameter of this event is a structure of [CYBLE\\_HRS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT-HTSS\_NOTIFICATION\_ENABLED*** HTS Server - Notifications for Health Thermometer Service Characteristic were enabled. The parameter of this event is a structure of [CYBLE-HTS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT-HTSS\_NOTIFICATION\_DISABLED*** HTS Server - Notifications for Health Thermometer Service Characteristic were disabled. The parameter of this event is a structure of [CYBLE-HTS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT-HTSS\_INDICATION\_ENABLED*** HTS Server - Indication for Health Thermometer Service Characteristic was enabled. The parameter of this event is a structure of [CYBLE-HTS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT-HTSS\_INDICATION\_DISABLED*** HTS Server - Indication for Health Thermometer Service Characteristic was disabled. The parameter of this event is a structure of [CYBLE-HTS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT-HTSS\_INDICATION\_CONFIRMED*** HTS Server - Health Thermometer Service Characteristic Indication was confirmed. The parameter of this event is a structure of [CYBLE-HTS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT-HTSS\_CHAR\_WRITE*** HTS Server - Write Request for Health Thermometer Service Characteristic was received. The parameter of this event is a structure of [CYBLE-HTS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_HTSC\_NOTIFICATION** HTS Client - Health Thermometer Service Characteristic Notification was received. The parameter of this event is a structure of [CYBLE HTS CHAR VALUE T](#) type.

**CYBLE\_EVT\_HTSC\_INDICATION** HTS Client - Health Thermometer Service Characteristic Indication was received. The parameter of this event is a structure of [CYBLE HTS CHAR VALUE T](#) type.

**CYBLE\_EVT\_HTSC\_READ\_CHAR\_RESPONSE** HTS Client - Read Response for Read Request of Health Thermometer Service Characteristic value. The parameter of this event is a structure of [CYBLE HTS CHAR VALUE T](#) type.

**CYBLE\_EVT\_HTSC\_WRITE\_CHAR\_RESPONSE** HTS Client - Write Response for Write Request of Health Thermometer Service Characteristic value. The parameter of this event is a structure of [CYBLE HTS CHAR VALUE T](#) type.

**CYBLE\_EVT\_HTSC\_READ\_DESCR\_RESPONSE** HTS Client - Read Response for Read Request of Health Thermometer Service Characteristic Descriptor Read request. The parameter of this event is a structure of [CYBLE HTS DESCR VALUE T](#) type.

**CYBLE\_EVT\_HTSC\_WRITE\_DESCR\_RESPONSE** HTS Client - Write Response for Write Request of Health Thermometer Service Characteristic Configuration Descriptor value. The parameter of this event is a structure of [CYBLE HTS DESCR VALUE T](#) type.

**CYBLE\_EVT\_IASS\_WRITE\_CHAR\_CMD** IAS Server - Write command request for Alert Level Characteristic. The parameter of this event is a structure of [CYBLE IAS CHAR VALUE T](#) type.

**CYBLE\_EVT\_LLSS\_WRITE\_CHAR\_REQ** LLS Server - Write request for Alert Level Characteristic. The parameter of this event is a structure of [CYBLE LLS CHAR VALUE T](#) type.

**CYBLE\_EVT\_LLSC\_READ\_CHAR\_RESPONSE** LLS Client - Read response for Alert Level Characteristic. The parameter of this event is a structure of [CYBLE LLS CHAR VALUE T](#) type.

**CYBLE\_EVT\_LLSC\_WRITE\_CHAR\_RESPONSE** LLS Client - Write response for write request of Alert Level Characteristic. The parameter of this event is a structure of [CYBLE LLS CHAR VALUE T](#) type.

**CYBLE\_EVT\_LNSS\_INDICATION\_ENABLED** LNS Server - Indication for Location and Navigation Service Characteristic was enabled. The parameter of this event is a structure of [CYBLE LNS CHAR VALUE T](#) type.

**CYBLE\_EVT\_LNSS\_INDICATION\_DISABLED** LNS Server - Indication for Location and Navigation Service Characteristic was disabled. The parameter of this event is a structure of [CYBLE LNS CHAR VALUE T](#) type.

**CYBLE\_EVT\_LNSS\_INDICATION\_CONFIRMED** LNS Server - Location and Navigation Service Characteristic Indication was confirmed. The parameter of this event is a structure of [CYBLE LNS CHAR VALUE T](#) type.

**CYBLE\_EVT\_LNSS\_NOTIFICATION\_ENABLED** LNS Server - Notifications for Location and Navigation Service Characteristic were enabled. The parameter of this event is a structure of [CYBLE LNS CHAR VALUE T](#) type.

**CYBLE\_EVT\_LNSS\_NOTIFICATION\_DISABLED** LNS Server - Notifications for Location and Navigation Service Characteristic were disabled. The parameter of this event is a structure of [CYBLE LNS CHAR VALUE T](#) type.

**CYBLE\_EVT\_LNSS\_WRITE\_CHAR** LNS Server - Write Request for Location and Navigation Service Characteristic was received. The parameter of this event is a structure of [CYBLE LNS CHAR VALUE T](#) type.

**CYBLE\_EVT\_LNSC\_INDICATION** LNS Client - Location and Navigation Service Characteristic Indication was received. The parameter of this event is a structure of [CYBLE LNS CHAR VALUE T](#) type.

**CYBLE\_EVT\_LNSC\_NOTIFICATION** LNS Client - Location and Navigation Service Characteristic Notification was received. The parameter of this event is a structure of [CYBLE LNS CHAR VALUE T](#) type.

**CYBLE\_EVT\_LNSC\_READ\_CHAR\_RESPONSE** LNS Client - Read Response for Read Request of Location and Navigation Service Characteristic value. The parameter of this event is a structure of [CYBLE LNS CHAR VALUE T](#) type.





**CYBLE\_EVT\_LNSC\_WRITE\_CHAR\_RESPONSE** LNS Client - Write Response for Write Request of Location and Navigation Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_LNS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_LNSC\_READ\_DESCR\_RESPONSE** LNS Client - Read Response for Read Request of Location and Navigation Service Characteristic Descriptor Read request. The parameter of this event is a structure of [CYBLE\\_LNS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_LNSC\_WRITE\_DESCR\_RESPONSE** LNS Client - Write Response for Write Request of Location and Navigation Service Characteristic Configuration Descriptor value. The parameter of this event is a structure of [CYBLE\\_LNS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_NDCSC\_READ\_CHAR\_RESPONSE** NDCS Client - Read Response for Read Request of Next DST Change Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_NDCS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_PASSS\_NOTIFICATION\_ENABLED** PASS Server - Notifications for Phone Alert Status Service Characteristic were enabled. The parameter of this event is a structure of [CYBLE\\_PASS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_PASSS\_NOTIFICATION\_DISABLED** PASS Server - Notifications for Phone Alert Status Service Characteristic were disabled. The parameter of this event is a structure of [CYBLE\\_PASS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_PASSS\_WRITE\_CHAR** PASS Server - Write Request for Phone Alert Status Service Characteristic was received. The parameter of this event is a structure of [CYBLE\\_PASS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_PASSC\_NOTIFICATION** PASS Client - Phone Alert Status Service Characteristic Notification was received. The parameter of this event is a structure of [CYBLE\\_PASS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_PASSC\_READ\_CHAR\_RESPONSE** PASS Client - Read Response for Read Request of Phone Alert Status Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_PASS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_PASSC\_WRITE\_CHAR\_RESPONSE** PASS Client - Write Response for Write Request of Phone Alert Status Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_PASS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_PASSC\_READ\_DESCR\_RESPONSE** PASS Client - Read Response for Read Request of Phone Alert Status Service Characteristic Descriptor Read request. The parameter of this event is a structure of [CYBLE\\_PASS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_PASSC\_WRITE\_DESCR\_RESPONSE** PASS Client - Write Response for Write Request of Phone Alert Status Service Characteristic Configuration Descriptor value. The parameter of this event is a structure of [CYBLE\\_PASS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_RSCSS\_NOTIFICATION\_ENABLED** RSCS Server - Notifications for Running Speed and Cadence Service Characteristic were enabled. The parameter of this event is a structure of [CYBLE\\_RSCS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_RSCSS\_NOTIFICATION\_DISABLED** RSCS Server - Notifications for Running Speed and Cadence Service Characteristic was disabled. The parameter of this event is a structure of [CYBLE\\_RSCS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_RSCSS\_INDICATION\_ENABLED** RSCS Server - Indication for Running Speed and Cadence Service Characteristic was enabled. The parameter of this event is a structure of [CYBLE\\_RSCS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_RSCSS\_INDICATION\_DISABLED** RSCS Server - Indication for Running Speed and Cadence Service Characteristic was disabled. The parameter of this event is a structure of [CYBLE\\_RSCS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_RSCSS\_INDICATION\_CONFIRMATION** RSCS Server - Running Speed and Cadence Service Characteristic Indication was confirmed. The parameter of this event is a structure of [CYBLE\\_RSCS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_RSCSS\_CHAR\_WRITE** RSCS Server - Write Request for Running Speed and Cadence Service Characteristic was received. The parameter of this event is a structure of [CYBLE\\_RSCS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_RSCSC\_NOTIFICATION** RSCS Client - Running Speed and Cadence Service Characteristic Notification was received. The parameter of this event is a structure of [CYBLE\\_RSCS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_RSCSC\_INDICATION** RSCS Client - Running Speed and Cadence Service Characteristic Indication was received. The parameter of this event is a structure of [CYBLE\\_RSCS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_RSCSC\_READ\_CHAR\_RESPONSE** RSCS Client - Read Response for Read Request of Running Speed and Cadence Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_RSCS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_RSCSC\_WRITE\_CHAR\_RESPONSE** RSCS Client - Write Response for Write Request of Running Speed and Cadence Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_RSCS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_RSCSC\_READ\_DESCR\_RESPONSE** RSCS Client - Read Response for Read Request of Running Speed and Cadence Service Characteristic Descriptor Read request. The parameter of this event is a structure of [CYBLE\\_RSCS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_RSCSC\_WRITE\_DESCR\_RESPONSE** RSCS Client - Write Response for Write Request of Running Speed and Cadence Service Characteristic Configuration Descriptor value. The parameter of this event is a structure of [CYBLE\\_RSCS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_RTUSS\_WRITE\_CHAR\_CMD** RTUS Server - Write command request for Reference Time Update Characteristic value. The parameter of this event is a structure of [CYBLE\\_RTUS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_RTUSC\_READ\_CHAR\_RESPONSE** RTUS Client - Read Response for Read Request of Reference Time Update Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_RTUS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_SCPSS\_NOTIFICATION\_ENABLED** ScPS Server - Notifications for Scan Refresh Characteristic were enabled. The parameter of this event is a structure of [CYBLE\\_SCPS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_SCPSS\_NOTIFICATION\_DISABLED** ScPS Server - Notifications for Scan Refresh Characteristic were disabled. The parameter of this event is a structure of [CYBLE\\_SCPS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_SCPSS\_SCAN\_INT\_WIN\_CHAR\_WRITE** ScPS Client - Read Response for Scan Interval Window Characteristic Value of Scan Parameters Service. The parameter of this event is a structure of [CYBLE\\_SCPS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_SCPSC\_NOTIFICATION** ScPS Client - Scan Refresh Characteristic Notification was received. The parameter of this event is a structure of [CYBLE\\_SCPS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_SCPSC\_READ\_DESCR\_RESPONSE** ScPS Client - Read Response for Scan Refresh Characteristic Descriptor Read Request. The parameter of this event is a structure of [CYBLE\\_SCPS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_SCPSC\_WRITE\_DESCR\_RESPONSE** ScPS Client - Write Response for Scan Refresh Client Characteristic Configuration Descriptor Value. The parameter of this event is a structure of [CYBLE\\_SCPS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_TPSS\_NOTIFICATION\_ENABLED** TPS Server - Notification for Tx Power Level Characteristic was enabled. The parameter of this event is a structure of [CYBLE\\_TPS\\_CHAR\\_VALUE\\_T](#) type.





***CYBLE\_EVT\_TPSS\_NOTIFICATION\_DISABLED*** TPS Server - Notification for Tx Power Level Characteristic was disabled. The parameter of this event is a structure of [CYBLE\\_TPS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_TPSC\_NOTIFICATION*** TPS Client - Tx Power Level Characteristic Notification. The parameter of this event is a structure of [CYBLE\\_TPS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_TPSC\_READ\_CHAR\_RESPONSE*** TPS Client - Read Response for Tx Power Level Characteristic Value Read Request. The parameter of this event is a structure of [CYBLE\\_TPS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_TPSC\_READ\_DESCR\_RESPONSE*** TPS Client - Read Response for Tx Power Level Client Characteristic Configuration Descriptor Value Read Request. The parameter of this event is a structure of [CYBLE\\_TPS\\_DESCR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_TPSC\_WRITE\_DESCR\_RESPONSE*** TPS Client - Write Response for Tx Power Level Characteristic Descriptor Value Write Request. The parameter of this event is a structure of [CYBLE\\_TPS\\_DESCR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_UDSS\_INDICATION\_ENABLED*** UDS Server - Indication for User Data Service Characteristic was enabled. The parameter of this event is a structure of [CYBLE\\_UDS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_UDSS\_INDICATION\_DISABLED*** UDS Server - Indication for User Data Service Characteristic was disabled. The parameter of this event is a structure of [CYBLE\\_UDS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_UDSS\_INDICATION\_CONFIRMED*** UDS Server - User Data Service Characteristic Indication was confirmed. The parameter of this event is a structure of [CYBLE\\_UDS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_UDSS\_NOTIFICATION\_ENABLED*** UDS Server - Notifications for User Data Service Characteristic were enabled. The parameter of this event is a structure of [CYBLE\\_UDS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_UDSS\_NOTIFICATION\_DISABLED*** UDS Server - Notifications for User Data Service Characteristic were disabled. The parameter of this event is a structure of [CYBLE\\_UDS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_UDSS\_READ\_CHAR*** UDS Server - Read Request for User Data Service Characteristic was received. The parameter of this event is a structure of [CYBLE\\_UDS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_UDSS\_WRITE\_CHAR*** UDS Server - Write Request for User Data Service Characteristic was received. The parameter of this event is a structure of [CYBLE\\_UDS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_UDSC\_INDICATION*** UDS Client - User Data Service Characteristic Indication was received. The parameter of this event is a structure of [CYBLE\\_UDS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_UDSC\_NOTIFICATION*** UDS Client - User Data Service Characteristic Notification was received. The parameter of this event is a structure of [CYBLE\\_UDS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_UDSC\_READ\_CHAR\_RESPONSE*** UDS Client - Read Response for Read Request of User Data Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_UDS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_UDSC\_WRITE\_CHAR\_RESPONSE*** UDS Client - Write Response for Write Request of User Data Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_UDS\\_CHAR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_UDSC\_READ\_DESCR\_RESPONSE*** UDS Client - Read Response for Read Request of User Data Service Characteristic Descriptor Read request. The parameter of this event is a structure of [CYBLE\\_UDS\\_DESCR\\_VALUE\\_T](#) type.

***CYBLE\_EVT\_UDSC\_WRITE\_DESCR\_RESPONSE*** UDS Client - Write Response for Write Request of User Data Service Characteristic Configuration Descriptor value. The parameter of this event is a structure of [CYBLE\\_UDS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_UDSC\_ERROR\_RESPONSE** UDS Client - Error Response for Write Request for User Data Service Characteristic Value. The parameter of this event is a structure of [CYBLE\\_UDS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_WPTSS\_NOTIFICATION\_ENABLED** WPTS Server - Notifications for Wireless Power Transfer Service Characteristic were enabled. The parameter of this event is a structure of [CYBLE\\_WPTS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_WPTSS\_NOTIFICATION\_DISABLED** WPTS Server - Notifications for Wireless Power Transfer Service Characteristic were disabled. The parameter of this event is a structure of [CYBLE\\_WPTS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_WPTSS\_INDICATION\_ENABLED** WPTS Server - Indication for Wireless Power Transfer Service Characteristic was enabled. The parameter of this event is a structure of [CYBLE\\_WPTS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_WPTSS\_INDICATION\_DISABLED** WPTS Server - Indication for Wireless Power Transfer Service Characteristic was disabled. The parameter of this event is a structure of [CYBLE\\_WPTS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_WPTSS\_INDICATION\_CONFIRMED** WPTS Server - Wireless Power Transfer Service Characteristic Indication was confirmed. The parameter of this event is a structure of [CYBLE\\_WPTS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_WPTSS\_WRITE\_CHAR** WPTS Server - Write Request for Wireless Power Transfer Service Characteristic was received. The parameter of this event is a structure of [CYBLE\\_WPTS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_WPTSC\_NOTIFICATION** WPTS Client - Wireless Power Transfer Service Characteristic Notification was received. The parameter of this event is a structure of [CYBLE\\_WPTS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_WPTSC\_INDICATION** WPTS Client - Wireless Power Transfer Service Characteristic Indication was received. The parameter of this event is a structure of [CYBLE\\_WPTS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_WPTSC\_WRITE\_CHAR\_RESPONSE** WPTS Client - Write Response for Read Request of Wireless Power Transfer Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_WPTS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_WPTSC\_READ\_CHAR\_RESPONSE** WPTS Client - Read Response for Read Request of Wireless Power Transfer Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_WPTS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_WPTSC\_READ\_DESCR\_RESPONSE** WPTS Client - Read Response for Read Request of Wireless Power Transfer Service Characteristic Descriptor Read request. The parameter of this event is a structure of [CYBLE\\_WPTS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_WPTSC\_WRITE\_DESCR\_RESPONSE** WPTS Client - Write Response for Write Request of Wireless Power Transfer Service Characteristic Configuration Descriptor value. The parameter of this event is a structure of [CYBLE\\_WPTS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_WSSS\_INDICATION\_ENABLED** WSS Server - Indication for Weight Scale Service Characteristic was enabled. The parameter of this event is a structure of [CYBLE\\_WSS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_WSSS\_INDICATION\_DISABLED** WSS Server - Indication for Weight Scale Service Characteristic was disabled. The parameter of this event is a structure of [CYBLE\\_WSS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_WSSS\_INDICATION\_CONFIRMED** WSS Server - Weight Scale Service Characteristic Indication was confirmed. The parameter of this event is a structure of [CYBLE\\_WSS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_WSSC\_INDICATION** WSS Client - Weight Scale Service Characteristic Indication was received. The parameter of this event is a structure of [CYBLE\\_WSS\\_CHAR\\_VALUE\\_T](#) type.



**CYBLE\_EVT\_WSSC\_READ\_CHAR\_RESPONSE** WSS Client - Read Response for Read Request of Weight Scale Service Characteristic value. The parameter of this event is a structure of [CYBLE\\_WSS\\_CHAR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_WSSC\_READ\_DESCR\_RESPONSE** WSS Client - Read Response for Read Request of Weight Scale Service Characteristic Descriptor Read request. The parameter of this event is a structure of [CYBLE\\_WSS\\_DESCR\\_VALUE\\_T](#) type.

**CYBLE\_EVT\_WSSC\_WRITE\_DESCR\_RESPONSE** WSS Client - Write Response for Write Request of Weight Scale Service Characteristic Configuration Descriptor value. The parameter of this event is a structure of [CYBLE\\_WSS\\_DESCR\\_VALUE\\_T](#) type.

## Apple Notification Center Service (ANCS)

### Description

The Apple Notification Center Service provides iOS notifications from Apple devices for accessories.

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The ANCS API names begin with CyBle\_Ancs. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [ANCS Server and Client Function](#)

*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*

- [ANCS Server Functions](#)

*APIs unique to ANCS designs configured as a GATT Server role.*

- [ANCS Client Functions](#)

*APIs unique to ANCS designs configured as a GATT Client role.*

- [ANCS Definitions and Data Structures](#)

*Contains the ANCS specific definitions and data structures used in the ANCS APIs.*

## ANCS Server and Client Function

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.

No letter is appended to the API name: CyBle\_Ancs

### Functions

- void [CyBle\\_AncsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

### Function Documentation

**void CyBle\_AncsRegisterAttrCallback** ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

Registers a callback function for service-specific attribute operations. Service-specific write requests from a peer device will not be handled with an unregistered callback function.

#### Parameters:

<i>callbackFunc</i>	An application layer event callback function to receive events from the BLE Component. The definition of CYBLE_CALLBACK_T for ANCS is: typedef void (* CYBLE_CALLBACK_T) (uint32 eventCode, void
---------------------	---



	<p><i>*eventParam</i>), where:</p> <ul style="list-style-type: none"> <li>• <i>eventCode</i> indicates the event that triggered this callback.</li> <li>• <i>eventParam</i> contains the parameters corresponding to the current event.</li> </ul>
--	--

**Returns:**

None.

**Events**

None.

**Side Effects**

The *\*eventParams* in the callback function should not be used by the application once the callback function execution is finished. Otherwise this data may become corrupted.

## ANCS Server Functions

### Description

APIs unique to ANCS designs configured as a GATT Server role.

A letter 's' is appended to the API name: *CyBle\_Ancss*

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_AncssSetCharacteristicValue \(CYBLE\\_ANCS\\_CHAR\\_INDEX\\_T charIndex, uint8 attrSize, uint8 \\*attrValue\)](#)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_AncssGetCharacteristicValue \(CYBLE\\_ANCS\\_CHAR\\_INDEX\\_T charIndex, uint8 attrSize, uint8 \\*attrValue\)](#)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_AncssGetCharacteristicDescriptor \(CYBLE\\_ANCS\\_CHAR\\_INDEX\\_T charIndex, CYBLE\\_ANCS\\_DESCR\\_INDEX\\_T descrIndex, uint8 attrSize, uint8 \\*attrValue\)](#)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_AncssSendNotification \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_ANCS\\_CHAR\\_INDEX\\_T charIndex, uint8 attrSize, uint8 \\*attrValue\)](#)

### Function Documentation

**[CYBLE\\_API\\_RESULT\\_T CyBle\\_AncssSetCharacteristicValue \(CYBLE\\_ANCS\\_CHAR\\_INDEX\\_T charIndex, uint8 attrSize, uint8 \\* attrValue\)](#)**

Sets the value of the characteristic, as identified by *charIndex*.

**Parameters:**

<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be stored to the GATT database.

**Returns:**

Return value is of type *CYBLE\_API\_RESULT\_T*.

- *CYBLE\_ERROR\_OK* - The request handled successfully.
- *CYBLE\_ERROR\_INVALID\_PARAMETER* - Validation of the input parameter failed.
- *CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE* - An optional characteristic is absent



**Events**

None

**CYBLE\_API\_RESULT\_T** **CyBle\_AncssGetCharacteristicValue** (**CYBLE\_ANCS\_CHAR\_INDEX\_T** *charIndex*, **uint8** *attrSize*, **uint8 \*** *attrValue*)

Gets the value of the characteristic, as identified by *charIndex*.

**Parameters:**

<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the location where characteristic value data should be stored.

**Returns:**

A return value is of type **CYBLE\_API\_RESULT\_T**.

- **CYBLE\_ERROR\_OK** - The characteristic value was read successfully
- **CYBLE\_ERROR\_INVALID\_PARAMETER** - Validation of the input parameter failed.
- **CYBLE\_ERROR\_INVALID\_OPERATION** - Operation is invalid for this characteristic.
- **CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE** - A characteristic is absent.

**Events**

None.

**CYBLE\_API\_RESULT\_T** **CyBle\_AncssGetCharacteristicDescriptor** (**CYBLE\_ANCS\_CHAR\_INDEX\_T** *charIndex*, **CYBLE\_ANCS\_DESCR\_INDEX\_T** *descrIndex*, **uint8** *attrSize*, **uint8 \*** *attrValue*)

Gets a characteristic descriptor of the specified characteristic.

**Parameters:**

<i>charIndex</i>	The index of the characteristic.
<i>descrIndex</i>	The index of the descriptor.
<i>attrSize</i>	The size of the descriptor value attribute.
<i>attrValue</i>	The pointer to the location where characteristic descriptor value data should be stored.

**Returns:**

A return value is of type **CYBLE\_API\_RESULT\_T**.

- **CYBLE\_ERROR\_OK** - The Characteristic Descriptor value was read successfully
- **CYBLE\_ERROR\_INVALID\_PARAMETER** - Validation of the input parameter failed.
- **CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE** - A characteristic is absent.

**Events**

None.

**CYBLE\_API\_RESULT\_T** **CyBle\_AncssSendNotification** (**CYBLE\_CONN\_HANDLE\_T** *connHandle*, **CYBLE\_ANCS\_CHAR\_INDEX\_T** *charIndex*, **uint8** *attrSize*, **uint8 \*** *attrValue*)

Sends a notification of the specified characteristic value, as identified by the *charIndex*.

**Parameters:**

<i>connHandle</i>	The connection handle that consists of the device ID and ATT connection ID.
-------------------	---



<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the client device.

**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - An optional characteristic is absent
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_NTF\_DISABLED - Notification is not enabled by the client

**Events**

None.

## ANCS Client Functions

### Description

APIs unique to ANCS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: CyBle\_Ancsc

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_AncscSetCharacteristicValue \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_ANCS\\_CHAR\\_INDEX\\_T charIndex, uint8 attrSize, uint8 \\*attrValue\)](#)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_AncscSetCharacteristicDescriptor \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_ANCS\\_CHAR\\_INDEX\\_T charIndex, CYBLE\\_ANCS\\_DESCR\\_INDEX\\_T descrIndex, uint8 attrSize, uint8 \\*attrValue\)](#)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_AncscGetCharacteristicDescriptor \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_ANCS\\_CHAR\\_INDEX\\_T charIndex, CYBLE\\_ANCS\\_DESCR\\_INDEX\\_T descrIndex\)](#)

### Function Documentation

**[CYBLE\\_API\\_RESULT\\_T CyBle\\_AncscSetCharacteristicValue \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_ANCS\\_CHAR\\_INDEX\\_T charIndex, uint8 attrSize, uint8 \\* attrValue\)](#)**

This function is used to write the characteristic (which is identified by charIndex) value attribute in the server. The Write Response just confirms the operation success.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the server device.





**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the server is not established.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic.

**Events**

In the case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the ANCS service-specific callback is registered (with CyBle\_AncsRegisterAttrCallback):

- CYBLE\_EVT\_ANCS\_WRITE\_CHAR\_RESPONSE - If the requested attribute is successfully written on the peer device, the details (char index, etc.) are provided with an event parameter structure of type [CYBLE\\_ANCS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the ANCS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - If the requested attribute is successfully written on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - If there some trouble with the requested attribute on the peer device, the details are provided with an event parameter structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_AncscSetCharacteristicDescriptor ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_ANCS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_ANCS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \* attrValue)**

This function is used to write the characteristic Value to the server, as identified by its charIndex.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>descrIndex</i>	The index of the service characteristic descriptor.
<i>attrSize</i>	The size of the characteristic descriptor value attribute.
<i>attrValue</i>	The pointer to the characteristic descriptor value data that should be sent to the server device.

**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_INVALID\_STATE - The state is not valid.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic.
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted on the specified attribute

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:





If the ANCS service-specific callback is registered (with `CyBle_AncsRegisterAttrCallback`):

- `CYBLE_EVT_ANCSC_WRITE_DESCR_RESPONSE` - If the requested attribute is successfully written on the peer device, the details (char index, descr index etc.) are provided with an event parameter structure of type [CYBLE\\_ANCS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the ANCS service-specific callback is not registered):

- `CYBLE_EVT_GATTC_WRITE_RSP` - If the requested attribute is successfully written on the peer device.
- `CYBLE_EVT_GATTC_ERROR_RSP` - If there is some trouble with the requested attribute on the peer device, the details are provided with an event parameter structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) `CyBle_AncscGetCharacteristicDescriptor` ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_ANCS\\_CHAR\\_INDEX\\_T](#) *charIndex*, [CYBLE\\_ANCS\\_DESCR\\_INDEX\\_T](#) *descrIndex*)**

Gets the characteristic descriptor of the specified characteristic.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>descrIndex</i>	The index of the service characteristic descriptor.

**Returns:**

A return value is of type `CYBLE_API_RESULT_T`.

- `CYBLE_ERROR_OK` - The request was sent successfully.
- `CYBLE_ERROR_INVALID_PARAMETER` - Validation of the input parameters failed.
- `CYBLE_ERROR_INVALID_STATE` - The state is not valid.
- `CYBLE_ERROR_MEMORY_ALLOCATION_FAILED` - Memory allocation failed.
- `CYBLE_ERROR_GATT_DB_INVALID_ATTR_HANDLE` - The peer device doesn't have the particular descriptor.
- `CYBLE_ERROR_INVALID_OPERATION` - This operation is not permitted on the specified attribute

**Events**

In case of successful execution (return value = `CYBLE_ERROR_OK`) the next events can appear:

If the ANCS service-specific callback is registered (with `CyBle_AncsRegisterAttrCallback`):

- `CYBLE_EVT_ANCSC_READ_DESCR_RESPONSE` - If the requested attribute is successfully written on the peer device, the details (char index, descr index, value, etc.) are provided with an event parameter structure of type [CYBLE\\_ANCS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the ANCS service-specific callback is not registered):

- `CYBLE_EVT_GATTC_READ_RSP` - If the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with an event parameter structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- `CYBLE_EVT_GATTC_ERROR_RSP` - If there is some trouble with the requested attribute on the peer device, the details are provided with an event parameter structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

## ANCS Definitions and Data Structures

### Description

Contains the ANCS specific definitions and data structures used in the ANCS APIs.



## Data Structures

- struct [CYBLE\\_ANCSS\\_CHAR\\_T](#)
- struct [CYBLE\\_ANCSS\\_T](#)
- struct [CYBLE\\_ANCSC\\_CHAR\\_T](#)
- struct [CYBLE\\_ANCSC\\_T](#)
- struct [CYBLE\\_ANCS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_ANCS\\_DESCR\\_VALUE\\_T](#)

## Enumerations

- enum [CYBLE\\_ANCS\\_CHAR\\_INDEX\\_T](#){ [CYBLE\\_ANCS\\_NS](#), [CYBLE\\_ANCS\\_CP](#), [CYBLE\\_ANCS\\_DS](#), [CYBLE\\_ANCS\\_CHAR\\_COUNT](#)}
- enum [CYBLE\\_ANCS\\_DESCR\\_INDEX\\_T](#){ [CYBLE\\_ANCS\\_CCCD](#), [CYBLE\\_ANCS\\_DESCR\\_COUNT](#)}

## Enumeration Type Documentation

### enum [CYBLE\\_ANCS\\_CHAR\\_INDEX\\_T](#)

ANC Service Characteristics indexes

#### Enumerator

- [CYBLE\\_ANCS\\_NS](#)** Notification Source characteristic index
- [CYBLE\\_ANCS\\_CP](#)** Control Point characteristic index
- [CYBLE\\_ANCS\\_DS](#)** Data Source characteristic index
- [CYBLE\\_ANCS\\_CHAR\\_COUNT](#)** Total count of ANCS characteristics

### enum [CYBLE\\_ANCS\\_DESCR\\_INDEX\\_T](#)

ANC Service Characteristic Descriptors indexes

#### Enumerator

- [CYBLE\\_ANCS\\_CCCD](#)** Client Characteristic Configuration descriptor index
- [CYBLE\\_ANCS\\_DESCR\\_COUNT](#)** Total count of ANCS descriptors

## Alert Notification Service (ANS)

### Description

The Alert Notification Service exposes alert information in a device.

This information includes:

- Type of alert occurring in a device
- Additional text information such as the caller's ID or sender's ID
- Count of new alerts
- Count of unread alert items

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The ANS API names begin with CyBle\_Ans. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [ANS Server and Client Function](#)

*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*



- [ANS Server Functions](#)  
*APIs unique to ANS designs configured as a GATT Server role.*
- [ANS Client Functions](#)  
*APIs unique to ANS designs configured as a GATT Client role.*
- [ANS Definitions and Data Structures](#)  
*Contains the ANS specific definitions and data structures used in the ANS APIs.*

## ANS Server and Client Function

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles. No letter is appended to the API name: CyBle\_Ans

### Functions

- void [CyBle\\_AnsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

### Function Documentation

#### void CyBle\_AnsRegisterAttrCallback ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

Registers a callback function for Alert Notification Service specific attribute operations. Service specific write requests from peer device will not be handled with unregistered callback function.

##### Parameters:

<i>callbackFunc</i>	<p>An application layer event callback function to receive service specific events from the BLE Component. The definition of CYBLE_CALLBACK_T for Alert Notification Service is,</p> <pre>typedef void (* CYBLE_CALLBACK_T) (uint32 eventCode, void *eventParam)</pre> <ul style="list-style-type: none"> <li>• eventCode indicates the event that triggered this callback (e.g. CYBLE_EVT_ANSS_NOTIFICATION_ENABLED)</li> <li>• eventParam contains the parameters corresponding to the current event (e.g. Pointer to <a href="#">CYBLE_ANS_CHAR_VALUE_T</a> structure that contains details of the characteristic for which notification enabled event was triggered).</li> </ul>
---------------------	--

##### Returns:

None

##### Events

None

##### Side Effects

The \*eventParams in the callback function should not be used by the application once the callback function execution is finished. Otherwise this data may become corrupted.



## ANS Server Functions

### Description

APIs unique to ANS designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_Anss

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_AnssSetCharacteristicValue](#) ([CYBLE\\_ANS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_AnssGetCharacteristicValue](#) ([CYBLE\\_ANS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_AnssGetCharacteristicDescriptor](#) ([CYBLE\\_ANS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_ANS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_AnssSendNotification](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_ANS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)

### Function Documentation

**[CYBLE\\_API\\_RESULT\\_T CyBle\\_AnssSetCharacteristicValue](#)** ([CYBLE\\_ANS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)

Sets a characteristic value of Alert Notification Service, which is a value identified by charIndex, to the local database.

#### Parameters:

<i>charIndex</i>	The index of the service characteristic of type CYBLE_ANS_CHAR_INDEX_T. The valid values are, <ul style="list-style-type: none"> <li>• CYBLE_ANS_SUPPORTED_NEW_ALERT_CAT</li> <li>• CYBLE_ANS_SUPPORTED_UNREAD_ALERT_CAT</li> </ul>
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to characteristic value data that should be stored in the GATT database.

#### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request is handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.

#### Events

None

**[CYBLE\\_API\\_RESULT\\_T CyBle\\_AnssGetCharacteristicValue](#)** ([CYBLE\\_ANS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)

Gets a characteristic value of Alert Notification Service. The value is identified by charIndex.

#### Parameters:

<i>charIndex</i>	The index of the service characteristic of type CYBLE_ANS_CHAR_INDEX_T. The valid values are, <ul style="list-style-type: none"> <li>• CYBLE_ANS_NEW_ALERT</li> </ul>
------------------	---



	<ul style="list-style-type: none"> <li>• CYBLE_ANS_UNREAD_ALERT_STATUS</li> </ul>
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the location where characteristic value data should be stored.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request is handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_AnssGetCharacteristicDescriptor (CYBLE\_ANS\_CHAR\_INDEX\_T *charIndex*, CYBLE\_ANS\_DESCR\_INDEX\_T *descrIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Gets a characteristic descriptor of the specified characteristic of Alert Notification Service.

**Parameters:**

<i>charIndex</i>	The index of the service characteristic of type CYBLE_ANS_CHAR_INDEX_T. The valid values are, <ul style="list-style-type: none"> <li>• CYBLE_ANS_NEW_ALERT</li> <li>• CYBLE_ANS_UNREAD_ALERT_STATUS</li> </ul>
<i>descrIndex</i>	The index of the service characteristic descriptor of type CYBLE_ANS_DESCR_INDEX_T. The valid value is, <ul style="list-style-type: none"> <li>• CYBLE_ANS_CCCD</li> </ul>
<i>attrSize</i>	The size of the characteristic descriptor attribute.
<i>attrValue</i>	The pointer to the location where characteristic descriptor value data should be stored.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request is handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_AnssSendNotification (CYBLE\_CONN\_HANDLE\_T *connHandle*, CYBLE\_ANS\_CHAR\_INDEX\_T *charIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Sends a notification with the characteristic value, as specified by its *charIndex*, to the Client device.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic of type CYBLE_ANS_CHAR_INDEX_T. The valid values are, <ul style="list-style-type: none"> <li>• CYBLE_ANS_UNREAD_ALERT_STATUS</li> </ul>



	<ul style="list-style-type: none"> <li>• CYBLE_ANS_NEW_ALERT</li> </ul>
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the Client device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The function completed successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of input parameter is failed.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this. characteristic.
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_NTF\_DISABLED - Notification is not enabled by the client.

**Events**

None

## ANS Client Functions

### Description

APIs unique to ANS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: CyBle\_Ansc

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_AnscGetCharacteristicValue \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_ANS\\_CHAR\\_INDEX\\_T charIndex\)](#)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_AnscSetCharacteristicValue \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_ANS\\_CHAR\\_INDEX\\_T charIndex, uint8 attrSize, uint8 \\*attrValue\)](#)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_AnscSetCharacteristicDescriptor \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_ANS\\_CHAR\\_INDEX\\_T charIndex, CYBLE\\_ANS\\_DESCR\\_INDEX\\_T descrIndex, uint8 attrSize, uint8 \\*attrValue\)](#)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_AnscGetCharacteristicDescriptor \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_ANS\\_CHAR\\_INDEX\\_T charIndex, uint8 descrIndex\)](#)

### Function Documentation

#### [CYBLE\\_API\\_RESULT\\_T CyBle\\_AnscGetCharacteristicValue \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_ANS\\_CHAR\\_INDEX\\_T charIndex\)](#)

Sends a request to the peer device to get a characteristic value, as identified by its charIndex.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully;



- CYBLE\_ERROR\_INVALID\_STATE - The component in in invalid state for current operation.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic.

### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the ANS service-specific callback is registered (with CyBle\_AnsRegisterAttrCallback):

- CYBLE\_EVT\_ANSC\_READ\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index , value, etc.) are provided with event parameter structure of type [CYBLE\\_ANS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the ANS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_AnsSetCharacteristicValue ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_ANS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)**

Sends a request to the peer device to set the characteristic value, as identified by its charIndex.

### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	Size of the Characteristic value attribute.
<i>attrValue</i>	Pointer to the characteristic value data that should be sent to the server device.

### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully.
- CYBLE\_ERROR\_INVALID\_STATE - The component in in invalid state for current operation.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic.

### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the ANS service-specific callback is registered (with CyBle\_AnsRegisterAttrCallback):

- CYBLE\_EVT\_ANSC\_WRITE\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, etc.) are provided with event parameter structure of type [CYBLE\\_ANS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the ANS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.





- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_AnsSetCharacteristicDescriptor ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_ANS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_ANS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)**

Sends a request to the peer device to set the characteristic descriptor of the specified characteristic of Alert Notification Service.

**Parameters:**

<i>connHandle</i>	The BLE peer device connection handle.
<i>charIndex</i>	The index of the ANS characteristic.
<i>descrIndex</i>	The index of the ANS characteristic descriptor.
<i>attrSize</i>	The size of the characteristic descriptor attribute.
<i>attrValue</i>	Pointer to the characteristic descriptor value data that should be sent to the server device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully.
- CYBLE\_ERROR\_INVALID\_STATE - The component in invalid state for current operation.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic.

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the ANS service-specific callback is registered (with CyBle\_AnsRegisterAttrCallback):

- CYBLE\_EVT\_ANSC\_WRITE\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index etc.) are provided with event parameter structure of type [CYBLE\\_ANS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the ANS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_AnsGetCharacteristicDescriptor ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_ANS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 descrIndex)**

Sends a request to the peer device to get the characteristic descriptor of the specified characteristic of Alert Notification Service.

**Parameters:**

<i>connHandle</i>	BLE peer device connection handle.
<i>charIndex</i>	The index of the Service Characteristic.
<i>descrIndex</i>	The index of the Service Characteristic Descriptor.

**Returns:**

Return value is of type `CYBLE_API_RESULT_T`.

- `CYBLE_ERROR_OK` - A request was sent successfully.
- `CYBLE_ERROR_INVALID_PARAMETER` - Validation of the input parameters failed.
- `CYBLE_ERROR_INVALID_STATE` - The component is in invalid state for current operation.
- `CYBLE_ERROR_MEMORY_ALLOCATION_FAILED` - Memory allocation failed.
- `CYBLE_ERROR_INVALID_OPERATION` - Cannot process a request to send PDU due to invalid operation performed by the application.

**Events**

In case of successful execution (return value = `CYBLE_ERROR_OK`) the next events can appear:

If the ANS service-specific callback is registered (with `CyBle_AnsRegisterAttrCallback`):

- `CYBLE_EVT_ANSC_READ_DESCR_RESPONSE` - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index, value, etc.) are provided with event parameter structure of type [CYBLE\\_ANS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the ANS service-specific callback is not registered):

- `CYBLE_EVT_GATTC_READ_RSP` - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- `CYBLE_EVT_GATTC_ERROR_RSP` - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

## ANS Definitions and Data Structures

### Description

Contains the ANS specific definitions and data structures used in the ANS APIs.

### Data Structures

- struct [CYBLE\\_ANS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_ANS\\_DESCR\\_VALUE\\_T](#)
- struct [CYBLE\\_ANSS\\_CHAR\\_T](#)
- struct [CYBLE\\_ANSS\\_T](#)
- struct [CYBLE\\_SRVR\\_FULL\\_CHAR\\_INFO\\_T](#)
- struct [CYBLE\\_ANSC\\_T](#)

### Enumerations

- enum [CYBLE\\_ANS\\_CHAR\\_INDEX\\_T](#) { [CYBLE\\_ANS\\_SUPPORTED\\_NEW\\_ALERT\\_CAT](#), [CYBLE\\_ANS\\_NEW\\_ALERT](#), [CYBLE\\_ANS\\_SUPPORTED\\_UNREAD\\_ALERT\\_CAT](#), [CYBLE\\_ANS\\_UNREAD\\_ALERT\\_STATUS](#), [CYBLE\\_ANS\\_ALERT\\_NTF\\_CONTROL\\_POINT](#), [CYBLE\\_ANS\\_CHAR\\_COUNT](#) }
- enum [CYBLE\\_ANS\\_DESCR\\_INDEX\\_T](#) { [CYBLE\\_ANS\\_CCCD](#), [CYBLE\\_ANS\\_DESCR\\_COUNT](#) }

### Enumeration Type Documentation

#### enum [CYBLE\\_ANS\\_CHAR\\_INDEX\\_T](#)

ANS Characteristic indexes



**Enumerator****CYBLE\_ANS\_SUPPORTED\_NEW\_ALERT\_CAT** Supported New Alert Category Characteristic index**CYBLE\_ANS\_NEW\_ALERT** New Alert Characteristic index**CYBLE\_ANS\_SUPPORTED\_UNREAD\_ALERT\_CAT** Supported Unread Alert Category Characteristic index**CYBLE\_ANS\_UNREAD\_ALERT\_STATUS** Unread Alert Status Characteristic index**CYBLE\_ANS\_ALERT\_NTF\_CONTROL\_POINT** Alert Notification Control Point Characteristic index**CYBLE\_ANS\_CHAR\_COUNT** Total count of ANS characteristics**enum [CYBLE\\_ANS\\_DESCR\\_INDEX\\_T](#)**

ANS Characteristic Descriptors indexes

**Enumerator****CYBLE\_ANS\_CCCD** Client Characteristic Configuration Descriptor index**CYBLE\_ANS\_DESCR\_COUNT** Total count of descriptors

## Battery Service BAS

### Description

The Battery Service exposes the battery level of a single battery or set of batteries in a device.

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The BAS API names begin with CyBle\_Bas. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [BAS Server and Client Function](#)  
*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*
- [BAS Server Functions](#)  
*APIs unique to BAS designs configured as a GATT Server role.*
- [BAS Client Functions](#)  
*APIs unique to BAS designs configured as a GATT Client role.*
- [BAS Definitions and Data Structures](#)  
*Contains the BAS specific definitions and data structures used in the BAS APIs.*

## BAS Server and Client Function

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.

No letter is appended to the API name: CyBle\_Bas

### Functions

- void [CyBle\\_BasRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#)callbackFunc)

## Function Documentation

### void CyBle\_BasRegisterAttrCallback ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

Registers a callback function for service specific attribute operations. Service specific write requests from peer device will not be handled with unregistered callback function.

#### Parameters:

<i>callbackFunc</i>	<p>An application layer event callback function to receive battery service events from the BLE Component. The definition of <a href="#">CYBLE_CALLBACK_T</a> for Battery Service is,</p> <pre>typedef void (* CYBLE_CALLBACK_T) (uint32 eventCode, void *eventParam)</pre> <ul style="list-style-type: none"> <li>eventCode indicates the event that triggered this callback (e.g. <a href="#">CYBLE_EVT_BASS_NOTIFICATION_ENABLED</a>)</li> <li>eventParam contains the parameters corresponding to the current event (e.g., pointer to <a href="#">CYBLE_BAS_CHAR_VALUE_T</a> structure that contains details of the characteristic for which notification enabled event was triggered)</li> </ul>
---------------------	--

#### Returns:

None

#### Events

None

#### Side Effects

The \*eventParams in the callback function should not be used by the application once the callback function execution is finished. Otherwise this data may become corrupted.

## BAS Server Functions

### Description

APIs unique to BAS designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_Bass

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_BassSetCharacteristicValue](#)(uint8 serviceIndex, [CYBLE\\_BAS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_BassGetCharacteristicValue](#)(uint8 serviceIndex, [CYBLE\\_BAS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_BassGetCharacteristicDescriptor](#)(uint8 serviceIndex, [CYBLE\\_BAS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_BAS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_BassSendNotification](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, uint8 serviceIndex, [CYBLE\\_BAS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)



## Function Documentation

**CYBLE\_API\_RESULT\_T CyBle\_BassSetCharacteristicValue (uint8 *serviceIndex*, CYBLE\_BAS\_CHAR\_INDEX\_T *charIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Sets a characteristic value of the service in the local database.

### Parameters:

<i>serviceIndex</i>	The index of the service instance.
<i>charIndex</i>	The index of the service characteristic of type CYBLE_BAS_CHAR_INDEX_T.
<i>attrSize</i>	The size of the characteristic value attribute. A battery level characteristic has 1 byte length.
<i>attrValue</i>	The pointer to the characteristic value data that should be stored to the GATT database.

### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed

### Events

None

**CYBLE\_API\_RESULT\_T CyBle\_BassGetCharacteristicValue (uint8 *serviceIndex*, CYBLE\_BAS\_CHAR\_INDEX\_T *charIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Gets a characteristic value of the Battery service, which is identified by charIndex.

### Parameters:

<i>serviceIndex</i>	The index of the service instance. e.g. If two Battery Services are supported in your design, then first service will be identified by serviceIndex of 0 and the second by serviceIndex of 1.
<i>charIndex</i>	The index of a service characteristic of type CYBLE_BAS_CHAR_INDEX_T.
<i>attrSize</i>	The size of the characteristic value attribute. A battery level characteristic has a 1 byte length.
<i>attrValue</i>	The pointer to the location where characteristic value data should be stored.

### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed

### Events

None

**CYBLE\_API\_RESULT\_T CyBle\_BassGetCharacteristicDescriptor (uint8 *serviceIndex*, CYBLE\_BAS\_CHAR\_INDEX\_T *charIndex*, CYBLE\_BAS\_DESCR\_INDEX\_T *descrIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Gets a characteristic descriptor of a specified characteristic of the Battery service from the local GATT database.



**Parameters:**

<i>serviceIndex</i>	The index of the service instance. e.g. If two Battery Services are supported in your design, then first service will be identified by serviceIndex of 0 and the second by serviceIndex of 1.
<i>charIndex</i>	The index of a service characteristic of type CYBLE_BAS_CHAR_INDEX_T.
<i>descrIndex</i>	The index of a service characteristic descriptor of type CYBLE_BAS_DESCR_INDEX_T.
<i>attrSize</i>	The size of the characteristic descriptor attribute.
<i>attrValue</i>	The pointer to the location where characteristic descriptor value data should be stored.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_BassSendNotification (CYBLE\_CONN\_HANDLE\_T connHandle, uint8 serviceIndex, CYBLE\_BAS\_CHAR\_INDEX\_T charIndex, uint8 attrSize, uint8 \* attrValue)**

This function updates the value of the Battery Level characteristic in the GATT database. If the client has configured a notification on the Battery Level characteristic, the function additionally sends this value using a GATT Notification message.

The CYBLE\_EVT\_BASC\_NOTIFICATION event is received by the peer device, on invoking this function.

**Parameters:**

<i>connHandle</i>	The BLE peer device connection handle
<i>serviceIndex</i>	The index of the service instance. e.g. If two Battery Services are supported in your design, then first service will be identified by serviceIndex of 0 and the second by serviceIndex of 1.
<i>charIndex</i>	The index of a service characteristic of type CYBLE_BAS_CHAR_INDEX_T.
<i>attrSize</i>	The size of the characteristic value attribute. A battery level characteristic has 1 byte length.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the Client device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_NTF\_DISABLED - Notification is not enabled by the client.



## BAS Client Functions

### Description

APIs unique to BAS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: CyBle\_Basc

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_BascGetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, uint8 serviceIndex, [CYBLE\\_BAS\\_CHAR\\_INDEX\\_T](#) charIndex)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_BascSetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, uint8 serviceIndex, [CYBLE\\_BAS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_BAS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_BascGetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, uint8 serviceIndex, [CYBLE\\_BAS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_BAS\\_DESCR\\_INDEX\\_T](#) descrIndex)

### Function Documentation

**[CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_BascGetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, uint8 serviceIndex, [CYBLE\\_BAS\\_CHAR\\_INDEX\\_T](#) charIndex)**

This function is used to read the characteristic value from a server which is identified by charIndex.

This function call can result in generation of the following events based on the response from the server device.

- CYBLE\_EVT\_BASC\_READ\_CHAR\_RESPONSE
- CYBLE\_EVT\_GATTC\_ERROR\_RSP

#### Parameters:

<i>connHandle</i>	The BLE peer device connection handle.
<i>serviceIndex</i>	Index of the service instance. e.g. If two Battery Services are supported in your design, then first service will be identified by serviceIndex of 0 and the second by serviceIndex of 1.
<i>charIndex</i>	The index of a service characteristic of type CYBLE_BAS_CHAR_INDEX_T.

#### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The read request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the server is not established
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic

#### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the BAS service-specific callback is registered (with CyBle\_BasRegisterAttrCallback):

- CYBLE\_EVT\_BASC\_READ\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index , value, etc.) are provided with event parameter structure of type [CYBLE\\_BAS\\_CHAR\\_VALUE\\_T](#).





Otherwise (if the BAS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**CYBLE\_API\_RESULT\_T** **CyBle\_BascSetCharacteristicDescriptor** (**CYBLE\_CONN\_HANDLE\_T** *connHandle*, **uint8** *serviceIndex*, **CYBLE\_BAS\_CHAR\_INDEX\_T** *charIndex*, **CYBLE\_BAS\_DESCR\_INDEX\_T** *descrIndex*, **uint8** *attrSize*, **uint8 \*** *attrValue*)

Sends a request to set characteristic descriptor of specified Battery Service characteristic on the server device. This function call can result in the generation of the following events based on the response from the server device.

- CYBLE\_EVT\_BASC\_WRITE\_DESCR\_RESPONSE
- CYBLE\_EVT\_GATTC\_ERROR\_RSP

One of the following events is received by the peer device, on invoking this function.

- CYBLE\_EVT\_BASS\_NOTIFICATION\_ENABLED
- CYBLE\_EVT\_BASS\_NOTIFICATION\_DISABLED

#### Parameters:

<i>connHandle</i>	The BLE peer device connection handle.
<i>serviceIndex</i>	Index of the service instance. e.g. If two Battery Services are supported in your design, then first service will be identified by serviceIndex of 0 and the second by serviceIndex of 1.
<i>charIndex</i>	The index of a service characteristic of type CYBLE_BAS_CHAR_INDEX_T.
<i>descrIndex</i>	The index of a service characteristic descriptor of type CYBLE_BAS_DESCR_INDEX_T.
<i>attrSize</i>	The size of the characteristic descriptor attribute.
<i>attrValue</i>	Pointer to the characteristic descriptor value data that should be sent to the server device.

#### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_INVALID\_STATE - The state is not valid
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted on the specified attribute

#### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the BAS service-specific callback is registered (with CyBle\_BasRegisterAttrCallback):

- CYBLE\_EVT\_BASC\_WRITE\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index etc.) are provided with event parameter structure of type [CYBLE\\_BAS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the BAS service-specific callback is not registered):



- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_BascGetCharacteristicDescriptor ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, uint8 serviceIndex, [CYBLE\\_BAS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_BAS\\_DESCR\\_INDEX\\_T](#) descrIndex)**

Sends a request to get characteristic descriptor of specified Battery Service characteristic from the server device. This function call can result in generation of the following events based on the response from the server device.

- CYBLE\_EVT\_BASC\_READ\_DESCR\_RESPONSE
- CYBLE\_EVT\_GATTC\_ERROR\_RSP

**Parameters:**

<i>connHandle</i>	The BLE peer device connection handle.
<i>serviceIndex</i>	Index of the service instance. e.g. If two Battery Services are supported in your design, then first service will be identified by serviceIndex of 0 and the second by serviceIndex of 1.
<i>charIndex</i>	The index of a Battery service characteristic of type CYBLE_BAS_CHAR_INDEX_T.
<i>descrIndex</i>	The index of a Battery service characteristic descriptor of type CYBLE_BAS_DESCR_INDEX_T.

**Returns:**

- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_INVALID\_STATE - The state is not valid
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted on the specified attribute

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the BAS service-specific callback is registered (with CyBle\_BasRegisterAttrCallback):

- CYBLE\_EVT\_BASC\_READ\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index, value, etc.) are provided with event parameter structure of type [CYBLE\\_BAS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the BAS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

## BAS Definitions and Data Structures

### Description

Contains the BAS specific definitions and data structures used in the BAS APIs.



## Data Structures

- struct [CYBLE\\_BASS\\_T](#)
- struct [CYBLE\\_BASS\\_NOTIF\\_PAR\\_T](#)
- struct [CYBLE\\_BASC\\_T](#)
- struct [CYBLE\\_BAS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_BAS\\_DESCR\\_VALUE\\_T](#)

## Enumerations

- enum [CYBLE\\_BAS\\_CHAR\\_INDEX\\_T](#){ [CYBLE\\_BAS\\_BATTERY\\_LEVEL](#), [CYBLE\\_BAS\\_CHAR\\_COUNT](#)}
- enum [CYBLE\\_BAS\\_DESCR\\_INDEX\\_T](#){ [CYBLE\\_BAS\\_BATTERY\\_LEVEL\\_CCCD](#), [CYBLE\\_BAS\\_BATTERY\\_LEVEL\\_CPF](#), [CYBLE\\_BAS\\_DESCR\\_COUNT](#)}

## Enumeration Type Documentation

### enum [CYBLE\\_BAS\\_CHAR\\_INDEX\\_T](#)

BAS Characteristic indexes

#### Enumerator

**[CYBLE\\_BAS\\_BATTERY\\_LEVEL](#)** Battery Level characteristic index

**[CYBLE\\_BAS\\_CHAR\\_COUNT](#)** Total count of characteristics

### enum [CYBLE\\_BAS\\_DESCR\\_INDEX\\_T](#)

BAS Characteristic Descriptors indexes

#### Enumerator

**[CYBLE\\_BAS\\_BATTERY\\_LEVEL\\_CCCD](#)** Client Characteristic Configuration descriptor index

**[CYBLE\\_BAS\\_BATTERY\\_LEVEL\\_CPF](#)** Characteristic Presentation Format descriptor index

**[CYBLE\\_BAS\\_DESCR\\_COUNT](#)** Total count of descriptors

## Body Composition Service (BCS)

### Description

The Environmental Sensing Service exposes data related to body composition from a body composition analyzer (Server) intended for consumer healthcare as well as sports/fitness applications.

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The BCS API names begin with CyBle\_Bcs. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [BCS Server and Client Function](#)  
*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*
- [BCS Server Functions](#)  
*APIs unique to BCS designs configured as a GATT Server role.*
- [BCS Client Functions](#)  
*APIs unique to DIS designs configured as a GATT Client role.*
- [BCS Definitions and Data Structures](#)  
*Contains the BCS specific definitions and data structures used in the BCS APIs.*



## BCS Server and Client Function

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.

No letter is appended to the API name: CyBle\_Bcs

### Functions

- void [CyBle\\_BcsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

### Function Documentation

#### void CyBle\_BcsRegisterAttrCallback ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

Registers a callback function for service specific attribute operations. Service specific write requests from peer device will not be handled with unregistered callback function.

##### Parameters:

<i>callbackFunc</i>	<p>An application layer event callback function to receive events from the BLE Component. The definition of CYBLE_CALLBACK_T is:</p> <pre>typedef void (* CYBLE_CALLBACK_T) (uint32 eventCode, void *eventParam)</pre> <ul style="list-style-type: none"> <li>eventCode: Indicates the event that triggered this callback (e.g. CYBLE_EVT_BCSS_INDICATION_ENABLED).</li> <li>eventParam: Contains the parameters corresponding to the current event. (e.g. pointer to <a href="#">CYBLE_BCS_CHAR_VALUE_T</a> structure that contains details of the characteristic for which notification the enabled event was triggered).</li> </ul>
---------------------	--

##### Returns:

None

##### Events

None

## BCS Server Functions

### Description

APIs unique to BCS designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_Bcss

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_BcssSetCharacteristicValue](#) ([CYBLE\\_BCS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_BcssGetCharacteristicValue](#) ([CYBLE\\_BCS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_BcssSetCharacteristicDescriptor](#) ([CYBLE\\_BCS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_BCS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_BcssGetCharacteristicDescriptor](#) ([CYBLE\\_BCS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_BCS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)



- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_BcssSendIndication](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_BCS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)

## Function Documentation

**[CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_BcssSetCharacteristicValue](#) ([CYBLE\\_BCS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)**

Sets a value for one of three characteristic values of the Body Composition Service. The characteristic is identified by charIndex.

### Parameters:

<i>charIndex</i>	The index of a Body Composition Service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be stored to the GATT database.

### Returns:

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The characteristic value was written successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.

### Events

None

**[CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_BcssGetCharacteristicValue](#) ([CYBLE\\_BCS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)**

Reads a characteristic value of the Body Composition Service, which is identified by charIndex from the GATT database.

### Parameters:

<i>charIndex</i>	The index of the Body Composition Service characteristic.
<i>attrSize</i>	The size of the Body Composition Service characteristic value attribute.
<i>attrValue</i>	The pointer to the location where characteristic value data should be stored.

### Returns:

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The characteristic value was read successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.

### Events

None

**[CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_BcssSetCharacteristicDescriptor](#) ([CYBLE\\_BCS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_BCS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \* attrValue)**

Sets the characteristic descriptor of the specified characteristic.

### Parameters:

<i>charIndex</i>	The index of the service characteristic.
<i>charInstance</i>	The instance of the characteristic specified by "charIndex".
<i>attrSize</i>	The size of the characteristic descriptor attribute.



<i>attrValue</i>	The pointer to the descriptor value data to be stored in the GATT database.
------------------	---

**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_BcssGetCharacteristicDescriptor (CYBLE\_BCS\_CHAR\_INDEX\_T *charIndex*, CYBLE\_BCS\_DESCR\_INDEX\_T *descrIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Reads a characteristic descriptor of a specified characteristic of the Body Composition Service from the GATT database.

**Parameters:**

<i>charIndex</i>	The index of the characteristic.
<i>descrIndex</i>	The index of the descriptor.
<i>attrSize</i>	The size of the descriptor value.
<i>attrValue</i>	The pointer to the location where characteristic descriptor value data should be stored.

**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The optional descriptor is absent.

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_BcssSendIndication (CYBLE\_CONN\_HANDLE\_T *connHandle*, CYBLE\_BCS\_CHAR\_INDEX\_T *charIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Sends an indication with a characteristic value of the Body Composition Service, which is a value specified by *charIndex*, to the client's device.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the client's device.

**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted.
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.



- CYBLE\_ERROR\_IND\_DISABLED - Indication is not enabled by the client.

### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the BCS service-specific callback is registered (with CyBle\_BcsRegisterAttrCallback):

- CYBLE\_EVT\_BCSS\_INDICATION\_CONFIRMED - If the indication is successfully delivered to the peer device.

Otherwise (if the BCS service-specific callback is not registered):

- CYBLE\_EVT\_GATTS\_HANDLE\_VALUE\_CNF - If the indication is successfully delivered to the peer device.

## BCS Client Functions

### Description

APIs unique to DIS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: CyBle\_Bcsc

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_BcscGetCharacteristicValue \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_BCS\\_CHAR\\_INDEX\\_T charIndex\)](#)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_BcscSetCharacteristicDescriptor \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_BCS\\_CHAR\\_INDEX\\_T charIndex, CYBLE\\_BCS\\_DESCR\\_INDEX\\_T descrIndex, uint8 attrSize, uint8 \\*attrValue\)](#)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_BcscGetCharacteristicDescriptor \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_BCS\\_CHAR\\_INDEX\\_T charIndex, CYBLE\\_BCS\\_DESCR\\_INDEX\\_T descrIndex\)](#)

### Function Documentation

#### [CYBLE\\_API\\_RESULT\\_T CyBle\\_BcscGetCharacteristicValue \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_BCS\\_CHAR\\_INDEX\\_T charIndex\)](#)

This function is used to read a characteristic value, which is a value identified by charIndex, from the server.

#### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic. Starts with zero.
<i>charInstance</i>	The instance of the characteristic specified by "charIndex".

#### Returns:

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The read request was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the server is not established.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic.

### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:





If the BCS service-specific callback is registered (with `CyBle_BcsRegisterAttrCallback`):

- `CYBLE_EVT_BCSC_READ_CHAR_RESPONSE` - If the requested attribute is successfully read on the peer device, the details (char index, value, etc.) are provided with an event parameter structure of type [CYBLE\\_BCS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the BCS service-specific callback is not registered):

- `CYBLE_EVT_GATTC_READ_RSP` - If the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- `CYBLE_EVT_GATTC_ERROR_RSP` - If there is some trouble with the requested attribute on the peer device, the details are provided with an event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) `CyBle_BcscSetCharacteristicDescriptor` ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_BCS\\_CHAR\\_INDEX\\_T](#) *charIndex*, [CYBLE\\_BCS\\_DESCR\\_INDEX\\_T](#) *descrIndex*, *uint8 attrSize*, *uint8 \*attrValue*)**

This function is used to write the characteristic descriptor to the server, which is identified by *charIndex* and *descrIndex*.

#### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic. Starts with zero.
<i>descrIndex</i>	The index of the service characteristic descriptor.
<i>charInstance</i>	The instance of the characteristic specified by "charIndex".
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic descriptor value data that should be sent to the server device.

#### Returns:

A return value is of type `CYBLE_API_RESULT_T`.

- `CYBLE_ERROR_OK` - The request was sent successfully.
- `CYBLE_ERROR_INVALID_PARAMETER` - Validation of the input parameters failed.
- `CYBLE_ERROR_INVALID_STATE` - The state is not valid.
- `CYBLE_ERROR_MEMORY_ALLOCATION_FAILED` - Memory allocation failed.
- `CYBLE_ERROR_INVALID_OPERATION` - This operation is not permitted on the specified attribute.

#### Events

In case of successful execution (return value = `CYBLE_ERROR_OK`) the next events can appear:

If the BCS service-specific callback is registered (with `CyBle_BcsRegisterAttrCallback`):

- `CYBLE_EVT_BCSC_WRITE_DESCR_RESPONSE` - If the requested attribute is successfully written on the peer device, the details (char index, descr index etc.) are provided with an event parameter structure of type [CYBLE\\_BCS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the BCS service-specific callback is not registered):

- `CYBLE_EVT_GATTC_WRITE_RSP` - If the requested attribute is successfully written on the peer device.
- `CYBLE_EVT_GATTC_ERROR_RSP` - If there is some trouble with the requested attribute on the peer device, the details are provided with an event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_BcscGetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_BCS\\_CHAR\\_INDEX\\_T](#) *charIndex*, [CYBLE\\_BCS\\_DESCR\\_INDEX\\_T](#) *descrIndex*)**

Sends a request to get the characteristic descriptor of the specified characteristic of the service.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic. Starts with zero.
<i>charInstance</i>	The instance of the characteristic specified by "charIndex".
<i>descrIndex</i>	The index of the service characteristic descriptor.

**Returns:**

- [CYBLE\\_ERROR\\_OK](#) - The request was sent successfully.
- [CYBLE\\_ERROR\\_INVALID\\_PARAMETER](#) - Validation of the input parameters failed.
- [CYBLE\\_ERROR\\_INVALID\\_STATE](#) - The state is not valid.
- [CYBLE\\_ERROR\\_MEMORY\\_ALLOCATION\\_FAILED](#) - Memory allocation failed.
- [CYBLE\\_ERROR\\_INVALID\\_OPERATION](#) - This operation is not permitted on the specified attribute.

**Events**

In case of successful execution (return value = [CYBLE\\_ERROR\\_OK](#)) the next events can appear:

If the BCS service-specific callback is registered (with [CyBle\\_BcsRegisterAttrCallback](#)):

- [CYBLE\\_EVT\\_BCSC\\_READ\\_DESCR\\_RESPONSE](#) - If the requested attribute is successfully written on the peer device, the details (char index, descr index, value, etc.) are provided with an event parameter structure of type [CYBLE\\_BCS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the BCS service-specific callback is not registered):

- [CYBLE\\_EVT\\_GATTC\\_READ\\_RSP](#) - If the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with an event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- [CYBLE\\_EVT\\_GATTC\\_ERROR\\_RSP](#) - If there is some trouble with the requested attribute on the peer device, the details are provided with an event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

## BCS Definitions and Data Structures

### Description

Contains the BCS specific definitions and data structures used in the BCS APIs.

### Data Structures

- struct [CYBLE\\_BCS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_BCS\\_DESCR\\_VALUE\\_T](#)
- struct [CYBLE\\_BCSS\\_CHAR\\_T](#)
- struct [CYBLE\\_BCSS\\_T](#)
- struct [CYBLE\\_BCSC\\_CHAR\\_T](#)
- struct [CYBLE\\_BCSC\\_T](#)

### Enumerations

- enum [CYBLE\\_BCS\\_CHAR\\_INDEX\\_T](#){ [CYBLE\\_BCS\\_BODY\\_COMPOSITION\\_FEATURE](#), [CYBLE\\_BCS\\_BODY\\_COMPOSITION\\_MEASUREMENT](#), [CYBLE\\_BCS\\_CHAR\\_COUNT](#)}



- enum [CYBLE\\_BCS\\_DESCR\\_INDEX\\_T](#) { [CYBLE\\_BCS\\_CCCD](#), [CYBLE\\_BCS\\_DESCR\\_COUNT](#) }

## Enumeration Type Documentation

### enum [CYBLE\\_BCS\\_CHAR\\_INDEX\\_T](#)

BCS Characteristic indexes

#### Enumerator

**[CYBLE\\_BCS\\_BODY\\_COMPOSITION\\_FEATURE](#)** Body Composition Feature Characteristic index

**[CYBLE\\_BCS\\_BODY\\_COMPOSITION\\_MEASUREMENT](#)** Body Composition Measurement Characteristic index

**[CYBLE\\_BCS\\_CHAR\\_COUNT](#)** Total count of BCS Characteristics

### enum [CYBLE\\_BCS\\_DESCR\\_INDEX\\_T](#)

BCS Characteristic Descriptors indexes

#### Enumerator

**[CYBLE\\_BCS\\_CCCD](#)** Client Characteristic Configuration Descriptor index

**[CYBLE\\_BCS\\_DESCR\\_COUNT](#)** Total count of Descriptors

## Blood Pressure Service (BLS)

### Description

The Blood Pressure Service exposes blood pressure and other data related to a non-invasive blood pressure monitor for consumer and professional healthcare applications.

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The BLS API names begin with CyBle\_Bls. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [BLS Server and Client Function](#)  
*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*
- [BLS Server Functions](#)  
*APIs unique to BLS designs configured as a GATT Server role.*
- [BLS Client Functions](#)  
*APIs unique to BLS designs configured as a GATT Client role.*
- [BLS Definitions and Data Structures](#)  
*Contains the BLS specific definitions and data structures used in the BLS APIs.*

## BLS Server and Client Function

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.

No letter is appended to the API name: CyBle\_Bls

### Functions

- void [CyBle\\_BlsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

## Function Documentation

### void CyBle\_BlsRegisterAttrCallback ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

Registers a callback function for service specific attribute operations. Service specific write requests from peer device will not be handled with unregistered callback function.

#### Parameters:

<i>callbackFunc</i>	<p>An application layer event callback function to receive events from the BLE Component. The definition of CYBLE_CALLBACK_T for Blood Pressure Service is:</p> <pre>typedef void (* CYBLE_CALLBACK_T) (uint32 eventCode, void *eventParam)</pre> <ul style="list-style-type: none"> <li>eventCode indicates the event that triggered this callback (e.g. CYBLE_EVT_BASS_NOTIFICATION_ENABLED)</li> <li>eventParam contains the parameters corresponding to the current event (e.g. Pointer to <a href="#">CYBLE_BLS_CHAR_VALUE_T</a> structure that contains details of the characteristic for which notification enabled event was triggered).</li> </ul>
---------------------	---

#### Returns:

None

#### Events

None

## BLS Server Functions

### Description

APIs unique to BLS designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_Blss

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_BlssSetCharacteristicValue](#) ([CYBLE\\_BLS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_BlssGetCharacteristicValue](#) ([CYBLE\\_BLS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_BlssGetCharacteristicDescriptor](#) ([CYBLE\\_BLS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_BLS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_BlssSendNotification](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_BLS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_BlssSendIndication](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_BLS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)

## Function Documentation

### [CYBLE\\_API\\_RESULT\\_T](#) CyBle\_BlssSetCharacteristicValue ([CYBLE\\_BLS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)

Sets the value of a characteristic which is identified by charIndex.



**Parameters:**

<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be stored to the GATT database.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_BlssGetCharacteristicValue (CYBLE\_BLS\_CHAR\_INDEX\_T *charIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Gets a characteristic value of the Blood pressure service, which is identified by *charIndex*.

**Parameters:**

<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be in the GATT database.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_BlssGetCharacteristicDescriptor (CYBLE\_BLS\_CHAR\_INDEX\_T *charIndex*, CYBLE\_BLS\_DESCR\_INDEX\_T *descrIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Gets a characteristic descriptor of a specified characteristic of the Blood pressure service from the local GATT database.

**Parameters:**

<i>charIndex</i>	The index of the characteristic.
<i>descrIndex</i>	The index of the characteristic descriptor.
<i>attrSize</i>	The size of the characteristic descriptor attribute.
<i>attrValue</i>	The pointer to the location where characteristic descriptor value data should be stored.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed



- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional descriptor is absent

**Events**

None

**CYBLE\_API\_RESULT\_T** **CyBle\_BlssSendNotification** (**CYBLE\_CONN\_HANDLE\_T** *connHandle*, **CYBLE\_BLS\_CHAR\_INDEX\_T** *charIndex*, **uint8** *attrSize*, **uint8 \*** *attrValue*)

Sends a notification of the specified characteristic to the Client device.

**Parameters:**

<i>connHandle</i>	The connection handle which consist of the device ID and ATT connection ID.
<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the client device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_NTF\_DISABLED - Notification is not enabled by the client

**Events**

None

**CYBLE\_API\_RESULT\_T** **CyBle\_BlssSendIndication** (**CYBLE\_CONN\_HANDLE\_T** *connHandle*, **CYBLE\_BLS\_CHAR\_INDEX\_T** *charIndex*, **uint8** *attrSize*, **uint8 \*** *attrValue*)

Sends an indication of the specified characteristic to the Client device.

**Parameters:**

<i>connHandle</i>	The connection handle which consist of the device ID and ATT connection ID.
<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the client device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed



- CYBLE\_ERROR\_IND\_DISABLED - Indication is not enabled by the client

### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the BLS service-specific callback is registered (with CyBle\_BlsRegisterAttrCallback):

- CYBLE\_EVT\_BLSS\_INDICATION\_CONFIRMED - in case if the indication is successfully delivered to the peer device.

Otherwise (if the BLS service-specific callback is not registered):

- CYBLE\_EVT\_GATTS\_HANDLE\_VALUE\_CNF - in case if the indication is successfully delivered to the peer device.

## BLS Client Functions

### Description

APIs unique to BLS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: CyBle\_Blsc

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_BlscGetCharacteristicValue \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_BLS\\_CHAR\\_INDEX\\_T charIndex\)](#)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_BlscSetCharacteristicDescriptor \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_BLS\\_CHAR\\_INDEX\\_T charIndex, CYBLE\\_BLS\\_DESCR\\_INDEX\\_T descrIndex, uint8 attrSize, uint8 \\*attrValue\)](#)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_BlscGetCharacteristicDescriptor \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_BLS\\_CHAR\\_INDEX\\_T charIndex, CYBLE\\_BLS\\_DESCR\\_INDEX\\_T descrIndex\)](#)

### Function Documentation

#### [CYBLE\\_API\\_RESULT\\_T CyBle\\_BlscGetCharacteristicValue \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_BLS\\_CHAR\\_INDEX\\_T charIndex\)](#)

This function is used to read the characteristic Value from a server which is identified by charIndex.

#### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.

#### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The read request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the server is not established
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic

### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the BLS service-specific callback is registered (with CyBle\_BlsRegisterAttrCallback):





- CYBLE\_EVT\_BLSC\_READ\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index , value, etc.) are provided with event parameter structure of type [CYBLE\\_BLS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the BLS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_BlscSetCharacteristicDescriptor ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_BLS\\_CHAR\\_INDEX\\_T](#) *charIndex*, [CYBLE\\_BLS\\_DESCR\\_INDEX\\_T](#) *descrIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Sends a request to set characteristic descriptor of specified Blood Pressure Service characteristic on the server device.

#### Parameters:

<i>connHandle</i>	The BLE peer device connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>descrIndex</i>	The index of the service characteristic descriptor.
<i>attrSize</i>	The size of the characteristic descriptor value attribute.
<i>attrValue</i>	Pointer to the characteristic descriptor value data that should be sent to the server device.

#### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_INVALID\_STATE - The state is not valid
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted on the specified attribute

#### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the BLS service-specific callback is registered (with CyBle\_BlsRegisterAttrCallback):

- CYBLE\_EVT\_BLSC\_WRITE\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index etc.) are provided with event parameter structure of type [CYBLE\\_BLS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the BLS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).



**[CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_BlscGetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_BLS\\_CHAR\\_INDEX\\_T](#) *charIndex*, [CYBLE\\_BLS\\_DESCR\\_INDEX\\_T](#) *descrIndex*)**

Sends a request to get characteristic descriptor of specified Blood Pressure Service characteristic from the server device. This function call can result in the generation of the following events based on the response from the server device.

- CYBLE\_EVT\_BLSC\_READ\_DESCR\_RESPONSE
- CYBLE\_EVT\_GATTC\_ERROR\_RSP

**Parameters:**

<i>connHandle</i>	The BLE peer device connection handle.
<i>charIndex</i>	The index of a service characteristic.
<i>descrIndex</i>	The index of a service characteristic descriptor.

**Returns:**

Return value is of type [CYBLE\\_API\\_RESULT\\_T](#).

- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_INVALID\_STATE - The state is not valid
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular descriptor
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted on the specified attribute

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the BLS service-specific callback is registered (with [CyBle\\_BlsRegisterAttrCallback](#)):

- CYBLE\_EVT\_BLSC\_READ\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index, value, etc.) are provided with event parameter structure of type [CYBLE\\_BLS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the BLS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

## BLS Definitions and Data Structures

### Description

Contains the BLS specific definitions and data structures used in the BLS APIs.

### Data Structures

- struct [CYBLE\\_BLSS\\_CHAR\\_T](#)
- struct [CYBLE\\_BLSS\\_T](#)
- struct [CYBLE\\_BLSC\\_CHAR\\_T](#)
- struct [CYBLE\\_BLSC\\_T](#)

- struct [CYBLE\\_BLS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_BLS\\_DESCR\\_VALUE\\_T](#)

## Enumerations

- enum [CYBLE\\_BLS\\_CHAR\\_INDEX\\_T](#){ [CYBLE\\_BLS\\_BPM](#), [CYBLE\\_BLS\\_ICP](#), [CYBLE\\_BLS\\_BPF](#), [CYBLE\\_BLS\\_CHAR\\_COUNT](#)}
- enum [CYBLE\\_BLS\\_DESCR\\_INDEX\\_T](#){ [CYBLE\\_BLS\\_CCCD](#), [CYBLE\\_BLS\\_DESCR\\_COUNT](#)}

## Enumeration Type Documentation

### enum [CYBLE\\_BLS\\_CHAR\\_INDEX\\_T](#)

Service Characteristics indexes

#### Enumerator

**[CYBLE\\_BLS\\_BPM](#)** Blood Pressure Measurement characteristic index  
**[CYBLE\\_BLS\\_ICP](#)** Intermediate Cuff Pressure Context characteristic index  
**[CYBLE\\_BLS\\_BPF](#)** Blood Pressure Feature characteristic index  
**[CYBLE\\_BLS\\_CHAR\\_COUNT](#)** Total count of BLS characteristics

### enum [CYBLE\\_BLS\\_DESCR\\_INDEX\\_T](#)

Service Characteristic Descriptors indexes

#### Enumerator

**[CYBLE\\_BLS\\_CCCD](#)** Client Characteristic Configuration descriptor index  
**[CYBLE\\_BLS\\_DESCR\\_COUNT](#)** Total count of BLS descriptors

## Bond Management Service (BMS)

### Description

The Bond Management Service defines how a peer Bluetooth device can manage the storage of bond information, especially the deletion of it, on the Bluetooth device supporting this service.

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The BMS API names begin with CyBle\_Bms. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [BMS Server and Client Function](#)  
*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*
- [BMS Server Functions](#)  
*APIs unique to BMS designs configured as a GATT Server role.*
- [BMS Client Functions](#)  
*APIs unique to BMS designs configured as a GATT Client role.*
- [BMS Definitions and Data Structures](#)  
*Contains the BMS specific definitions and data structures used in the BMS APIs.*



## BMS Server and Client Function

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles. No letter is appended to the API name: CyBle\_Bms

### Functions

- void [CyBle\\_BmsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

### Function Documentation

#### void [CyBle\\_BmsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

Registers a callback function for service specific attribute operations. Service specific write requests from peer device will not be handled with unregistered callback function.

##### Parameters:

<i>callbackFunc</i>	<p>An application layer event callback function to receive events from the BLE Component. The definition of CYBLE_CALLBACK_T for BM Service is:</p> <pre>typedef void (* CYBLE_CALLBACK_T) (uint32 eventCode, void *eventParam)</pre> <ul style="list-style-type: none"> <li>eventCode indicates the event that triggered this callback.</li> <li>eventParam contains the parameters corresponding to the current event.</li> </ul>
---------------------	---

##### Returns:

None

##### Events

None

##### Side Effects

The \*eventParams in the callback function should not be used by the application once the callback function execution is finished. Otherwise this data may become corrupted.

## BMS Server Functions

### Description

APIs unique to BMS designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_Bmss

### Functions

- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_BmssSetCharacteristicValue](#) ([CYBLE\\_BMS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_BmssGetCharacteristicValue](#) ([CYBLE\\_BMS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_BmssSetCharacteristicDescriptor](#) ([CYBLE\\_BMS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_BMS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)



- [CYBLE\\_API\\_RESULT\\_T CyBle\\_BmssGetCharacteristicDescriptor](#) ([CYBLE\\_BMS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_BMS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)

## Function Documentation

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_BmssSetCharacteristicValue ([CYBLE\\_BMS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)**

Sets a characteristic value of the service identified by charIndex.

### Parameters:

<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be stored in the GATT database.

### Returns:

The return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - An optional characteristic is absent.

### Events

None

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_BmssGetCharacteristicValue ([CYBLE\\_BMS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)**

Gets a characteristic value of the service, which is identified by charIndex.

### Parameters:

<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the location where Characteristic value data should be stored.

### Returns:

The return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - An optional characteristic is absent.

### Events

None

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_BmssSetCharacteristicDescriptor ([CYBLE\\_BMS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_BMS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \* attrValue)**

Sets a characteristic descriptor of a specified characteristic of the service.

### Parameters:

<i>charIndex</i>	The index of a service characteristic of type CYBLE_BMS_CHAR_INDEX_T.
<i>descrIndex</i>	The index of a service characteristic descriptor of type



	CYBLE_BMS_DESCR_INDEX_T.
<i>attrSize</i>	The size of the characteristic descriptor attribute.
<i>attrValue</i>	The pointer to the descriptor value data that should be stored to the GATT database.

**Returns:**

The return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request is handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_BmssGetCharacteristicDescriptor (CYBLE\_BMS\_CHAR\_INDEX\_T charIndex, CYBLE\_BMS\_DESCR\_INDEX\_T descrIndex, uint8 attrSize, uint8 \* attrValue)**

Gets a characteristic descriptor of a specified characteristic of the service.

**Parameters:**

<i>charIndex</i>	The index of a service characteristic of type CYBLE_BMS_CHAR_INDEX_T.
<i>descrIndex</i>	The index of a service characteristic descriptor of type CYBLE_BMS_DESCR_INDEX_T.
<i>attrSize</i>	The size of the characteristic descriptor attribute.
<i>attrValue</i>	The pointer to the location where characteristic descriptor value data should be stored.

**Returns:**

The return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.

**Events**

None

## BMS Client Functions

### Description

APIs unique to BMS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: CyBle\_Bmsc

### Functions

- CYBLE\_API\_RESULT\_T CyBle\_BmscGetCharacteristicValue (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_BMS\_CHAR\_INDEX\_T charIndex)
- CYBLE\_API\_RESULT\_T CyBle\_BmscSetCharacteristicValue (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_BMS\_CHAR\_INDEX\_T charIndex, uint8 attrSize, uint8 \*attrValue)
- CYBLE\_API\_RESULT\_T CyBle\_BmscReliableWriteCharacteristicValue (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_BMS\_CHAR\_INDEX\_T charIndex, uint8 attrSize, uint8 \*attrValue)



- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_BmscGetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_BMS\\_CHAR\\_INDEX\\_T](#) *charIndex*, [CYBLE\\_BMS\\_DESCR\\_INDEX\\_T](#) *descrIndex*)

## Function Documentation

### [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_BmscGetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_BMS\\_CHAR\\_INDEX\\_T](#) *charIndex*)

This function is used to read the characteristic value from a server which is identified by *charIndex*.

#### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.

#### Returns:

The return value is of type [CYBLE\\_API\\_RESULT\\_T](#).

- [CYBLE\\_ERROR\\_OK](#) - The read request was sent successfully.
- [CYBLE\\_ERROR\\_INVALID\\_PARAMETER](#) - Validation of the input parameters failed.
- [CYBLE\\_ERROR\\_GATT\\_DB\\_INVALID\\_ATTR\\_HANDLE](#) - The peer device doesn't have the particular characteristic.
- [CYBLE\\_ERROR\\_MEMORY\\_ALLOCATION\\_FAILED](#) - Memory allocation failed.
- [CYBLE\\_ERROR\\_INVALID\\_STATE](#) - Connection with the server is not established.
- [CYBLE\\_ERROR\\_INVALID\\_OPERATION](#) - Operation is invalid for this characteristic.

#### Events

In case of successful execution (return value = [CYBLE\\_ERROR\\_OK](#)) the next events can appear:

If the BMS service-specific callback is registered (with [CyBle\\_BmsRegisterAttrCallback](#)):

- [CYBLE\\_EVT\\_BMSC\\_READ\\_CHAR\\_RESPONSE](#) - in case if the requested attribute is successfully wrote on the peer device, the details (*char index* , *value*, etc.) are provided with event parameter structure of type [CYBLE\\_BMS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the BMS service-specific callback is not registered):

- [CYBLE\\_EVT\\_GATTC\\_READ\\_RSP](#) - in case if the requested attribute is successfully read on the peer device, the details (*handle*, *value*, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- [CYBLE\\_EVT\\_GATTC\\_ERROR\\_RSP](#) - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

### [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_BmscSetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_BMS\\_CHAR\\_INDEX\\_T](#) *charIndex*, *uint8 attrSize*, *uint8 \* attrValue*)

This function is used to write the characteristic (which is identified by *charIndex*) value attribute to the server. The function supports a long write procedure - it depends on the *attrSize* parameter - if it is larger than the current MTU size - 1, then the long write will be executed.

The Write response just confirms the operation success.

#### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the





	server device.
--	----------------

**Returns:**

The return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the server is not established.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic.

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the BMS service-specific callback is registered (with CyBle\_BmsRegisterAttrCallback):

- CYBLE\_EVT\_BMSC\_WRITE\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, etc.) are provided with event parameter structure of type [CYBLE\\_BMS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the BMS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_BmscReliableWriteCharacteristicValue ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_BMS\\_CHAR\\_INDEX\\_T](#) *charIndex*, *uint8 attrSize*, *uint8 \* attrValue*)**

This function is used to perform a reliable write command for the Bond Management Control Point characteristic (identified by *charIndex*) value attribute to the server.

The Write response just confirms the operation success.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the server device.

**Returns:**

The return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the server is not established.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic.



**[CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_BmscGetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_BMS\\_CHAR\\_INDEX\\_T](#) *charIndex*, [CYBLE\\_BMS\\_DESCR\\_INDEX\\_T](#) *descrIndex*)**

Gets the characteristic descriptor of the specified characteristic.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic.
<i>descrIndex</i>	The index of the service characteristic descriptor.

**Returns:**

Return value is of type [CYBLE\\_API\\_RESULT\\_T](#).

- [CYBLE\\_ERROR\\_OK](#) - The request was sent successfully.
- [CYBLE\\_ERROR\\_INVALID\\_PARAMETER](#) - Validation of the input parameters failed.
- [CYBLE\\_ERROR\\_INVALID\\_STATE](#) - The state is not valid.
- [CYBLE\\_ERROR\\_MEMORY\\_ALLOCATION\\_FAILED](#) - Memory allocation failed.
- [CYBLE\\_ERROR\\_GATT\\_DB\\_INVALID\\_ATTR\\_HANDLE](#) - The peer device doesn't have the particular descriptor.
- [CYBLE\\_ERROR\\_INVALID\\_OPERATION](#) - This operation is not permitted on the specified attribute.

**Events**

In case of successful execution (return value = [CYBLE\\_ERROR\\_OK](#)) the next events can appear:

If the BMS service-specific callback is registered (with [CyBle\\_BmsRegisterAttrCallback](#)):

- [CYBLE\\_EVT\\_BMSC\\_READ\\_DESCR\\_RESPONSE](#) - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index, value, etc.) are provided with event parameter structure of type [CYBLE\\_BMS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the BMS service-specific callback is not registered):

- [CYBLE\\_EVT\\_GATTC\\_READ\\_RSP](#) - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- [CYBLE\\_EVT\\_GATTC\\_ERROR\\_RSP](#) - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

## BMS Definitions and Data Structures

### Description

Contains the BMS specific definitions and data structures used in the BMS APIs.

### Data Structures

- struct [CYBLE\\_BMSS\\_CHAR\\_T](#)
- struct [CYBLE\\_BMSS\\_T](#)
- struct [CYBLE\\_BMSC\\_CHAR\\_T](#)
- struct [CYBLE\\_BMSC\\_T](#)
- struct [CYBLE\\_BMS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_BMS\\_DESCR\\_VALUE\\_T](#)



## Enumerations

- enum [CYBLE\\_BMS\\_CHAR\\_INDEX\\_T](#) { [CYBLE\\_BMS\\_BMCP](#), [CYBLE\\_BMS\\_BMFT](#), [CYBLE\\_BMS\\_CHAR\\_COUNT](#) }
- enum [CYBLE\\_BMS\\_DESCR\\_INDEX\\_T](#) { [CYBLE\\_BMS\\_CEPD](#), [CYBLE\\_BMS\\_DESCR\\_COUNT](#) }

## Enumeration Type Documentation

### enum [CYBLE\\_BMS\\_CHAR\\_INDEX\\_T](#)

Service Characteristics indexes

#### Enumerator

**[CYBLE\\_BMS\\_BMCP](#)** Bond Management Control Point characteristic index

**[CYBLE\\_BMS\\_BMFT](#)** Bond Management Feature characteristic index

**[CYBLE\\_BMS\\_CHAR\\_COUNT](#)** Total count of BMS characteristics

### enum [CYBLE\\_BMS\\_DESCR\\_INDEX\\_T](#)

Service Characteristic Descriptors indexes

#### Enumerator

**[CYBLE\\_BMS\\_CEPD](#)** Characteristic Extended Properties descriptor index

**[CYBLE\\_BMS\\_DESCR\\_COUNT](#)** Total count of CGMS descriptors

## Continuous Glucose Monitoring Service (CGMS)

### Description

The Continuous Glucose Monitoring Service exposes glucose measurement and other data related to a personal CGM sensor for healthcare applications.

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The BMS API names begin with CyBle\_Cgms. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [CGMS Server and Client Function](#)  
*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*
- [CGMS Server Functions](#)  
*APIs unique to BMS designs configured as a GATT Server role.*
- [CGMS Client Functions](#)  
*APIs unique to BMS designs configured as a GATT Client role.*
- [CGMS Definitions and Data Structures](#)  
*Contains the CGMS specific definitions and data structures used in the CGMS APIs.*

## CGMS Server and Client Function

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.

No letter is appended to the API name: CyBle\_Cgms



## Functions

- void [CyBle\\_CgmsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

## Function Documentation

### void [CyBle\\_CgmsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

Registers a callback function for service specific attribute operations. Service specific write requests from peer device will not be handled with unregistered callback function.

#### Parameters:

<i>callbackFunc</i>	An application layer event callback function to receive events from the BLE Component. The definition of <a href="#">CYBLE_CALLBACK_T</a> for CGM Service is,
---------------------	---

typedef void (\* [CYBLE\\_CALLBACK\\_T](#)) (uint32 eventCode, void \*eventParam)

- eventCode indicates the event that triggered this callback.
- eventParam contains the parameters corresponding to the current event.

#### Returns:

None.

#### Events

None

#### Side Effects

The \*eventParams in the callback function should not be used by the application once the callback function execution is finished. Otherwise this data may become corrupted.

## CGMS Server Functions

### Description

APIs unique to BMS designs configured as a GATT Server role.

A letter 's' is appended to the API name: [CyBle\\_Cgmss](#)

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CgmssSetCharacteristicValue](#) ([CYBLE\\_CGMS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CgmssGetCharacteristicValue](#) ([CYBLE\\_CGMS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CgmssSetCharacteristicDescriptor](#) ([CYBLE\\_CGMS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_CGMS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CgmssGetCharacteristicDescriptor](#) ([CYBLE\\_CGMS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_CGMS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CgmssSendNotification](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_CGMS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CgmssSendIndication](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_CGMS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)



## Function Documentation

**CYBLE\_API\_RESULT\_T CyBle\_CgmssSetCharacteristicValue (CYBLE\_CGMS\_CHAR\_INDEX\_T *charIndex*, *uint8 attrSize*, *uint8 \* attrValue*)**

Sets a characteristic value of the service identified by *charIndex*.

### Parameters:

<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be stored in the GATT database.

### Returns:

The return value is of type `CYBLE_API_RESULT_T`.

- `CYBLE_ERROR_OK` - The request handled successfully.
- `CYBLE_ERROR_INVALID_PARAMETER` - Validation of the input parameter failed.
- `CYBLE_ERROR_GATT_DB_INVALID_ATTR_HANDLE` - An optional characteristic is absent.

### Events

None

**CYBLE\_API\_RESULT\_T CyBle\_CgmssGetCharacteristicValue (CYBLE\_CGMS\_CHAR\_INDEX\_T *charIndex*, *uint8 attrSize*, *uint8 \* attrValue*)**

Gets a characteristic value of the service identified by *charIndex*.

### Parameters:

<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the location where Characteristic value data should be stored.

### Returns:

The return value is of type `CYBLE_API_RESULT_T`.

- `CYBLE_ERROR_OK` - The request handled successfully.
- `CYBLE_ERROR_INVALID_PARAMETER` - Validation of the input parameter failed.
- `CYBLE_ERROR_GATT_DB_INVALID_ATTR_HANDLE` - An optional characteristic is absent.

### Events

None

**CYBLE\_API\_RESULT\_T CyBle\_CgmssSetCharacteristicDescriptor (CYBLE\_CGMS\_CHAR\_INDEX\_T *charIndex*, CYBLE\_CGMS\_DESCR\_INDEX\_T *descrIndex*, *uint8 attrSize*, *uint8 \* attrValue*)**

Sets a characteristic descriptor of a specified characteristic of the service.

### Parameters:

<i>charIndex</i>	The index of a service characteristic of type <code>CYBLE_CGMS_CHAR_INDEX_T</code> .
<i>descrIndex</i>	The index of a service characteristic descriptor of type <code>CYBLE_CGMS_DESCR_INDEX_T</code> .
<i>attrSize</i>	The size of the characteristic descriptor attribute.
<i>attrValue</i>	The pointer to the descriptor value data that should be stored to the



	GATT database.
--	----------------

**Returns:**

The return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request is handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_CgmssGetCharacteristicDescriptor (CYBLE\_CGMS\_CHAR\_INDEX\_T *charIndex*, CYBLE\_CGMS\_DESCR\_INDEX\_T *descrIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Gets a characteristic descriptor of a specified characteristic of the service.

**Parameters:**

<i>charIndex</i>	The index of a service characteristic of type CYBLE_CGMS_CHAR_INDEX_T.
<i>descrIndex</i>	The index of a service characteristic descriptor of type CYBLE_CGMS_DESCR_INDEX_T.
<i>attrSize</i>	The size of the characteristic descriptor attribute.
<i>attrValue</i>	The pointer to the location where characteristic descriptor value data should be stored.

**Returns:**

The return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_CgmssSendNotification (CYBLE\_CONN\_HANDLE\_T *connHandle*, CYBLE\_CGMS\_CHAR\_INDEX\_T *charIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Sends a notification of the specified characteristic to the client device, as defined by the charIndex value.

**Parameters:**

<i>connHandle</i>	The connection handle which consists of the device ID and ATT connection ID.
<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the Characteristic value data that should be sent to the client device.

**Returns:**

The return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - An optional characteristic is absent.
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established.



- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_NTF\_DISABLED - Notification is not enabled by the client.

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_CgmssSendIndication (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_CGMS\_CHAR\_INDEX\_T charIndex, uint8 attrSize, uint8 \* attrValue)**

Sends an indication of the specified characteristic to the client device, as defined by the charIndex value.

**Parameters:**

<i>connHandle</i>	The connection handle which consists of the device ID and ATT connection ID.
<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the Characteristic value data that should be sent to Client device.

**Returns:**

The return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - An optional characteristic is absent.
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_IND\_DISABLED - Indication is not enabled by the client.

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the CGMS service-specific callback is registered (with CyBle\_CgmsRegisterAttrCallback):

- CYBLE\_EVT\_CGMSS\_INDICATION\_CONFIRMED - in case if the indication is successfully delivered to the peer device.

Otherwise (if the CGMS service-specific callback is not registered):

- CYBLE\_EVT\_GATTS\_HANDLE\_VALUE\_CNF - in case if the indication is successfully delivered to the peer device.

## CGMS Client Functions

### Description

APIs unique to BMS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: CyBle\_Cgmssc

### Functions

- CYBLE\_API\_RESULT\_T CyBle\_CgmsscSetCharacteristicValue (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_CGMS\_CHAR\_INDEX\_T charIndex, uint8 attrSize, uint8 \* attrValue)
- CYBLE\_API\_RESULT\_T CyBle\_CgmsscGetCharacteristicValue (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_CGMS\_CHAR\_INDEX\_T charIndex)





- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_CgmscSetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_CGMS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_CGMS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_CgmscGetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_CGMS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_CGMS\\_DESCR\\_INDEX\\_T](#) descrIndex)

## Function Documentation

### [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_CgmscSetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_CGMS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)

This function is used to write the characteristic (identified by charIndex) value attribute to the server. The Write Response just confirms the operation success.

#### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the server device.

#### Returns:

The return value is of type [CYBLE\\_API\\_RESULT\\_T](#).

- [CYBLE\\_ERROR\\_OK](#) - The request was sent successfully.
- [CYBLE\\_ERROR\\_INVALID\\_PARAMETER](#) - Validation of the input parameters failed.
- [CYBLE\\_ERROR\\_MEMORY\\_ALLOCATION\\_FAILED](#) - Memory allocation failed.
- [CYBLE\\_ERROR\\_INVALID\\_STATE](#) - Connection with the server is not established.
- [CYBLE\\_ERROR\\_GATT\\_DB\\_INVALID\\_ATTR\\_HANDLE](#) - The peer device doesn't have the particular characteristic.
- [CYBLE\\_ERROR\\_INVALID\\_OPERATION](#) - Operation is invalid for this characteristic.

#### Events

In case of successful execution (return value = [CYBLE\\_ERROR\\_OK](#)) the next events can appear:

If the CGMS service-specific callback is registered (with [CyBle\\_CgmsRegisterAttrCallback](#)):

- [CYBLE\\_EVT\\_CGMS\\_WRITE\\_CHAR\\_RESPONSE](#) - in case if the requested attribute is successfully wrote on the peer device, the details (char index, etc.) are provided with event parameter structure of type [CYBLE\\_CGMS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the CGMS service-specific callback is not registered):

- [CYBLE\\_EVT\\_GATTC\\_WRITE\\_RSP](#) - in case if the requested attribute is successfully wrote on the peer device.
- [CYBLE\\_EVT\\_GATTC\\_ERROR\\_RSP](#) - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

### [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_CgmscGetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_CGMS\\_CHAR\\_INDEX\\_T](#) charIndex)

This function is used to read the characteristic Value from a server identified by charIndex.

#### Parameters:

<i>connHandle</i>	The connection handle.
-------------------	------------------------



<i>charIndex</i>	The index of the service characteristic.
------------------	--

**Returns:**

The return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The read request was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the server is not established.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic.

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the CGMS service-specific callback is registered (with CyBle\_CgmsRegisterAttrCallback):

- CYBLE\_EVT\_CGMSC\_READ\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index , value, etc.) are provided with event parameter structure of type [CYBLE\\_CGMS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the CGMS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_CgmscSetCharacteristicDescriptor ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_CGMS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_CGMS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \* attrValue)**

Sets the Characteristic Descriptor of the specified characteristic.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic.
<i>descrIndex</i>	The index of a service characteristic descriptor.
<i>attrSize</i>	The size of the characteristic descriptor value attribute.
<i>attrValue</i>	The pointer to the characteristic descriptor value data that should be sent to the server device.

**Returns:**

The return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_INVALID\_STATE - The state is not valid.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic.
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted on the specified attribute.



## Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the CGMS service-specific callback is registered (with CyBle\_CgmsRegisterAttrCallback):

- CYBLE\_EVT\_CGMS\_WRITE\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index etc.) are provided with event parameter structure of type [CYBLE\\_CGMS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the CGMS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_CgmsGetCharacteristicDescriptor ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_CGMS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_CGMS\\_DESCR\\_INDEX\\_T](#) descrIndex)**

Gets the characteristic descriptor of the specified characteristic.

### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic.
<i>descrIndex</i>	The index of the service characteristic descriptor.

### Returns:

The return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_INVALID\_STATE - The state is not valid.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular descriptor.
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted on the specified attribute.

## Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the CGMS service-specific callback is registered (with CyBle\_CgmsRegisterAttrCallback):

- CYBLE\_EVT\_CGMS\_READ\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index, value, etc.) are provided with event parameter structure of type [CYBLE\\_CGMS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the CGMS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).



## CGMS Definitions and Data Structures

### Description

Contains the CGMS specific definitions and data structures used in the CGMS APIs.

### Data Structures

- struct [CYBLE\\_CGMSS\\_CHAR\\_T](#)
- struct [CYBLE\\_CGMSS\\_T](#)
- struct [CYBLE\\_CGMSC\\_CHAR\\_T](#)
- struct [CYBLE\\_CGMSC\\_T](#)
- struct [CYBLE\\_CGMS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_CGMS\\_DESCR\\_VALUE\\_T](#)

### Enumerations

- enum [CYBLE\\_CGMS\\_CHAR\\_INDEX\\_T](#) { [CYBLE\\_CGMS\\_CGMT](#), [CYBLE\\_CGMS\\_CGFT](#), [CYBLE\\_CGMS\\_CGST](#), [CYBLE\\_CGMS\\_SSTM](#), [CYBLE\\_CGMS\\_SRTM](#), [CYBLE\\_CGMS\\_RACP](#), [CYBLE\\_CGMS\\_SOCP](#), [CYBLE\\_CGMS\\_CHAR\\_COUNT](#) }
- enum [CYBLE\\_CGMS\\_DESCR\\_INDEX\\_T](#) { [CYBLE\\_CGMS\\_CCCD](#), [CYBLE\\_CGMS\\_DESCR\\_COUNT](#) }

### Enumeration Type Documentation

#### enum [CYBLE\\_CGMS\\_CHAR\\_INDEX\\_T](#)

Service Characteristics indexes

##### Enumerator

***CYBLE\_CGMS\_CGMT*** CGM Measurement characteristic index  
***CYBLE\_CGMS\_CGFT*** CGM Feature characteristic index  
***CYBLE\_CGMS\_CGST*** CGM Status characteristic index  
***CYBLE\_CGMS\_SSTM*** CGM Session Start Time characteristic index  
***CYBLE\_CGMS\_SRTM*** CGM Session Run Time characteristic index  
***CYBLE\_CGMS\_RACP*** Record Access Control Point characteristic index  
***CYBLE\_CGMS\_SOCP*** CGM Specific Ops Control Point characteristic index  
***CYBLE\_CGMS\_CHAR\_COUNT*** Total count of CGMS characteristics

#### enum [CYBLE\\_CGMS\\_DESCR\\_INDEX\\_T](#)

Service Characteristic Descriptors indexes

##### Enumerator

***CYBLE\_CGMS\_CCCD*** Client Characteristic Configuration descriptor index  
***CYBLE\_CGMS\_DESCR\_COUNT*** Total count of CGMS descriptors

## Cycling Power Service (CPS)

### Description

The Cycling Power Service (CPS) exposes power- and force-related data and optionally speed- and cadence-related data from a Cycling Power sensor (GATT Server) intended for sports and fitness applications.

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.



The CPS API names begin with CyBle\_Cps. In addition to this, the APIs also append the GATT role initial letter in the API name.

## Modules

- [CPS Server and Client Function](#)  
*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*
- [CPS Server Functions](#)  
*APIs unique to CPS designs configured as a GATT Server role.*
- [CPS Client Functions](#)  
*APIs unique to CPS designs configured as a GATT Client role.*
- [CPS Definitions and Data Structures](#)  
*Contains the CPS specific definitions and data structures used in the CPS APIs.*

## CPS Server and Client Function

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles. No letter is appended to the API name: CyBle\_Cps

### Functions

- void [CyBle\\_CpsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

### Function Documentation

#### void CyBle\_CpsRegisterAttrCallback ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

Registers a callback function for service specific attribute operations. Service specific write requests from peer device will not be handled with unregistered callback function.

##### Parameters:

<i>callbackFunc</i>	<p>An application layer event callback function to receive events from the BLE Component. The definition of CYBLE_CALLBACK_T for CPS is:</p> <pre>typedef void (* CYBLE_CALLBACK_T) (uint32 eventCode, void *eventParam)</pre> <ul style="list-style-type: none"> <li>• eventCode indicates the event that triggered this callback.</li> <li>• eventParam contains the parameters corresponding to the current event.</li> </ul>
---------------------	--

##### Returns:

None.

##### Events

None

## CPS Server Functions

### Description

APIs unique to CPS designs configured as a GATT Server role.



A letter 's' is appended to the API name: CyBle\_Cpss

## Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CpssSetCharacteristicValue](#) ([CYBLE\\_CPS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CpssGetCharacteristicValue](#) ([CYBLE\\_CPS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CpssSetCharacteristicDescriptor](#) ([CYBLE\\_CPS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_CPS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CpssGetCharacteristicDescriptor](#) ([CYBLE\\_CPS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_CPS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CpssSendNotification](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_CPS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CpssSendIndication](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_CPS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CpssStartBroadcast](#) (uint16 advInterval, uint8 attrSize, uint8 \*attrValue)
- void [CyBle\\_CpssStopBroadcast](#) (void)

## Function Documentation

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_CpssSetCharacteristicValue ([CYBLE\\_CPS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)**

Sets a characteristic value of the service in the local database.

### Parameters:

<i>charIndex</i>	The index of a service characteristic of type CYBLE_CPS_CHAR_INDEX_T.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be stored to the GATT database.

### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request is handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed

### Events

None

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_CpssGetCharacteristicValue ([CYBLE\\_CPS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)**

Gets a characteristic value of the service, which is a value identified by charIndex.

### Parameters:

<i>charIndex</i>	The index of a service characteristic of type CYBLE_CPS_CHAR_INDEX_T.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the location where characteristic value data should be stored.



**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request is handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed

**Events**

None

**CYBLE\_API\_RESULT\_T** **CyBle\_CpssSetCharacteristicDescriptor** (**CYBLE\_CPS\_CHAR\_INDEX\_T** *charIndex*, **CYBLE\_CPS\_DESCR\_INDEX\_T** *descrIndex*, uint8 *attrSize*, uint8 \* *attrValue*)

Sets a characteristic descriptor of a specified characteristic of the service.

**Parameters:**

<i>charIndex</i>	The index of a service characteristic of type CYBLE_CPS_CHAR_INDEX_T.
<i>descrIndex</i>	The index of a service characteristic descriptor of type CYBLE_CPS_DESCR_INDEX_T.
<i>attrSize</i>	The size of the characteristic descriptor attribute.
<i>attrValue</i>	The pointer to the descriptor value data that should be stored to the GATT database.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request is handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed

**Events**

None

**CYBLE\_API\_RESULT\_T** **CyBle\_CpssGetCharacteristicDescriptor** (**CYBLE\_CPS\_CHAR\_INDEX\_T** *charIndex*, **CYBLE\_CPS\_DESCR\_INDEX\_T** *descrIndex*, uint8 *attrSize*, uint8 \* *attrValue*)

Gets a characteristic descriptor of a specified characteristic of the service.

**Parameters:**

<i>charIndex</i>	The index of a service characteristic of type CYBLE_CPS_CHAR_INDEX_T.
<i>descrIndex</i>	The index of a service characteristic descriptor of type CYBLE_CPS_DESCR_INDEX_T.
<i>attrSize</i>	The size of the characteristic descriptor attribute.
<i>attrValue</i>	The pointer to the location where characteristic descriptor value data should be stored.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed

**Events**

None





**CYBLE\_API\_RESULT\_T CyBle\_CpssSendNotification (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_CPS\_CHAR\_INDEX\_T charIndex, uint8 attrSize, uint8 \* attrValue)**

Sends notification with a characteristic value of the CPS, which is a value specified by charIndex, to the Client device.

**Parameters:**

<i>connHandle</i>	The connection handle
<i>charIndex</i>	The index of a service characteristic of type CYBLE_CPS_CHAR_INDEX_T.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the Client device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the Client is not established
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_NTF\_DISABLED - Notification is not enabled by the Client.

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_CpssSendIndication (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_CPS\_CHAR\_INDEX\_T charIndex, uint8 attrSize, uint8 \* attrValue)**

Sends indication with a characteristic value of the CPS, which is a value specified by charIndex, to the Client device.

**Parameters:**

<i>connHandle</i>	The connection handle
<i>charIndex</i>	The index of a service characteristic of type CYBLE_CPS_CHAR_INDEX_T.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the Client device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the Client is not established
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_IND\_DISABLED - Indication is not enabled by the Client



## Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the CPS service-specific callback is registered (with CyBle\_CpsRegisterAttrCallback):

- CYBLE\_EVT\_CPSS\_INDICATION\_CONFIRMED - in case if the indication is successfully delivered to the peer device.

Otherwise (if the CPS service-specific callback is not registered):

- CYBLE\_EVT\_GATTS\_HANDLE\_VALUE\_CNF - in case if the indication is successfully delivered to the peer device.

## **CYBLE\_API\_RESULT\_T CyBle\_CpssStartBroadcast (uint16 advInterval, uint8 attrSize, uint8 \* attrValue)**

This function is used to start broadcasting of the Cycling Power Measurement characteristic or update broadcasting data when it was started before. It is available only in Broadcaster role.

### Parameters:

<i>advInterval</i>	Advertising interval in 625 us units. The valid range is from CYBLE_GAP_ADV_ADVERT_INTERVAL_NONCON_MIN to CYBLE_GAP_ADV_ADVERT_INTERVAL_MAX.
<i>attrSize</i>	The size of the characteristic value attribute. This size is limited by maximum advertising packet length and advertising header size.
<i>attrValue</i>	The pointer to the Cycling Power Measurement characteristic that include the mandatory fields (e.g. the Flags field and the Instantaneous Power field) and depending on the Flags field, some optional fields in a non connectable undirected advertising event.

### Returns:

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_INVALID_PARAMETER	On passing an invalid parameter.

## **void CyBle\_CpssStopBroadcast (void )**

This function is used to stop broadcasting of the Cycling Power Measurement characteristic.

### Returns:

None

## CPS Client Functions

### Description

APIs unique to CPS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: CyBle\_Cpsc

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CpscSetCharacteristicValue \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_CPS\\_CHAR\\_INDEX\\_T charIndex, uint8 attrSize, uint8 \\*attrValue\)](#)



- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CpscGetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T connHandle](#), [CYBLE\\_CPS\\_CHAR\\_INDEX\\_T charIndex](#))
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CpscSetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T connHandle](#), [CYBLE\\_CPS\\_CHAR\\_INDEX\\_T charIndex](#), [CYBLE\\_CPS\\_DESCR\\_INDEX\\_T descrIndex](#), uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CpscGetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T connHandle](#), [CYBLE\\_CPS\\_CHAR\\_INDEX\\_T charIndex](#), [CYBLE\\_CPS\\_DESCR\\_INDEX\\_T descrIndex](#))
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CpscStartObserve](#)(void)
- void [CyBle\\_CpscStopObserve](#)(void)

## Function Documentation

**[CYBLE\\_API\\_RESULT\\_T CyBle\\_CpscSetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T connHandle](#), [CYBLE\\_CPS\\_CHAR\\_INDEX\\_T charIndex](#), uint8 attrSize, uint8 \* attrValue)**

Sends a request to set a characteristic value of the service, which is a value identified by charIndex, to the server device.

### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic of type CYBLE_CPS_CHAR_INDEX_T.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be send to the server device.

### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the server is not established
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic

### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the CPS service-specific callback is registered (with CyBle\_CpsRegisterAttrCallback):

- CYBLE\_EVT\_CPSC\_WRITE\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, etc.) are provided with event parameter structure of type [CYBLE\\_CPS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the CPS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**CYBLE\_API\_RESULT\_T CyBle\_CpscGetCharacteristicValue (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_CPS\_CHAR\_INDEX\_T charIndex)**

This function is used to read a characteristic value, which is a value identified by charIndex, from the server. The Read Response returns the characteristic Value in the Attribute Value parameter.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic of type CYBLE_CPS_CHAR_INDEX_T.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The read request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the server is not established
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the CPS service-specific callback is registered (with CyBle\_CpsRegisterAttrCallback):

- CYBLE\_EVT\_CPSC\_READ\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index , value, etc.) are provided with event parameter structure of type CYBLE\_CPS\_CHAR\_VALUE\_T.

Otherwise (if the CPS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure (CYBLE\_GATTC\_READ\_RSP\_PARAM\_T).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure (CYBLE\_GATTC\_ERR\_RSP\_PARAM\_T).

**CYBLE\_API\_RESULT\_T CyBle\_CpscSetCharacteristicDescriptor (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_CPS\_CHAR\_INDEX\_T charIndex, CYBLE\_CPS\_DESCR\_INDEX\_T descrIndex, uint8 attrSize, uint8 \* attrValue)**

This function is used to write the characteristic descriptor to the server which is identified by charIndex

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic of type CYBLE_CPS_CHAR_INDEX_T.
<i>descrIndex</i>	The index of a service characteristic descriptor of type CYBLE_CPS_DESCR_INDEX_T.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic descriptor value data that should be sent to the server device.



**Returns:**

Return value is of type `CYBLE_API_RESULT_T`.

- `CYBLE_ERROR_OK` - The request was sent successfully
- `CYBLE_ERROR_INVALID_PARAMETER` - Validation of the input parameters failed
- `CYBLE_ERROR_INVALID_STATE` - The state is not valid
- `CYBLE_ERROR_MEMORY_ALLOCATION_FAILED` - Memory allocation failed
- `CYBLE_ERROR_INVALID_OPERATION` - This operation is not permitted on the specified attribute

**Events**

In case of successful execution (return value = `CYBLE_ERROR_OK`) the next events can appear:

If the CPS service-specific callback is registered (with `CyBle_CpsRegisterAttrCallback`):

- `CYBLE_EVT_CPSC_WRITE_DESCR_RESPONSE` - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index etc.) are provided with event parameter structure of type [CYBLE\\_CPS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the CPS service-specific callback is not registered):

- `CYBLE_EVT_GATTC_WRITE_RSP` - in case if the requested attribute is successfully wrote on the peer device.
- `CYBLE_EVT_GATTC_ERROR_RSP` - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) `CyBle_CpscGetCharacteristicDescriptor` ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_CPS\\_CHAR\\_INDEX\\_T](#) *charIndex*, [CYBLE\\_CPS\\_DESCR\\_INDEX\\_T](#) *descrIndex*)**

Sends a request to get the characteristic descriptor of the specified characteristic of the service.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic of type <code>CYBLE_CPS_CHAR_INDEX_T</code> .
<i>descrIndex</i>	The index of a service characteristic descriptor of type <code>CYBLE_CPS_DESCR_INDEX_T</code> .

**Returns:**

- `CYBLE_ERROR_OK` - The request was sent successfully
- `CYBLE_ERROR_INVALID_PARAMETER` - Validation of the input parameters failed
- `CYBLE_ERROR_INVALID_STATE` - The state is not valid
- `CYBLE_ERROR_MEMORY_ALLOCATION_FAILED` - Memory allocation failed
- `CYBLE_ERROR_INVALID_OPERATION` - This operation is not permitted on the specified attribute

**Events**

In case of successful execution (return value = `CYBLE_ERROR_OK`) the next events can appear:

If the CPS service-specific callback is registered (with `CyBle_CpsRegisterAttrCallback`):

- `CYBLE_EVT_CPSC_READ_DESCR_RESPONSE` - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index, value, etc.) are provided with event parameter structure of type [CYBLE\\_CPS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the CPS service-specific callback is not registered):

- `CYBLE_EVT_GATTC_READ_RSP` - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).



- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

### **CYBLE\_API\_RESULT\_TCyBle\_CpscStartObserve (void )**

This function is used for observing GAP peripheral devices. A device performing the observer role receives only advertisement data from devices irrespective of their discoverable mode settings. Advertisement data received is provided by the event, CYBLE\_EVT\_CPSC\_SCAN\_PROGRESS\_RESULT. This procedure sets the scanType sub parameter to passive scanning.

If 'scanTo' sub-parameter is set to zero value, then passive scanning procedure will continue until you call CyBle\_GapcStopObserve API. Possible generated events are:

- CYBLE\_EVT\_CPSC\_SCAN\_PROGRESS\_RESULT

None.

#### **Returns:**

CYBLE\_API\_RESULT\_T : Return value indicates if the function succeeded or failed. Following are the possible error codes.

Errors codes	Description
CYBLE_ERROR_OK	On successful operation.
CYBLE_ERROR_STACK_INTERNAL	An error occurred in the BLE stack.

### **void CyBle\_CpscStopObserve (void )**

This function used to stop the discovery of devices. On stopping discovery operation, CYBLE\_EVT\_GAPC\_SCAN\_START\_STOP event is generated. Application layer needs to keep track of the function call made before receiving this event to associate this event with either the start or stop discovery function.

Possible events generated are:

- CYBLE\_EVT\_GAPC\_SCAN\_START\_STOP

#### **Returns:**

None

## **CPS Definitions and Data Structures**

### **Description**

Contains the CPS specific definitions and data structures used in the CPS APIs.

### **Data Structures**

- struct [CYBLE\\_CPSS\\_CHAR\\_T](#)
- struct [CYBLE\\_CPSS\\_T](#)
- struct [CYBLE\\_CPSC\\_CHAR\\_T](#)
- struct [CYBLE\\_CPSC\\_T](#)
- struct [CYBLE\\_CPS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_CPS\\_DESCR\\_VALUE\\_T](#)
- struct [CYBLE\\_CYPACKED\\_ATTR](#)



## Enumerations

- enum [CYBLE\\_CPS\\_CHAR\\_INDEX\\_T](#) { [CYBLE\\_CPS\\_POWER\\_MEASURE](#), [CYBLE\\_CPS\\_POWER\\_FEATURE](#), [CYBLE\\_CPS\\_SENSOR\\_LOCATION](#), [CYBLE\\_CPS\\_POWER\\_VECTOR](#), [CYBLE\\_CPS\\_POWER\\_CP](#), [CYBLE\\_CPS\\_CHAR\\_COUNT](#) }
- enum [CYBLE\\_CPS\\_DESCR\\_INDEX\\_T](#) { [CYBLE\\_CPS\\_CCCD](#), [CYBLE\\_CPS\\_SCCD](#), [CYBLE\\_CPS\\_DESCR\\_COUNT](#) }
- enum [CYBLE\\_CPS\\_CP\\_OC\\_T](#) { [CYBLE\\_CPS\\_CP\\_OC\\_SCV](#) = 1u, [CYBLE\\_CPS\\_CP\\_OC\\_USL](#), [CYBLE\\_CPS\\_CP\\_OC\\_RSSL](#), [CYBLE\\_CPS\\_CP\\_OC\\_SCRL](#), [CYBLE\\_CPS\\_CP\\_OC\\_RCRL](#), [CYBLE\\_CPS\\_CP\\_OC\\_SCHL](#), [CYBLE\\_CPS\\_CP\\_OC\\_RCHL](#), [CYBLE\\_CPS\\_CP\\_OC\\_SCHW](#), [CYBLE\\_CPS\\_CP\\_OC\\_RCHW](#), [CYBLE\\_CPS\\_CP\\_OC\\_SSL](#), [CYBLE\\_CPS\\_CP\\_OC\\_RSL](#), [CYBLE\\_CPS\\_CP\\_OC\\_SOC](#), [CYBLE\\_CPS\\_CP\\_OC\\_MCPMCC](#), [CYBLE\\_CPS\\_CP\\_OC\\_RSR](#), [CYBLE\\_CPS\\_CP\\_OC\\_RFCD](#), [CYBLE\\_CPS\\_CP\\_OC\\_RC](#) = 32u }
- enum [CYBLE\\_CPS\\_CP\\_RC\\_T](#) { [CYBLE\\_CPS\\_CP\\_RC\\_SUCCESS](#) = 1u, [CYBLE\\_CPS\\_CP\\_RC\\_NOT\\_SUPPORTED](#), [CYBLE\\_CPS\\_CP\\_RC\\_INVALID\\_PARAMETER](#), [CYBLE\\_CPS\\_CP\\_RC\\_OPERATION\\_FAILED](#) }
- enum [CYBLE\\_CPS\\_SL\\_VALUE\\_T](#) { [CYBLE\\_CPS\\_SL\\_OTHER](#), [CYBLE\\_CPS\\_SL\\_TOP\\_OF\\_SHOE](#), [CYBLE\\_CPS\\_SL\\_IN\\_SHOE](#), [CYBLE\\_CPS\\_SL\\_HIP](#), [CYBLE\\_CPS\\_SL\\_FRONT\\_WHEEL](#), [CYBLE\\_CPS\\_SL\\_LEFT\\_CRANK](#), [CYBLE\\_CPS\\_SL\\_RIGHT\\_CRANK](#), [CYBLE\\_CPS\\_SL\\_LEFT\\_PEDAL](#), [CYBLE\\_CPS\\_SL\\_RIGHT\\_PEDAL](#), [CYBLE\\_CPS\\_SL\\_FRONT\\_HUB](#), [CYBLE\\_CPS\\_SL\\_REAR\\_DROPOUT](#), [CYBLE\\_CPS\\_SL\\_CHAINSTAY](#), [CYBLE\\_CPS\\_SL\\_REAR\\_WHEEL](#), [CYBLE\\_CPS\\_SL\\_REAR\\_HUB](#), [CYBLE\\_CPS\\_SL\\_CHEST](#), [CYBLE\\_CPS\\_SL\\_COUNT](#) }

## Enumeration Type Documentation

### enum [CYBLE\\_CPS\\_CHAR\\_INDEX\\_T](#)

Characteristic indexes

#### Enumerator

***CYBLE\_CPS\_POWER\_MEASURE*** Cycling Power Measurement characteristic index  
***CYBLE\_CPS\_POWER\_FEATURE*** Cycling Power Feature characteristic index  
***CYBLE\_CPS\_SENSOR\_LOCATION*** Sensor Location characteristic index  
***CYBLE\_CPS\_POWER\_VECTOR*** Cycling Power Vector characteristic index  
***CYBLE\_CPS\_POWER\_CP*** Cycling Power Control Point characteristic index  
***CYBLE\_CPS\_CHAR\_COUNT*** Total count of CPS characteristics

### enum [CYBLE\\_CPS\\_DESCR\\_INDEX\\_T](#)

Characteristic Descriptors indexes

#### Enumerator

***CYBLE\_CPS\_CCCD*** Client Characteristic Configuration descriptor index  
***CYBLE\_CPS\_SCCD*** Handle of the Server Characteristic Configuration descriptor  
***CYBLE\_CPS\_DESCR\_COUNT*** Total count of descriptors

### enum [CYBLE\\_CPS\\_CP\\_OC\\_T](#)

Op Codes of the Cycling Power Control Point characteristic

#### Enumerator

***CYBLE\_CPS\_CP\_OC\_SCV*** Set Cumulative Value  
***CYBLE\_CPS\_CP\_OC\_USL*** Update Sensor Location  
***CYBLE\_CPS\_CP\_OC\_RSSL*** Request Supported Sensor Locations





**CYBLE\_CPS\_CP\_OC\_SCRL** Set Crank Length  
**CYBLE\_CPS\_CP\_OC\_RCRL** Request Crank Length  
**CYBLE\_CPS\_CP\_OC\_SCHL** Set Chain Length  
**CYBLE\_CPS\_CP\_OC\_RCHL** Request Chain Length  
**CYBLE\_CPS\_CP\_OC\_SCHW** Set Chain Weight  
**CYBLE\_CPS\_CP\_OC\_RCHW** Request Chain Weight  
**CYBLE\_CPS\_CP\_OC\_SSL** Set Span Length  
**CYBLE\_CPS\_CP\_OC\_RSL** Request Span Length  
**CYBLE\_CPS\_CP\_OC\_SOC** Start Offset Compensation  
**CYBLE\_CPS\_CP\_OC\_MCPMCC** Mask Cycling Power Measurement Characteristic Content  
**CYBLE\_CPS\_CP\_OC\_RSR** Request Sampling Rate  
**CYBLE\_CPS\_CP\_OC\_RFCD** Request Factory Calibration Date  
**CYBLE\_CPS\_CP\_OC\_RC** Response Code

#### enum [CYBLE\\_CPS\\_CP\\_RC\\_T](#)

Response Code of the Cycling Power Control Point characteristic

##### Enumerator

**CYBLE\_CPS\_CP\_RC\_SUCCESS** Response for successful operation.  
**CYBLE\_CPS\_CP\_RC\_NOT\_SUPPORTED** Response if unsupported Op Code is received  
**CYBLE\_CPS\_CP\_RC\_INVALID\_PARAMETER** Response if Parameter received does not meet the requirements of the service or is outside of the supported range of the Sensor  
**CYBLE\_CPS\_CP\_RC\_OPERATION\_FAILED** Response if the requested procedure failed

#### enum [CYBLE\\_CPS\\_SL\\_VALUE\\_T](#)

Sensor Location characteristic value

## Cycling Speed and Cadence Service (CSCS)

### Description

The Cycling Speed and Cadence (CSC) Service exposes speed-related data and/or cadence-related data while using the Cycling Speed and Cadence sensor (Server).

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The CSCS API names begin with CyBle\_Cscs. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [CSCS Server and Client Function](#)  
*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*
- [CSCS Server Functions](#)  
*APIs unique to CSCS designs configured as a GATT Server role.*
- [CSCS Client Functions](#)  
*APIs unique to CSCS designs configured as a GATT Client role.*
- [CSCS Definitions and Data Structures](#)  
*Contains the CSCS specific definitions and data structures used in the CSCS APIs.*



## CSCS Server and Client Function

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles. No letter is appended to the API name: CyBle\_Cscs

### Functions

- void [CyBle\\_CscsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

### Function Documentation

#### void [CyBle\\_CscsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

Registers a callback function for Cycling Speed and Cadence Service specific attribute operations. Service specific write requests from peer device will not be handled with unregistered callback function.

##### Parameters:

<i>callbackFunc</i>	An application layer event callback function to receive events from the BLE Component. The definition of CYBLE_CALLBACK_T for CSCS is,
---------------------	--

typedef void (\* CYBLE\_CALLBACK\_T) (uint32 eventCode, void \*eventParam)

- eventCode indicates the event that triggered this callback.
- eventParam contains the parameters corresponding to the current event.

##### Returns:

None.

##### Events

None

##### Side Effects

The \*eventParams in the callback function should not be used by the application once the callback function execution is finished. Otherwise this data may become corrupted.

## CSCS Server Functions

### Description

APIs unique to CSCS designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_Cscss

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CscssSetCharacteristicValue](#) ([CYBLE\\_CSCS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CscssGetCharacteristicValue](#) ([CYBLE\\_CSCS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CscssGetCharacteristicDescriptor](#) ([CYBLE\\_CSCS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_CSCS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CscssSendNotification](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_CSCS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)



- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_CscssSendIndication](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_CSCS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)

## Function Documentation

**[CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_CscssSetCharacteristicValue](#) ([CYBLE\\_CSCS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)**

Sets characteristic value of the Cycling Speed and Cadence Service, which is identified by charIndex, to the local database.

### Parameters:

<i>charIndex</i>	The index of a service characteristic of type CYBLE_CSCS_CHAR_INDEX_T. Valid values are, <ul style="list-style-type: none"> <li>• CYBLE_CSCS_CSC_FEATURE</li> <li>• CYBLE_CSCS_SENSOR_LOCATION.</li> </ul>
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be stored to the GATT database.

### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request is handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Peer device doesn't have a particular characteristic.

### Events

None

**[CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_CscssGetCharacteristicValue](#) ([CYBLE\\_CSCS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)**

Gets a characteristic value of the Cycling Speed and Cadence Service, which is identified by charIndex, from the GATT database.

### Parameters:

<i>charIndex</i>	The index of a service characteristic of type CYBLE_CSCS_CHAR_INDEX_T. Valid value is, <ul style="list-style-type: none"> <li>• CYBLE_CSCS_SC_CONTROL_POINT.</li> </ul>
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the location where characteristic value data should be stored.

### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request is handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent.



**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_CscssGetCharacteristicDescriptor (CYBLE\_CSCS\_CHAR\_INDEX\_T *charIndex*, CYBLE\_CSCS\_DESCR\_INDEX\_T *descrIndex*, *uint8 attrSize*, *uint8 \* attrValue*)**

Gets a characteristic descriptor of a specified characteristic of the Cycling Speed and Cadence Service, from the GATT database.

**Parameters:**

<i>charIndex</i>	The index of a service characteristic of type CYBLE_CSCS_CHAR_INDEX_T. Valid values are, <ul style="list-style-type: none"> <li>• CYBLE_CSCS_CSC_MEASUREMENT</li> <li>• CYBLE_CSCS_SC_CONTROL_POINT.</li> </ul>
<i>descrIndex</i>	The index of a service characteristic descriptor of type CYBLE_CSCS_DESCR_INDEX_T. Valid value is <ul style="list-style-type: none"> <li>• CYBLE_CSCS_CCCD.</li> </ul>
<i>attrSize</i>	The size of the characteristic descriptor attribute.
<i>attrValue</i>	The pointer to the location where characteristic descriptor value data should be stored.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request is handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Peer device doesn't have a particular characteristic.

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_CscssSendNotification (CYBLE\_CONN\_HANDLE\_T *connHandle*, CYBLE\_CSCS\_CHAR\_INDEX\_T *charIndex*, *uint8 attrSize*, *uint8 \* attrValue*)**

Sends notification with a characteristic value, which is specified by *charIndex*, of the Cycling Speed and Cadence Service to the Client device.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic of type CYBLE_CSCS_CHAR_INDEX_T. Valid value is <ul style="list-style-type: none"> <li>• CYBLE_CSCS_CSC_MEASUREMENT.</li> </ul>
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the Client device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.



- CYBLE\_ERROR\_OK - The request is handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of input parameter is failed.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this. characteristic.
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established.
- CYBLE\_ERROR\_NTF\_DISABLED - Notification is not enabled by the client.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_CscssSendIndication (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_CSCS\_CHAR\_INDEX\_T charIndex, uint8 attrSize, uint8 \* attrValue)**

Sends indication with a characteristic value, which is specified by charIndex, of the Cycling Speed and Cadence Service to the Client device.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic of type CYBLE_CSCS_CHAR_INDEX_T.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the Client device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request is handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of input parameter is failed.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this. characteristic.
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established.
- CYBLE\_ERROR\_IND\_DISABLED - Indication is not enabled by the client.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the CSCS service-specific callback is registered (with CyBle\_CscsRegisterAttrCallback):

- CYBLE\_EVT\_CSCSS\_INDICATION\_CONFIRMED - in case if the indication is successfully delivered to the peer device.

Otherwise (if the CSCS service-specific callback is not registered):

- CYBLE\_EVT\_GATTS\_HANDLE\_VALUE\_CNF - in case if the indication is successfully delivered to the peer device.

## CSCS Client Functions

### Description

APIs unique to CSCS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: CyBle\_Cscsc



## Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CscscSetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_CSCS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CscscGetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_CSCS\\_CHAR\\_INDEX\\_T](#) charIndex)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CscscSetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_CSCS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_CSCS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CscscGetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_CSCS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_CSCS\\_DESCR\\_INDEX\\_T](#) descrIndex)

## Function Documentation

**[CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_CscscSetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_CSCS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)**

Sends a request to peer device to get characteristic descriptor of specified characteristic of the Cycling Speed and Cadence Service.

### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	Size of the characteristic value attribute.
<i>attrValue</i>	Pointer to the characteristic value data that should be sent to the server device.

### Returns:

Return value is of type [CYBLE\\_API\\_RESULT\\_T](#).

- [CYBLE\\_ERROR\\_OK](#) - The request was sent successfully;
- [CYBLE\\_ERROR\\_INVALID\\_STATE](#) - Connection with the client is not established.
- [CYBLE\\_ERROR\\_INVALID\\_PARAMETER](#) - Validation of the input parameters failed.
- [CYBLE\\_ERROR\\_MEMORY\\_ALLOCATION\\_FAILED](#) - Memory allocation failed.
- [CYBLE\\_ERROR\\_INVALID\\_OPERATION](#) - Operation is invalid for this. characteristic.
- [CYBLE\\_ERROR\\_GATT\\_DB\\_INVALID\\_ATTR\\_HANDLE](#) - Peer device doesn't have a particular characteristic.

### Events

In case of successful execution (return value = [CYBLE\\_ERROR\\_OK](#)) the next events can appear:

If the CSCS service-specific callback is registered (with [CyBle\\_CscsRegisterAttrCallback](#)):

- [CYBLE\\_EVT\\_CSCSC\\_WRITE\\_CHAR\\_RESPONSE](#) - in case if the requested attribute is successfully wrote on the peer device, the details (char index, etc.) are provided with event parameter structure of type [CYBLE\\_CSCS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the CSCS service-specific callback is not registered):

- [CYBLE\\_EVT\\_GATTC\\_WRITE\\_RSP](#) - in case if the requested attribute is successfully wrote on the peer device.
- [CYBLE\\_EVT\\_GATTC\\_ERROR\\_RSP](#) - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**CYBLE\_API\_RESULT\_T CyBle\_CscscGetCharacteristicValue (CYBLE\_CONN\_HANDLE\_T *connHandle*, CYBLE\_CSCS\_CHAR\_INDEX\_T *charIndex*)**

Sends a request to peer device to get characteristic value of the Cycling Speed and Cadence Service, which is identified by *charIndex*.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully;
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Peer device doesn't have a particular characteristic.

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the CSCS service-specific callback is registered (with CyBle\_CscscRegisterAttrCallback):

- CYBLE\_EVT\_CSCSC\_READ\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (*char index* , *value*, etc.) are provided with event parameter structure of type CYBLE\_CSCS\_CHAR\_VALUE\_T.

Otherwise (if the CSCS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (*handle*, *value*, etc.) are provided with event parameters structure (CYBLE\_GATTC\_READ\_RSP\_PARAM\_T).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure (CYBLE\_GATTC\_ERR\_RSP\_PARAM\_T).

**CYBLE\_API\_RESULT\_T CyBle\_CscscSetCharacteristicDescriptor (CYBLE\_CONN\_HANDLE\_T *connHandle*, CYBLE\_CSCS\_CHAR\_INDEX\_T *charIndex*, CYBLE\_CSCS\_DESCR\_INDEX\_T *descrIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Sends a request to peer device to get characteristic descriptor of specified characteristic of the Cycling Speed and Cadence Service.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a CSCS characteristic.
<i>descrIndex</i>	The index of a CSCS characteristic descriptor.
<i>attrSize</i>	The size of the characteristic descriptor attribute.
<i>attrValue</i>	The pointer to the characteristic descriptor value data that should be sent to the server device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - the request was sent successfully.





- CYBLE\_ERROR\_INVALID\_STATE - connection with the client is not established.
- CYBLE\_ERROR\_INVALID\_PARAMETER - validation of the input parameters failed.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Peer device doesn't have a particular descriptor.

### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the CSCS service-specific callback is registered (with CyBle\_CscsRegisterAttrCallback):

- CYBLE\_EVT\_CSCSC\_WRITE\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index etc.) are provided with event parameter structure of type [CYBLE\\_CSCS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the CSCS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_CscscGetCharacteristicDescriptor ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_CSCS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_CSCS\\_DESCR\\_INDEX\\_T](#) descrIndex)**

Sends a request to peer device to get characteristic descriptor of specified characteristic of the Cycling Speed and Cadence Service.

### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a Service Characteristic.
<i>descrIndex</i>	The index of a Service Characteristic Descriptor.

### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the Client is not established.
- CYBLE\_ERROR\_INVALID\_OPERATION - Cannot process a request to send PDU due to invalid operation performed by the application.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Peer device doesn't have a particular descriptor.

### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the CSCS service-specific callback is registered (with CyBle\_CscsRegisterAttrCallback):

- CYBLE\_EVT\_CSCSC\_READ\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index, value, etc.) are provided with event parameter structure of type [CYBLE\\_CSCS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the CSCS service-specific callback is not registered):



- `CYBLE_EVT_GATTC_READ_RSP` - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- `CYBLE_EVT_GATTC_ERROR_RSP` - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

## CSCS Definitions and Data Structures

### Description

Contains the CSCS specific definitions and data structures used in the CSCS APIs.

### Data Structures

- struct [CYBLE\\_CSCS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_CSCS\\_DESCR\\_VALUE\\_T](#)
- struct [CYBLE\\_CSCSS\\_CHAR\\_T](#)
- struct [CYBLE\\_CSCSS\\_T](#)
- struct [CYBLE\\_CSCSC\\_SRVR\\_FULL\\_CHAR\\_INFO\\_T](#)
- struct [CYBLE\\_CSCSC\\_T](#)

### Enumerations

- enum [CYBLE\\_CSCS\\_CHAR\\_INDEX\\_T](#) { [CYBLE\\_CSCS\\_CSC\\_MEASUREMENT](#), [CYBLE\\_CSCS\\_CSC\\_FEATURE](#), [CYBLE\\_CSCS\\_SENSOR\\_LOCATION](#), [CYBLE\\_CSCS\\_SC\\_CONTROL\\_POINT](#), [CYBLE\\_CSCS\\_CHAR\\_COUNT](#) }
- enum [CYBLE\\_CSCS\\_DESCR\\_INDEX\\_T](#) { [CYBLE\\_CSCS\\_CCCD](#), [CYBLE\\_CSCS\\_DESCR\\_COUNT](#) }

### Enumeration Type Documentation

#### enum [CYBLE\\_CSCS\\_CHAR\\_INDEX\\_T](#)

Characteristic indexes

##### Enumerator

**`CYBLE_CSCS_CSC_MEASUREMENT`** CSC Measurement Characteristic index

**`CYBLE_CSCS_CSC_FEATURE`** CSC Feature Characteristic index

**`CYBLE_CSCS_SENSOR_LOCATION`** CSC Sensor Location Characteristic index

**`CYBLE_CSCS_SC_CONTROL_POINT`** CSC SC Control Point Characteristic index

**`CYBLE_CSCS_CHAR_COUNT`** Total count of CSCS Characteristics

#### enum [CYBLE\\_CSCS\\_DESCR\\_INDEX\\_T](#)

Characteristic Descriptors indexes

##### Enumerator

**`CYBLE_CSCS_CCCD`** Client Characteristic Configuration Descriptor index

**`CYBLE_CSCS_DESCR_COUNT`** Total count of Descriptors



## Current Time Service (CTS)

### Description

Current Time Service defines how a Bluetooth device can expose time information to other Bluetooth devices.

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The CTS API names begin with CyBle\_Cts. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [CTS Server and Client Function](#)  
*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*
- [CTS Server Functions](#)  
*APIs unique to CTS designs configured as a GATT Server role.*
- [CTS Client Functions](#)  
*APIs unique to CTS designs configured as a GATT Client role.*
- [CTS Definitions and Data Structures](#)  
*Contains the CTS specific definitions and data structures used in the CTS APIs.*

## CTS Server and Client Function

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.

No letter is appended to the API name: CyBle\_Cts

### Functions

- void [CyBle\\_CtsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

### Function Documentation

#### void CyBle\_CtsRegisterAttrCallback ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

Registers a callback function for service specific attribute operations. Service specific write requests from peer device will not be handled with unregistered callback function.

##### Parameters:

<i>callbackFunc</i>	<p>An application layer event callback function to receive events from the BLE Component. The definition of CYBLE_CALLBACK_T for Current Time Service is:</p> <pre>typedef void (* CYBLE_CALLBACK_T) (uint32 eventCode, void *eventParam)</pre> <ul style="list-style-type: none"> <li>• eventCode indicates the event that triggered this callback (e.g. CYBLE_EVT_CTSS_NOTIFICATION_ENABLED)</li> <li>• eventParam contains the parameters corresponding to the current event (e.g. Pointer to <a href="#">CYBLE_CTS_CHAR_VALUE_T</a> structure that contains details of the characteristic for which notification enabled event was triggered).</li> </ul>
---------------------	---

**Returns:**

None

**Events**

None

## CTS Server Functions

### Description

APIs unique to CTS designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_Ctss

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CtssSetCharacteristicValue](#) ([CYBLE\\_CTS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CtssGetCharacteristicValue](#) ([CYBLE\\_CTS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CtssGetCharacteristicDescriptor](#) ([CYBLE\\_CTS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_CTS\\_CHAR\\_DESCRIPTOR\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CtssSendNotification](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_CTS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)

### Function Documentation

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_CtssSetCharacteristicValue ([CYBLE\\_CTS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)**

Sets a value for one of three characteristic values of the Current Time Service. The characteristic is identified by charIndex.

**Parameters:**

<i>charIndex</i>	The index of the Current Time Service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be stored to the GATT database.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The characteristic value was written successfully
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed

**Events**

None

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_CtssGetCharacteristicValue ([CYBLE\\_CTS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)**

Gets a characteristic value of the Current Time Service, which is identified by charIndex.

**Parameters:**

<i>charIndex</i>	The index of a Current Time Service characteristic.
------------------	---



<i>attrSize</i>	The size of the Current Time Service characteristic value attribute.
<i>attrValue</i>	The pointer to the location where characteristic value data should be stored.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The characteristic value was read successfully
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_CtssGetCharacteristicDescriptor (CYBLE\_CTS\_CHAR\_INDEX\_T *charIndex*, CYBLE\_CTS\_CHAR\_DESCRIPTOR\_T *descrIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Gets a characteristic descriptor of a specified characteristic of the Current Time Service.

**Parameters:**

<i>charIndex</i>	The index of the characteristic.
<i>descrIndex</i>	The index of the descriptor.
<i>attrSize</i>	The size of the descriptor value.
<i>attrValue</i>	The pointer to the location where characteristic descriptor value data should be stored.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional descriptor is absent

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_CtssSendNotification (CYBLE\_CONN\_HANDLE\_T *connHandle*, CYBLE\_CTS\_CHAR\_INDEX\_T *charIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Sends a notification to the client's device. A characteristic value also gets written to the GATT database.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic to be send as a notification to the Client device.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the Client device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The characteristic notification was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this. characteristic.



- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_NTF\_DISABLED - Notification is not enabled by the client.

**Events**

None

## CTS Client Functions

### Description

APIs unique to CTS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: CyBle\_Ctsc

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CtscSetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_CTS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CtscGetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_CTS\\_CHAR\\_INDEX\\_T](#) charIndex)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CtscSetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_CTS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_CTS\\_CHAR\\_DESCRIPTOR\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_CtscGetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_CTS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 descrIndex)

### Function Documentation

**[CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_CtscSetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_CTS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)**

Sets a characteristic value of the Current Time Service, which is identified by charIndex.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	The size of the characteristic descriptor attribute.
<i>attrValue</i>	Pointer to the characteristic value data that should be sent to the server device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the server is not established.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Peer device doesn't have a particular characteristic.

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:



If the CTS service-specific callback is registered (with `CyBle_CtsRegisterAttrCallback`):

- `CYBLE_EVT_CTSC_READ_CHAR_RESPONSE` - in case if the requested attribute is successfully wrote on the peer device, the details (char index , value, etc.) are provided with event parameter structure of type [CYBLE\\_CTS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the CTS service-specific callback is not registered):

- `CYBLE_EVT_GATTC_READ_RSP` - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- `CYBLE_EVT_GATTC_ERROR_RSP` - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) `CyBle_CtscGetCharacteristicValue` ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_CTS\\_CHAR\\_INDEX\\_T](#) *charIndex*)**

Gets a characteristic value of the Current Time Service, which is identified by *charIndex*.

#### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic.

#### Returns:

Return value is of type `CYBLE_API_RESULT_T`.

- `CYBLE_ERROR_OK` - The request was sent successfully.
- `CYBLE_ERROR_INVALID_PARAMETER` - Validation of the input parameters failed.
- `CYBLE_ERROR_MEMORY_ALLOCATION_FAILED` - Memory allocation failed.
- `CYBLE_ERROR_INVALID_STATE` - Connection with the server is not established.
- `CYBLE_ERROR_INVALID_OPERATION` - Operation is invalid for this characteristic.
- `CYBLE_ERROR_GATT_DB_INVALID_ATTR_HANDLE` - Peer device doesn't have a particular characteristic.

#### Events

In case of successful execution (return value = `CYBLE_ERROR_OK`) the next events can appear:

If the CTS service-specific callback is registered (with `CyBle_CtsRegisterAttrCallback`):

- `CYBLE_EVT_CTSC_READ_CHAR_RESPONSE` - in case if the requested attribute is successfully wrote on the peer device, the details (char index , value, etc.) are provided with event parameter structure of type [CYBLE\\_CTS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the CTS service-specific callback is not registered):

- `CYBLE_EVT_GATTC_READ_RSP` - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- `CYBLE_EVT_GATTC_ERROR_RSP` - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) `CyBle_CtscSetCharacteristicDescriptor` ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_CTS\\_CHAR\\_INDEX\\_T](#) *charIndex*, [CYBLE\\_CTS\\_CHAR\\_DESCRIPTOR\\_T](#) *descrIndex*, `uint8` *attrSize*, `uint8 *` *attrValue*)**

Sets a characteristic descriptor of the Current Time Characteristic of the Current Time Service.





**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the Current Time Service characteristic.
<i>descrIndex</i>	The index of the Current Time Service characteristic descriptor.
<i>attrSize</i>	The size of the characteristic descriptor attribute.
<i>attrValue</i>	Pointer to the characteristic descriptor value data that should be sent to the server device.

**Returns:**

Return value is of type `CYBLE_API_RESULT_T`.

- `CYBLE_ERROR_OK` - The request was sent successfully.
- `CYBLE_ERROR_INVALID_PARAMETER` - Validation of the input parameters failed.
- `CYBLE_ERROR_INVALID_STATE` - Connection with the server is not established.
- `CYBLE_ERROR_INVALID_OPERATION` - This operation is not permitted on specified attribute.
- `CYBLE_ERROR_MEMORY_ALLOCATION_FAILED` - Memory allocation failed.
- `CYBLE_ERROR_GATT_DB_INVALID_ATTR_HANDLE` - Peer device doesn't have a particular descriptor.

**Events**

In case of successful execution (return value = `CYBLE_ERROR_OK`) the next events can appear:

If the CTS service-specific callback is registered (with `CyBle_CtsRegisterAttrCallback`):

- `CYBLE_EVT_CTSC_WRITE_DESCR_RESPONSE` - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index etc.) are provided with event parameter structure of type [CYBLE\\_CTS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the CTS service-specific callback is not registered):

- `CYBLE_EVT_GATTC_WRITE_RSP` - in case if the requested attribute is successfully wrote on the peer device.
- `CYBLE_EVT_GATTC_ERROR_RSP` - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) `CyBle_CtscGetCharacteristicDescriptor` ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_CTS\\_CHAR\\_INDEX\\_T](#) *charIndex*, `uint8` *descrIndex*)**

Gets a characteristic descriptor of the Current Time Characteristic of the Current Time Service.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>descrIndex</i>	The index of a service characteristic descriptor.

**Returns:**

Return value is of type `CYBLE_API_RESULT_T`.

- `CYBLE_ERROR_OK` - The request was sent successfully.
- `CYBLE_ERROR_INVALID_PARAMETER` - Validation of the input parameters failed.
- `CYBLE_ERROR_INVALID_STATE` - State is not valid.
- `CYBLE_ERROR_MEMORY_ALLOCATION_FAILED` - Memory allocation failed.
- `CYBLE_ERROR_INVALID_OPERATION` - This operation is not permitted on specified attribute.



- `CYBLE_ERROR_GATT_DB_INVALID_ATTR_HANDLE` - Peer device doesn't have a particular descriptor.

### Events

In case of successful execution (return value = `CYBLE_ERROR_OK`) the next events can appear:

If the CTS service-specific callback is registered (with `CyBle_CtsRegisterAttrCallback`):

- `CYBLE_EVT_CTSC_READ_DESCR_RESPONSE` - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index, value, etc.) are provided with event parameter structure of type [CYBLE\\_CTS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the CTS service-specific callback is not registered):

- `CYBLE_EVT_GATTC_READ_RSP` - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- `CYBLE_EVT_GATTC_ERROR_RSP` - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

## CTS Definitions and Data Structures

### Description

Contains the CTS specific definitions and data structures used in the CTS APIs.

### Data Structures

- struct [CYBLE\\_CTS\\_CURRENT\\_TIME\\_T](#)
- struct [CYBLE\\_CTS\\_LOCAL\\_TIME\\_INFO\\_T](#)
- struct [CYBLE\\_CTS\\_REFERENCE\\_TIME\\_INFO\\_T](#)
- struct [CYBLE\\_CTS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_CTS\\_DESCR\\_VALUE\\_T](#)
- struct [CYBLE\\_CTSS\\_T](#)
- struct [CYBLE\\_CTSC\\_T](#)

### Enumerations

- enum [CYBLE\\_CTS\\_CHAR\\_INDEX\\_T](#){ [CYBLE\\_CTS\\_CURRENT\\_TIME](#), [CYBLE\\_CTS\\_LOCAL\\_TIME\\_INFO](#), [CYBLE\\_CTS\\_REFERENCE\\_TIME\\_INFO](#), [CYBLE\\_CTS\\_CHAR\\_COUNT](#)}
- enum [CYBLE\\_CTS\\_CHAR\\_DESCRIPTOR\\_T](#){ [CYBLE\\_CTS\\_CURRENT\\_TIME\\_CCCD](#), [CYBLE\\_CTS\\_COUNT](#)}

### Enumeration Type Documentation

#### enum [CYBLE\\_CTS\\_CHAR\\_INDEX\\_T](#)

Service Characteristics indexes

#### Enumerator

**`CYBLE_CTS_CURRENT_TIME`** Current Time characteristic index

**`CYBLE_CTS_LOCAL_TIME_INFO`** Local Time Information characteristic index

**`CYBLE_CTS_REFERENCE_TIME_INFO`** Reference Time Information characteristic index

**`CYBLE_CTS_CHAR_COUNT`** Total count of Current Time Service characteristics



**enum [CYBLE\\_CTS\\_CHAR\\_DESCRIPTOR\\_T](#)**

Service Characteristic Descriptors indexes

**Enumerator****[CYBLE\\_CTS\\_CURRENT\\_TIME\\_CCCD](#)** Current Time Client Characteristic configuration descriptor index**[CYBLE\\_CTS\\_COUNT](#)** Total count of Current Time Service characteristic descriptors

## Device Information Service (DIS)

### Description

The Device Information Service exposes manufacturer and/or vendor information about a device.

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The DIS API names begin with CyBle\_Dis. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [DIS Server and Client Function](#)

*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*

- [DIS Server Functions](#)

*APIs unique to DIS designs configured as a GATT Server role.*

- [DIS Client Functions](#)

*APIs unique to DIS designs configured as a GATT Client role.*

- [DIS Definitions and Data Structures](#)

*Contains the DIS specific definitions and data structures used in the DIS APIs.*

## DIS Server and Client Function

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.

No letter is appended to the API name: CyBle\_Dis

### Functions

- void [CyBle\\_DisRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

### Function Documentation

**void CyBle\_DisRegisterAttrCallback ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)**

Registers a callback function for service specific attribute operations. Callback doesn't have events in server role.

**Parameters:**

<i>callbackFunc</i>	<p>An application layer event callback function to receive events from the BLE Component. The definition of CYBLE_CALLBACK_T for Device Information Service is:</p> <pre>typedef void (* CYBLE_CALLBACK_T) (uint32 eventCode, void *eventParam)</pre> <ul style="list-style-type: none"> <li>• eventCode indicates the event that triggered this callback.</li> </ul>
---------------------	---



	<ul style="list-style-type: none"> <li>eventParam contains the parameters corresponding to the current event.</li> </ul>
--	--

**Returns:**

None

**Events**

None

## DIS Server Functions

### Description

APIs unique to DIS designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_Diss

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_DissSetCharacteristicValue](#) ([CYBLE\\_DIS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_DissGetCharacteristicValue](#) ([CYBLE\\_DIS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)

### Function Documentation

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_DissSetCharacteristicValue ([CYBLE\\_DIS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)**

Sets a characteristic value of the service, which is identified by charIndex, to the local database.

**Parameters:**

<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>*attrValue</i>	The pointer to the characteristic value data that should be stored to the GATT database.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed

**Events**

None

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_DissGetCharacteristicValue ([CYBLE\\_DIS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)**

Gets a characteristic value of the service, which is identified by charIndex, from the GATT database.

**Parameters:**

<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>*attrValue</i>	The pointer to the location where characteristic value data should be



	stored.
--	---------

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T. Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed

**Events**

None

## DIS Client Functions

### Description

APIs unique to DIS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: CyBle\_Disc

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_DiscGetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_DIS\\_CHAR\\_INDEX\\_T](#) charIndex)

### Function Documentation

[CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_DiscGetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_DIS\\_CHAR\\_INDEX\\_T](#) *charIndex*)

This function is used to read the characteristic Value from a server which is identified by charIndex.

The Read Response returns the characteristic value in the Attribute Value parameter. The Read Response only contains the characteristic value that is less than or equal to (MTU - 1) octets in length. If the characteristic value is greater than (MTU - 1) octets in length, a Read Long Characteristic Value procedure may be used if the rest of the characteristic value is required.

This function call can result in generation of the following events based on the response from the server device.

- CYBLE\_EVT\_DISC\_READ\_CHAR\_RESPONSE
- CYBLE\_EVT\_GATTC\_ERROR\_RSP

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The read request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the DIS service-specific callback is registered (with CyBle\_DisRegisterAttrCallback):



- `CYBLE_EVT_DISC_READ_CHAR_RESPONSE` - in case if the requested attribute is successfully wrote on the peer device, the details (char index , value, etc.) are provided with event parameter structure of type [CYBLE\\_DIS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the DIS service-specific callback is not registered):

- `CYBLE_EVT_GATTC_READ_RSP` - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- `CYBLE_EVT_GATTC_ERROR_RSP` - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

## DIS Definitions and Data Structures

### Description

Contains the DIS specific definitions and data structures used in the DIS APIs.

### Data Structures

- struct [CYBLE\\_DISS\\_T](#)
- struct [CYBLE\\_DISC\\_T](#)
- struct [CYBLE\\_DIS\\_CHAR\\_VALUE\\_T](#)

### Enumerations

- enum [CYBLE\\_DIS\\_CHAR\\_INDEX\\_T](#) { [CYBLE\\_DIS\\_MANUFACTURER\\_NAME](#), [CYBLE\\_DIS\\_MODEL\\_NUMBER](#), [CYBLE\\_DIS\\_SERIAL\\_NUMBER](#), [CYBLE\\_DIS\\_HARDWARE\\_REV](#), [CYBLE\\_DIS\\_FIRMWARE\\_REV](#), [CYBLE\\_DIS\\_SOFTWARE\\_REV](#), [CYBLE\\_DIS\\_SYSTEM\\_ID](#), [CYBLE\\_DIS\\_REG\\_CERT\\_DATA](#), [CYBLE\\_DIS\\_PNP\\_ID](#), [CYBLE\\_DIS\\_CHAR\\_COUNT](#) }

### Enumeration Type Documentation

#### enum [CYBLE\\_DIS\\_CHAR\\_INDEX\\_T](#)

DIS characteristic index

##### Enumerator

***CYBLE\_DIS\_MANUFACTURER\_NAME*** Manufacturer Name String characteristic index

***CYBLE\_DIS\_MODEL\_NUMBER*** Model Number String characteristic index

***CYBLE\_DIS\_SERIAL\_NUMBER*** Serial Number String characteristic index

***CYBLE\_DIS\_HARDWARE\_REV*** Hardware Revision String characteristic index

***CYBLE\_DIS\_FIRMWARE\_REV*** Firmware Revision String characteristic index

***CYBLE\_DIS\_SOFTWARE\_REV*** Software Revision String characteristic index

***CYBLE\_DIS\_SYSTEM\_ID*** System ID characteristic index

***CYBLE\_DIS\_REG\_CERT\_DATA*** IEEE 11073-20601 characteristic index

***CYBLE\_DIS\_PNP\_ID*** PnP ID characteristic index

***CYBLE\_DIS\_CHAR\_COUNT*** Total count of DIS characteristics

## Environmental Sensing Service (ESS)

### Description

The Environmental Sensing Service exposes measurement data from an environmental sensor intended for sports and fitness applications.

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The ESS API names begin with CyBle\_Ess. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [ESS Server and Client Function](#)  
*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*
- [ESS Server Functions](#)  
*APIs unique to ESS designs configured as a GATT Server role.*
- [ESS Client Functions](#)  
*APIs unique to ESS designs configured as a GATT Client role.*
- [ESS Definitions and Data Structures](#)  
*Contains the ESS specific definitions and data structures used in the ESS APIs.*

## ESS Server and Client Function

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.

No letter is appended to the API name: CyBle\_Ess

### Functions

- void [CyBle\\_EssRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

### Function Documentation

#### void CyBle\_EssRegisterAttrCallback ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

Registers a callback function for service specific attribute operations. Service specific write requests from peer device will not be handled with unregistered callback function.

##### Parameters:

<i>callbackFunc</i>	<p>An application layer event callback function to receive events from the BLE Component. The definition of CYBLE_CALLBACK_T for ESS Service is:</p> <pre>typedef void (* CYBLE_CALLBACK_T) (uint32 eventCode, void *eventParam)</pre> <ul style="list-style-type: none"> <li>• eventCode: Indicates the event that triggered this callback (e.g. CYBLE_EVT_ESS_NOTIFICATION_ENABLED).</li> <li>• eventParam: Contains the parameters corresponding to the current event. (e.g. Pointer to <a href="#">CYBLE_ESS_CHAR_VALUE_T</a> structure that contains details of the characteristic for which the notification enabled event was triggered).</li> </ul>
---------------------	---





**Returns:**

None.

**Events**

None

## ESS Server Functions

### Description

APIs unique to ESS designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_Esss

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_EsssSetChangeIndex](#)(uint16 *essIndex*)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_EsssSetCharacteristicValue](#) ([CYBLE\\_ESS\\_CHAR\\_INDEX\\_T](#) *charIndex*, uint8 *charInstance*, uint8 *attrSize*, uint8 \**attrValue*)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_EsssGetCharacteristicValue](#) ([CYBLE\\_ESS\\_CHAR\\_INDEX\\_T](#) *charIndex*, uint8 *charInstance*, uint8 *attrSize*, uint8 \**attrValue*)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_EsssSetCharacteristicDescriptor](#) ([CYBLE\\_ESS\\_CHAR\\_INDEX\\_T](#) *charIndex*, uint8 *charInstance*, [CYBLE\\_ESS\\_DESCR\\_INDEX\\_T](#) *descrIndex*, uint16 *attrSize*, uint8 \**attrValue*)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_EsssGetCharacteristicDescriptor](#) ([CYBLE\\_ESS\\_CHAR\\_INDEX\\_T](#) *charIndex*, uint8 *charInstance*, [CYBLE\\_ESS\\_DESCR\\_INDEX\\_T](#) *descrIndex*, uint16 *attrSize*, uint8 \**attrValue*)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_EsssSendNotification](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_ESS\\_CHAR\\_INDEX\\_T](#) *charIndex*, uint8 *charInstance*, uint8 *attrSize*, uint8 \**attrValue*)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_EsssSendIndication](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_ESS\\_CHAR\\_INDEX\\_T](#) *charIndex*, uint8 *charInstance*, uint8 *attrSize*, uint8 \**attrValue*)

### Function Documentation

#### [CYBLE\\_API\\_RESULT\\_T CyBle\\_EsssSetChangeIndex](#) (uint16 *essIndex*)

Performs write operation of two-byte pseudo-random change index to the advertisement packet. The "Service Data" field should be selected in the component customizer GUI and contain a two-byte initial change index value and in opposite case the function will always return "CYBLE\_ERROR\_INVALID\_OPERATION".

**Parameters:**

<i>essIndex</i>	A two-byte pseudo-random change index to be written to the advertisement data.
-----------------	--

**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully.
- CYBLE\_ERROR\_INVALID\_OPERATION - The change index is not present in the advertisement data or its length is not equal to two bytes.

#### [CYBLE\\_API\\_RESULT\\_T CyBle\\_EsssSetCharacteristicValue](#) ([CYBLE\\_ESS\\_CHAR\\_INDEX\\_T](#) *charIndex*, uint8 *charInstance*, uint8 *attrSize*, uint8 \* *attrValue*)

Sets the characteristic value of the service in the local database.

**Parameters:**

<i>charIndex</i>	The index of the service characteristic. Starts with zero.
------------------	--



<i>charInstance</i>	The instance number of the characteristic specified by "charIndex".
<i>attrSize</i>	The size (in Bytes) of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be stored in the GATT database.

**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - An optional characteristic is absent.

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_EsssGetCharacteristicValue (CYBLE\_ESS\_CHAR\_INDEX\_T charIndex, uint8 charInstance, uint8 attrSize, uint8 \* attrValue)**

Gets the characteristic value of the service, which is a value identified by charIndex.

**Parameters:**

<i>charIndex</i>	The index of the service characteristic. Starts with zero.
<i>charInstance</i>	The instance number of the characteristic specified by "charIndex".
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the location where characteristic value data should be stored.

**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - An optional characteristic is absent.

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_EsssSetCharacteristicDescriptor (CYBLE\_ESS\_CHAR\_INDEX\_T charIndex, uint8 charInstance, CYBLE\_ESS\_DESCR\_INDEX\_T descrIndex, uint16 attrSize, uint8 \* attrValue)**

Sets the characteristic descriptor of the specified characteristic.

**Parameters:**

<i>charIndex</i>	The index of the service characteristic.
<i>charInstance</i>	The instance number of the characteristic specified by "charIndex".
<i>descrIndex</i>	The index of the service characteristic descriptor of type CYBLE_ESS_DESCR_INDEX_T.
<i>attrSize</i>	The size of the characteristic descriptor attribute.
<i>attrValue</i>	The pointer to the descriptor value data to be stored in the GATT database.

**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully.



- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - An optional characteristic is absent.

**Events**

None

**CYBLE\_API\_RESULT\_T** **CyBle\_EsssGetCharacteristicDescriptor** (**CYBLE\_ESS\_CHAR\_INDEX\_T** *charIndex*, **uint8** *charInstance*, **CYBLE\_ESS\_DESCR\_INDEX\_T** *descrIndex*, **uint16** *attrSize*, **uint8 \*** *attrValue*)

Gets the characteristic descriptor of the specified characteristic.

**Parameters:**

<i>charIndex</i>	The index of the service characteristic. Starts with zero.
<i>charInstance</i>	The instance number of the characteristic specified by "charIndex".
<i>descrIndex</i>	The index of the service characteristic descriptor of type CYBLE_ESS_DESCR_INDEX_T.
<i>attrSize</i>	The size of the characteristic descriptor attribute.
<i>attrValue</i>	The pointer to the location where characteristic descriptor value data should be stored.

**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - An optional characteristic is absent.

**Events**

None

**CYBLE\_API\_RESULT\_T** **CyBle\_EsssSendNotification** (**CYBLE\_CONN\_HANDLE\_T** *connHandle*, **CYBLE\_ESS\_CHAR\_INDEX\_T** *charIndex*, **uint8** *charInstance*, **uint8** *attrSize*, **uint8 \*** *attrValue*)

Sends a notification with a characteristic value of the Environmental Sensing Service, which is a value specified by charIndex, to the client's device.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic. Starts with zero.
<i>charInstance</i>	The instance number of the characteristic specified by "charIndex".
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the client's device.

**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_NTF\_DISABLED - A notification is not enabled by the client.



- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - An optional characteristic is absent.

#### Events

None

**CYBLE\_API\_RESULT\_T** **CyBle\_EsssSendIndication** (**CYBLE\_CONN\_HANDLE\_T** *connHandle*, **CYBLE\_ESS\_CHAR\_INDEX\_T** *charIndex*, **uint8** *charInstance*, **uint8** *attrSize*, **uint8 \*** *attrValue*)

Sends an indication with a characteristic value of the Environmental Sensing Service, which is a value specified by *charIndex*, to the client's device.

#### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>charInstance</i>	The instance number of the characteristic specified by "charIndex".
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the client's device.

#### Returns:

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_IND\_DISABLED - Indication is not enabled by the client.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - An optional characteristic is absent.

#### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the ESS service-specific callback is registered (with **CyBle\_EssRegisterAttrCallback**):

- CYBLE\_EVT\_ESSS\_INDICATION\_CONFIRMED - in case if the indication is successfully delivered to the peer device.

Otherwise (if the ESS service-specific callback is not registered):

- CYBLE\_EVT\_GATTS\_HANDLE\_VALUE\_CNF - in case if the indication is successfully delivered to the peer device.

## ESS Client Functions

### Description

APIs unique to ESS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: **CyBle\_Essc**

### Functions

- **CYBLE\_API\_RESULT\_T** **CyBle\_EsscSetCharacteristicValue** (**CYBLE\_CONN\_HANDLE\_T** *connHandle*, **CYBLE\_ESS\_CHAR\_INDEX\_T** *charIndex*, **uint8** *charInstance*, **uint8** *attrSize*, **uint8 \*** *attrValue*)
- **CYBLE\_API\_RESULT\_T** **CyBle\_EsscGetCharacteristicValue** (**CYBLE\_CONN\_HANDLE\_T** *connHandle*, **CYBLE\_ESS\_CHAR\_INDEX\_T** *charIndex*, **uint8** *charInstance*)



- [CYBLE\\_API\\_RESULT\\_T CyBle\\_EsscSetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_ESS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 charInstance, [CYBLE\\_ESS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_EsscGetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_ESS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 charInstance, [CYBLE\\_ESS\\_DESCR\\_INDEX\\_T](#) descrIndex)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_EsscSetLongCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_ESS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 charInstance, [CYBLE\\_ESS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint16 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_EsscGetLongCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_ESS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 charInstance, [CYBLE\\_ESS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint16 attrSize, uint8 \*attrValue)

## Function Documentation

**[CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_EsscSetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_ESS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 charInstance, uint8 attrSize, uint8 \* attrValue)**

Sends a request to set a characteristic value of the service, which is a value identified by charIndex, to the server's device.

### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic. Starts with zero.
<i>charInstance</i>	The instance number of the characteristic specified by "charIndex".
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the server device.

### Returns:

A return value is of type [CYBLE\\_API\\_RESULT\\_T](#).

- [CYBLE\\_ERROR\\_OK](#) - The request was sent successfully
- [CYBLE\\_ERROR\\_INVALID\\_PARAMETER](#) - Validation of the input parameters failed
- [CYBLE\\_ERROR\\_MEMORY\\_ALLOCATION\\_FAILED](#) - Memory allocation failed.
- [CYBLE\\_ERROR\\_INVALID\\_STATE](#) - Connection with the server is not established.
- [CYBLE\\_ERROR\\_GATT\\_DB\\_INVALID\\_ATTR\\_HANDLE](#) - The peer device doesn't have the particular characteristic.
- [CYBLE\\_ERROR\\_INVALID\\_OPERATION](#) - Operation is invalid for this characteristic.
- [CYBLE\\_ERROR\\_GATT\\_DB\\_INVALID\\_ATTR\\_HANDLE](#) - An optional characteristic is absent.

### Events

In case of successful execution (return value = [CYBLE\\_ERROR\\_OK](#)) the next events can appear:

If the ESS service-specific callback is registered (with [CyBle\\_EssRegisterAttrCallback](#)):

- [CYBLE\\_EVT\\_ESSC\\_WRITE\\_CHAR\\_RESPONSE](#) - in case if the requested attribute is successfully wrote on the peer device, the details (char index, etc.) are provided with event parameter structure of type [CYBLE\\_ESS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the ESS service-specific callback is not registered):

- [CYBLE\\_EVT\\_GATTC\\_WRITE\\_RSP](#) - in case if the requested attribute is successfully wrote on the peer device.

- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_EsscGetCharacteristicValue ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_ESS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 charInstance)**

This function is used to read a characteristic value, which is a value identified by charIndex, from the server.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic. Starts with zero.
<i>charInstance</i>	The instance number of the characteristic specified by "charIndex".

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The read request was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the server is not established.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - An optional characteristic is absent.

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the ESS service-specific callback is registered (with CyBle\_EssRegisterAttrCallback):

- CYBLE\_EVT\_ESSC\_READ\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index , value, etc.) are provided with event parameter structure of type [CYBLE\\_ESS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the ESS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_EsscSetCharacteristicDescriptor ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_ESS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 charInstance, [CYBLE\\_ESS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \* attrValue)**

This function is used to write the characteristic descriptor to the server, which is identified by charIndex and descrIndex.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic. Starts with zero.
<i>descrIndex</i>	The index of the service characteristic descriptor.
<i>charInstance</i>	The instance number of the characteristic specified by "charIndex".



<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic descriptor value data that should be sent to the server device.

**Returns:**

A return value is of type `CYBLE_API_RESULT_T`.

- `CYBLE_ERROR_OK` - The request was sent successfully.
- `CYBLE_ERROR_INVALID_PARAMETER` - Validation of the input parameters failed.
- `CYBLE_ERROR_INVALID_STATE` - The state is not valid.
- `CYBLE_ERROR_MEMORY_ALLOCATION_FAILED` - Memory allocation failed.
- `CYBLE_ERROR_INVALID_OPERATION` - This operation is not permitted on the specified attribute.
- `CYBLE_ERROR_GATT_DB_INVALID_ATTR_HANDLE` - An optional Characteristic Descriptor is absent.

**Events**

In case of successful execution (return value = `CYBLE_ERROR_OK`) the next events can appear:

If the ESS service-specific callback is registered (with `CyBle_EssRegisterAttrCallback`):

- `CYBLE_EVT_ESSC_WRITE_DESCR_RESPONSE` - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index etc.) are provided with event parameter structure of type [CYBLE\\_ESS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the ESS service-specific callback is not registered):

- `CYBLE_EVT_GATTC_WRITE_RSP` - in case if the requested attribute is successfully wrote on the peer device.
- `CYBLE_EVT_GATTC_ERROR_RSP` - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) `CyBle_EsscGetCharacteristicDescriptor` ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_ESS\\_CHAR\\_INDEX\\_T](#) *charIndex*, `uint8` *charInstance*, [CYBLE\\_ESS\\_DESCR\\_INDEX\\_T](#) *descrIndex*)**

Sends a request to get the characteristic descriptor of the specified characteristic of the service.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic. Starts with zero.
<i>charInstance</i>	The instance number of the characteristic specified by "charIndex".
<i>descrIndex</i>	The index of the service characteristic descriptor.

**Returns:**

- `CYBLE_ERROR_OK` - The request was sent successfully.
- `CYBLE_ERROR_INVALID_PARAMETER` - Validation of the input parameters failed.
- `CYBLE_ERROR_INVALID_STATE` - The state is not valid.
- `CYBLE_ERROR_MEMORY_ALLOCATION_FAILED` - Memory allocation failed.
- `CYBLE_ERROR_INVALID_OPERATION` - This operation is not permitted on the specified attribute.
- `CYBLE_ERROR_GATT_DB_INVALID_ATTR_HANDLE` - An optional Characteristic Descriptor is absent.

**Events**

In case of successful execution (return value = `CYBLE_ERROR_OK`) the next events can appear:





If the ESS service-specific callback is registered (with `CyBle_EssRegisterAttrCallback`):

- `CYBLE_EVT_ESSC_READ_DESCR_RESPONSE` - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index, value, etc.) are provided with event parameter structure of type [CYBLE\\_ESS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the ESS service-specific callback is not registered):

- `CYBLE_EVT_GATTC_READ_RSP` - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- `CYBLE_EVT_GATTC_ERROR_RSP` - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) `CyBle_EsscSetLongCharacteristicDescriptor` ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_ESS\\_CHAR\\_INDEX\\_T](#) *charIndex*, *uint8 charInstance*, [CYBLE\\_ESS\\_DESCR\\_INDEX\\_T](#) *descrIndex*, *uint16 attrSize*, *uint8 \* attrValue*)**

This function is used to write a long characteristic descriptor to the server, which is identified by *charIndex* and *descrIndex*.

#### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic. Starts with zero.
<i>descrIndex</i>	The index of the service characteristic descriptor.
<i>charInstance</i>	The instance number of the characteristic specified by "charIndex".
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic descriptor value data that should be sent to the server device.

#### Returns:

Return value is of type `CYBLE_API_RESULT_T`.

- `CYBLE_ERROR_OK` - The request was sent successfully.
- `CYBLE_ERROR_INVALID_PARAMETER` - Validation of the input parameters failed.
- `CYBLE_ERROR_INVALID_STATE` - The state is not valid.
- `CYBLE_ERROR_MEMORY_ALLOCATION_FAILED` - Memory allocation failed.
- `CYBLE_ERROR_INVALID_OPERATION` - This operation is not permitted on the specified attribute.
- `CYBLE_ERROR_GATT_DB_INVALID_ATTR_HANDLE` - An optional characteristic Descriptor is absent.

**[CYBLE\\_API\\_RESULT\\_T](#) `CyBle_EsscGetLongCharacteristicDescriptor` ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_ESS\\_CHAR\\_INDEX\\_T](#) *charIndex*, *uint8 charInstance*, [CYBLE\\_ESS\\_DESCR\\_INDEX\\_T](#) *descrIndex*, *uint16 attrSize*, *uint8 \* attrValue*)**

Sends a request to read long characteristic descriptor of the specified characteristic of the service.

#### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic. Starts with zero.
<i>charInstance</i>	The instance number of the characteristic specified by "charIndex".
<i>descrIndex</i>	The index of the service characteristic descriptor.
<i>attrSize</i>	The size of the characteristic value attribute.



<i>attrValue</i>	The pointer to the buffer where the read long characteristic descriptor value should be stored.
------------------	---

**Returns:**

- CYBLE\_ERROR\_OK - The request was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_INVALID\_STATE - The state is not valid.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted on the specified attribute.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The optional Characteristic Descriptor is absent.

## ESS Definitions and Data Structures

### Description

Contains the ESS specific definitions and data structures used in the ESS APIs.

### Data Structures

- struct [CYBLE\\_ESSS\\_CHAR\\_T](#)
- struct [CYBLE\\_ESSS\\_CHAR\\_INFO\\_PTR\\_T](#)
- struct [CYBLE\\_ESSS\\_T](#)
- struct [CYBLE\\_ESSC\\_CHAR\\_T](#)
- struct [CYBLE\\_ESSC\\_CHAR\\_INFO\\_PTR\\_T](#)
- struct [CYBLE\\_ESSC\\_T](#)
- struct [CYBLE\\_ESS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_ESS\\_DESCR\\_VALUE\\_T](#)

### Enumerations

- enum [CYBLE\\_ESS\\_CHAR\\_INDEX\\_T](#){ [CYBLE\\_ESS\\_DESCRIPTOR\\_VALUE\\_CHANGED](#), [CYBLE\\_ESS\\_APPARENT\\_WIND\\_DIR](#), [CYBLE\\_ESS\\_APPARENT\\_WIND\\_SPEED](#), [CYBLE\\_ESS\\_DEW\\_POINT](#), [CYBLE\\_ESS\\_ELEVATION](#), [CYBLE\\_ESS\\_GUST\\_FACTOR](#), [CYBLE\\_ESS\\_HEAT\\_INDEX](#), [CYBLE\\_ESS\\_HUMIDITY](#), [CYBLE\\_ESS\\_IRRADIANCE](#), [CYBLE\\_ESS\\_POLLEN\\_CONCENTRATION](#), [CYBLE\\_ESS\\_RAINFALL](#), [CYBLE\\_ESS\\_PRESSURE](#), [CYBLE\\_ESS\\_TEMPERATURE](#), [CYBLE\\_ESS\\_TRUE\\_WIND\\_DIR](#), [CYBLE\\_ESS\\_TRUE\\_WIND\\_SPEED](#), [CYBLE\\_ESS\\_UV\\_INDEX](#), [CYBLE\\_ESS\\_WIND\\_CHILL](#), [CYBLE\\_ESS\\_BAROMETRIC\\_PRESSURE\\_TREND](#), [CYBLE\\_ESS\\_MAGNETIC\\_DECLINATION](#), [CYBLE\\_ESS\\_MAGNETIC\\_FLUX\\_DENSITY\\_2D](#), [CYBLE\\_ESS\\_MAGNETIC\\_FLUX\\_DENSITY\\_3D](#), [CYBLE\\_ESS\\_CHAR\\_COUNT](#)}
- enum [CYBLE\\_ESS\\_DESCR\\_INDEX\\_T](#){ [CYBLE\\_ESS\\_CCCD](#), [CYBLE\\_ESS\\_CHAR\\_EXTENDED\\_PROPERTIES](#), [CYBLE\\_ESS\\_ES\\_MEASUREMENT\\_DESCR](#), [CYBLE\\_ESS\\_ES\\_TRIGGER\\_SETTINGS\\_DESCR1](#), [CYBLE\\_ESS\\_ES\\_TRIGGER\\_SETTINGS\\_DESCR2](#), [CYBLE\\_ESS\\_ES\\_TRIGGER\\_SETTINGS\\_DESCR3](#), [CYBLE\\_ESS\\_ES\\_CONFIG\\_DESCR](#), [CYBLE\\_ESS\\_CHAR\\_USER\\_DESCRIPTION\\_DESCR](#), [CYBLE\\_ESS\\_VRD](#), [CYBLE\\_ESS\\_DESCR\\_COUNT](#)}

### Enumeration Type Documentation

#### enum [CYBLE\\_ESS\\_CHAR\\_INDEX\\_T](#)

ESS Characteristic indexes



**Enumerator**

**CYBLE\_ESS\_DESCRIPTOR\_VALUE\_CHANGED** Descriptor Value Changed Characteristic index  
**CYBLE\_ESS\_APPARENT\_WIND\_DIR** Apparent Wind Direction Characteristic index  
**CYBLE\_ESS\_APPARENT\_WIND\_SPEED** Apparent Wind Speed Characteristic index  
**CYBLE\_ESS\_DEW\_POINT** Dew Point Characteristic index  
**CYBLE\_ESS\_ELEVATION** Elevation Characteristic index  
**CYBLE\_ESS\_GUST\_FACTOR** Gust Factor Characteristic index  
**CYBLE\_ESS\_HEAT\_INDEX** Heat Index Characteristic index  
**CYBLE\_ESS\_HUMIDITY** Humidity Characteristic index  
**CYBLE\_ESS\_IRRADIANCE** Irradiance Characteristic index  
**CYBLE\_ESS\_POLLEN\_CONCENTRATION** Pollen Concentration Characteristic index  
**CYBLE\_ESS\_RAINFALL** Rainfall Characteristic index  
**CYBLE\_ESS\_PRESSURE** Pressure Characteristic index  
**CYBLE\_ESS\_TEMPERATURE** Temperature Characteristic index  
**CYBLE\_ESS\_TRUE\_WIND\_DIR** True Wind Direction Characteristic index  
**CYBLE\_ESS\_TRUE\_WIND\_SPEED** True Wind Speed Characteristic index  
**CYBLE\_ESS\_UV\_INDEX** UV Index Characteristic index  
**CYBLE\_ESS\_WIND\_CHILL** Wind Chill Characteristic index  
**CYBLE\_ESS\_BAROMETRIC\_PRESSURE\_TREND** Barometric Pressure trend Characteristic index  
**CYBLE\_ESS\_MAGNETIC\_DECLINATION** Magnetic Declination Characteristic index  
**CYBLE\_ESS\_MAGNETIC\_FLUX\_DENSITY\_2D** Magnetic Flux Density 2D Characteristic index  
**CYBLE\_ESS\_MAGNETIC\_FLUX\_DENSITY\_3D** Magnetic Flux Density 3D Characteristic index  
**CYBLE\_ESS\_CHAR\_COUNT** Total count of ESS characteristics

**enum [CYBLE\\_ESS\\_DESCR\\_INDEX\\_T](#)**

ESS Characteristic Descriptors indexes

**Enumerator**

**CYBLE\_ESS\_CCCD** Client Characteristic Configuration Descriptor index  
**CYBLE\_ESS\_CHAR\_EXTENDED\_PROPERTIES** Characteristic Extended Properties Descriptor index  
**CYBLE\_ESS\_ES\_MEASUREMENT\_DESCR** ES Measurement Descriptor index  
**CYBLE\_ESS\_ES\_TRIGGER\_SETTINGS\_DESCR1** ES Trigger Settings Descriptor #1 index  
**CYBLE\_ESS\_ES\_TRIGGER\_SETTINGS\_DESCR2** ES Trigger Settings Descriptor #2 index  
**CYBLE\_ESS\_ES\_TRIGGER\_SETTINGS\_DESCR3** ES Trigger Settings Descriptor #3 index  
**CYBLE\_ESS\_ES\_CONFIG\_DESCR** ES Configuration Descriptor index  
**CYBLE\_ESS\_CHAR\_USER\_DESCRIPTION\_DESCR** Characteristic User Description Descriptor index  
**CYBLE\_ESS\_VRD** Valid Range Descriptor index  
**CYBLE\_ESS\_DESCR\_COUNT** Total count of descriptors

## Glucose Service (GLS)

### Description

The Glucose Service exposes glucose and other data related to a personal glucose sensor for consumer healthcare applications and is not designed for clinical use.

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.



The GLS API names begin with CyBle\_Gls. In addition to this, the APIs also append the GATT role initial letter in the API name.

## Modules

- [GLS Server and Client Function](#)  
*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*
- [GLS Server Functions](#)  
*APIs unique to GLS designs configured as a GATT Server role.*
- [GLS Client Functions](#)  
*APIs unique to GLS designs configured as a GATT Client role.*
- [GLS Definitions and Data Structures](#)  
*Contains the GLS specific definitions and data structures used in the GLS APIs.*

## GLS Server and Client Function

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles. No letter is appended to the API name: CyBle\_Gls

### Functions

- void [CyBle\\_GlsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

### Function Documentation

#### void CyBle\_GlsRegisterAttrCallback ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

Registers a callback function for service specific attribute operations. Service specific write requests from peer device will not be handled with unregistered callback function.

##### Parameters:

<i>callbackFunc</i>	<p>An application layer event callback function to receive events from the BLE Component. The definition of CYBLE_CALLBACK_T for Glucose Service is:</p> <pre>typedef void (* CYBLE_CALLBACK_T) (uint32 eventCode, void *eventParam)</pre> <ul style="list-style-type: none"> <li>• eventCode indicates the event that triggered this callback.</li> <li>• eventParam contains the parameters corresponding to the current event.</li> </ul>
---------------------	--

##### Returns:

None

##### Events

None

##### Side Effects

The \*eventParams in the callback function should not be used by the application once the callback function execution is finished. Otherwise this data may become corrupted.

## GLS Server Functions

### Description

APIs unique to GLS designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_Glss

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GlssSetCharacteristicValue](#) ([CYBLE\\_GLS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GlssGetCharacteristicValue](#) ([CYBLE\\_GLS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GlssGetCharacteristicDescriptor](#) ([CYBLE\\_GLS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_GLS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GlssSendNotification](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_GLS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GlssSendIndication](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_GLS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)

### Function Documentation

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_GlssSetCharacteristicValue ([CYBLE\\_GLS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)**

Sets a characteristic value of the service, which is identified by charIndex.

#### Parameters:

<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>*attrValue</i>	The pointer to the characteristic value data that should be stored in the GATT database.

#### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent

#### Events

None

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_GlssGetCharacteristicValue ([CYBLE\\_GLS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)**

Gets a characteristic value of the service, which is identified by charIndex.

#### Parameters:

<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>*attrValue</i>	Pointer to the location where Characteristic value data should be stored.



**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_GlssGetCharacteristicDescriptor (CYBLE\_GLS\_CHAR\_INDEX\_T *charIndex*, CYBLE\_GLS\_DESCR\_INDEX\_T *descrIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Gets the characteristic descriptor of the specified characteristic.

**Parameters:**

<i>charIndex</i>	The index of the characteristic.
<i>descrIndex</i>	The index of the descriptor.
<i>attrSize</i>	The size of the descriptor value attribute.
<i>*attrValue</i>	Pointer to the location where the descriptor value data should be stored.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional descriptor is absent

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_GlssSendNotification (CYBLE\_CONN\_HANDLE\_T *connHandle*, CYBLE\_GLS\_CHAR\_INDEX\_T *charIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Sends a notification of the specified characteristic to the client device, as defined by the charIndex value.

**Parameters:**

<i>connHandle</i>	The connection handle which consist of the device ID and ATT connection ID.
<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>*attrValue</i>	Pointer to the Characteristic value data that should be sent to Client device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed



- CYBLE\_ERROR\_NTF\_DISABLED - Notification is not enabled by the client

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_GlssSendIndication (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_GLS\_CHAR\_INDEX\_T charIndex, uint8 attrSize, uint8 \* attrValue)**

Sends a indication of the specified characteristic to the client device, as defined by the charIndex value.

**Parameters:**

<i>connHandle</i>	The connection handle which consist of the device ID and ATT connection ID.
<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>*attrValue</i>	Pointer to the Characteristic value data that should be sent to Client device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_IND\_DISABLED - Indication is not enabled by the client

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the GLS service-specific callback is registered (with CyBle\_GlsRegisterAttrCallback):

- CYBLE\_EVT\_GLSS\_INDICATION\_CONFIRMED - in case if the indication is successfully delivered to the peer device.

Otherwise (if the GLS service-specific callback is not registered):

- CYBLE\_EVT\_GATTS\_HANDLE\_VALUE\_CNF - in case if the indication is successfully delivered to the peer device.

## GLS Client Functions

### Description

APIs unique to GLS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: CyBle\_Glsc

### Functions

- **CYBLE\_API\_RESULT\_T CyBle\_GlscSetCharacteristicValue (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_GLS\_CHAR\_INDEX\_T charIndex, uint8 attrSize, uint8 \*attrValue)**
- **CYBLE\_API\_RESULT\_T CyBle\_GlscGetCharacteristicValue (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_GLS\_CHAR\_INDEX\_T charIndex)**





- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GlscSetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T connHandle](#), [CYBLE\\_GLS\\_CHAR\\_INDEX\\_T charIndex](#), [CYBLE\\_GLS\\_DESCR\\_INDEX\\_T descrIndex](#), uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_GlscGetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T connHandle](#), [CYBLE\\_GLS\\_CHAR\\_INDEX\\_T charIndex](#), [CYBLE\\_GLS\\_DESCR\\_INDEX\\_T descrIndex](#))

## Function Documentation

**[CYBLE\\_API\\_RESULT\\_T CyBle\\_GlscSetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T connHandle](#), [CYBLE\\_GLS\\_CHAR\\_INDEX\\_T charIndex](#), uint8 attrSize, uint8 \* attrValue)**

This function is used to write the characteristic (which is identified by charIndex) value attribute to the server. The Write Response just confirms the operation success.

### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>*attrValue</i>	The pointer to the characteristic value data that should be sent to the server device.

### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the server is not established
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic

### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the GLS service-specific callback is registered (with CyBle\_GlsRegisterAttrCallback):

- CYBLE\_EVT\_GLSC\_WRITE\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, etc.) are provided with event parameter structure of type [CYBLE\\_GLS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the GLS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T CyBle\\_GlscGetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T connHandle](#), [CYBLE\\_GLS\\_CHAR\\_INDEX\\_T charIndex](#))**

This function is used to read the characteristic Value from a server which is identified by charIndex.

### Parameters:

<i>connHandle</i>	The connection handle.
-------------------	------------------------



<i>charIndex</i>	The index of the service characteristic.
------------------	--

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The read request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the server is not established
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the GLS service-specific callback is registered (with CyBle\_GlsRegisterAttrCallback):

- CYBLE\_EVT\_GLSC\_READ\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index , value, etc.) are provided with event parameter structure of type [CYBLE\\_GLS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the GLS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**CYBLE\_API\_RESULT\_T CyBle\_GlscSetCharacteristicDescriptor (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_GLS\_CHAR\_INDEX\_T charIndex, CYBLE\_GLS\_DESCR\_INDEX\_T descrIndex, uint8 attrSize, uint8 \*attrValue)**

Sets the Characteristic Descriptor of the specified Characteristic.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic.
<i>descrIndex</i>	The index of a service characteristic descriptor.
<i>attrSize</i>	The size of the characteristic descriptor value attribute.
<i>*attrValue</i>	Pointer to the characteristic descriptor value data that should be sent to the server device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_INVALID\_STATE - The state is not valid
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted on the specified attribute



## Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the GLS service-specific callback is registered (with CyBle\_GlsRegisterAttrCallback):

- CYBLE\_EVT\_GLSC\_WRITE\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index etc.) are provided with event parameter structure of type [CYBLE\\_GLS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the GLS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_GlscGetCharacteristicDescriptor ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_GLS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_GLS\\_DESCR\\_INDEX\\_T](#) descrIndex)**

Gets the characteristic descriptor of the specified characteristic.

### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic.
<i>descrIndex</i>	The index of the service characteristic descriptor.

### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_INVALID\_STATE - The state is not valid
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular descriptor
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted on the specified attribute

## Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the GLS service-specific callback is registered (with CyBle\_GlsRegisterAttrCallback):

- CYBLE\_EVT\_GLSC\_READ\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index, value, etc.) are provided with event parameter structure of type [CYBLE\\_GLS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the GLS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

## GLS Definitions and Data Structures

### Description

Contains the GLS specific definitions and data structures used in the GLS APIs.

### Data Structures

- struct [CYBLE\\_GLSS\\_CHAR\\_T](#)
- struct [CYBLE\\_GLSS\\_T](#)
- struct [CYBLE\\_GLSC\\_CHAR\\_T](#)
- struct [CYBLE\\_GLSC\\_T](#)
- struct [CYBLE\\_GLS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_GLS\\_DESCR\\_VALUE\\_T](#)

### Enumerations

- enum [CYBLE\\_GLS\\_CHAR\\_INDEX\\_T](#){ [CYBLE\\_GLS\\_GLMT](#), [CYBLE\\_GLS\\_GLMC](#), [CYBLE\\_GLS\\_GLFT](#), [CYBLE\\_GLS\\_RACP](#), [CYBLE\\_GLS\\_CHAR\\_COUNT](#)}
- enum [CYBLE\\_GLS\\_DESCR\\_INDEX\\_T](#){ [CYBLE\\_GLS\\_CCCD](#), [CYBLE\\_GLS\\_DESCR\\_COUNT](#)}

### Enumeration Type Documentation

#### enum [CYBLE\\_GLS\\_CHAR\\_INDEX\\_T](#)

Service Characteristics indexes

##### Enumerator

***CYBLE\_GLS\_GLMT*** Glucose Measurement characteristic index  
***CYBLE\_GLS\_GLMC*** Glucose Measurement Context characteristic index  
***CYBLE\_GLS\_GLFT*** Glucose Feature characteristic index  
***CYBLE\_GLS\_RACP*** Record Access Control Point characteristic index  
***CYBLE\_GLS\_CHAR\_COUNT*** Total count of GLS characteristics

#### enum [CYBLE\\_GLS\\_DESCR\\_INDEX\\_T](#)

Service Characteristic Descriptors indexes

##### Enumerator

***CYBLE\_GLS\_CCCD*** Client Characteristic Configuration descriptor index  
***CYBLE\_GLS\_DESCR\_COUNT*** Total count of GLS descriptors

## HID Service (HIDS)

### Description

The HID Service exposes data and associated formatting for HID Devices and HID Hosts.

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The HID API names begin with CyBle\_Hid. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [HIDS Server and Client Functions](#)



*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*

- [HIDS Server Functions](#)

*APIs unique to HID designs configured as a GATT Server role.*

- [HIDS Client Functions](#)

*APIs unique to HID designs configured as a GATT Client role.*

- [HIDS Definitions and Data Structures](#)

*Contains the HID specific definitions and data structures used in the HID APIs.*

## HIDS Server and Client Functions

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.

No letter is appended to the API name: CyBle\_Hid

### Functions

- void [CyBle\\_HidsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

### Function Documentation

#### void CyBle\_HidsRegisterAttrCallback ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

Registers a callback function for service specific attribute operations. Service specific write requests from peer device will not be handled with unregistered callback function.

#### Parameters:

<i>callbackFunc</i>	<p>An application layer event callback function to receive events from the BLE Component. The definition of CYBLE_CALLBACK_T for HID Service is:</p> <pre>typedef void (* CYBLE_CALLBACK_T) (uint32 eventCode, void *eventParam)</pre> <ul style="list-style-type: none"> <li>• eventCode indicates the event that triggered this callback (e.g. CYBLE_EVT_HIDS_NOTIFICATION_ENABLED).</li> <li>• eventParam contains the parameters corresponding to the current event. (e.g. pointer to <a href="#">CYBLE_HIDS_CHAR_VALUE_T</a> structure that contains details of the characteristic for which notification enabled event was triggered).</li> </ul>
---------------------	---

#### Returns:

None

#### Events

None

#### Side Effects

The \*eventParams in the callback function should not be used by the application once the callback function execution is finished. Otherwise this data may become corrupted.

## HIDS Server Functions

### Description

APIs unique to HID designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_Hids

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_HidssSetCharacteristicValue](#)(uint8 serviceIndex, [CYBLE\\_HIDS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_HidssGetCharacteristicValue](#)(uint8 serviceIndex, [CYBLE\\_HIDS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_HidssGetCharacteristicDescriptor](#)(uint8 serviceIndex, [CYBLE\\_HIDS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_HIDS\\_DESCR\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_HidssSendNotification](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, uint8 serviceIndex, [CYBLE\\_HIDS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)

### Function Documentation

**[CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_HidssSetCharacteristicValue](#) (uint8 *serviceIndex*, [CYBLE\\_HIDS\\_CHAR\\_INDEX\\_T](#) *charIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Sets local characteristic value of the specified HID Service characteristics.

#### Parameters:

<i>serviceIndex</i>	The index of the service instance. e.g. If two HID Services are supported in your design, then first service will be identified by serviceIndex of 0 and the second by serviceIndex of 1.
<i>charIndex</i>	The index of a service characteristic. <ul style="list-style-type: none"> <li>• CYBLE_HIDS_PROTOCOL_MODE - Protocol Mode characteristic</li> <li>• CYBLE_HIDS_REPORT_MAP - Report Map characteristic</li> <li>• CYBLE_HIDS_INFORMATION - HID Information characteristic</li> <li>• CYBLE_HIDS_CONTROL_POINT - HID Control Point characteristic</li> <li>• CYBLE_HIDS_BOOT_KYBRD_IN_REP - Boot Keyboard Input Report Characteristic</li> <li>• CYBLE_HIDS_BOOT_KYBRD_OUT_REP - Boot Keyboard Output Report Characteristic</li> <li>• CYBLE_HIDS_BOOT_MOUSE_IN_REP - Boot Mouse Input Report Characteristic</li> <li>• CYBLE_HIDS_REPORT - Report Characteristic</li> </ul>
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be stored in the GATT database.

#### Returns:

Return value is of type [CYBLE\\_API\\_RESULT\\_T](#).



- CYBLE\_ERROR\_OK - The request handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent

**Events**

None

**CYBLE\_API\_RESULT\_T** **CyBle\_HidssGetCharacteristicValue** (uint8 *serviceIndex*,  
**CYBLE\_HIDS\_CHAR\_INDEX\_T** *charIndex*, uint8 *attrSize*, uint8 \* *attrValue*)

Gets local characteristic value of the specified HID Service characteristics.

**Parameters:**

<i>serviceIndex</i>	The index of the service instance. e.g. If two HID Services are supported in your design, then first service will be identified by serviceIndex of 0 and the second by serviceIndex of 1.
<i>charIndex</i>	The index of the service characteristic. <ul style="list-style-type: none"> <li>• CYBLE_HIDS_PROTOCOL_MODE - Protocol Mode characteristic</li> <li>• CYBLE_HIDS_REPORT_MAP - Report Map characteristic</li> <li>• CYBLE_HIDS_INFORMATION - HID Information characteristic</li> <li>• CYBLE_HIDS_CONTROL_POINT - HID Control Point characteristic</li> <li>• CYBLE_HIDS_BOOT_KYBRD_IN_REP - Boot Keyboard Input Report Characteristic</li> <li>• CYBLE_HIDS_BOOT_KYBRD_OUT_REP - Boot Keyboard Output Report Characteristic</li> <li>• CYBLE_HIDS_BOOT_MOUSE_IN_REP - Boot Mouse Input Report Characteristic</li> <li>• CYBLE_HIDS_REPORT - Report Characteristic</li> </ul>
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the location where characteristic value data should be stored.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent

**Events**

None

**CYBLE\_API\_RESULT\_T** **CyBle\_HidssGetCharacteristicDescriptor** (uint8 *serviceIndex*,  
**CYBLE\_HIDS\_CHAR\_INDEX\_T** *charIndex*, **CYBLE\_HIDS\_DESCR\_T** *descrIndex*, uint8 *attrSize*, uint8 \*  
*attrValue*)

Gets local characteristic descriptor of the specified HID Service characteristic.



**Parameters:**

<i>serviceIndex</i>	The index of the service instance. e.g. If two HID Services are supported in your design, then first service will be identified by serviceIndex of 0 and the second by serviceIndex of 1.
<i>charIndex</i>	The index of the characteristic. <ul style="list-style-type: none"> <li>• CYBLE_HIDS_REPORT_MAP - Report Map Characteristic</li> <li>• CYBLE_HIDS_BOOT_KYBRD_IN_REP - Boot Keyboard Input Report Characteristic</li> <li>• CYBLE_HIDS_BOOT_KYBRD_OUT_REP - Boot Keyboard Output Report Characteristic</li> <li>• CYBLE_HIDS_BOOT_MOUSE_IN_REP - Boot Mouse Input Report Characteristic</li> <li>• CYBLE_HIDS_REPORT - Report Characteristic</li> </ul>
<i>descrIndex</i>	The index of the descriptor. <ul style="list-style-type: none"> <li>• CYBLE_HIDS_REPORT_CCCD - Client Characteristic Configuration descriptor</li> <li>• CYBLE_HIDS_REPORT_RRD - Report Reference descriptor</li> <li>• CYBLE_HIDS_REPORT_MAP_ERRD - Report Map External Report Reference descriptor</li> </ul>
<i>attrSize</i>	The size of the descriptor value attribute.
<i>attrValue</i>	The pointer to the location where characteristic descriptor value data should be stored.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional descriptor is absent

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_HidssSendNotification (CYBLE\_CONN\_HANDLE\_T connHandle, uint8 serviceIndex, CYBLE\_HIDS\_CHAR\_INDEX\_T charIndex, uint8 attrSize, uint8 \* attrValue)**

Sends specified HID Service characteristic notification to the Client device.

CYBLE\_EVT\_HIDSC\_NOTIFICATION event is received by the peer device, on invoking this function.

**Parameters:**

<i>connHandle</i>	BLE peer device connection handle.
<i>serviceIndex</i>	The index of the HID service instance. e.g. If two HID Services are supported in your design, then first service will be identified by serviceIndex of 0 and the second by serviceIndex of 1.
<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	Pointer to the characteristic value data that should be sent to the Client



	device.
--	---------

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_NTF\_DISABLED - Notification is not enabled by the client.

## HIDS Client Functions

### Description

APIs unique to HID designs configured as a GATT Client role.

A letter 'c' is appended to the API name: CyBle\_Hidc

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_HidscSetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_HIDSC\\_CHAR\\_WRITE\\_T](#) subProcedure, uint8 serviceIndex, [CYBLE\\_HIDS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_HidscGetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_HIDSC\\_CHAR\\_READ\\_T](#) subProcedure, uint8 serviceIndex, [CYBLE\\_HIDS\\_CHAR\\_INDEX\\_T](#) charIndex)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_HidscSetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, uint8 serviceIndex, [CYBLE\\_HIDS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_HIDS\\_DESCR\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_HidscGetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, uint8 serviceIndex, [CYBLE\\_HIDS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_HIDS\\_DESCR\\_T](#) descrIndex)

### Function Documentation

**[CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_HidscSetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_HIDSC\\_CHAR\\_WRITE\\_T](#) subProcedure, uint8 serviceIndex, [CYBLE\\_HIDS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)**

Sends a request to set characteristic value of the specified HID Service, which is identified by serviceIndex and reportIndex, on the server device. This function call can result in generation of the following events based on the response from the server device:

- CYBLE\_EVT\_HIDSC\_WRITE\_CHAR\_RESPONSE
- CYBLE\_EVT\_GATTC\_ERROR\_RSP

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>subProcedure</i>	Characteristic value write sub-procedure. <ul style="list-style-type: none"> <li>• CYBLE_HIDSC_WRITE_WITHOUT_RESPONSE</li> <li>• CYBLE_HIDSC_WRITE_CHAR_VALUE</li> </ul>



<i>serviceIndex</i>	The index of the service instance. e.g. If two HID Services are supported in your design, then first service will be identified by serviceIndex of 0 and the second by serviceIndex of 1.
<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the server device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the HIDS service-specific callback is registered (with CyBle\_HidsRegisterAttrCallback):

- CYBLE\_EVT\_HIDSC\_WRITE\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, etc.) are provided with event parameter structure of type [CYBLE\\_HIDS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the HIDS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**CYBLE\_API\_RESULT\_T CyBle\_HidscGetCharacteristicValue (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_HIDSC\_CHAR\_READ\_T subProcedure, uint8 serviceIndex, CYBLE\_HIDS\_CHAR\_INDEX\_T charIndex)**

This function is used to read the characteristic value from a server which is identified by charIndex.

The Read Response returns the characteristic value in the Attribute Value parameter.

The Read Response only contains the characteristic value that is less than or equal to (MTU - 1) octets in length. If the characteristic value is greater than (MTU - 1) octets in length, the Read Long Characteristic Value procedure may be used if the rest of the characteristic Value is required.

This function call can result in generation of the following events based on the response from the server device:

- CYBLE\_EVT\_HIDSC\_READ\_CHAR\_RESPONSE
- CYBLE\_EVT\_GATTC\_ERROR\_RSP.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>subProcedure</i>	The characteristic value read sub-procedure. <ul style="list-style-type: none"> <li>• CYBLE_HIDSC_READ_CHAR_VALUE</li> <li>• CYBLE_HIDSC_READ_LONG_CHAR_VALUE.</li> </ul>



<i>serviceIndex</i>	The index of the service instance.
<i>charIndex</i>	The index of the service characteristic.

**Returns:**

Return value is of type `CYBLE_API_RESULT_T`.

- `CYBLE_ERROR_OK` - The read request was sent successfully
- `CYBLE_ERROR_INVALID_PARAMETER` - Validation of the input parameters failed
- `CYBLE_ERROR_GATT_DB_INVALID_ATTR_HANDLE` - The peer device doesn't have the particular characteristic
- `CYBLE_ERROR_MEMORY_ALLOCATION_FAILED` - Memory allocation failed
- `CYBLE_ERROR_INVALID_STATE` - Connection with the server is not established
- `CYBLE_ERROR_INVALID_OPERATION` - Operation is invalid for this characteristic

**Events**

In case of successful execution (return value = `CYBLE_ERROR_OK`) the next events can appear:

If the HIDS service-specific callback is registered (with `CyBle_HidsRegisterAttrCallback`):

- `CYBLE_EVT_HIDSC_READ_CHAR_RESPONSE` - in case if the requested attribute is successfully wrote on the peer device, the details (char index , value, etc.) are provided with event parameter structure of type [CYBLE\\_HIDS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the HIDS service-specific callback is not registered):

- `CYBLE_EVT_GATTC_READ_RSP` - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- `CYBLE_EVT_GATTC_READ_BLOB_RSP` - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- `CYBLE_EVT_GATTC_ERROR_RSP` - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) `CyBle_HidscSetCharacteristicDescriptor` ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, `uint8` *serviceIndex*, [CYBLE\\_HIDS\\_CHAR\\_INDEX\\_T](#) *charIndex*, [CYBLE\\_HIDS\\_DESCR\\_T](#) *descrIndex*, `uint8` *attrSize*, `uint8 *` *attrValue*)**

This function is used to write the characteristic descriptor to the server, which is identified by *charIndex*. This function call can result in generation of the following events based on the response from the server device:

- `CYBLE_EVT_HIDSC_WRITE_DESCR_RESPONSE`
- `CYBLE_EVT_GATTC_ERROR_RSP`

Following event is received by the peer device, on invoking this function:

- `CYBLE_EVT_HIDSS_NOTIFICATION_ENABLED`
- `CYBLE_EVT_HIDSS_NOTIFICATION_DISABLED`

**Parameters:**

<i>connHandle</i>	The BLE peer device connection handle.
<i>serviceIndex</i>	The index of the service instance. e.g. If two HID Services are supported in your design, then first service will be identified by <i>serviceIndex</i> of 0 and the second by <i>serviceIndex</i> of 1.
<i>charIndex</i>	The index of the HID service characteristic.
<i>descrIndex</i>	The index of the HID service characteristic descriptor.

<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic descriptor value data that should be sent to the server device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_INVALID\_STATE - The state is not valid
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted on the specified attribute

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the HIDS service-specific callback is registered (with CyBle\_HidsRegisterAttrCallback):

- CYBLE\_EVT\_HIDSC\_WRITE\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index etc.) are provided with event parameter structure of type [CYBLE\\_HIDS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the HIDS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_HidscGetCharacteristicDescriptor ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, uint8 serviceIndex, [CYBLE\\_HIDS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_HIDS\\_DESCR\\_T](#) descrIndex)**

Gets a characteristic descriptor of the specified characteristic of the HID Service from the server device.

This function call can result in generation of the following events based on the response from the server device.

- CYBLE\_EVT\_HIDSC\_READ\_DESCR\_RESPONSE
- CYBLE\_EVT\_GATTC\_ERROR\_RSP

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>serviceIndex</i>	The index of the service instance. e.g. If two HID Services are supported in your design, then first service will be identified by serviceIndex of 0 and the second by serviceIndex of 1.
<i>charIndex</i>	The index of the service characteristic.
<i>descrIndex</i>	The index of the HID Service characteristic descriptor.

**Returns:**

- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_INVALID\_STATE - The state is not valid
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed



- `CYBLE_ERROR_GATT_DB_INVALID_ATTR_HANDLE` - The peer device doesn't have the particular descriptor
- `CYBLE_ERROR_INVALID_OPERATION` - This operation is not permitted on the specified attribute

### Events

In case of successful execution (return value = `CYBLE_ERROR_OK`) the next events can appear:

If the HIDS service-specific callback is registered (with `CyBle_HidsRegisterAttrCallback`):

- `CYBLE_EVT_HIDSC_READ_DESCR_RESPONSE` - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index, value, etc.) are provided with event parameter structure of type [CYBLE\\_HIDS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the HIDS service-specific callback is not registered):

- `CYBLE_EVT_GATTC_READ_RSP` - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- `CYBLE_EVT_GATTC_ERROR_RSP` - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

## HIDS Definitions and Data Structures

### Description

Contains the HID specific definitions and data structures used in the HID APIs.

### Data Structures

- struct [CYBLE\\_HIDSS\\_REPORT\\_REF\\_T](#)
- struct [CYBLE\\_HIDSS\\_INFORMATION\\_T](#)
- struct [CYBLE\\_HIDSS\\_REPORT\\_T](#)
- struct [CYBLE\\_HIDSS\\_T](#)
- struct [CYBLE\\_HIDSC\\_REPORT\\_T](#)
- struct [CYBLE\\_HIDSC\\_REPORT\\_MAP\\_T](#)
- struct [CYBLE\\_HIDSC\\_T](#)
- struct [CYBLE\\_HIDS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_HIDS\\_DESCR\\_VALUE\\_T](#)

### Enumerations

- enum [CYBLE\\_HIDS\\_CHAR\\_INDEX\\_T](#){ [CYBLE\\_HIDS\\_PROTOCOL\\_MODE](#), [CYBLE\\_HIDS\\_INFORMATION](#), [CYBLE\\_HIDS\\_CONTROL\\_POINT](#), [CYBLE\\_HIDS\\_REPORT\\_MAP](#), [CYBLE\\_HIDS\\_BOOT\\_KYBRD\\_IN\\_REP](#), [CYBLE\\_HIDS\\_BOOT\\_KYBRD\\_OUT\\_REP](#), [CYBLE\\_HIDS\\_BOOT\\_MOUSE\\_IN\\_REP](#), [CYBLE\\_HIDS\\_REPORT](#), [CYBLE\\_HIDS\\_REPORT\\_END](#)= [CYBLE\\_HIDS\\_REPORT](#) + [CYBLE\\_HIDS\\_REPORT\\_COUNT](#) - 1, [CYBLE\\_HIDS\\_CHAR\\_COUNT](#)}
- enum [CYBLE\\_HIDS\\_DESCR\\_T](#){ [CYBLE\\_HIDS\\_REPORT\\_CCCD](#), [CYBLE\\_HIDS\\_REPORT\\_RRD](#), [CYBLE\\_HIDS\\_REPORT\\_MAP\\_ERRD](#), [CYBLE\\_HIDS\\_DESCR\\_COUNT](#)}
- enum [CYBLE\\_HIDSC\\_CHAR\\_WRITE\\_T](#){ [CYBLE\\_HIDSC\\_WRITE\\_WITHOUT\\_RESPONSE](#), [CYBLE\\_HIDSC\\_WRITE\\_CHAR\\_VALUE](#)}
- enum [CYBLE\\_HIDSC\\_CHAR\\_READ\\_T](#){ [CYBLE\\_HIDSC\\_READ\\_CHAR\\_VALUE](#), [CYBLE\\_HIDSC\\_READ\\_LONG\\_CHAR\\_VALUE](#)}

## Enumeration Type Documentation

### enum [CYBLE\\_HIDS\\_CHAR\\_INDEX\\_T](#)

HIDS characteristic indexes

#### Enumerator

***CYBLE\_HIDS\_PROTOCOL\_MODE*** Protocol Mode Characteristic index  
***CYBLE\_HIDS\_INFORMATION*** HID Information Characteristic index  
***CYBLE\_HIDS\_CONTROL\_POINT*** HID Control Point Characteristic index  
***CYBLE\_HIDS\_REPORT\_MAP*** Report Map Characteristic index  
***CYBLE\_HIDS\_BOOT\_KYBRD\_IN\_REP*** Boot Keyboard Input Report Characteristic index  
***CYBLE\_HIDS\_BOOT\_KYBRD\_OUT\_REP*** Boot Keyboard Output Report Characteristic index  
***CYBLE\_HIDS\_BOOT\_MOUSE\_IN\_REP*** Boot Mouse Input Report Characteristic index  
***CYBLE\_HIDS\_REPORT*** Report Characteristic index  
***CYBLE\_HIDS\_REPORT\_END*** Index of last Report Char  
***CYBLE\_HIDS\_CHAR\_COUNT*** Total count of characteristics

### enum [CYBLE\\_HIDS\\_DESCR\\_T](#)

HID Service Characteristic Descriptors indexes

#### Enumerator

***CYBLE\_HIDS\_REPORT\_CCCD*** Client Characteristic Configuration descriptor index  
***CYBLE\_HIDS\_REPORT\_RRD*** Report Reference descriptor index  
***CYBLE\_HIDS\_REPORT\_MAP\_ERRD*** Report Map External Report Reference descriptor index  
***CYBLE\_HIDS\_DESCR\_COUNT*** Total count of descriptors

### enum [CYBLE\\_HIDSC\\_CHAR\\_WRITE\\_T](#)

Characteristic Value Write Sub-Procedure supported by HID Service

#### Enumerator

***CYBLE\_HIDSC\_WRITE\_WITHOUT\_RESPONSE*** Write Without Response  
***CYBLE\_HIDSC\_WRITE\_CHAR\_VALUE*** Write Characteristic Value

### enum [CYBLE\\_HIDSC\\_CHAR\\_READ\\_T](#)

Characteristic Value Read Sub-Procedure supported by HID Service

#### Enumerator

***CYBLE\_HIDSC\_READ\_CHAR\_VALUE*** Read Characteristic Value  
***CYBLE\_HIDSC\_READ\_LONG\_CHAR\_VALUE*** Read Long Characteristic Values

## Heart Rate Service (HRS)

### Description

The Heart Rate Service exposes heart rate and other data related to a heart rate sensor intended for fitness applications.

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The HRS API names begin with CyBle\_Hrs. In addition to this, the APIs also append the GATT role initial letter in the API name.





## Modules

- [HRS Server and Client Function](#)  
*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*
- [HRS Server Functions](#)  
*APIs unique to HRS designs configured as a GATT Server role.*
- [HRS Client Functions](#)  
*APIs unique to HRS designs configured as a GATT Client role.*
- [HRS Definitions and Data Structures](#)  
*Contains the HRS specific definitions and data structures used in the HRS APIs.*

## HRS Server and Client Function

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.  
No letter is appended to the API name: CyBle\_Hrs

### Functions

- void [CyBle\\_HrsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

### Function Documentation

#### void [CyBle\\_HrsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

Registers a callback function for service specific attribute operations. Service specific write requests from peer device will not be handled with unregistered callback function.

##### Parameters:

<i>callbackFunc</i>	<p>An application layer event callback function to receive events from the BLE Component. The definition of CYBLE_CALLBACK_T for HRS Service is:</p> <pre>typedef void (* CYBLE_CALLBACK_T) (uint32 eventCode, void *eventParam)</pre> <ul style="list-style-type: none"> <li>• eventCode indicates the event that triggered this callback (e.g. CYBLE_EVT_HRSS_NOTIFICATION_ENABLED).</li> <li>• eventParam contains the parameters corresponding to the current event. (e.g. pointer to <a href="#">CYBLE_HRS_CHAR_VALUE_T</a> structure that contains details of the characteristic for which notification enabled event was triggered).</li> </ul>
---------------------	--

##### Returns:

None

##### Events

None

## HRS Server Functions

### Description

APIs unique to HRS designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_Hrss

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_HrssSetCharacteristicValue](#) ([CYBLE\\_HRS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_HrssGetCharacteristicValue](#) ([CYBLE\\_HRS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_HrssGetCharacteristicDescriptor](#) ([CYBLE\\_HRS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_HRS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_HrssSendNotification](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_HRS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)

### Function Documentation

**[CYBLE\\_API\\_RESULT\\_T CyBle\\_HrssSetCharacteristicValue](#)** ([CYBLE\\_HRS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)

Sets local characteristic value of the specified Heart Rate Service characteristic.

#### Parameters:

<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute. The Heart Rate Measurement characteristic has a 20 byte length (by default). The Body Sensor Location and Control Point characteristic both have 1 byte length.
<i>attrValue</i>	The pointer to the characteristic value data that should be stored in the GATT database.

#### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent

#### Events

None

**[CYBLE\\_API\\_RESULT\\_T CyBle\\_HrssGetCharacteristicValue](#)** ([CYBLE\\_HRS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)

Gets the local characteristic value of specified Heart Rate Service characteristic.

#### Parameters:

<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute. The Heart Rate Measurement characteristic has a 20 byte length (by default). The Body Sensor Location and Control Point characteristic both have 1 byte length.



<i>attrValue</i>	The pointer to the location where characteristic value data should be stored.
------------------	---

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_HrssGetCharacteristicDescriptor (CYBLE\_HRS\_CHAR\_INDEX\_T *charIndex*, CYBLE\_HRS\_DESCR\_INDEX\_T *descrIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Gets the local characteristic descriptor of the specified Heart Rate Service characteristic.

**Parameters:**

<i>charIndex</i>	The index of the characteristic.
<i>descrIndex</i>	The index of the descriptor.
<i>attrSize</i>	The size of the descriptor value attribute. The Heart Rate Measurement characteristic client configuration descriptor has 2 bytes length.
<i>attrValue</i>	The pointer to the location where characteristic descriptor value data should be stored.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional descriptor is absent

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_HrssSendNotification (CYBLE\_CONN\_HANDLE\_T *connHandle*, CYBLE\_HRS\_CHAR\_INDEX\_T *charIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Sends notification of a specified Heart Rate Service characteristic value to the Client device. No response is expected.

The CYBLE\_EVT\_HRSC\_NOTIFICATION event is received by the peer device, on invoking this function.

**Parameters:**

<i>connHandle</i>	The connection handle which consist of the device ID and ATT connection ID.
<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute. The Heart Rate Measurement characteristic has a 20 byte length (by default). The Body Sensor Location and Control Point characteristic both have 1 byte length.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the client device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_NTF\_DISABLED - Notification is not enabled by the client.

**Events**

None

## HRS Client Functions

### Description

APIs unique to HRS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: CyBle\_Hrsc

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_HrscSetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_HRS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_HrscGetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_HRS\\_CHAR\\_INDEX\\_T](#) charIndex)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_HrscSetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_HRS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_HRS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_HrscGetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_HRS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_HRS\\_DESCR\\_INDEX\\_T](#) descrIndex)

### Function Documentation

#### **CYBLE\_API\_RESULT\_T CyBle\_HrscSetCharacteristicValue (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_HRS\_CHAR\_INDEX\_T charIndex, uint8 attrSize, uint8 \* attrValue)**

This function is used to write the characteristic value attribute (identified by charIndex) to the server. The Write Response just confirms the operation success.

This function call can result in generation of the following events based on the response from the server device:

- CYBLE\_EVT\_HRSC\_WRITE\_CHAR\_RESPONSE
- CYBLE\_EVT\_GATTC\_ERROR\_RSP

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the server device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.



- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the server is not established
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic

### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the HRS service-specific callback is registered (with CyBle\_HrsRegisterAttrCallback):

- CYBLE\_EVT\_HRSC\_WRITE\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, etc.) are provided with event parameter structure of type [CYBLE\\_HRS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the HRS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

### **CYBLE\_API\_RESULT\_T CyBle\_HrscGetCharacteristicValue (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_HRS\_CHAR\_INDEX\_T charIndex)**

This function is used to read the characteristic Value from a server which is identified by charIndex.

The Read Response returns the characteristic Value in the Attribute Value parameter.

The Read Response only contains the characteristic Value that is less than or equal to (MTU - 1) octets in length. If the characteristic Value is greater than (MTU - 1) octets in length, the Read Long Characteristic Value procedure may be used if the rest of the characteristic Value is required.

### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.

### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The read request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the server is not established
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic

### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the HRS service-specific callback is registered (with CyBle\_HrsRegisterAttrCallback):

- CYBLE\_EVT\_HRSC\_READ\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index , value, etc.) are provided with event parameter structure of type [CYBLE\\_HRS\\_CHAR\\_VALUE\\_T](#).



Otherwise (if the HRS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_HrscSetCharacteristicDescriptor ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_HRS\\_CHAR\\_INDEX\\_T](#) *charIndex*, [CYBLE\\_HRS\\_DESCR\\_INDEX\\_T](#) *descrIndex*, uint8 *attrSize*, uint8 \**attrValue*)**

This function is used to write the characteristic Value to the server, which is identified by *charIndex*.

This function call can result in generation of the following events based on the response from the server device:

- CYBLE\_EVT\_HRSC\_WRITE\_DESCR\_RESPONSE
- CYBLE\_EVT\_GATTC\_ERROR\_RSP

One of the following events is received by the peer device, on invoking this function:

- CYBLE\_EVT\_HRSS\_NOTIFICATION\_ENABLED
- CYBLE\_EVT\_HRSS\_NOTIFICATION\_DISABLED

#### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>descrIndex</i>	The index of the service characteristic descriptor.
<i>attrSize</i>	The size of the characteristic descriptor value attribute.
<i>attrValue</i>	The pointer to the characteristic descriptor value data that should be sent to the server device.

#### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_INVALID\_STATE - The state is not valid
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted on the specified attribute

#### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the HRS service-specific callback is registered (with *CyBle\_HrsRegisterAttrCallback*):

- CYBLE\_EVT\_HRSC\_WRITE\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index etc.) are provided with event parameter structure of type [CYBLE\\_HRS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the HRS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.



- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_HrscGetCharacteristicDescriptor ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_HRS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_HRS\\_DESCR\\_INDEX\\_T](#) descrIndex)**

Gets a characteristic descriptor of a specified characteristic of the service.

This function call can result in generation of the following events based on the response from the server device:

- CYBLE\_EVT\_HRSC\_READ\_DESCR\_RESPONSE
- CYBLE\_EVT\_GATTC\_ERROR\_RSP

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>descrIndex</i>	The index of the service characteristic descriptor.

**Returns:**

Return value is of type [CYBLE\\_API\\_RESULT\\_T](#).

- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_INVALID\_STATE - The state is not valid
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular descriptor
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted on the specified attribute

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the HRS service-specific callback is registered (with [CyBle\\_HrsRegisterAttrCallback](#)):

- CYBLE\_EVT\_HRSC\_READ\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index, value, etc.) are provided with event parameter structure of type [CYBLE\\_HRS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the HRS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

## HRS Definitions and Data Structures

### Description

Contains the HRS specific definitions and data structures used in the HRS APIs.

### Data Structures

- struct [CYBLE\\_HRSS\\_T](#)
- struct [CYBLE\\_HRSC\\_T](#)





- struct [CYBLE\\_HRS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_HRS\\_DESCR\\_VALUE\\_T](#)

## Enumerations

- enum [CYBLE\\_HRS\\_CHAR\\_INDEX\\_T](#) { [CYBLE\\_HRS\\_HRM](#), [CYBLE\\_HRS\\_BSL](#), [CYBLE\\_HRS\\_CPT](#), [CYBLE\\_HRS\\_CHAR\\_COUNT](#) }
- enum [CYBLE\\_HRS\\_DESCR\\_INDEX\\_T](#) { [CYBLE\\_HRS\\_HRM\\_CCCD](#), [CYBLE\\_HRS\\_DESCR\\_COUNT](#) }

## Enumeration Type Documentation

### enum [CYBLE\\_HRS\\_CHAR\\_INDEX\\_T](#)

HRS Characteristics indexes

#### Enumerator

**[CYBLE\\_HRS\\_HRM](#)** Heart Rate Measurement characteristic index

**[CYBLE\\_HRS\\_BSL](#)** Body Sensor Location characteristic index

**[CYBLE\\_HRS\\_CPT](#)** Control Point characteristic index

**[CYBLE\\_HRS\\_CHAR\\_COUNT](#)** Total count of HRS characteristics

### enum [CYBLE\\_HRS\\_DESCR\\_INDEX\\_T](#)

HRS Characteristic Descriptors indexes

#### Enumerator

**[CYBLE\\_HRS\\_HRM\\_CCCD](#)** Heart Rate Measurement client char. config. descriptor index

**[CYBLE\\_HRS\\_DESCR\\_COUNT](#)** Total count of HRS HRM descriptors

## Health Thermometer Service (HTS)

### Description

The Health Thermometer Service exposes temperature and other data related to a thermometer used for healthcare applications.

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The HTS API names begin with CyBle\_Hts. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [HTS Server and Client Function](#)  
*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*
- [HTS Server Functions](#)  
*APIs unique to HTS designs configured as a GATT Server role.*
- [HTS Client Functions](#)  
*APIs unique to HTS designs configured as a GATT Client role.*
- [HTS Definitions and Data Structures](#)  
*Contains the HTS specific definitions and data structures used in the HTS APIs.*



## HTS Server and Client Function

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.

No letter is appended to the API name: CyBle\_Hts

### Functions

- void [CyBle\\_HtsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

### Function Documentation

#### void [CyBle\\_HtsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

Registers a callback function for service specific attribute operations. Service specific write requests from peer device will not be handled with unregistered callback function.

##### Parameters:

<i>callbackFunc</i>	<p>An application layer event callback function to receive events from the BLE Component. The definition of <a href="#">CYBLE_CALLBACK_T</a> for HTS Service is:</p> <pre>typedef void (* CYBLE_CALLBACK_T) (uint32 eventCode, void *eventParam)</pre> <ul style="list-style-type: none"> <li>eventCode indicates the event that triggered this callback (e.g. <a href="#">CYBLE_EVT_HTSS_NOTIFICATION_ENABLED</a>).</li> <li>eventParam contains the parameters corresponding to the current event. (e.g. pointer to <a href="#">CYBLE-HTS-CHAR-VALUE-T</a> structure that contains details of the characteristic for which notification enabled event was triggered).</li> </ul>
---------------------	--

##### Returns:

None

##### Events

None

## HTS Server Functions

### Description

APIs unique to HTS designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_Htss

### Functions

- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_HtssSetCharacteristicValue](#) ([CYBLE-HTS-CHAR-INDEX-T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_HtssGetCharacteristicValue](#) ([CYBLE-HTS-CHAR-INDEX-T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_HtssSetCharacteristicDescriptor](#) ([CYBLE-HTS-CHAR-INDEX-T](#) charIndex, [CYBLE-HTS-DESCR-INDEX-T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)



- [CYBLE\\_API\\_RESULT\\_T CyBle\\_HtssGetCharacteristicDescriptor](#) ([CYBLE HTS CHAR INDEX T](#) *charIndex*, [CYBLE HTS DESCR INDEX T](#) *descrIndex*, uint8 *attrSize*, uint8 \**attrValue*)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_HtssSendNotification](#) ([CYBLE\\_CONN\\_HANDLE T](#) *connHandle*, [CYBLE HTS CHAR INDEX T](#) *charIndex*, uint8 *attrSize*, uint8 \**attrValue*)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_HtssSendIndication](#) ([CYBLE\\_CONN\\_HANDLE T](#) *connHandle*, [CYBLE HTS CHAR INDEX T](#) *charIndex*, uint8 *attrSize*, uint8 \**attrValue*)

## Function Documentation

**[CYBLE\\_API\\_RESULT\\_T CyBle\\_HtssSetCharacteristicValue](#)** ([CYBLE HTS CHAR INDEX T](#) *charIndex*, uint8 *attrSize*, uint8 \* *attrValue*)

Sets the characteristic value of the service in the local database.

### Parameters:

<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size (in Bytes) of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be stored in the GATT database.

### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed

### Events

None

**[CYBLE\\_API\\_RESULT\\_T CyBle\\_HtssGetCharacteristicValue](#)** ([CYBLE HTS CHAR INDEX T](#) *charIndex*, uint8 *attrSize*, uint8 \* *attrValue*)

Gets the characteristic value of the service, which is a value identified by *charIndex*.

### Parameters:

<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the location where characteristic value data should be stored.

### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed

### Events

None

**[CYBLE\\_API\\_RESULT\\_T CyBle\\_HtssSetCharacteristicDescriptor](#)** ([CYBLE HTS CHAR INDEX T](#) *charIndex*, [CYBLE HTS DESCR INDEX T](#) *descrIndex*, uint8 *attrSize*, uint8 \* *attrValue*)

Sets the characteristic descriptor of the specified characteristic.

### Parameters:

<i>charIndex</i>	The index of the service characteristic.
------------------	--



<i>descrIndex</i>	The index of the service characteristic descriptor.
<i>attrSize</i>	The size of the characteristic descriptor attribute.
<i>attrValue</i>	The pointer to the descriptor value data that should be stored in the GATT database.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_HtssGetCharacteristicDescriptor (CYBLE HTS CHAR INDEX T *charIndex*, CYBLE HTS DESCR INDEX T *descrIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Gets the characteristic descriptor of the specified characteristic.

**Parameters:**

<i>charIndex</i>	The index of the service characteristic.
<i>descrIndex</i>	The index of the service characteristic descriptor.
<i>attrSize</i>	The size of the characteristic descriptor attribute.
<i>attrValue</i>	The pointer to the location where characteristic descriptor value data should be stored.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_HtssSendNotification (CYBLE CONN HANDLE T *connHandle*, CYBLE HTS CHAR INDEX T *charIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Sends notification with a characteristic value of the Health Thermometer Service, which is a value specified by *charIndex*, to the Client device.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the client's device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established



- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_NTF\_DISABLED - Notification is not enabled by the client.

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_HtssSendIndication (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE HTS CHAR INDEX\_T charIndex, uint8 attrSize, uint8 \* attrValue)**

Sends indication with a characteristic value of the Health Thermometer Service, which is a value specified by charIndex, to the Client device.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the Client device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_IND\_DISABLED - Indication is not enabled by the client

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the HTS service-specific callback is registered (with CyBle\_HtsRegisterAttrCallback):

- CYBLE\_EVT\_HTSS\_INDICATION\_CONFIRMED - in case if the indication is successfully delivered to the peer device.

Otherwise (if the HTS service-specific callback is not registered):

- CYBLE\_EVT\_GATTS\_HANDLE\_VALUE\_CNF - in case if the indication is successfully delivered to the peer device.

## HTS Client Functions

### Description

APIs unique to HTS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: CyBle\_Htsc

### Functions

- CYBLE\_API\_RESULT\_T CyBle\_HtscSetCharacteristicValue (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE HTS CHAR INDEX\_T charIndex, uint8 attrSize, uint8 \*attrValue)
- CYBLE\_API\_RESULT\_T CyBle\_HtscGetCharacteristicValue (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE HTS CHAR INDEX\_T charIndex)



- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_HtscSetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_HTS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_HTS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_HtscGetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_HTS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_HTS\\_DESCR\\_INDEX\\_T](#) descrIndex)

## Function Documentation

**[CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_HtscSetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_HTS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)**

Sends a request to set a characteristic value of the service, which is a value identified by charIndex, to the server device.

### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the server device.

### Returns:

Return value is of type [CYBLE\\_API\\_RESULT\\_T](#).

- [CYBLE\\_ERROR\\_OK](#) - The request was sent successfully
- [CYBLE\\_ERROR\\_INVALID\\_PARAMETER](#) - Validation of the input parameters failed
- [CYBLE\\_ERROR\\_MEMORY\\_ALLOCATION\\_FAILED](#) - Memory allocation failed
- [CYBLE\\_ERROR\\_INVALID\\_STATE](#) - Connection with the server is not established
- [CYBLE\\_ERROR\\_GATT\\_DB\\_INVALID\\_ATTR\\_HANDLE](#) - The peer device doesn't have the particular characteristic
- [CYBLE\\_ERROR\\_INVALID\\_OPERATION](#) - Operation is invalid for this characteristic

### Events

In case of successful execution (return value = [CYBLE\\_ERROR\\_OK](#)) the next events can appear:

If the HTS service-specific callback is registered (with [CyBle\\_HtsRegisterAttrCallback](#)):

- [CYBLE\\_EVT\\_HTSC\\_WRITE\\_CHAR\\_RESPONSE](#) - in case if the requested attribute is successfully wrote on the peer device, the details (char index, etc.) are provided with event parameter structure of type [CYBLE\\_HTS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the HTS service-specific callback is not registered):

- [CYBLE\\_EVT\\_GATTC\\_WRITE\\_RSP](#) - in case if the requested attribute is successfully wrote on the peer device.
- [CYBLE\\_EVT\\_GATTC\\_ERROR\\_RSP](#) - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_HtscGetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_HTS\\_CHAR\\_INDEX\\_T](#) charIndex)**

This function is used to read a characteristic value, which is a value identified by charIndex, from the server.

### Parameters:

<i>connHandle</i>	The connection handle.
-------------------	------------------------



<i>charIndex</i>	The index of the service characteristic.
------------------	--

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The read request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the server is not established
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the HTS service-specific callback is registered (with CyBle\_HtsRegisterAttrCallback):

- CYBLE\_EVT\_HTSC\_READ\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index , value, etc.) are provided with event parameter structure of type [CYBLE HTS CHAR VALUE T](#).

Otherwise (if the HTS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE GATTC READ RSP PARAM T](#)).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE GATTC ERR RSP PARAM T](#)).

**CYBLE\_API\_RESULT\_T CyBle\_HtscSetCharacteristicDescriptor (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE HTS CHAR INDEX\_T charIndex, CYBLE HTS DESCR INDEX\_T descrIndex, uint8 attrSize, uint8 \* attrValue)**

This function is used to write the characteristic descriptor to the server, which is identified by charIndex and descrIndex.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>descrIndex</i>	The index of the service characteristic descriptor.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic descriptor value data that should be sent to the server device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_INVALID\_STATE - The state is not valid
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted on the specified attribute





## Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the HTS service-specific callback is registered (with CyBle\_HtsRegisterAttrCallback):

- CYBLE\_EVT\_HTSC\_WRITE\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index etc.) are provided with event parameter structure of type [CYBLE HTS DESCR VALUE T](#).

Otherwise (if the HTS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE GATTC ERR RSP PARAM T](#)).

**[CYBLE\\_API\\_RESULT T](#) CyBle\_HtsGetCharacteristicDescriptor ([CYBLE\\_CONN\\_HANDLE T](#) *connHandle*, [CYBLE HTS CHAR INDEX T](#) *charIndex*, [CYBLE HTS DESCR INDEX T](#) *descrIndex*)**

Gets the characteristic descriptor of the specified characteristic of the service.

### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>descrIndex</i>	The index of the service characteristic descriptor.

### Returns:

- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_INVALID\_STATE - The state is not valid
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted on the specified attribute

## Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the HTS service-specific callback is registered (with CyBle\_HtsRegisterAttrCallback):

- CYBLE\_EVT\_HTSC\_READ\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index, value, etc.) are provided with event parameter structure of type [CYBLE HTS DESCR VALUE T](#).

Otherwise (if the HTS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE GATTC READ RSP PARAM T](#)).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE GATTC ERR RSP PARAM T](#)).

## HTS Definitions and Data Structures

### Description

Contains the HTS specific definitions and data structures used in the HTS APIs.

## Data Structures

- struct [CYBLE\\_HTSS\\_CHAR\\_T](#)
- struct [CYBLE\\_HTSS\\_T](#)
- struct [CYBLE\\_HTSC\\_CHAR\\_T](#)
- struct [CYBLE\\_HTSC\\_T](#)
- struct [CYBLE\\_HTS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_HTS\\_DESCR\\_VALUE\\_T](#)
- struct [CYBLE\\_HTS\\_FLOAT32](#)

## Enumerations

- enum [CYBLE\\_HTS\\_CHAR\\_INDEX\\_T](#) { [CYBLE\\_HTS\\_TEMP\\_MEASURE](#), [CYBLE\\_HTS\\_TEMP\\_TYPE](#), [CYBLE\\_HTS\\_INTERM\\_TEMP](#), [CYBLE\\_HTS\\_MEASURE\\_INTERVAL](#), [CYBLE\\_HTS\\_CHAR\\_COUNT](#) }
- enum [CYBLE\\_HTS\\_DESCR\\_INDEX\\_T](#) { [CYBLE\\_HTS\\_CCCD](#), [CYBLE\\_HTS\\_VRD](#), [CYBLE\\_HTS\\_DESCR\\_COUNT](#) }
- enum [CYBLE\\_HTS\\_TEMP\\_TYPE\\_T](#) { [CYBLE\\_HTS\\_TEMP\\_TYPE\\_ARMPIT](#) = 0x01u, [CYBLE\\_HTS\\_TEMP\\_TYPE\\_BODY](#), [CYBLE\\_HTS\\_TEMP\\_TYPE\\_EAR](#), [CYBLE\\_HTS\\_TEMP\\_TYPE\\_FINGER](#), [CYBLE\\_HTS\\_TEMP\\_TYPE\\_GI\\_TRACT](#), [CYBLE\\_HTS\\_TEMP\\_TYPE\\_MOUTH](#), [CYBLE\\_HTS\\_TEMP\\_TYPE\\_RECTUM](#), [CYBLE\\_HTS\\_TEMP\\_TYPE\\_TOE](#), [CYBLE\\_HTS\\_TEMP\\_TYPE\\_TYMPANUM](#) }

## Enumeration Type Documentation

### enum [CYBLE\\_HTS\\_CHAR\\_INDEX\\_T](#)

HTS Characteristic indexes

#### Enumerator

**[CYBLE\\_HTS\\_TEMP\\_MEASURE](#)** Temperature Measurement characteristic index  
**[CYBLE\\_HTS\\_TEMP\\_TYPE](#)** Temperature Type characteristic index  
**[CYBLE\\_HTS\\_INTERM\\_TEMP](#)** Intermediate Temperature characteristic index  
**[CYBLE\\_HTS\\_MEASURE\\_INTERVAL](#)** Measurement Interval characteristic index  
**[CYBLE\\_HTS\\_CHAR\\_COUNT](#)** Total count of HTS characteristics

### enum [CYBLE\\_HTS\\_DESCR\\_INDEX\\_T](#)

HTS Characteristic Descriptors indexes

#### Enumerator

**[CYBLE\\_HTS\\_CCCD](#)** Client Characteristic Configuration descriptor index  
**[CYBLE\\_HTS\\_VRD](#)** Valid Range descriptor index  
**[CYBLE\\_HTS\\_DESCR\\_COUNT](#)** Total count of descriptors

### enum [CYBLE\\_HTS\\_TEMP\\_TYPE\\_T](#)

Temperature Type measurement indicates where the temperature was measured

#### Enumerator

**[CYBLE\\_HTS\\_TEMP\\_TYPE\\_ARMPIT](#)** Armpit  
**[CYBLE\\_HTS\\_TEMP\\_TYPE\\_BODY](#)** Body (general)  
**[CYBLE\\_HTS\\_TEMP\\_TYPE\\_EAR](#)** Ear (usually ear lobe)  
**[CYBLE\\_HTS\\_TEMP\\_TYPE\\_FINGER](#)** Finger



**CYBLE\_HTS\_TEMP\_TYPE\_GI\_TRACT** Gastro-intestinal Tract

**CYBLE\_HTS\_TEMP\_TYPE\_MOUTH** Mouth

**CYBLE\_HTS\_TEMP\_TYPE\_RECTUM** Rectum

**CYBLE\_HTS\_TEMP\_TYPE\_TOE** Toe

**CYBLE\_HTS\_TEMP\_TYPE\_TYMPANUM** Tympanum (ear drum)

## Immediate Alert Service (IAS)

### Description

The Immediate Alert Service exposes a control point to allow a peer device to cause the device to immediately alert. The Immediate Alert Service uses the Alert Level Characteristic to cause an alert when it is written with a value other than "No Alert".

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The IAS API names begin with CyBle\_ias. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [IAS Server Functions](#)  
*APIs unique to IAS designs configured as a GATT Server role.*
- [IAS Client Functions](#)  
*APIs unique to IAS designs configured as a GATT Client role.*
- [IAS Definitions and Data Structures](#)  
*Contains the IAS specific definitions and data structures used in the IAS APIs.*

## IAS Server Functions

### Description

APIs unique to IAS designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_lass

### Functions

- void [CyBle\\_iasRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)
- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_lassGetCharacteristicValue](#) ([CYBLE\\_IAS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)

## Function Documentation

### void CyBle\_iasRegisterAttrCallback ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

Registers callback function for service specific attribute operations. Service specific write requests from peer device will not be handled with unregistered callback function.

#### Parameters:

<i>callbackFunc</i>	An application layer event callback function to receive events from the BLE Component. The definition of CYBLE_CALLBACK_T for IAS Service is:  typedef void (* CYBLE_CALLBACK_T) (uint32 eventCode, void *eventParam)
---------------------	---



	<ul style="list-style-type: none"> <li>• <code>eventCode</code> indicates the event that triggered this callback (e.g. <code>CYBLE_EVT_IASS_NOTIFICATION_ENABLED</code>).</li> <li>• <code>eventParam</code> contains the parameters corresponding to the current event. (e.g. pointer to <a href="#">CYBLE_IAS_CHAR_VALUE_T</a> structure that contains details of the characteristic for which notification enabled event was triggered).</li> </ul>
--	--

**Returns:**

None

**Events**

None

**Side Effects**

The `*eventParams` in the callback function should not be used by the application once the callback function execution is finished. Otherwise this data may become corrupted.

**Note :** IAS only has events for the GATT server. There are no events for the GATT client since the client sends data without waiting for response. Therefore there is no need to register a callback through `CyBle_IasRegisterAttrCallback` for an IAS GATT client.

**[CYBLE\\_API\\_RESULT\\_T](#) `CyBle_IassGetCharacteristicValue` ([CYBLE\\_IAS\\_CHAR\\_INDEX\\_T](#) *charIndex*, `uint8` *attrSize*, `uint8 *` *attrValue*)**

Gets the Alert Level characteristic value of the service, which is identified by *charIndex*.

**Parameters:**

<i>charIndex</i>	The index of the Alert Level characteristic.
<i>attrSize</i>	The size of the Alert Level characteristic value attribute.
<i>attrValue</i>	The pointer to the location where the Alert Level characteristic value data should be stored.

**Returns:**

Return value is of type `CYBLE_API_RESULT_T`.

- `CYBLE_ERROR_OK` - The characteristic value was read successfully
- `CYBLE_ERROR_INVALID_PARAMETER` - Validation of the input parameters failed

**Events**

None

## IAS Client Functions

### Description

APIs unique to IAS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: `CyBle_Iasc`

### Functions

- **[CYBLE\\_API\\_RESULT\\_T](#) `CyBle_IascSetCharacteristicValue` ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_IAS\\_CHAR\\_INDEX\\_T](#) *charIndex*, `uint8` *attrSize*, `uint8 *` *attrValue*)**



## Function Documentation

**[CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_IascSetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_IAS\\_CHAR\\_INDEX\\_T](#) *charIndex*, *uint8 attrSize*, *uint8 \* attrValue*)**

Sets a Alert Level characteristic value of the service, which is identified by *charIndex*.

### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the Alert Level service characteristic.
<i>attrSize</i>	The size of the Alert Level characteristic value attribute.
<i>attrValue</i>	The pointer to the Alert Level characteristic value data that should be sent to the server device.

### Returns:

Return value is of type [CYBLE\\_API\\_RESULT\\_T](#).

- [CYBLE\\_ERROR\\_OK](#) - The request was sent successfully
- [CYBLE\\_ERROR\\_INVALID\\_PARAMETER](#) - Validation of the input parameters failed
- [CYBLE\\_ERROR\\_MEMORY\\_ALLOCATION\\_FAILED](#) - Memory allocation failed
- [CYBLE\\_ERROR\\_INVALID\\_STATE](#) - Connection with the server is not established
- [CYBLE\\_ERROR\\_INVALID\\_OPERATION](#) - Operation is invalid for this characteristic

### Events

In case of successful execution (return value = [CYBLE\\_ERROR\\_OK](#)) the next events can appear:

If the IAS service-specific callback is registered (with [CyBle\\_IasRegisterAttrCallback](#)):

- [CYBLE\\_EVT\\_IASC\\_WRITE\\_CHAR\\_RESPONSE](#) - in case if the requested attribute is successfully wrote on the peer device, the details (*char index*, etc.) are provided with event parameter structure of type [CYBLE\\_IAS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the IAS service-specific callback is not registered):

- [CYBLE\\_EVT\\_GATTC\\_WRITE\\_RSP](#) - in case if the requested attribute is successfully wrote on the peer device.
- [CYBLE\\_EVT\\_GATTC\\_ERROR\\_RSP](#) - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

## IAS Definitions and Data Structures

### Description

Contains the IAS specific definitions and data structures used in the IAS APIs.

### Data Structures

- struct [CYBLE\\_IASS\\_T](#)
- struct [CYBLE\\_IAS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_IASC\\_T](#)

### Enumerations

- enum [CYBLE\\_IAS\\_CHAR\\_INDEX\\_T](#) { [CYBLE\\_IAS\\_ALERT\\_LEVEL](#), [CYBLE\\_IAS\\_CHAR\\_COUNT](#) }

## Enumeration Type Documentation

### enum [CYBLE\\_IAS\\_CHAR\\_INDEX\\_T](#)

Immediate Alert Service Characteristic indexes

#### Enumerator

**CYBLE\_IAS\_ALERT\_LEVEL** Alert Level Characteristic index

**CYBLE\_IAS\_CHAR\_COUNT** Total count of characteristics

## Link Loss Service (LLS)

### Description

The Link Loss Service uses the Alert Level Characteristic to cause an alert in the device when the link is lost.

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The LLS API names begin with CyBle\_Lls. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [LLS Server and Client Function](#)  
*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*
- [LLS Server Functions](#)  
*APIs unique to LLS designs configured as a GATT Server role.*
- [LLS Client Functions](#)  
*APIs unique to LLS designs configured as a GATT Client role.*
- [LLS Definitions and Data Structures](#)  
*Contains the LLS specific definitions and data structures used in the LLS APIs.*

## LLS Server and Client Function

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.

No letter is appended to the API name: CyBle\_Lls

### Functions

- void [CyBle\\_LlsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

### Function Documentation

#### void [CyBle\\_LlsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

Registers a callback function for service specific attribute operations. Service specific write requests from peer device will not be handled with unregistered callback function.

#### Parameters:

<i>callbackFunc</i>	An application layer event callback function to receive events from the BLE Component. The definition of CYBLE_CALLBACK_T for Link Loss Service is:  typedef void (* CYBLE_CALLBACK_T) (uint32 eventCode, void
---------------------	--



	<p><b>*eventParam)</b></p> <ul style="list-style-type: none"> <li>eventCode indicates the event that triggered this callback (e.g. CYBLE_EVT_LLSS_NOTIFICATION_ENABLED).</li> <li>eventParam contains the parameters corresponding to the current event. (e.g. pointer to <a href="#">CYBLE_LLS_CHAR_VALUE_T</a> structure that contains details of the characteristic for which notification enabled event was triggered).</li> </ul>
--	--

**Returns:**

None

**Events**

None

**Side Effects**

The \*eventParams in the callback function should not be used by the application once the callback function execution is finished. Otherwise this data may become corrupted.

## LLS Server Functions

### Description

APIs unique to LLS designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_Llss

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_LlssGetCharacteristicValue \(CYBLE\\_LLS\\_CHAR\\_INDEX\\_T charIndex, uint8 attrSize, uint8 \\*attrValue\)](#)

### Function Documentation

**[CYBLE\\_API\\_RESULT\\_T CyBle\\_LlssGetCharacteristicValue \(CYBLE\\_LLS\\_CHAR\\_INDEX\\_T charIndex, uint8 attrSize, uint8 \\* attrValue\)](#)**

Gets an Alert Level characteristic value of the service, which is identified by charIndex.

**Parameters:**

<i>charIndex</i>	The index of an Alert Level characteristic.
<i>attrSize</i>	The size of the Alert Level characteristic value attribute.
<i>attrValue</i>	The pointer to the location where an Alert Level characteristic value data should be stored.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The characteristic value was read successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed

**Events**

None



## LLS Client Functions

### Description

APIs unique to LLS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: CyBle\_Llsc

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_LlscSetCharacteristicValue \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_LLS\\_CHAR\\_INDEX\\_T charIndex, uint8 attrSize, uint8 \\*attrValue\)](#)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_LlscGetCharacteristicValue \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_LLS\\_CHAR\\_INDEX\\_T charIndex\)](#)

### Function Documentation

**[CYBLE\\_API\\_RESULT\\_T CyBle\\_LlscSetCharacteristicValue \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_LLS\\_CHAR\\_INDEX\\_T charIndex, uint8 attrSize, uint8 \\* attrValue\)](#)**

Sets the Alert Level characteristic value of the Link Loss Service, which is identified by charIndex.

This function call can result in generation of the following events based on the response from the server device.

- CYBLE\_EVT\_LLSC\_WRITE\_CHAR\_RESPONSE
- CYBLE\_EVT\_GATTC\_ERROR\_RSP

#### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the Alert Level service characteristic.
<i>attrSize</i>	The size of the Alert Level characteristic value attribute.
<i>attrValue</i>	The pointer to the Alert Level characteristic value data that should be sent to the server device.

#### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed

#### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the LLS service-specific callback is registered (with CyBle\_LlsRegisterAttrCallback):

- CYBLE\_EVT\_LLSC\_WRITE\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, etc.) are provided with event parameter structure of type [CYBLE\\_LLS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the LLS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure [\(CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T\)](#).



### **CYBLE\_API\_RESULT\_T CyBle\_LlscGetCharacteristicValue (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_LLS\_CHAR\_INDEX\_T charIndex)**

Sends a request to get characteristic value of the Link Loss Service, which is identified by charIndex.

This function call can result in generation of the following events based on the response from the server device:

- CYBLE\_EVT\_LLSC\_READ\_CHAR\_RESPONSE
- CYBLE\_EVT\_GATTC\_ERROR\_RSP

#### **Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the Link Loss Service characteristic.

#### **Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the server is not established
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic

#### **Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the LLS service-specific callback is registered (with CyBle\_LlsRegisterAttrCallback):

- CYBLE\_EVT\_LLSC\_READ\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index , value, etc.) are provided with event parameter structure of type [CYBLE\\_LLS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the LLS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

## **LLS Definitions and Data Structures**

### **Description**

Contains the LLS specific definitions and data structures used in the LLS APIs.

### **Data Structures**

- struct [CYBLE\\_LLS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_LLSS\\_T](#)
- struct [CYBLE\\_LLSC\\_T](#)

### **Enumerations**

- enum [CYBLE\\_LLS\\_CHAR\\_INDEX\\_T](#){ [CYBLE\\_LLS\\_ALERT\\_LEVEL](#), [CYBLE\\_LLS\\_CHAR\\_COUNT](#)}

## Enumeration Type Documentation

### enum [CYBLE\\_LLS\\_CHAR\\_INDEX\\_T](#)

Link Loss Service Characteristic indexes

#### Enumerator

**CYBLE\_LLS\_ALERT\_LEVEL** Alert Level Characteristic index

**CYBLE\_LLS\_CHAR\_COUNT** Total count of characteristics

## Location and Navigation Service (LNS)

### Description

The Location and Navigation Service exposes location and navigation-related data from a Location and Navigation sensor (Server) intended for outdoor activity applications.

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The LNS API names begin with CyBle\_Lns. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [LNS Server and Client Function](#)  
*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*
- [LNS Server Functions](#)  
*APIs unique to LNS designs configured as a GATT Server role.*
- [LNS Client Functions](#)  
*APIs unique to LNS designs configured as a GATT Client role.*
- [LNS Definitions and Data Structures](#)  
*Contains the LNS specific definitions and data structures used in the LNS APIs.*

## LNS Server and Client Function

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.

No letter is appended to the API name: CyBle\_Lns

### Functions

- void [CyBle\\_LnsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

### Function Documentation

#### void [CyBle\\_LnsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

Registers a callback function for service specific attribute operations. Service specific write requests from peer device will not be handled with unregistered callback function.

#### Parameters:

<i>callbackFunc</i>	An application layer event callback function to receive events from the BLE Component. The definition of CYBLE_CALLBACK_T for LNS is: typedef void (* CYBLE_CALLBACK_T) (uint32 eventCode, void
---------------------	--



	<p><i>*eventParam</i>)</p> <ul style="list-style-type: none"> <li>eventCode indicates the event that triggered this callback.</li> <li>eventParam contains the parameters corresponding to the current event.</li> </ul>
--	--

**Returns:**

None

**Events**

None

**Side Effects**

The *\*eventParams* in the callback function should not be used by the application once the callback function execution is finished. Otherwise this data may become corrupted.

## LNS Server Functions

### Description

APIs unique to LNS designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_Lnss

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_LnssSetCharacteristicValue](#) ([CYBLE\\_LNS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_LnssGetCharacteristicValue](#) ([CYBLE\\_LNS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_LnssGetCharacteristicDescriptor](#) ([CYBLE\\_LNS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_LNS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_LnssSendNotification](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_LNS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_LnssSendIndication](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_LNS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)

### Function Documentation

**[CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_LnssSetCharacteristicValue](#) ([CYBLE\\_LNS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)**

Sets the value of the characteristic, as identified by charIndex.

**Parameters:**

<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be stored to the GATT database.

**Returns:**

Return value is of type [CYBLE\\_API\\_RESULT\\_T](#).

- [CYBLE\\_ERROR\\_OK](#) - The request handled successfully.
- [CYBLE\\_ERROR\\_INVALID\\_PARAMETER](#) - Validation of the input parameter failed.



- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent

**Events**

None

**CYBLE\_API\_RESULT\_T** **CyBle\_LnssGetCharacteristicValue** (**CYBLE\_LNS\_CHAR\_INDEX\_T** *charIndex*, **uint8** *attrSize*, **uint8 \*** *attrValue*)

Gets the value of the characteristic, as identified by *charIndex*.

**Parameters:**

<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the location where characteristic value data should be stored.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - Characteristic value was read successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Characteristic is absent.

**Events**

None

**CYBLE\_API\_RESULT\_T** **CyBle\_LnssGetCharacteristicDescriptor** (**CYBLE\_LNS\_CHAR\_INDEX\_T** *charIndex*, **CYBLE\_LNS\_DESCR\_INDEX\_T** *descrIndex*, **uint8** *attrSize*, **uint8 \*** *attrValue*)

Gets a characteristic descriptor of the specified characteristic.

**Parameters:**

<i>charIndex</i>	The index of the characteristic.
<i>descrIndex</i>	The index of the descriptor.
<i>attrSize</i>	The size of the descriptor value attribute.
<i>attrValue</i>	The pointer to the location where characteristic descriptor value data should be stored.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - Characteristic Descriptor value was read successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Characteristic is absent.

**Events**

None

**CYBLE\_API\_RESULT\_T** **CyBle\_LnssSendNotification** (**CYBLE\_CONN\_HANDLE\_T** *connHandle*, **CYBLE\_LNS\_CHAR\_INDEX\_T** *charIndex*, **uint8** *attrSize*, **uint8 \*** *attrValue*)

Sends a notification of the specified characteristic value, as identified by the *charIndex*.

**Parameters:**

<i>connHandle</i>	The connection handle which consist of the device ID and ATT
-------------------	--



	connection ID.
<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the client device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_NTF\_DISABLED - Notification is not enabled by the client

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_LnssSendIndication (CYBLE\_CONN\_HANDLE\_T *connHandle*, CYBLE\_LNS\_CHAR\_INDEX\_T *charIndex*, *uint8 attrSize*, *uint8 \* attrValue*)**

Sends an indication of the specified characteristic value, as identified by the *charIndex*.

**Parameters:**

<i>connHandle</i>	The connection handle which consist of the device ID and ATT connection ID.
<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the client device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_NTF\_DISABLED - Notification is not enabled by the client
- CYBLE\_ERROR\_IND\_DISABLED - Indication is disabled for this characteristic

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the LNS service-specific callback is registered (with *CyBle\_LnsRegisterAttrCallback*):

- CYBLE\_EVT\_LNSS\_INDICATION\_CONFIRMED - in case if the indication is successfully delivered to the peer device.

Otherwise (if the LNS service-specific callback is not registered):



- CYBLE\_EVT\_GATTS\_HANDLE\_VALUE\_CNF - in case if the indication is successfully delivered to the peer device.

## LNS Client Functions

### Description

APIs unique to LNS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: CyBle\_Lnsc

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_LnscSetCharacteristicValue \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_LNS\\_CHAR\\_INDEX\\_T charIndex, uint8 attrSize, uint8 \\*attrValue\)](#)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_LnscGetCharacteristicValue \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_LNS\\_CHAR\\_INDEX\\_T charIndex\)](#)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_LnscSetCharacteristicDescriptor \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_LNS\\_CHAR\\_INDEX\\_T charIndex, CYBLE\\_LNS\\_DESCR\\_INDEX\\_T descrIndex, uint8 attrSize, uint8 \\*attrValue\)](#)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_LnscGetCharacteristicDescriptor \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_LNS\\_CHAR\\_INDEX\\_T charIndex, CYBLE\\_LNS\\_DESCR\\_INDEX\\_T descrIndex\)](#)

### Function Documentation

**[CYBLE\\_API\\_RESULT\\_T CyBle\\_LnscSetCharacteristicValue \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_LNS\\_CHAR\\_INDEX\\_T charIndex, uint8 attrSize, uint8 \\* attrValue\)](#)**

This function is used to write the characteristic (which is identified by charIndex) value attribute in the server. The Write Response just confirms the operation success.

#### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the server device.

#### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the server is not established
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic

#### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the LNS service-specific callback is registered (with CyBle\_LnsRegisterAttrCallback):





- CYBLE\_EVT\_LNSC\_WRITE\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, etc.) are provided with event parameter structure of type [CYBLE\\_LNS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the LNS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

### **CYBLE\_API\_RESULT\_T CyBle\_LnscGetCharacteristicValue (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_LNS\_CHAR\_INDEX\_T charIndex)**

This function is used to read the characteristic Value from a server, as identified by its charIndex

The Read Response returns the characteristic Value in the Attribute Value parameter.

The Read Response only contains the characteristic Value that is less than or equal to (MTU - 1) octets in length. If the characteristic Value is greater than (MTU - 1) octets in length, the Read Long Characteristic Value procedure may be used if the rest of the characteristic Value is required.

#### **Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.

#### **Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The read request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the server is not established
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic

#### **Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the LNS service-specific callback is registered (with CyBle\_LnsRegisterAttrCallback):

- CYBLE\_EVT\_LNSC\_READ\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index , value, etc.) are provided with event parameter structure of type [CYBLE\\_LNS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the LNS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**CYBLE\_API\_RESULT\_T CyBle\_LnscSetCharacteristicDescriptor (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_LNS\_CHAR\_INDEX\_T charIndex, CYBLE\_LNS\_DESCR\_INDEX\_T descrIndex, uint8 attrSize, uint8 \*attrValue)**

This function is used to write the characteristic Value to the server, as identified by its charIndex.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>descrIndex</i>	The index of the service characteristic descriptor.
<i>attrSize</i>	The size of the characteristic descriptor value attribute.
<i>attrValue</i>	The pointer to the characteristic descriptor value data that should be sent to the server device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_INVALID\_STATE - The state is not valid
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted on the specified attribute

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the LNS service-specific callback is registered (with CyBle\_LnsRegisterAttrCallback):

- CYBLE\_EVT\_LNSC\_WRITE\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index etc.) are provided with event parameter structure of type CYBLE\_LNS\_DESCR\_VALUE\_T.

Otherwise (if the LNS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure (CYBLE\_GATTC\_ERR\_RSP\_PARAM\_T).

**CYBLE\_API\_RESULT\_T CyBle\_LnscGetCharacteristicDescriptor (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_LNS\_CHAR\_INDEX\_T charIndex, CYBLE\_LNS\_DESCR\_INDEX\_T descrIndex)**

Gets the characteristic descriptor of the specified characteristic.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>descrIndex</i>	The index of the service characteristic descriptor.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed



- `CYBLE_ERROR_INVALID_STATE` - The state is not valid
- `CYBLE_ERROR_MEMORY_ALLOCATION_FAILED` - Memory allocation failed
- `CYBLE_ERROR_GATT_DB_INVALID_ATTR_HANDLE` - The peer device doesn't have the particular descriptor
- `CYBLE_ERROR_INVALID_OPERATION` - This operation is not permitted on the specified attribute

### Events

In case of successful execution (return value = `CYBLE_ERROR_OK`) the next events can appear:

If the LNS service-specific callback is registered (with `CyBle_LnsRegisterAttrCallback`):

- `CYBLE_EVT_LNSC_READ_DESCR_RESPONSE` - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index, value, etc.) are provided with event parameter structure of type [CYBLE\\_LNS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the LNS service-specific callback is not registered):

- `CYBLE_EVT_GATTC_READ_RSP` - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- `CYBLE_EVT_GATTC_ERROR_RSP` - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

## LNS Definitions and Data Structures

### Description

Contains the LNS specific definitions and data structures used in the LNS APIs.

### Data Structures

- struct [CYBLE\\_LNSS\\_CHAR\\_T](#)
- struct [CYBLE\\_LNSS\\_T](#)
- struct [CYBLE\\_LNSC\\_CHAR\\_T](#)
- struct [CYBLE\\_LNSC\\_T](#)
- struct [CYBLE\\_LNS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_LNS\\_DESCR\\_VALUE\\_T](#)

### Enumerations

- enum [CYBLE\\_LNS\\_CHAR\\_INDEX\\_T](#) { [CYBLE\\_LNS\\_FT](#), [CYBLE\\_LNS\\_LS](#), [CYBLE\\_LNS\\_PQ](#), [CYBLE\\_LNS\\_CP](#), [CYBLE\\_LNS\\_NV](#), [CYBLE\\_LNS\\_CHAR\\_COUNT](#) }
- enum [CYBLE\\_LNS\\_DESCR\\_INDEX\\_T](#) { [CYBLE\\_LNS\\_CCCD](#), [CYBLE\\_LNS\\_DESCR\\_COUNT](#) }

### Enumeration Type Documentation

#### enum [CYBLE\\_LNS\\_CHAR\\_INDEX\\_T](#)

LNS Service Characteristics indexes

##### Enumerator

**`CYBLE_LNS_FT`** Location and Navigation Feature characteristic index

**`CYBLE_LNS_LS`** Location and Speed characteristic index

**`CYBLE_LNS_PQ`** Position Quality characteristic index



**CYBLE\_LNS\_CP** Location and Navigation Control Point characteristic index

**CYBLE\_LNS\_NV** Navigation characteristic index

**CYBLE\_LNS\_CHAR\_COUNT** Total count of LNS characteristics

#### enum [CYBLE\\_LNS\\_DESCR\\_INDEX\\_T](#)

LNS Service Characteristic Descriptors indexes

##### Enumerator

**CYBLE\_LNS\_CCCD** Client Characteristic Configuration descriptor index

**CYBLE\_LNS\_DESCR\_COUNT** Total count of LNS descriptors

## Next DST Change Service (NDCS)

### Description

This Service enables a BLE device that has knowledge about the next occurrence of a DST change to expose this information to another Bluetooth device. The Service uses the "Time with DST" Characteristic and the functions exposed in this Service are used to interact with that Characteristic.

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The NDSC API names begin with CyBle\_Ndsc. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [NDCS Server and Client Functions](#)  
*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*
- [NDCS Server Functions](#)  
*APIs unique to NDSC designs configured as a GATT Server role.*
- [NDCS Client Functions](#)  
*APIs unique to NDSC designs configured as a GATT Client role.*
- [NDCS Definitions and Data Structures](#)  
*Contains the NDSC specific definitions and data structures used in the NDSC APIs.*

## NDCS Server and Client Functions

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.

No letter is appended to the API name: CyBle\_Ndsc

### Functions

- void [CyBle\\_NdcsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

### Function Documentation

#### void CyBle\_NdcsRegisterAttrCallback ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

Registers a callback function for Next DST Change Service specific attribute operations. Service specific write requests from peer device will not be handled with unregistered callback function.



**Parameters:**

<i>callbackFunc</i>	<p>An application layer event callback function to receive events from the BLE Component. The definition of CYBLE_CALLBACK_T for NDCS is:</p> <pre>typedef void (* CYBLE_CALLBACK_T) (uint32 eventCode, void *eventParam)</pre> <ul style="list-style-type: none"> <li>eventCode indicates the event that triggered this callback.</li> <li>eventParam contains the parameters corresponding to the current event.</li> </ul>
---------------------	---

**Returns:**

None.

**Events**

None

## NDCS Server Functions

### Description

APIs unique to NDSC designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_Ndscs

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_NdcssSetCharacteristicValue \(CYBLE\\_NDCS\\_CHAR\\_INDEX\\_T charIndex, uint8 attrSize, uint8 \\*attrValue\)](#)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_NdcssGetCharacteristicValue \(CYBLE\\_NDCS\\_CHAR\\_INDEX\\_T charIndex, uint8 attrSize, uint8 \\*attrValue\)](#)

### Function Documentation

**[CYBLE\\_API\\_RESULT\\_T CyBle\\_NdcssSetCharacteristicValue \(CYBLE\\_NDCS\\_CHAR\\_INDEX\\_T charIndex, uint8 attrSize, uint8 \\* attrValue\)](#)**

Sets characteristic value of the Next DST Change Service, which is identified by charIndex in the local database.

**Parameters:**

<i>CYBLE_NDCS_CHAR_INDEX_T</i>	charIndex: The index of a service characteristic of type CYBLE_NDCS_CHAR_INDEX_T.
<i>uint8</i>	attrSize: The size of the characteristic value attribute.
<i>uint8</i>	*attrValue: The pointer to the characteristic value data that should be stored to the GATT database.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - the request is handled successfully;
- CYBLE\_ERROR\_INVALID\_PARAMETER - validation of the input parameters failed.

**Events**

None



**CYBLE\_API\_RESULT\_T CyBle\_NdcscGetCharacteristicValue (CYBLE\_NDCS\_CHAR\_INDEX\_T *charIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Gets a characteristic value of the Next DST Change Service, which is identified by *charIndex*.

**Parameters:**

<i>charIndex</i>	The index of a service characteristic of type CYBLE_NDCS_CHAR_INDEX_T.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the location where characteristic value data should be stored.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - the request is handled successfully;
- CYBLE\_ERROR\_INVALID\_PARAMETER - validation of the input parameter failed.

**Events**

None

## NDSCS Client Functions

### Description

APIs unique to NDSC designs configured as a GATT Client role.

A letter 'c' is appended to the API name: CyBle\_Ndsc

### Functions

- **CYBLE\_API\_RESULT\_T CyBle\_NdscGetCharacteristicValue (CYBLE\_CONN\_HANDLE\_T *connHandle*, CYBLE\_NDCS\_CHAR\_INDEX\_T *charIndex*)**

### Function Documentation

**CYBLE\_API\_RESULT\_T CyBle\_NdscGetCharacteristicValue (CYBLE\_CONN\_HANDLE\_T *connHandle*, CYBLE\_NDCS\_CHAR\_INDEX\_T *charIndex*)**

Sends a request to peer device to set characteristic value of the Next DST Change Service, which is identified by *charIndex*.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - the request was sent successfully.
- CYBLE\_ERROR\_INVALID\_STATE - connection with the client is not established.
- CYBLE\_ERROR\_INVALID\_PARAMETER - validation of the input parameters failed.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic.

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:



If the NDCS service-specific callback is registered (with `CyBle_NdcsRegisterAttrCallback`):

- `CYBLE_EVT_NDCSC_READ_CHAR_RESPONSE` - in case if the requested attribute is successfully wrote on the peer device, the details (char index , value, etc.) are provided with event parameter structure of type [CYBLE\\_NDCS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the NDCS service-specific callback is not registered):

- `CYBLE_EVT_GATTC_READ_RSP` - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- `CYBLE_EVT_GATTC_ERROR_RSP` - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

## NDCS Definitions and Data Structures

### Description

Contains the NDSC specific definitions and data structures used in the NDSC APIs.

### Data Structures

- struct [CYBLE\\_NDCS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_NDCSS\\_T](#)
- struct [CYBLE\\_NDCSC\\_T](#)

### Enumerations

- enum [CYBLE\\_NDCS\\_CHAR\\_INDEX\\_T](#) { [CYBLE\\_NDCS\\_TIME\\_WITH\\_DST](#), [CYBLE\\_NDCS\\_CHAR\\_COUNT](#) }

### Enumeration Type Documentation

enum [CYBLE\\_NDCS\\_CHAR\\_INDEX\\_T](#)

Characteristic indexes

#### Enumerator

**`CYBLE_NDCS_TIME_WITH_DST`** Time with DST Characteristic index

**`CYBLE_NDCS_CHAR_COUNT`** Total count of NDCS Characteristics

## Phone Alert Status Service (PASS)

### Description

The Phone Alert Status Service uses the Alert Status Characteristic and Ringer Setting Characteristic to expose the phone alert status and uses the Ringer Control Point Characteristic to control the phone's ringer into mute or enable. Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The PASS API names begin with `CyBle_Pass`. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [PASS Server and Client Function](#)

*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*

- [PASS Server Functions](#)





*APIs unique to PASS designs configured as a GATT Server role.*

- [PASS Client Functions](#)

*APIs unique to PASS designs configured as a GATT Client role.*

- [PASS Definitions and Data Structures](#)

*Contains the PASS specific definitions and data structures used in the PASS APIs.*

## PASS Server and Client Function

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles. No letter is appended to the API name: CyBle\_Pass

### Functions

- void [CyBle\\_PassRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

### Function Documentation

#### void CyBle\_PassRegisterAttrCallback ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

Registers a callback function for service specific attribute operations. Service specific write requests from peer device will not be handled with unregistered callback function.

##### Parameters:

<i>callbackFunc</i>	<p>An application layer event callback function to receive events from the BLE Component. The definition of CYBLE_CALLBACK_T for PASS is:</p> <pre>typedef void (* CYBLE_CALLBACK_T) (uint32 eventCode, void *eventParam)</pre> <ul style="list-style-type: none"> <li>• eventCode indicates the event that triggered this callback.</li> <li>• eventParam contains the parameters corresponding to the current event.</li> </ul>
---------------------	---

##### Returns:

None

##### Events

None

## PASS Server Functions

### Description

APIs unique to PASS designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_Passs

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_PasssSetCharacteristicValue](#) ([CYBLE\\_PASS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_PasssGetCharacteristicValue](#) ([CYBLE\\_PASS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)



- [CYBLE\\_API\\_RESULT\\_T CyBle\\_PasssGetCharacteristicDescriptor \(CYBLE\\_PASS\\_CHAR\\_INDEX\\_T charIndex, CYBLE\\_PASS\\_DESCR\\_INDEX\\_T descrIndex, uint8 attrSize, uint8 \\*attrValue\)](#)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_PasssSendNotification \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_PASS\\_CHAR\\_INDEX\\_T charIndex, uint8 attrSize, uint8 \\*attrValue\)](#)

## Function Documentation

**[CYBLE\\_API\\_RESULT\\_T CyBle\\_PasssSetCharacteristicValue \(CYBLE\\_PASS\\_CHAR\\_INDEX\\_T charIndex, uint8 attrSize, uint8 \\* attrValue\)](#)**

Sets the value of a characteristic which is identified by charIndex.

### Parameters:

<i>charIndex</i>	the index of a service characteristic.
<i>attrSize</i>	the size of the characteristic value attribute.
<i>attrValue</i>	the pointer to the characteristic value data that should be stored to the GATT database.

### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent

### Events

None

**[CYBLE\\_API\\_RESULT\\_T CyBle\\_PasssGetCharacteristicValue \(CYBLE\\_PASS\\_CHAR\\_INDEX\\_T charIndex, uint8 attrSize, uint8 \\* attrValue\)](#)**

Gets the value of a characteristic which is identified by charIndex.

### Parameters:

<i>charIndex</i>	the index of a service characteristic.
<i>attrSize</i>	the size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the location where characteristic value data should be stored.

### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional descriptor is absent

### Events

None

**[CYBLE\\_API\\_RESULT\\_T CyBle\\_PasssGetCharacteristicDescriptor \(CYBLE\\_PASS\\_CHAR\\_INDEX\\_T charIndex, CYBLE\\_PASS\\_DESCR\\_INDEX\\_T descrIndex, uint8 attrSize, uint8 \\* attrValue\)](#)**

Gets a characteristic descriptor of a specified characteristic of the service.

### Parameters:

<i>charIndex</i>	The index of the characteristic.
------------------	----------------------------------



<i>descrIndex</i>	The index of the descriptor.
<i>attrSize</i>	The size of the descriptor value attribute.
<i>attrValue</i>	The pointer to the descriptor value data that should be stored to the GATT database.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional descriptor is absent

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_PasssSendNotification (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_PASS\_CHAR\_INDEX\_T charIndex, uint8 attrSize, uint8 \* attrValue)**

Sends a notification of the specified by the charIndex characteristic value.

**Parameters:**

<i>connHandle</i>	The connection handle which consists of the device ID and ATT connection ID.
<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the client device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_NTF\_DISABLED - Notification is not enabled by the Client

**Events**

None

## PASS Client Functions

### Description

APIs unique to PASS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: CyBle\_Passc

### Functions

- **CYBLE\_API\_RESULT\_T CyBle\_PasscSetCharacteristicValue (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_PASS\_CHAR\_INDEX\_T charIndex, uint8 attrSize, uint8 \*attrValue)**



- [CYBLE\\_API\\_RESULT\\_T CyBle\\_PasscGetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T connHandle](#), [CYBLE\\_PASS\\_CHAR\\_INDEX\\_T charIndex](#))
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_PasscSetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T connHandle](#), [CYBLE\\_PASS\\_CHAR\\_INDEX\\_T charIndex](#), [CYBLE\\_PASS\\_DESCR\\_INDEX\\_T descrIndex](#), [uint8 attrSize](#), [uint8 \\*attrValue](#))
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_PasscGetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T connHandle](#), [CYBLE\\_PASS\\_CHAR\\_INDEX\\_T charIndex](#), [CYBLE\\_PASS\\_DESCR\\_INDEX\\_T descrIndex](#))

## Function Documentation

**[CYBLE\\_API\\_RESULT\\_T CyBle\\_PasscSetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T connHandle](#), [CYBLE\\_PASS\\_CHAR\\_INDEX\\_T charIndex](#), [uint8 attrSize](#), [uint8 \\* attrValue](#))**

This function is used to write the characteristic (which is identified by charIndex) value attribute to the Server. The Write Response just confirms the operation success.

### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the server device.

### Returns:

Return value is of type [CYBLE\\_API\\_RESULT\\_T](#).

- [CYBLE\\_ERROR\\_OK](#) - The request was sent successfully
- [CYBLE\\_ERROR\\_INVALID\\_PARAMETER](#) - Validation of the input parameters failed
- [CYBLE\\_ERROR\\_MEMORY\\_ALLOCATION\\_FAILED](#) - Memory allocation failed
- [CYBLE\\_ERROR\\_INVALID\\_STATE](#) - Connection with the server is not established
- [CYBLE\\_ERROR\\_GATT\\_DB\\_INVALID\\_ATTR\\_HANDLE](#) - The peer device doesn't have the particular characteristic
- [CYBLE\\_ERROR\\_INVALID\\_OPERATION](#) - Operation is invalid for this characteristic

### Events

In case of successful execution (return value = [CYBLE\\_ERROR\\_OK](#)) the next events can appear:

If the PASS service-specific callback is registered (with [CyBle\\_PassRegisterAttrCallback](#)):

- [CYBLE\\_EVT\\_PASSC\\_WRITE\\_CHAR\\_RESPONSE](#) - in case if the requested attribute is successfully wrote on the peer device, the details (char index, etc.) are provided with event parameter structure of type [CYBLE\\_PASS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the PASS service-specific callback is not registered):

- [CYBLE\\_EVT\\_GATTC\\_WRITE\\_RSP](#) - in case if the requested attribute is successfully wrote on the peer device.
- [CYBLE\\_EVT\\_GATTC\\_ERROR\\_RSP](#) - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T CyBle\\_PasscGetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T connHandle](#), [CYBLE\\_PASS\\_CHAR\\_INDEX\\_T charIndex](#))**

This function is used to read the characteristic Value from a Server which is identified by the charIndex. The Read Response returns the characteristic Value in the Attribute Value parameter.



The Read Response only contains the characteristic Value that is less than or equal to (MTU - 1) octets in length. If the characteristic Value is greater than (MTU - 1) octets in length, the Read Long Characteristic Value procedure may be used if the rest of the characteristic Value is required.

#### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic.

#### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The read request was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the Server is not established.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic.

#### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the PASS service-specific callback is registered (with CyBle\_PassRegisterAttrCallback):

- CYBLE\_EVT\_PASSC\_READ\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index , value, etc.) are provided with event parameter structure of type [CYBLE\\_PASS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the PASS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_PasscSetCharacteristicDescriptor ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_PASS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_PASS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \* attrValue)**

This function is used to write the characteristic Value to the server which is identified by the charIndex.

#### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic.
<i>descrIndex</i>	The index of a service characteristic descriptor.
<i>attrSize</i>	The size of the characteristic descriptor value attribute.
<i>attrValue</i>	The pointer to the characteristic descriptor value data that should be sent to the server device.

#### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.



- CYBLE\_ERROR\_INVALID\_STATE - The state is not valid.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic.
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted on the specified attribute.

### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the PASS service-specific callback is registered (with CyBle\_PassRegisterAttrCallback):

- CYBLE\_EVT\_PASSC\_WRITE\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index etc.) are provided with event parameter structure of type [CYBLE\\_PASS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the PASS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_PasscGetCharacteristicDescriptor ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_PASS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_PASS\\_DESCR\\_INDEX\\_T](#) descrIndex)**

Gets a characteristic descriptor of a specified characteristic of the service.

### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic.
<i>descrIndex</i>	The index of a service characteristic descriptor.

### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_INVALID\_STATE - The state is not valid.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular descriptor.
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted on the specified attribute.

### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the PASS service-specific callback is registered (with CyBle\_PassRegisterAttrCallback):

- CYBLE\_EVT\_PASSC\_READ\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index, value, etc.) are provided with event parameter structure of type [CYBLE\\_PASS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the PASS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).



- `CYBLE_EVT_GATTC_ERROR_RSP` - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

## PASS Definitions and Data Structures

### Description

Contains the PASS specific definitions and data structures used in the PASS APIs.

### Data Structures

- struct [CYBLE\\_PASSS\\_CHAR\\_T](#)
- struct [CYBLE\\_PASSS\\_T](#)
- struct [CYBLE\\_PASSC\\_CHAR\\_T](#)
- struct [CYBLE\\_PASSC\\_T](#)
- struct [CYBLE\\_PASS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_PASS\\_DESCR\\_VALUE\\_T](#)

### Enumerations

- enum [CYBLE\\_PASS\\_CHAR\\_INDEX\\_T](#) { [CYBLE\\_PASS\\_AS](#), [CYBLE\\_PASS\\_RS](#), [CYBLE\\_PASS\\_CP](#), [CYBLE\\_PASS\\_CHAR\\_COUNT](#) }
- enum [CYBLE\\_PASS\\_DESCR\\_INDEX\\_T](#) { [CYBLE\\_PASS\\_CCCD](#), [CYBLE\\_PASS\\_DESCR\\_COUNT](#) }
- enum [CYBLE\\_PASS\\_RS\\_T](#) { [CYBLE\\_PASS\\_RS\\_SILENT](#), [CYBLE\\_PASS\\_RS\\_NORMAL](#) }
- enum [CYBLE\\_PASS\\_CP\\_T](#) { [CYBLE\\_PASS\\_CP\\_SILENT](#) = 1, [CYBLE\\_PASS\\_CP\\_MUTE](#), [CYBLE\\_PASS\\_CP\\_CANCEL](#) }

### Enumeration Type Documentation

#### enum [CYBLE\\_PASS\\_CHAR\\_INDEX\\_T](#)

Service Characteristics indexes

##### Enumerator

**`CYBLE_PASS_AS`** Alert Status characteristic index  
**`CYBLE_PASS_RS`** Ringer Setting characteristic index  
**`CYBLE_PASS_CP`** Ringer Control Point characteristic index  
**`CYBLE_PASS_CHAR_COUNT`** Total count of PASS characteristics

#### enum [CYBLE\\_PASS\\_DESCR\\_INDEX\\_T](#)

Service Characteristic Descriptors indexes

##### Enumerator

**`CYBLE_PASS_CCCD`** Client Characteristic Configuration descriptor index  
**`CYBLE_PASS_DESCR_COUNT`** Total count of PASS descriptors

#### enum [CYBLE\\_PASS\\_RS\\_T](#)

Ringer Setting values

##### Enumerator

**`CYBLE_PASS_RS_SILENT`** Ringer Silent  
**`CYBLE_PASS_RS_NORMAL`** Ringer Normal





**enum [CYBLE\\_PASS\\_CP\\_T](#)**

Ringer Control Point values

**Enumerator****[CYBLE\\_PASS\\_CP\\_SILENT](#)** Silent Mode**[CYBLE\\_PASS\\_CP\\_MUTE](#)** Mute Once**[CYBLE\\_PASS\\_CP\\_CANCEL](#)** Cancel Silent Mode

## Running Speed and Cadence Service (RSCS)

### Description

The Running Speed and Cadence (RSC) Service exposes speed, cadence and other data related to fitness applications such as the stride length and the total distance the user has travelled while using the Running Speed and Cadence sensor (Server).

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The RSCS API names begin with CyBle\_Rscs. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [RSCS Server and Client Functions](#)

*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*

- [RSCS Server Functions](#)

*APIs unique to RSCS designs configured as a GATT Server role.*

- [RSCS Client Functions](#)

*APIs unique to RSCS designs configured as a GATT Client role.*

- [RSCS Definitions and Data Structures](#)

*Contains the RSCS specific definitions and data structures used in the RSCS APIs.*

## RSCS Server and Client Functions

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.

No letter is appended to the API name: CyBle\_Rscs

### Functions

- void [CyBle\\_RscsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

### Function Documentation

**void CyBle\_RscsRegisterAttrCallback ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)**

Registers a callback function for Running Speed and Cadence Service specific attribute operations. Service specific write requests from peer device will not be handled with unregistered callback function.

**Parameters:**

<i>callbackFunc</i>	An application layer event callback function to receive events from the BLE Component. The definition of <a href="#">CYBLE_CALLBACK_T</a> for RSCS is: typedef void (* <a href="#">CYBLE_CALLBACK_T</a> ) (uint32 eventCode, void
---------------------	--

	<p><i>*eventParam</i>)</p> <ul style="list-style-type: none"> <li>eventCode indicates the event that triggered this callback.</li> <li>eventParam contains the parameters corresponding to the current event.</li> </ul>
--	--

**Returns:**

None

**Events**

None

## RSCS Server Functions

### Description

APIs unique to RSCS designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_Rscss

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_RscssSetCharacteristicValue](#) ([CYBLE\\_RSCS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_RscssGetCharacteristicValue](#) ([CYBLE\\_RSCS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_RscssGetCharacteristicDescriptor](#) ([CYBLE\\_RSCS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_RSCS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_RscssSendNotification](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_RSCS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_RscssSendIndication](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_RSCS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)

### Function Documentation

**[CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_RscssSetCharacteristicValue](#) ([CYBLE\\_RSCS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)**

Sets the characteristic value of the Running Speed and Cadence Service in the local GATT database. The characteristic is identified by charIndex.

**Parameters:**

<i>charIndex</i>	The index of a service characteristic. Valid values are, <ul style="list-style-type: none"> <li>CYBLE_RSCS_RSC_FEATURE</li> <li>CYBLE_RSCS_SENSOR_LOCATION.</li> </ul>
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be stored in the GATT database.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.



- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent

**Events**

None

**CYBLE\_API\_RESULT\_T** **CyBle\_RscssGetCharacteristicValue** (**CYBLE\_RSCS\_CHAR\_INDEX\_T** *charIndex*, **uint8** *attrSize*, **uint8 \*** *attrValue*)

Gets the characteristic value of the Running Speed and Cadence Service from the GATT database. The characteristic is identified by *charIndex*.

**Parameters:**

<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the location where characteristic value data should be stored.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Peer device doesn't have a particular characteristic

**Events**

None

**CYBLE\_API\_RESULT\_T** **CyBle\_RscssGetCharacteristicDescriptor** (**CYBLE\_RSCS\_CHAR\_INDEX\_T** *charIndex*, **CYBLE\_RSCS\_DESCR\_INDEX\_T** *descrIndex*, **uint8** *attrSize*, **uint8 \*** *attrValue*)

Gets the characteristic descriptor of a specified characteristic of the Running Speed and Cadence Service from the GATT database.

**Parameters:**

<i>charIndex</i>	The index of a service characteristic. Valid values are, <ul style="list-style-type: none"> <li>• CYBLE_RSCS_RSC_MEASUREMENT</li> <li>• CYBLE_RSCS_SC_CONTROL_POINT</li> </ul>
<i>descrIndex</i>	The index of a service characteristic descriptor. Valid value is, <ul style="list-style-type: none"> <li>• CYBLE_RSCS_CCCD</li> </ul>
<i>attrSize</i>	The size of the characteristic descriptor attribute.
<i>attrValue</i>	The pointer to the location where characteristic descriptor value data should be stored.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed



- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Peer device doesn't have a particular descriptor

**Events**

None

**CYBLE\_API\_RESULT\_T** **CyBle\_RscssSendNotification** (**CYBLE\_CONN\_HANDLE\_T** *connHandle*, **CYBLE\_RSCS\_CHAR\_INDEX\_T** *charIndex*, *uint8 attrSize*, *uint8 \* attrValue*)

Sends a notification with the characteristic value to the Client device. This is specified by charIndex of the Running Speed and Cadence Service.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic. Valid value is, <ul style="list-style-type: none"> <li>• CYBLE_RSCS_RSC_MEASUREMENT</li> </ul>
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the client device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of input parameter is failed
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this. characteristic.
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established
- CYBLE\_ERROR\_NTF\_DISABLED - Notification is not enabled by the client
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.

**Events**

None

**CYBLE\_API\_RESULT\_T** **CyBle\_RscssSendIndication** (**CYBLE\_CONN\_HANDLE\_T** *connHandle*, **CYBLE\_RSCS\_CHAR\_INDEX\_T** *charIndex*, *uint8 attrSize*, *uint8 \* attrValue*)

Sends an indication with a characteristic value to the Client device. This is specified by charIndex of the Running Speed and Cadence Service.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the client device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of input parameter is failed
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this. characteristic.



- `CYBLE_ERROR_INVALID_STATE` - Connection with the client is not established
- `CYBLE_ERROR_IND_DISABLED` - Indication is not enabled by the client
- `CYBLE_ERROR_MEMORY_ALLOCATION_FAILED` - Memory allocation failed
- `CYBLE_ERROR_GATT_DB_INVALID_ATTR_HANDLE` - Peer device doesn't have a particular characteristic

### Events

In case of successful execution (return value = `CYBLE_ERROR_OK`) the next events can appear:

If the RSCS service-specific callback is registered (with `CyBle_RscsRegisterAttrCallback`):

- `CYBLE_EVT_RSCSS_INDICATION_CONFIRMED` - in case if the indication is successfully delivered to the peer device.

Otherwise (if the RSCS service-specific callback is not registered):

- `CYBLE_EVT_GATTS_HANDLE_VALUE_CNF` - in case if the indication is successfully delivered to the peer device.

## RSCS Client Functions

### Description

APIs unique to RSCS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: `CyBle_Rscsc`

### Functions

- [`CYBLE\_API\_RESULT\_T CyBle\_RscscSetCharacteristicValue`](#) ([`CYBLE\_CONN\_HANDLE\_T`](#) connHandle, [`CYBLE\_RSCS\_CHAR\_INDEX\_T`](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [`CYBLE\_API\_RESULT\_T CyBle\_RscscGetCharacteristicValue`](#) ([`CYBLE\_CONN\_HANDLE\_T`](#) connHandle, [`CYBLE\_RSCS\_CHAR\_INDEX\_T`](#) charIndex)
- [`CYBLE\_API\_RESULT\_T CyBle\_RscscSetCharacteristicDescriptor`](#) ([`CYBLE\_CONN\_HANDLE\_T`](#) connHandle, [`CYBLE\_RSCS\_CHAR\_INDEX\_T`](#) charIndex, [`CYBLE\_RSCS\_DESCR\_INDEX\_T`](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [`CYBLE\_API\_RESULT\_T CyBle\_RscscGetCharacteristicDescriptor`](#) ([`CYBLE\_CONN\_HANDLE\_T`](#) connHandle, [`CYBLE\_RSCS\_CHAR\_INDEX\_T`](#) charIndex, uint8 descrIndex)

### Function Documentation

[\*\*`CYBLE\_API\_RESULT\_T`\*\*](#) [\*\*`CyBle\_RscscSetCharacteristicValue`\*\*](#) ([\*\*`CYBLE\_CONN\_HANDLE\_T`\*\*](#) connHandle, [\*\*`CYBLE\_RSCS\_CHAR\_INDEX\_T`\*\*](#) charIndex, uint8 attrSize, uint8 \* attrValue)

Sends a request to the peer device to get the characteristic descriptor of the specified characteristic of the Running Speed and Cadence Service.

#### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	Size of the characteristic value attribute.
<i>attrValue</i>	Pointer to the characteristic value data that should be sent to the server device.

#### Returns:

Return value is of type `CYBLE_API_RESULT_T`.

- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Peer device doesn't have a particular characteristic

## Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the RSCS service-specific callback is registered (with CyBle\_RscsRegisterAttrCallback):

- CYBLE\_EVT\_RSCSC\_WRITE\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, etc.) are provided with event parameter structure of type [CYBLE\\_RSCS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the RSCS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

## **CYBLE\_API\_RESULT\_T CyBle\_RscscGetCharacteristicValue (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_RSCS\_CHAR\_INDEX\_T charIndex)**

Sends a request to the peer device to set the characteristic value of the Running Speed and Cadence Service.

### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.

### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Peer device doesn't have a particular characteristic

## Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the RSCS service-specific callback is registered (with CyBle\_RscsRegisterAttrCallback):

- CYBLE\_EVT\_RSCSC\_READ\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index , value, etc.) are provided with event parameter structure of type [CYBLE\\_RSCS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the RSCS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).



- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_RscscSetCharacteristicDescriptor ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_RSCS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_RSCS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \* attrValue)**

Sends a request to the peer device to get the characteristic descriptor of the specified characteristic of the Running Speed and Cadence Service.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a RSCS characteristic.
<i>descrIndex</i>	The index of a RSCS characteristic descriptor.
<i>attrSize</i>	The size of the characteristic descriptor attribute.
<i>attrValue</i>	The pointer to the characteristic descriptor value data that should be sent to the server device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - the request was sent successfully
- CYBLE\_ERROR\_INVALID\_STATE - connection with the client is not established
- CYBLE\_ERROR\_INVALID\_PARAMETER - validation of the input parameters failed
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Peer device doesn't have a particular descriptor

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the RSCS service-specific callback is registered (with CyBle\_RscsRegisterAttrCallback):

- CYBLE\_EVT\_RSCSC\_WRITE\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index etc.) are provided with event parameter structure of type [CYBLE\\_RSCS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the RSCS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_RscscGetCharacteristicDescriptor ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_RSCS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 descrIndex)**

Sends a request to the peer device to get characteristic descriptor of the specified characteristic of the Running Speed and Cadence Service.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a Service Characteristic.





<i>descrIndex</i>	The index of a Service Characteristic Descriptor.
-------------------	---

**Returns:**

Return value is of type `CYBLE_API_RESULT_T`.

- `CYBLE_ERROR_OK` - The request was sent successfully
- `CYBLE_ERROR_INVALID_PARAMETER` - Validation of the input parameters failed
- `CYBLE_ERROR_MEMORY_ALLOCATION_FAILED` - Memory allocation failed
- `CYBLE_ERROR_INVALID_STATE` - Connection with the client is not established
- `CYBLE_ERROR_INVALID_OPERATION` - Cannot process a request to send PDU due to invalid operation performed by the application
- `CYBLE_ERROR_GATT_DB_INVALID_ATTR_HANDLE` - Peer device doesn't have a particular descriptor

**Events**

In case of successful execution (return value = `CYBLE_ERROR_OK`) the next events can appear:

If the RSCS service-specific callback is registered (with `CyBle_RscsRegisterAttrCallback`):

- `CYBLE_EVT_RSCSC_READ_DESCR_RESPONSE` - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index, value, etc.) are provided with event parameter structure of type [CYBLE\\_RSCS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the RSCS service-specific callback is not registered):

- `CYBLE_EVT_GATTC_READ_RSP` - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- `CYBLE_EVT_GATTC_ERROR_RSP` - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

## RSCS Definitions and Data Structures

### Description

Contains the RSCS specific definitions and data structures used in the RSCS APIs.

### Data Structures

- struct [CYBLE\\_RSCS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_RSCS\\_DESCR\\_VALUE\\_T](#)
- struct [CYBLE\\_RSCSS\\_CHAR\\_T](#)
- struct [CYBLE\\_RSCSS\\_T](#)
- struct [CYBLE\\_RSCSC\\_SRVR\\_FULL\\_CHAR\\_INFO\\_T](#)
- struct [CYBLE\\_RSCSC\\_T](#)

### Enumerations

- enum [CYBLE\\_RSCS\\_CHAR\\_INDEX\\_T](#){ [CYBLE\\_RSCS\\_RSC\\_MEASUREMENT](#), [CYBLE\\_RSCS\\_RSC\\_FEATURE](#), [CYBLE\\_RSCS\\_SENSOR\\_LOCATION](#), [CYBLE\\_RSCS\\_SC\\_CONTROL\\_POINT](#), [CYBLE\\_RSCS\\_CHAR\\_COUNT](#)}
- enum [CYBLE\\_RSCS\\_DESCR\\_INDEX\\_T](#){ [CYBLE\\_RSCS\\_CCCD](#), [CYBLE\\_RSCS\\_DESCR\\_COUNT](#)}



## Enumeration Type Documentation

### enum [CYBLE\\_RSCS\\_CHAR\\_INDEX\\_T](#)

RSCS Characteristic indexes

#### Enumerator

**CYBLE\_RSCS\_RSC\_MEASUREMENT** RSC Measurement Characteristic index

**CYBLE\_RSCS\_RSC\_FEATURE** RSC Feature Characteristic index

**CYBLE\_RSCS\_SENSOR\_LOCATION** Sensor Location Characteristic index

**CYBLE\_RSCS\_SC\_CONTROL\_POINT** SC Control Point Characteristic index

**CYBLE\_RSCS\_CHAR\_COUNT** Total count of RSCS characteristics

### enum [CYBLE\\_RSCS\\_DESCR\\_INDEX\\_T](#)

RSCS Characteristic Descriptors indexes

#### Enumerator

**CYBLE\_RSCS\_CCCD** Client Characteristic Configuration Descriptor index

**CYBLE\_RSCS\_DESCR\_COUNT** Total count of descriptors

## Reference Time Update Service (RTUS)

### Description

This Service enables a Bluetooth device that can update the system time using the reference time such as a GPS receiver to expose a control point and expose the accuracy (drift) of the local system time compared to the reference time source.

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The RTUS API names begin with CyBle\_Rtus. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [RTUS Server and Client Function](#)

*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*

- [RTUS Server Functions](#)

*APIs unique to RTUS designs configured as a GATT Server role.*

- [RTUS Client Functions](#)

*APIs unique to RTUS designs configured as a GATT Client role.*

- [RTUS Definitions and Data Structures](#)

*Contains the RTUS specific definitions and data structures used in the RTUS APIs.*

## RTUS Server and Client Function

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.

No letter is appended to the API name: CyBle\_Rtus

### Functions

- void [CyBle\\_RtusRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)



## Function Documentation

### void CyBle\_RtusRegisterAttrCallback ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

Registers a callback function for Reference Time Update Service specific attribute operations. Service specific write requests from peer device will not be handled with unregistered callback function.

#### Parameters:

<i>callbackFunc</i>	An application layer event callback function to receive events from the BLE Component. The definition of CYBLE_CALLBACK_T for RTUS is: <pre>typedef void (* CYBLE_CALLBACK_T) (uint32 eventCode, void *eventParam)</pre> <ul style="list-style-type: none"> <li>eventCode indicates the event that triggered this callback.</li> <li>eventParam contains the parameters corresponding to the current event.</li> </ul>
---------------------	---

#### Returns:

None.

#### Events

None

## RTUS Server Functions

### Description

APIs unique to RTUS designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_Rtuss

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_RtussSetCharacteristicValue](#) ([CYBLE\\_RTUS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_RtussGetCharacteristicValue](#) ([CYBLE\\_RTUS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)

## Function Documentation

### [CYBLE\\_API\\_RESULT\\_T](#) CyBle\_RtussSetCharacteristicValue ([CYBLE\\_RTUS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)

Sets characteristic value of the Reference Time Update Service, which is identified by charIndex in the local database.

#### Parameters:

<i>charIndex</i>	The index of a service characteristic of type CYBLE_RTUS_CHAR_INDEX_T.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be stored to the GATT database.

#### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.



- CYBLE\_ERROR\_OK - the request is handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - validation of the input parameters failed

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_RtuscGetCharacteristicValue (CYBLE\_RTUS\_CHAR\_INDEX\_T *charIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Gets a characteristic value of the Reference Time Update Service, which is identified by *charIndex*.

**Parameters:**

<i>charIndex</i>	The index of a service characteristic of type CYBLE_RTUS_CHAR_INDEX_T.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the location where characteristic value data should be stored.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - the request is handled successfully;
- CYBLE\_ERROR\_INVALID\_PARAMETER - validation of the input parameter failed.

**Events**

None

## RTUS Client Functions

### Description

APIs unique to RTUS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: CyBle\_Rtusc

### Functions

- CYBLE\_API\_RESULT\_T CyBle\_RtuscSetCharacteristicValue (CYBLE\_CONN\_HANDLE\_T *connHandle*, CYBLE\_RTUS\_CHAR\_INDEX\_T *charIndex*, uint8 *attrSize*, uint8 \* *attrValue*)
- CYBLE\_API\_RESULT\_T CyBle\_RtuscGetCharacteristicValue (CYBLE\_CONN\_HANDLE\_T *connHandle*, CYBLE\_RTUS\_CHAR\_INDEX\_T *charIndex*)

### Function Documentation

**CYBLE\_API\_RESULT\_T CyBle\_RtuscSetCharacteristicValue (CYBLE\_CONN\_HANDLE\_T *connHandle*, CYBLE\_RTUS\_CHAR\_INDEX\_T *charIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Sends a request to peer device to get characteristic descriptor of specified characteristic of the Reference Time Update Service.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic.
<i>attrSize</i>	Size of the characteristic value attribute.
<i>attrValue</i>	Pointer to the characteristic value data that should be sent to the server device.



**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully.
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the Client is not established.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic.

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the RTUS service-specific callback is registered (with CyBle\_RtusRegisterAttrCallback):

- CYBLE\_EVT\_RTUSC\_WRITE\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, etc.) are provided with event parameter structure of type [CYBLE\\_RTUS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the RTUS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**CYBLE\_API\_RESULT\_T CyBle\_RtuscGetCharacteristicValue (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_RTUS\_CHAR\_INDEX\_T charIndex)**

Sends a request to a peer device to set characteristic value of the Reference Time Update Service, which is identified by charIndex.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - the request was sent successfully;
- CYBLE\_ERROR\_INVALID\_STATE - connection with the Client is not established.
- CYBLE\_ERROR\_INVALID\_PARAMETER - validation of the input parameters failed.

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the RTUS service-specific callback is registered (with CyBle\_RtusRegisterAttrCallback):

- CYBLE\_EVT\_RTUSC\_READ\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index , value, etc.) are provided with event parameter structure of type [CYBLE\\_RTUS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the RTUS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).



## RTUS Definitions and Data Structures

### Description

Contains the RTUS specific definitions and data structures used in the RTUS APIs.

### Data Structures

- struct [CYBLE\\_RTUS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_RTUS\\_TIME\\_UPDATE\\_STATE\\_T](#)
- struct [CYBLE\\_RTUSS\\_T](#)
- struct [CYBLE\\_RTUSC\\_T](#)

### Enumerations

- enum [CYBLE\\_RTUS\\_CHAR\\_INDEX\\_T](#) { [CYBLE\\_RTUS\\_TIME\\_UPDATE\\_CONTROL\\_POINT](#), [CYBLE\\_RTUS\\_TIME\\_UPDATE\\_STATE](#), [CYBLE\\_RTUS\\_CHAR\\_COUNT](#) }

### Enumeration Type Documentation

#### enum [CYBLE\\_RTUS\\_CHAR\\_INDEX\\_T](#)

Characteristic indexes

##### Enumerator

**[CYBLE\\_RTUS\\_TIME\\_UPDATE\\_CONTROL\\_POINT](#)** Time Update Control Point Characteristic index

**[CYBLE\\_RTUS\\_TIME\\_UPDATE\\_STATE](#)** Time Update State Characteristic index

**[CYBLE\\_RTUS\\_CHAR\\_COUNT](#)** Total count of RTUS characteristics

## Scan Parameters Service (ScPS)

### Description

The Scan Parameters Service enables a Server device to expose a Characteristic for the GATT Client to write its scan interval and scan window on the Server device, and enables a Server to request a refresh of the GATT Client scan interval and scan window.

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The ScPS API names begin with CyBle\_Scps. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [ScPS Server and Client Functions](#)  
*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*
- [ScPS Server Functions](#)  
*APIs unique to ScPS designs configured as a GATT Server role.*
- [ScPS Client Functions](#)  
*APIs unique to ScPS designs configured as a GATT Client role.*
- [ScPS Definitions and Data Structures](#)  
*Contains the ScPS specific definitions and data structures used in the ScPS APIs.*



## ScPS Server and Client Functions

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles. No letter is appended to the API name: CyBle\_Scps

### Functions

- void [CyBle\\_ScpsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

### Function Documentation

#### void [CyBle\\_ScpsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

Registers a callback function for service specific attribute operations. Service specific write requests from peer device will not be handled with unregistered callback function.

##### Parameters:

<i>callbackFunc</i>	<p>An application layer event callback function to receive events from the BLE Component. The definition of CYBLE_CALLBACK_T for ScPS is:</p> <pre>typedef void (* CYBLE_CALLBACK_T) (uint32 eventCode, void *eventParam)</pre> <ul style="list-style-type: none"> <li>eventCode indicates the event that triggered this callback.</li> <li>eventParam contains the parameters corresponding to the current event.</li> </ul>
---------------------	---

##### Returns:

None

##### Events

None

## ScPS Server Functions

### Description

APIs unique to ScPS designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_Scpss

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_ScpssSetCharacteristicValue](#) ([CYBLE\\_SCPS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_ScpssGetCharacteristicValue](#) ([CYBLE\\_SCPS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_ScpssGetCharacteristicDescriptor](#) ([CYBLE\\_SCPS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_SCPS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_ScpssSendNotification](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_SCPS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)





## Function Documentation

**CYBLE\_API\_RESULT\_T CyBle\_ScpssSetCharacteristicValue (CYBLE\_SCPS\_CHAR\_INDEX\_T *charIndex*, *uint8 attrSize*, *uint8 \* attrValue*)**

Sets a characteristic value of the Scan Parameters service, which is identified by *charIndex*.

### Parameters:

<i>charIndex</i>	The index of the service characteristic. <ul style="list-style-type: none"> <li>• CYBLE_SCPS_SCAN_INT_WIN - The Scan Interval Window characteristic index</li> <li>• CYBLE_SCPS_SCAN_REFRESH - The Scan Refresh characteristic index</li> </ul>
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be stored to the GATT database.

### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - An optional characteristic is absent

### Events

None

**CYBLE\_API\_RESULT\_T CyBle\_ScpssGetCharacteristicValue (CYBLE\_SCPS\_CHAR\_INDEX\_T *charIndex*, *uint8 attrSize*, *uint8 \* attrValue*)**

Gets a characteristic value of the Scan Parameters service, which is identified by *charIndex*.

### Parameters:

<i>charIndex</i>	The index of the service characteristic. <ul style="list-style-type: none"> <li>• CYBLE_SCPS_SCAN_INT_WIN - The Scan Interval Window characteristic index</li> <li>• CYBLE_SCPS_SCAN_REFRESH - The Scan Refresh characteristic index</li> </ul>
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the location where characteristic value data should be stored.

### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent

### Events

None



**CYBLE\_API\_RESULT\_T CyBle\_ScpssGetCharacteristicDescriptor (CYBLE\_SCPS\_CHAR\_INDEX\_T *charIndex*, CYBLE\_SCPS\_DESCR\_INDEX\_T *descrIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Gets a characteristic descriptor of the specified characteristic of the Scan Parameters service.

**Parameters:**

<i>charIndex</i>	The index of the characteristic. <ul style="list-style-type: none"><li>• CYBLE_SCPS_SCAN_REFRESH - The Scan Refresh characteristic index</li></ul>
<i>descrIndex</i>	The index of the descriptor. <ul style="list-style-type: none"><li>• CYBLE_SCPS_SCAN_REFRESH_CCCD - The Client Characteristic Configuration descriptor index of the Scan Refresh characteristic</li></ul>
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the location where the characteristic descriptor value data should be stored.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional descriptor is absent

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_ScpssSendNotification (CYBLE\_CONN\_HANDLE\_T *connHandle*, CYBLE\_SCPS\_CHAR\_INDEX\_T *charIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

This function notifies the client that the server requires the Scan Interval Window Characteristic to be written with the latest values upon notification.

The CYBLE\_EVT\_SCPSC\_NOTIFICATION event is received by the peer device, on invoking this function.

**Parameters:**

<i>connHandle</i>	The connection handle
<i>charIndex</i>	The index of the characteristic. <ul style="list-style-type: none"><li>• CYBLE_SCPS_SCAN_REFRESH - The Scan Refresh characteristic index</li></ul>
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the Client device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established



- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_NTF\_DISABLED - Notification is not enabled by the client.

**Events**

None

## ScPS Client Functions

### Description

APIs unique to ScPS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: CyBle\_Scpsc

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_ScpscSetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_SCPS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_ScpscSetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_SCPS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_SCPS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_ScpscGetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_SCPS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_SCPS\\_DESCR\\_INDEX\\_T](#) descrIndex)

### Function Documentation

**[CYBLE\\_API\\_RESULT\\_T CyBle\\_ScpscSetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_SCPS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)**

Sets a characteristic value of the Scan Parameters Service, which is identified by charIndex.

This function call can result in generation of the following events based on the response from the server device:

- CYBLE\_EVT\_GATTC\_WRITE\_RSP
- CYBLE\_EVT\_GATTC\_ERROR\_RSP

The CYBLE\_EVT\_SCPSS\_SCAN\_INT\_WIN\_CHAR\_WRITE event is received by the peer device on invoking this function.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the server device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic.



## Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the CSPS service-specific callback is registered (with CyBle\_CspsRegisterAttrCallback):

- CYBLE\_EVT\_CSPSC\_WRITE\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, etc.) are provided with event parameter structure of type [CYBLE\\_SCPS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the CSPS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_ScpscSetCharacteristicDescriptor ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_SCPS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_SCPS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \* attrValue)**

Sets characteristic descriptor of specified characteristic of the Scan Parameters Service.

This function call can result in generation of the following events based on the response from the server device:

- CYBLE\_EVT\_SCPS\_WRITE\_DESCR\_RESPONSE
- CYBLE\_EVT\_GATTC\_ERROR\_RSP

Following events can be received by the peer device on invoking this function:

- CYBLE\_EVT\_SCPS\_NOTIFICATION\_ENABLED
- CYBLE\_EVT\_SCPS\_NOTIFICATION\_DISABLED

### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>descrIndex</i>	The index of the service characteristic descriptor.
<i>attrSize</i>	The size of the descriptor value attribute.
<i>attrValue</i>	The pointer to the characteristic descriptor value data that should be sent to the server device.

### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_INVALID\_STATE - The state is not valid
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted on the specified attribute

## Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the SCPS service-specific callback is registered (with CyBle\_ScpsRegisterAttrCallback):



- CYBLE\_EVT\_SCPSC\_WRITE\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index etc.) are provided with event parameter structure of type [CYBLE\\_SCPSC\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the SCPS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_ScpsscGetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_SCPSC\\_CHAR\\_INDEX\\_T](#) *charIndex*, [CYBLE\\_SCPSC\\_DESCR\\_INDEX\\_T](#) *descrIndex*)**

Gets characteristic descriptor of specified characteristic of the Scan Parameters Service.

This function call can result in generation of the following events based on the response from the server device:

- CYBLE\_EVT\_SCPSC\_READ\_DESCR\_RESPONSE
- CYBLE\_EVT\_GATTC\_ERROR\_RSP

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a Service Characteristic.
<i>descrIndex</i>	The index of a Service Characteristic Descriptor.

**Returns:**

- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_INVALID\_STATE - The state is not valid
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular descriptor
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted on the specified attribute

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the SCPS service-specific callback is registered (with [CyBle\\_ScpsRegisterAttrCallback](#)):

- CYBLE\_EVT\_SCPSC\_READ\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index, value, etc.) are provided with event parameter structure of type [CYBLE\\_SCPSC\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the SCPS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

## ScPS Definitions and Data Structures

### Description

Contains the ScPS specific definitions and data structures used in the ScPS APIs.

### Data Structures

- struct [CYBLE\\_SCPSS\\_T](#)
- struct [CYBLE\\_SCPSC\\_T](#)
- struct [CYBLE\\_SCPS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_SCPS\\_DESCR\\_VALUE\\_T](#)

### Enumerations

- enum [CYBLE\\_SCPS\\_CHAR\\_INDEX\\_T](#) { [CYBLE\\_SCPS\\_SCAN\\_INT\\_WIN](#), [CYBLE\\_SCPS\\_SCAN\\_REFRESH](#), [CYBLE\\_SCPS\\_CHAR\\_COUNT](#) }
- enum [CYBLE\\_SCPS\\_DESCR\\_INDEX\\_T](#) { [CYBLE\\_SCPS\\_SCAN\\_REFRESH\\_CCCD](#), [CYBLE\\_SCPS\\_DESCR\\_COUNT](#) }

### Enumeration Type Documentation

#### enum [CYBLE\\_SCPS\\_CHAR\\_INDEX\\_T](#)

ScPS Characteristic indexes

##### Enumerator

**[CYBLE\\_SCPS\\_SCAN\\_INT\\_WIN](#)** Scan Interval Window characteristic index

**[CYBLE\\_SCPS\\_SCAN\\_REFRESH](#)** Scan Refresh characteristic index

**[CYBLE\\_SCPS\\_CHAR\\_COUNT](#)** Total count of characteristics

#### enum [CYBLE\\_SCPS\\_DESCR\\_INDEX\\_T](#)

ScPS Characteristic Descriptors indexes

##### Enumerator

**[CYBLE\\_SCPS\\_SCAN\\_REFRESH\\_CCCD](#)** Client Characteristic Configuration descriptor index

**[CYBLE\\_SCPS\\_DESCR\\_COUNT](#)** Total count of descriptors

## TX Power Service (TPS)

### Description

The Tx Power Service uses the Tx Power Level Characteristic to expose the current transmit power level of a device when in a connection.

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The TPS API names begin with CyBle\_Tps. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [TPS Server and Client Function](#)

*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*

- [TPS Server Functions](#)



*APIs unique to TPS designs configured as a GATT Server role.*

- [TPS Client Functions](#)

*APIs unique to TPS designs configured as a GATT Client role.*

- [TPS Definitions and Data Structures](#)

*Contains the TPS specific definitions and data structures used in the TPS APIs.*

## TPS Server and Client Function

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles. No letter is appended to the API name: CyBle\_Tps

### Functions

- void [CyBle\\_TpsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

### Function Documentation

#### void [CyBle\\_TpsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

Registers a callback function for service specific attribute operations. Service specific write requests from peer device will not be handled with unregistered callback function.

##### Parameters:

<i>callbackFunc</i>	<p>An application layer event callback function to receive events from the BLE Component. The definition of CYBLE_CALLBACK_T for TPS is:</p> <pre>typedef void (* CYBLE_CALLBACK_T) (uint32 eventCode, void *eventParam)</pre> <ul style="list-style-type: none"> <li>• eventCode indicates the event that triggered this callback.</li> <li>• eventParam contains the parameters corresponding to the current event.</li> </ul>
---------------------	--

##### Returns:

None

##### Events

None

##### Side Effects

The \*eventParams in the callback function should not be used by the application once the callback function execution is finished. Otherwise this data may become corrupted.

## TPS Server Functions

### Description

APIs unique to TPS designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_Tpss



## Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_TpssSetCharacteristicValue \(CYBLE\\_TPS\\_CHAR\\_INDEX\\_T charIndex, uint8 attrSize, int8 \\*attrValue\)](#)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_TpssGetCharacteristicValue \(CYBLE\\_TPS\\_CHAR\\_INDEX\\_T charIndex, uint8 attrSize, int8 \\*attrValue\)](#)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_TpssGetCharacteristicDescriptor \(CYBLE\\_TPS\\_CHAR\\_INDEX\\_T charIndex, CYBLE\\_TPS\\_CHAR\\_DESCRIPTOR\\_T descrIndex, uint8 attrSize, uint8 \\*attrValue\)](#)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_TpssSendNotification \(CYBLE\\_CONN\\_HANDLE\\_T connHandle, CYBLE\\_TPS\\_CHAR\\_INDEX\\_T charIndex, uint8 attrSize, int8 \\*attrValue\)](#)

## Function Documentation

### [CYBLE\\_API\\_RESULT\\_T CyBle\\_TpssSetCharacteristicValue \(CYBLE\\_TPS\\_CHAR\\_INDEX\\_T charIndex, uint8 attrSize, int8 \\* attrValue\)](#)

Sets characteristic value of the Tx Power Service, which is identified by charIndex.

#### Parameters:

<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be stored in the GATT database.

#### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The characteristic value was read successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of input parameters failed.

#### Events

None

### [CYBLE\\_API\\_RESULT\\_T CyBle\\_TpssGetCharacteristicValue \(CYBLE\\_TPS\\_CHAR\\_INDEX\\_T charIndex, uint8 attrSize, int8 \\* attrValue\)](#)

Gets characteristic value of the Tx Power Service, which is identified by charIndex.

#### Parameters:

<i>charIndex</i>	The index of the Tx Power characteristic.
<i>attrSize</i>	The size of the Tx Power characteristic value attribute.
<i>attrValue</i>	The pointer to the location where Tx Power characteristic value data should be stored.

#### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - Characteristic value was read successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed

#### Events

None

### [CYBLE\\_API\\_RESULT\\_T CyBle\\_TpssGetCharacteristicDescriptor \(CYBLE\\_TPS\\_CHAR\\_INDEX\\_T charIndex, CYBLE\\_TPS\\_CHAR\\_DESCRIPTOR\\_T descrIndex, uint8 attrSize, uint8 \\* attrValue\)](#)

Gets characteristic descriptor of specified characteristic of the Tx Power Service.



**Parameters:**

<i>charIndex</i>	The index of the characteristic.
<i>descrIndex</i>	The index of the descriptor.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the location where characteristic descriptor value data should be stored.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - Characteristic Descriptor value was read successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of input parameters failed
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional descriptor is absent

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_TpssSendNotification (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_TPS\_CHAR\_INDEX\_T charIndex, uint8 attrSize, int8 \* attrValue)**

Sends a notification with the characteristic value, as specified by charIndex, to the Client device.

The CYBLE\_EVT\_TPSC\_NOTIFICATION event is received by the peer device on invoking this function.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the client's device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of input parameter failed.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this. characteristic.
- CYBLE\_ERROR\_INVALID\_STATE - Connection with client is not established.
- CYBLE\_ERROR\_NTF\_DISABLED - Notification is not enabled by the client.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.

**Events**

None

## TPS Client Functions

### Description

APIs unique to TPS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: CyBle\_Tpsc

## Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_TpscGetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_TPS\\_CHAR\\_INDEX\\_T](#) charIndex)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_TpscSetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_TPS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_TPS\\_CHAR\\_DESCRIPTOR\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_TpscGetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_TPS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_TPS\\_CHAR\\_DESCRIPTOR\\_T](#) descrIndex)

## Function Documentation

### [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_TpscGetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_TPS\\_CHAR\\_INDEX\\_T](#) charIndex)

Gets the characteristic value of the Tx Power Service, which is identified by charIndex.

This function call can result in generation of the following events based on the response from the server device:

- CYBLE\_EVT\_TPSC\_READ\_CHAR\_RESPONSE
- CYBLE\_EVT\_GATTC\_ERROR\_RSP

#### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the characteristic.

#### Returns:

Return value is of type [CYBLE\\_API\\_RESULT\\_T](#).

- CYBLE\_ERROR\_OK - Request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the server is not established
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic

#### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the TPS service-specific callback is registered (with [CyBle\\_AncsRegisterAttrCallback](#)):

- CYBLE\_EVT\_TPSC\_READ\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index , value, etc.) are provided with event parameter structure of type [CYBLE\\_TPS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the TPS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

### [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_TpscSetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_TPS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_TPS\\_CHAR\\_DESCRIPTOR\\_T](#) descrIndex, uint8 attrSize, uint8 \* attrValue)

Sets a characteristic descriptor value of the Tx Power Service.



This function call can result in generation of the following events based on the response from the server device:

- CYBLE\_EVT\_TPSC\_WRITE\_DESCR\_RESPONSE
- CYBLE\_EVT\_GATTC\_ERROR\_RSP

Following events can be received by the peer device, on invoking this function:

- CYBLE\_EVT\_TPSS\_NOTIFICATION\_ENABLED
- CYBLE\_EVT\_TPSS\_NOTIFICATION\_DISABLED

#### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the Characteristic
<i>descrIndex</i>	The index of the TX Power Service characteristic descriptor.
<i>attrSize</i>	The size of the characteristic descriptor attribute.
<i>attrValue</i>	The pointer to the characteristic descriptor value data that should be sent to the server device.

#### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the server is not established.
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted on the specified attribute.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.

#### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the TPS service-specific callback is registered (with CyBle\_AncsRegisterAttrCallback):

- CYBLE\_EVT\_TPSC\_WRITE\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index etc.) are provided with event parameter structure of type [CYBLE\\_TPS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the TPS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure [\(CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T\)](#).

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_TpscGetCharacteristicDescriptor ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_TPS\\_CHAR\\_INDEX\\_T](#) *charIndex*, [CYBLE\\_TPS\\_CHAR\\_DESCRIPTOR\\_T](#) *descrIndex*)**

Gets a characteristic descriptor of the Tx Power Service.

This function call can result in generation of the following events based on the response from the server device:

- CYBLE\_EVT\_TPSC\_READ\_DESCR\_RESPONSE
- CYBLE\_EVT\_GATTC\_ERROR\_RSP

#### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the characteristic.
<i>descrIndex</i>	The index of the characteristic descriptor.



**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - Request was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_INVALID\_STATE - The component is in invalid state for current operation.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_INVALID\_OPERATION - Cannot process request to send PDU due to invalid operation performed by the application.

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the TPS service-specific callback is registered (with CyBle\_AncsRegisterAttrCallback):

- CYBLE\_EVT\_TPSC\_READ\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index, value, etc.) are provided with event parameter structure of type [CYBLE\\_TPS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the TPS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

## TPS Definitions and Data Structures

### Description

Contains the TPS specific definitions and data structures used in the TPS APIs.

### Data Structures

- struct [CYBLE\\_TPS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_TPS\\_DESCR\\_VALUE\\_T](#)
- struct [CYBLE\\_TPSS\\_T](#)
- struct [CYBLE\\_TPSC\\_T](#)

### Enumerations

- enum [CYBLE\\_TPS\\_CHAR\\_INDEX\\_T](#) { [CYBLE\\_TPS\\_TX\\_POWER\\_LEVEL](#), [CYBLE\\_TPS\\_CHAR\\_COUNT](#) }
- enum [CYBLE\\_TPS\\_CHAR\\_DESCRIPTOR\\_T](#) { [CYBLE\\_TPS\\_CCCD](#), [CYBLE\\_TPS\\_DESCR\\_COUNT](#) }

### Enumeration Type Documentation

#### enum [CYBLE\\_TPS\\_CHAR\\_INDEX\\_T](#)

TPS Characteristic indexes

##### Enumerator

**CYBLE\_TPS\_TX\_POWER\_LEVEL** Tx Power Level characteristic index

**CYBLE\_TPS\_CHAR\_COUNT** Total count of characteristics



**enum [CYBLE\\_TPS\\_CHAR\\_DESCRIPTOR\\_T](#)**

TPS Characteristic Descriptors indexes

**Enumerator****[CYBLE\\_TPS\\_CCCD](#)** Tx Power Level Client Characteristic configuration descriptor index**[CYBLE\\_TPS\\_DESCR\\_COUNT](#)** Total count of Tx Power Service characteristic descriptors

## User Data Service (UDS)

### Description

The User Data Service exposes user-related data in the sports and fitness environment. This allows remote access and update of user data by a Client as well as the synchronization of user data between a Server and a Client.

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The UDSAPI names begin with CyBle\_Uds. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [UDS Server and Client Function](#)

*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*

- [UDS Server Functions](#)

*APIs unique to UDS designs configured as a GATT Server role.*

- [UDS Client Functions](#)

*APIs unique to UDS designs configured as a GATT Client role.*

- [UDS Definitions and Data Structures](#)

*Contains the UDS specific definitions and data structures used in the UDS APIs.*

## UDS Server and Client Function

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.

No letter is appended to the API name: CyBle\_Uds

### Functions

- void [CyBle\\_UdsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

### Function Documentation

**void [CyBle\\_UdsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)**

Registers a callback function for service-specific attribute operations. Service-specific write requests from a peer device will not be handled with an unregistered callback function.

**Parameters:**

<i>callbackFunc</i>	<p>An application layer event callback function to receive events from the BLE Component. The definition of <a href="#">CYBLE_CALLBACK_T</a> for UDS is:</p> <pre>typedef void (* CYBLE_CALLBACK_T) (uint32 eventCode, void *eventParam), where:</pre> <ul style="list-style-type: none"> <li>• eventCode indicates the event that triggered this callback.</li> </ul>
---------------------	--

	<ul style="list-style-type: none"> <li>eventParam contains the parameters corresponding to the current event.</li> </ul>
--	--

**Returns:**

None.

**Events**

None.

**Side Effects**

The \*eventParams in the callback function should not be used by the application once the callback function execution is finished. Otherwise this data may become corrupted.

## UDS Server Functions

### Description

APIs unique to UDS designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_Udss

### Functions

- [CYBLE\\_API\\_RESULT\\_T CyBle\\_UdssSetCharacteristicValue](#) ([CYBLE\\_UDS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_UdssGetCharacteristicValue](#) ([CYBLE\\_UDS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_UdssGetCharacteristicDescriptor](#) ([CYBLE\\_UDS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_UDS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_UdssSendNotification](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_UDS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_UdssSendIndication](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_UDS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)

### Function Documentation

**[CYBLE\\_API\\_RESULT\\_T CyBle\\_UdssSetCharacteristicValue](#)** ([CYBLE\\_UDS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)

Sets the value of the characteristic, as identified by charIndex.

**Parameters:**

<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be stored to the GATT database.

**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - An optional characteristic is absent





**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_UdssGetCharacteristicValue (CYBLE\_UDS\_CHAR\_INDEX\_T *charIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Gets the value of the characteristic, as identified by *charIndex*.

**Parameters:**

<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the location where characteristic value data should be stored.

**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The characteristic value was read successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - A characteristic is absent.

**Events**

None.

**CYBLE\_API\_RESULT\_T CyBle\_UdssGetCharacteristicDescriptor (CYBLE\_UDS\_CHAR\_INDEX\_T *charIndex*, CYBLE\_UDS\_DESCR\_INDEX\_T *descrIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Gets a characteristic descriptor of the specified characteristic.

**Parameters:**

<i>charIndex</i>	The index of the characteristic.
<i>descrIndex</i>	The index of the descriptor.
<i>attrSize</i>	The size of the descriptor value attribute.
<i>attrValue</i>	The pointer to the location where characteristic descriptor value data should be stored.

**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - Characteristic Descriptor value was read successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - A characteristic is absent.

**Events**

None.

**CYBLE\_API\_RESULT\_T CyBle\_UdssSendNotification (CYBLE\_CONN\_HANDLE\_T *connHandle*, CYBLE\_UDS\_CHAR\_INDEX\_T *charIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Sends a notification of the specified characteristic value, as identified by the *charIndex*.

**Parameters:**

<i>connHandle</i>	The connection handle which consist of the device ID and ATT connection ID.
-------------------	---

<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the client device.

**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - An optional characteristic is absent.
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_NTF\_DISABLED - Notification is not enabled by the client.

**Events**

None.

**CYBLE\_API\_RESULT\_T CyBle\_UdssSendIndication (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_UDS\_CHAR\_INDEX\_T charIndex, uint8 attrSize, uint8 \* attrValue)**

Sends an indication of the specified characteristic value, as identified by the charIndex.

**Parameters:**

<i>connHandle</i>	The connection handle which consist of the device ID and ATT connection ID.
<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the client device.

**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - An optional characteristic is absent.
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_NTF\_DISABLED - Notification is not enabled by the client.
- CYBLE\_ERROR\_IND\_DISABLED - Indication is disabled for this characteristic.

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the UDS service-specific callback is registered (with CyBle\_UdsRegisterAttrCallback):

- CYBLE\_EVT\_UDSS\_INDICATION\_CONFIRMED - If the indication is successfully delivered to the peer device.

Otherwise (if the UDS service-specific callback is not registered):



- `CYBLE_EVT_GATTS_HANDLE_VALUE_CNF` - If the indication is successfully delivered to the peer device.

## UDS Client Functions

### Description

APIs unique to UDS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: `CyBle_Udsc`

### Functions

- [`CYBLE\_API\_RESULT\_T CyBle\_UdscSetCharacteristicValue`](#) ([`CYBLE\_CONN\_HANDLE\_T connHandle`](#), [`CYBLE\_UDS\_CHAR\_INDEX\_T charIndex`](#), `uint8 attrSize`, `uint8 *attrValue`)
- [`CYBLE\_API\_RESULT\_T CyBle\_UdscGetCharacteristicValue`](#) ([`CYBLE\_CONN\_HANDLE\_T connHandle`](#), [`CYBLE\_UDS\_CHAR\_INDEX\_T charIndex`](#))
- [`CYBLE\_API\_RESULT\_T CyBle\_UdscGetLongCharacteristicValue`](#) ([`CYBLE\_CONN\_HANDLE\_T connHandle`](#), [`CYBLE\_UDS\_CHAR\_INDEX\_T charIndex`](#), `uint16 attrSize`, `uint8 *attrValue`)
- [`CYBLE\_API\_RESULT\_T CyBle\_UdscSetCharacteristicDescriptor`](#) ([`CYBLE\_CONN\_HANDLE\_T connHandle`](#), [`CYBLE\_UDS\_CHAR\_INDEX\_T charIndex`](#), [`CYBLE\_UDS\_DESCR\_INDEX\_T descrIndex`](#), `uint8 attrSize`, `uint8 *attrValue`)
- [`CYBLE\_API\_RESULT\_T CyBle\_UdscGetCharacteristicDescriptor`](#) ([`CYBLE\_CONN\_HANDLE\_T connHandle`](#), [`CYBLE\_UDS\_CHAR\_INDEX\_T charIndex`](#), [`CYBLE\_UDS\_DESCR\_INDEX\_T descrIndex`](#))

### Function Documentation

**[`CYBLE\_API\_RESULT\_T CyBle\_UdscSetCharacteristicValue`](#)** ([`CYBLE\_CONN\_HANDLE\_T connHandle`](#), [`CYBLE\_UDS\_CHAR\_INDEX\_T charIndex`](#), `uint8 attrSize`, `uint8 * attrValue`)

This function is used to write the characteristic (which is identified by `charIndex`) value attribute in the server. The Write Response just confirms the operation success.

#### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the server device.

#### Returns:

A return value is of type `CYBLE_API_RESULT_T`.

- `CYBLE_ERROR_OK` - The request was sent successfully.
- `CYBLE_ERROR_INVALID_PARAMETER` - Validation of the input parameters failed.
- `CYBLE_ERROR_MEMORY_ALLOCATION_FAILED` - Memory allocation failed.
- `CYBLE_ERROR_INVALID_STATE` - Connection with the server is not established.
- `CYBLE_ERROR_GATT_DB_INVALID_ATTR_HANDLE` - The peer device doesn't have the particular characteristic.
- `CYBLE_ERROR_INVALID_OPERATION` - Operation is invalid for this characteristic.

#### Events

In the case of successful execution (return value = `CYBLE_ERROR_OK`) the next events can appear:



If the UDS service-specific callback is registered (with `CyBle_UdsRegisterAttrCallback`):

- `CYBLE_EVT_UDSC_WRITE_CHAR_RESPONSE` - If the requested attribute is successfully written on the peer device, the details (char index, etc.) are provided with an event parameter structure of type [CYBLE\\_UDS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the UDS service-specific callback is not registered):

- `CYBLE_EVT_GATTC_WRITE_RSP` - If the requested attribute is successfully written on the peer device.
- `CYBLE_EVT_GATTC_ERROR_RSP` - If there is some trouble with the requested attribute on the peer device, the details are provided with an event parameter structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

### **CYBLE\_API\_RESULT\_T `CyBle_UdscGetCharacteristicValue` (CYBLE\_CONN\_HANDLE\_T *connHandle*, CYBLE\_UDS\_CHAR\_INDEX\_T *charIndex*)**

This function is used to read the characteristic Value from a server, as identified by its *charIndex*

The Read Response returns the characteristic Value in the Attribute Value parameter.

The Read Response only contains the characteristic Value that is less than or equal to (MTU - 1) octets in length. If the characteristic Value is greater than (MTU - 1) octets in length, the Read Long Characteristic Value procedure may be used if the rest of the characteristic Value is required.

#### **Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.

#### **Returns:**

A return value is of type `CYBLE_API_RESULT_T`.

- `CYBLE_ERROR_OK` - The read request was sent successfully.
- `CYBLE_ERROR_INVALID_PARAMETER` - Validation of the input parameters failed.
- `CYBLE_ERROR_GATT_DB_INVALID_ATTR_HANDLE` - The peer device doesn't have the particular characteristic.
- `CYBLE_ERROR_MEMORY_ALLOCATION_FAILED` - Memory allocation failed.
- `CYBLE_ERROR_INVALID_STATE` - Connection with the server is not established.
- `CYBLE_ERROR_INVALID_OPERATION` - Operation is invalid for this characteristic.

#### **Events**

In case of successful execution (return value = `CYBLE_ERROR_OK`) the next events can appear:

If the UDS service-specific callback is registered (with `CyBle_UdsRegisterAttrCallback`):

- `CYBLE_EVT_UDSC_READ_CHAR_RESPONSE` - If the requested attribute is successfully written on the peer device, the details (char index , value, etc.) are provided with an event parameter structure of type [CYBLE\\_UDS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the UDS service-specific callback is not registered):

- `CYBLE_EVT_GATTC_READ_RSP` - If the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with an event parameter structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- `CYBLE_EVT_GATTC_ERROR_RSP` - If there is some trouble with the requested attribute on the peer device, the details are provided with an event parameter structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).



**CYBLE\_API\_RESULT\_T CyBle\_UdscGetLongCharacteristicValue (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_UDS\_CHAR\_INDEX\_T charIndex, uint16 attrSize, uint8 \* attrValue)**

Sends a request to read a long characteristic.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the buffer where the read long characteristic descriptor value should be stored.

**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The read request was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the server is not established.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic

**Events**

In the case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the UDS service-specific callback is registered (with CyBle\_UdsRegisterAttrCallback):

- CYBLE\_EVT\_UDSC\_READ\_CHAR\_RESPONSE - If the requested attribute is successfully written on the peer device, the details (char index , value, etc.) are provided with an event parameter structure of type CYBLE\_UDS\_CHAR\_VALUE\_T.

Otherwise (if the UDS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_BLOB\_RSP - If the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with an event parameter structure (CYBLE\_GATTC\_READ\_RSP\_PARAM\_T).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - If there is some trouble with the requested attribute on the peer device, the details are provided with an event parameter structure (CYBLE\_GATTC\_ERR\_RSP\_PARAM\_T).

**CYBLE\_API\_RESULT\_T CyBle\_UdscSetCharacteristicDescriptor (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_UDS\_CHAR\_INDEX\_T charIndex, CYBLE\_UDS\_DESCR\_INDEX\_T descrIndex, uint8 attrSize, uint8 \* attrValue)**

This function is used to write the characteristic Value to the server, as identified by its charIndex.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>descrIndex</i>	The index of the service characteristic descriptor.
<i>attrSize</i>	The size of the characteristic descriptor value attribute.
<i>attrValue</i>	The pointer to the characteristic descriptor value data that should be sent to the server device.

**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_INVALID\_STATE - The state is not valid.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic.
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted on the specified attribute

**Events**

In the case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the UDS service-specific callback is registered (with CyBle\_UdsRegisterAttrCallback):

- CYBLE\_EVT\_UDSC\_WRITE\_DESCR\_RESPONSE - If the requested attribute is successfully written on the peer device, the details (char index, descr index etc.) are provided with an event parameter structure of type [CYBLE\\_UDS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the UDS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - If the requested attribute is successfully written on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - If there is some trouble with the requested attribute on the peer device, the details are provided with an event parameter structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_UdscGetCharacteristicDescriptor ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_UDS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_UDS\\_DESCR\\_INDEX\\_T](#) descrIndex)**

Gets the characteristic descriptor of the specified characteristic.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>descrIndex</i>	The index of the service characteristic descriptor.

**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_INVALID\_STATE - The state is not valid.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular descriptor.
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted on the specified attribute.

**Events**

In the case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the UDS service-specific callback is registered (with CyBle\_UdsRegisterAttrCallback):

- CYBLE\_EVT\_UDSC\_READ\_DESCR\_RESPONSE - If the requested attribute is successfully written on the peer device, the details (char index, descr index, value, etc.) are provided with an event parameter structure of type [CYBLE\\_UDS\\_DESCR\\_VALUE\\_T](#).



Otherwise (if the UDS service-specific callback is not registered):

- **CYBLE\_EVT\_GATTC\_READ\_RSP** - If the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with an event parameter structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- **CYBLE\_EVT\_GATTC\_ERROR\_RSP** - If there is some trouble with the requested attribute on the peer device, the details are provided with an event parameter structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

## UDS Definitions and Data Structures

### Description

Contains the UDS specific definitions and data structures used in the UDS APIs.

### Data Structures

- struct [CYBLE\\_UDSS\\_CHAR\\_T](#)
- struct [CYBLE\\_UDSS\\_T](#)
- struct [CYBLE\\_UDSC\\_CHAR\\_T](#)
- struct [CYBLE\\_UDSC\\_T](#)
- struct [CYBLE\\_UDS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_UDS\\_DESCR\\_VALUE\\_T](#)

### Enumerations

- enum [CYBLE\\_UDS\\_CHAR\\_INDEX\\_T](#){ [CYBLE\\_UDS\\_FNM](#), [CYBLE\\_UDS\\_LNM](#), [CYBLE\\_UDS\\_EML](#), [CYBLE\\_UDS\\_AGE](#), [CYBLE\\_UDS\\_DOB](#), [CYBLE\\_UDS\\_GND](#), [CYBLE\\_UDS\\_WGT](#), [CYBLE\\_UDS\\_HGT](#), [CYBLE\\_UDS\\_VO2](#), [CYBLE\\_UDS\\_HRM](#), [CYBLE\\_UDS\\_RHR](#), [CYBLE\\_UDS\\_MRH](#), [CYBLE\\_UDS\\_AET](#), [CYBLE\\_UDS\\_ANT](#), [CYBLE\\_UDS\\_STP](#), [CYBLE\\_UDS\\_DTA](#), [CYBLE\\_UDS\\_WCC](#), [CYBLE\\_UDS\\_HCC](#), [CYBLE\\_UDS\\_FBL](#), [CYBLE\\_UDS\\_FBU](#), [CYBLE\\_UDS\\_AEL](#), [CYBLE\\_UDS\\_AEU](#), [CYBLE\\_UDS\\_ANL](#), [CYBLE\\_UDS\\_ANU](#), [CYBLE\\_UDS\\_5ZL](#), [CYBLE\\_UDS\\_3ZL](#), [CYBLE\\_UDS\\_2ZL](#), [CYBLE\\_UDS\\_DCI](#), [CYBLE\\_UDS\\_UIX](#), [CYBLE\\_UDS\\_UCP](#), [CYBLE\\_UDS\\_LNG](#), [CYBLE\\_UDS\\_CHAR\\_COUNT](#)}
- enum [CYBLE\\_UDS\\_DESCR\\_INDEX\\_T](#){ [CYBLE\\_UDS\\_CCCD](#), [CYBLE\\_UDS\\_DESCR\\_COUNT](#)}

### Enumeration Type Documentation

#### enum [CYBLE\\_UDS\\_CHAR\\_INDEX\\_T](#)

UDS Service Characteristics indexes

##### Enumerator

**[CYBLE\\_UDS\\_FNM](#)** First Name characteristic index  
**[CYBLE\\_UDS\\_LNM](#)** Last Name characteristic index  
**[CYBLE\\_UDS\\_EML](#)** Email Address characteristic index  
**[CYBLE\\_UDS\\_AGE](#)** Age characteristic index  
**[CYBLE\\_UDS\\_DOB](#)** Date of Birth characteristic index  
**[CYBLE\\_UDS\\_GND](#)** Gender characteristic index  
**[CYBLE\\_UDS\\_WGT](#)** Weight characteristic index  
**[CYBLE\\_UDS\\_HGT](#)** Height characteristic index  
**[CYBLE\\_UDS\\_VO2](#)** VO2 Max characteristic index  
**[CYBLE\\_UDS\\_HRM](#)** Heart Rate Max characteristic index





**CYBLE\_UDS\_RHR** Resting Heart Rate characteristic index  
**CYBLE\_UDS\_MRH** Maximum Recommended Heart Rate characteristic index  
**CYBLE\_UDS\_AET** Aerobic Threshold characteristic index  
**CYBLE\_UDS\_ANT** Anaerobic Threshold characteristic index  
**CYBLE\_UDS\_STP** Sport Type for Aerobic and Anaerobic Thresholds characteristic index  
**CYBLE\_UDS\_DTA** Date of Threshold Assessment characteristic index  
**CYBLE\_UDS\_WCC** Waist Circumference characteristic index  
**CYBLE\_UDS\_HCC** Hip Circumference characteristic index  
**CYBLE\_UDS\_FBL** Fat Burn Heart Rate Lower Limit characteristic index  
**CYBLE\_UDS\_FBU** Fat Burn Heart Rate Upper Limit characteristic index  
**CYBLE\_UDS\_AEL** Aerobic Heart Rate Lower Limit characteristic index  
**CYBLE\_UDS\_AEU** Aerobic Heart Rate Upper Limit characteristic index  
**CYBLE\_UDS\_ANL** Anaerobic Heart Rate Lower Limit characteristic index  
**CYBLE\_UDS\_ANU** Anaerobic Heart Rate Upper Limit characteristic index  
**CYBLE\_UDS\_5ZL** Five Zone Heart Rate Limits characteristic index  
**CYBLE\_UDS\_3ZL** Three Zone Heart Rate Limits characteristic index  
**CYBLE\_UDS\_2ZL** Two Zone Heart Rate Limit characteristic index  
**CYBLE\_UDS\_DCI** Database Change Increment characteristic index  
**CYBLE\_UDS\_UIX** User Index characteristic index  
**CYBLE\_UDS\_UCP** User Control Point characteristic index  
**CYBLE\_UDS\_LNG** Language characteristic index  
**CYBLE\_UDS\_CHAR\_COUNT** Total count of UDS characteristics

#### enum [CYBLE\\_UDS\\_DESCR\\_INDEX\\_T](#)

UDS Service Characteristic Descriptors indexes

##### Enumerator

**CYBLE\_UDS\_CCCD** Client Characteristic Configuration descriptor index  
**CYBLE\_UDS\_DESCR\_COUNT** Total count of UDS descriptors

## Wireless Power Transfer Service (WPTS)

### Description

The Wireless Power Transfer Service enables communication between Power Receiver Unit and Power Transmitter Unit in the Wireless Power Transfer systems.

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The WPTS API names begin with CyBle\_Wpts. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [WPTS Server and Client Function](#)

*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*

- [WPTS Server Functions](#)

*APIs unique to WPTS designs configured as a GATT Server role.*

- [WPTS Client Functions](#)



*APIs unique to WPTS designs configured as a GATT Client role.*

- [WPTS Definitions and Data Structures](#)

*Contains the WPTS specific definitions and data structures used in the WPTS APIs.*

## WPTS Server and Client Function

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.

No letter is appended to the API name: CyBle\_Wpts

### Functions

- void [CyBle\\_WptsRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

### Function Documentation

#### void CyBle\_WptsRegisterAttrCallback ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

Registers a callback function for service specific attribute operations. Service specific write requests from peer device will not be handled with unregistered callback function.

#### Parameters:

<i>callbackFunc</i>	<p>An application layer event callback function to receive events from the BLE Component. The definition of CYBLE_CALLBACK_T is:</p> <pre>typedef void (* CYBLE_CALLBACK_T) (uint32 eventCode, void *eventParam)</pre> <ul style="list-style-type: none"> <li>• eventCode indicates the event that triggered this callback (e.g. CYBLE_EVT_WPTSS_INDICATION_ENABLED).</li> <li>• eventParam contains the parameters corresponding to the current event. (e.g. pointer to <a href="#">CYBLE_WPTS_CHAR_VALUE_T</a> structure that contains details of the characteristic for which notification enabled event was triggered).</li> </ul>
---------------------	--

#### Returns:

None

#### Events

None

## WPTS Server Functions

### Description

APIs unique to WPTS designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_Wptss

### Functions

- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_WptssSetCharacteristicValue](#) ([CYBLE\\_WPTS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)



- [CYBLE\\_API\\_RESULT\\_T CyBle\\_WptssGetCharacteristicValue](#) ([CYBLE\\_WPTS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_WptssSetCharacteristicDescriptor](#) ([CYBLE\\_WPTS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_WPTS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_WptssGetCharacteristicDescriptor](#) ([CYBLE\\_WPTS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_WPTS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_WptssSendNotification](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_WPTS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_WptssSendIndication](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_WPTS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)

## Function Documentation

**[CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_WptssSetCharacteristicValue](#) ([CYBLE\\_WPTS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)**

Sets a characteristic value of the Wireless Power Transfer Service in the local GATT database. The characteristic is identified by charIndex.

### Parameters:

<i>charIndex</i>	The index of a service characteristic of type CYBLE_WPTS_CHAR_INDEX_T.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be stored to the GATT database.

### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The characteristic value was written successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.

### Events

None

**[CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_WptssGetCharacteristicValue](#) ([CYBLE\\_WPTS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)**

Reads a characteristic value of the Wireless Power Transfer Service, which is identified by charIndex from the GATT database.

### Parameters:

<i>charIndex</i>	The index of a service characteristic of type CYBLE_WPTS_CHAR_INDEX_T.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the location where characteristic value data should be stored.

### Returns:

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The characteristic value was read successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.



**Events**

None

**CYBLE\_API\_RESULT\_T** **CyBle\_WptssSetCharacteristicDescriptor** (**CYBLE\_WPTS\_CHAR\_INDEX\_T** *charIndex*, **CYBLE\_WPTS\_DESCR\_INDEX\_T** *descrIndex*, *uint8 attrSize*, *uint8 \* attrValue*)

Sets the characteristic descriptor of the specified characteristic.

**Parameters:**

<i>charIndex</i>	The index of a service characteristic of type CYBLE_WPTS_CHAR_INDEX_T.
<i>descrIndex</i>	The index of a service characteristic descriptor of type CYBLE_WPTS_DESCR_INDEX_T.
<i>attrSize</i>	The size of the characteristic descriptor attribute.
<i>attrValue</i>	The pointer to the descriptor value data that should be stored to the GATT database.

**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.

**Events**

None

**CYBLE\_API\_RESULT\_T** **CyBle\_WptssGetCharacteristicDescriptor** (**CYBLE\_WPTS\_CHAR\_INDEX\_T** *charIndex*, **CYBLE\_WPTS\_DESCR\_INDEX\_T** *descrIndex*, *uint8 attrSize*, *uint8 \* attrValue*)

Reads a a characteristic descriptor of a specified characteristic of the Wireless Power Transfer Service from the GATT database.

**Parameters:**

<i>charIndex</i>	The index of a service characteristic of type CYBLE_WPTS_CHAR_INDEX_T.
<i>descrIndex</i>	The index of a service characteristic descriptor of type CYBLE_WPTS_DESCR_INDEX_T.
<i>attrSize</i>	The size of the characteristic descriptor attribute.
<i>attrValue</i>	The pointer to the location where characteristic descriptor value data should be stored.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed

**Events**

None

**CYBLE\_API\_RESULT\_T** **CyBle\_WptssSendNotification** (**CYBLE\_CONN\_HANDLE\_T** *connHandle*, **CYBLE\_WPTS\_CHAR\_INDEX\_T** *charIndex*, *uint8 attrSize*, *uint8 \* attrValue*)

Sends notification with a characteristic value of the WPTS, which is a value specified by charIndex, to the Client device.



**Parameters:**

<i>connHandle</i>	The connection handle
<i>charIndex</i>	The index of a service characteristic of type CYBLE_WPTS_CHAR_INDEX_T.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the Client device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the Client is not established
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_NTF\_DISABLED - Notification is not enabled by the Client.

**Events**

None

**CYBLE\_API\_RESULT\_T CyBle\_WptssSendIndication (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_WPTS\_CHAR\_INDEX\_T charIndex, uint8 attrSize, uint8 \* attrValue)**

Sends an indication with a characteristic value of the Wireless Power Transfer Service, which is a value specified by charIndex, to the Client device.

**Parameters:**

<i>connHandle</i>	The connection handle
<i>charIndex</i>	The index of a service characteristic of type CYBLE_WPTS_CHAR_INDEX_T.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the Client device.

**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - Optional characteristic is absent
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_IND\_DISABLED - Indication is not enabled by the client.

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the WPTS service-specific callback is registered (with CyBle\_WptsRegisterAttrCallback):



- CYBLE\_EVT\_WPTSS\_INDICATION\_CONFIRMED - in case if the indication is successfully delivered to the peer device.

Otherwise (if the WPTS service-specific callback is not registered):

- CYBLE\_EVT\_GATTS\_HANDLE\_VALUE\_CNF - in case if the indication is successfully delivered to the peer device.

## WPTS Client Functions

### Description

APIs unique to WPTS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: CyBle\_Wptsc

### Functions

- void [CyBle\\_WptscDiscovery](#) ([CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) servHandle)
- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_WptscSetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_WPTS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_WptscGetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_WPTS\\_CHAR\\_INDEX\\_T](#) charIndex)
- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_WptscSetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_WPTS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_WPTS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_WptscGetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_WPTS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_WPTS\\_DESCR\\_INDEX\\_T](#) descrIndex)

### Function Documentation

#### void [CyBle\\_WptscDiscovery](#) ([CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) *servHandle*)

This function discovers the PRU's WPT service and characteristics using the GATT Primary Service Handle, received through the WPT Service Data within the PRU advertisement payload, together with the handle offsets defined A4WP specification.

The PTU may perform service discovery using the [CyBle\\_GattcStartDiscovery\(\)](#) API. This function may be used in response to Service Changed indication or to discover services other than the WPT service supported by the PRU.

#### Parameters:

<i>servHandle</i>	GATT Primary Service Handle of the WPT service.
-------------------	---

#### Returns:

None

#### [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_WptscSetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_WPTS\\_CHAR\\_INDEX\\_T](#) *charIndex*, uint8 *attrSize*, uint8 \* *attrValue*)

Sends a request to set a characteristic value of the service, which is a value identified by charIndex, to the server device.

#### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic of type CYBLE_WPTS_CHAR_INDEX_T.



<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be send to the server device.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the server is not established
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the WPTS service-specific callback is registered (with CyBle\_WptsRegisterAttrCallback):

- CYBLE\_EVT\_WPTSC\_WRITE\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, etc.) are provided with event parameter structure of type [CYBLE\\_WPTS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the WPTS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) CyBle\_WptscGetCharacteristicValue ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_WPTS\\_CHAR\\_INDEX\\_T](#) charIndex)**

This function is used to read a characteristic value, which is a value identified by charIndex, from the server.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic of type CYBLE_WPTS_CHAR_INDEX_T.

**Returns:**

Return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The read request was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the server is not established.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic.

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the WPTS service-specific callback is registered (with CyBle\_WptsRegisterAttrCallback):





- CYBLE\_EVT\_WPTSC\_READ\_CHAR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index , value, etc.) are provided with event parameter structure of type [CYBLE\\_WPTS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the WPTS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**CYBLE\_API\_RESULT\_T** CyBle\_WptscSetCharacteristicDescriptor (**CYBLE\_CONN\_HANDLE\_T** *connHandle*, **CYBLE\_WPTS\_CHAR\_INDEX\_T** *charIndex*, **CYBLE\_WPTS\_DESCR\_INDEX\_T** *descrIndex*, **uint8** *attrSize*, **uint8 \*** *attrValue*)

This function is used to write the characteristic descriptor to the server, which is identified by *charIndex* and *descrIndex*.

#### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic of type CYBLE_WPTS_CHAR_INDEX_T.
<i>descrIndex</i>	The index of a service characteristic descriptor of type CYBLE_WPTS_DESCR_INDEX_T.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic descriptor value data that should be sent to the server device.

#### Returns:

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_INVALID\_STATE - The state is not valid.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted on the specified attribute.

#### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the WPTS service-specific callback is registered (with CyBle\_WptsRegisterAttrCallback):

- CYBLE\_EVT\_WPTSC\_WRITE\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index etc.) are provided with event parameter structure of type [CYBLE\\_WPTS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the WPTS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_WRITE\_RSP - in case if the requested attribute is successfully wrote on the peer device.
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

### **CYBLE\_API\_RESULT\_T CyBle\_WptscGetCharacteristicDescriptor (CYBLE\_CONN\_HANDLE\_T *connHandle*, CYBLE\_WPTS\_CHAR\_INDEX\_T *charIndex*, CYBLE\_WPTS\_DESCR\_INDEX\_T *descrIndex*)**

Sends a request to get the characteristic descriptor of the specified characteristic of the service.

#### **Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of a service characteristic of type CYBLE_WPTS_CHAR_INDEX_T.
<i>descrIndex</i>	The index of a service characteristic descriptor of type CYBLE_WPTS_DESCR_INDEX_T.

#### **Returns:**

- CYBLE\_ERROR\_OK - The request was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_INVALID\_STATE - The state is not valid.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted on the specified attribute.

#### **Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the WPTS service-specific callback is registered (with CyBle\_WptsRegisterAttrCallback):

- CYBLE\_EVT\_WPTSC\_READ\_DESCR\_RESPONSE - in case if the requested attribute is successfully wrote on the peer device, the details (char index, descr index, value, etc.) are provided with event parameter structure of type [CYBLE\\_WPTS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the WPTS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - in case if the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - in case if there some trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

## **WPTS Definitions and Data Structures**

### **Description**

Contains the WPTS specific definitions and data structures used in the WPTS APIs.

### **Data Structures**

- struct [CYBLE\\_WPTSS\\_CHAR\\_T](#)
- struct [CYBLE\\_WPTS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_WPTS\\_DESCR\\_VALUE\\_T](#)
- struct [CYBLE\\_WPTSS\\_T](#)
- struct [CYBLE\\_WPTSC\\_CHAR\\_T](#)
- struct [CYBLE\\_WPTSC\\_T](#)



## Enumerations

- enum [CYBLE\\_WPTS\\_CHAR\\_INDEX\\_T](#) { [CYBLE\\_WPTS\\_PRU\\_CONTROL](#), [CYBLE\\_WPTS\\_PTU\\_STATIC\\_PAR](#), [CYBLE\\_WPTS\\_PRU\\_ALERT](#), [CYBLE\\_WPTS\\_PRU\\_STATIC\\_PAR](#), [CYBLE\\_WPTS\\_PRU\\_DYNAMIC\\_PAR](#), [CYBLE\\_WPTS\\_CHAR\\_COUNT](#) }
- enum [CYBLE\\_WPTS\\_DESCR\\_INDEX\\_T](#) { [CYBLE\\_WPTS\\_CCCD](#), [CYBLE\\_WPTS\\_DESCR\\_COUNT](#) }

## Enumeration Type Documentation

### enum [CYBLE\\_WPTS\\_CHAR\\_INDEX\\_T](#)

WPTS Characteristic indexes

#### Enumerator

**[CYBLE\\_WPTS\\_PRU\\_CONTROL](#)** PRU Control Characteristic index  
**[CYBLE\\_WPTS\\_PTU\\_STATIC\\_PAR](#)** PTU Static Parameter Characteristic index  
**[CYBLE\\_WPTS\\_PRU\\_ALERT](#)** PRU Alert Characteristic index  
**[CYBLE\\_WPTS\\_PRU\\_STATIC\\_PAR](#)** PRU Static Parameter Characteristic index  
**[CYBLE\\_WPTS\\_PRU\\_DYNAMIC\\_PAR](#)** PRU Dynamic Parameter Characteristic index  
**[CYBLE\\_WPTS\\_CHAR\\_COUNT](#)** Total count of WPTS Characteristics

### enum [CYBLE\\_WPTS\\_DESCR\\_INDEX\\_T](#)

WPTS Characteristic Descriptors indexes

#### Enumerator

**[CYBLE\\_WPTS\\_CCCD](#)** Client Characteristic Configuration Descriptor index  
**[CYBLE\\_WPTS\\_DESCR\\_COUNT](#)** Total count of Descriptors

## Weight Scale Service (WSS)

### Description

The Weight Scale Service exposes weight and related data from a weight scale (Server) intended for consumer healthcare as well as sports/fitness applications.

Depending on the chosen GATT role in the GUI, you may use a subset of the supported APIs.

The WSS API names begin with CyBle\_Wss. In addition to this, the APIs also append the GATT role initial letter in the API name.

### Modules

- [WSS Server and Client Function](#)  
*These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.*
- [WSS Server Functions](#)  
*APIs unique to WSS designs configured as a GATT Server role.*
- [WSS Client Functions](#)  
*APIs unique to WSS designs configured as a GATT Client role.*
- [WSS Definitions and Data Structures](#)  
*Contains the WSS specific definitions and data structures used in the WSS APIs.*

## WSS Server and Client Function

### Description

These are APIs common to both GATT Client role and GATT Server role. You may use them in either roles.

No letter is appended to the API name: CyBle\_Wss

### Functions

- void [CyBle\\_WssRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

### Function Documentation

#### void [CyBle\\_WssRegisterAttrCallback](#) ([CYBLE\\_CALLBACK\\_T](#) callbackFunc)

Registers a callback function for service specific attribute operations. Service specific write requests from peer device will not be handled with unregistered callback function.

##### Parameters:

<i>callbackFunc</i>	<p>An application layer event callback function to receive events from the BLE Component. The definition of CYBLE_CALLBACK_T is:</p> <pre>typedef void (* CYBLE_CALLBACK_T) (uint32 eventCode, void *eventParam)</pre> <ul style="list-style-type: none"> <li>eventCode - Indicates the event that triggered this callback (e.g. CYBLE_EVT_WSSS_INDICATION_ENABLED).</li> <li>eventParam - Contains the parameters corresponding to the current event. (e.g. pointer to <a href="#">CYBLE_WSS_CHAR_VALUE_T</a> structure that contains details of the characteristic for which an indication enabled event was triggered).</li> </ul>
---------------------	---

##### Returns:

None.

##### Events

None.

## WSS Server Functions

### Description

APIs unique to WSS designs configured as a GATT Server role.

A letter 's' is appended to the API name: CyBle\_Wsss

### Functions

- uint8 [CyBle\\_WssGetAdUserIdListSize](#)(void)
- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_WssSetAdUserId](#)(uint8 listSize, const uint8 userIdList[])
- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_WsssSetCharacteristicValue](#) ([CYBLE\\_WSS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T](#) [CyBle\\_WsssGetCharacteristicValue](#) ([CYBLE\\_WSS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)



- [CYBLE\\_API\\_RESULT\\_T CyBle\\_WsssSetCharacteristicDescriptor](#) ([CYBLE\\_WSS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_WSS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_WsssGetCharacteristicDescriptor](#) ([CYBLE\\_WSS\\_CHAR\\_INDEX\\_T](#) charIndex, [CYBLE\\_WSS\\_DESCR\\_INDEX\\_T](#) descrIndex, uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_WsssSendIndication](#) ([CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle, [CYBLE\\_WSS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \*attrValue)

## Function Documentation

### uint8 CyBle\_WssGetAdUserIdListSize (void )

Returns the size (in bytes) of User ID List in the advertisement packet.

#### Returns:

Size of User ID List.

### [CYBLE\\_API\\_RESULT\\_T](#) CyBle\_WssSetAdUserId (uint8 listSize, const uint8 userIdList[])

Sets the User ID List to the advertisement packet. To be able to set the User ID List with this function, the advertisement packet should be configured in the component GUI to include Weight Scale Service UUID in the Service Data field. The Service Data should have enough room to fit the User ID List that is planned to be advertised. To reserve the room for the User ID List, the Service Data for WSS should be filled with Unknown User ID - 0xFF. The amount of 0xFF's should be equal to User List Size that is planned to be advertised.

#### Parameters:

<i>listSize</i>	The size of the User List.
<i>userIdList</i>	The array contains a User List.

#### Returns:

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully.
- CYBLE\_ERROR\_INVALID\_OPERATION - The advertisement packet doesn't contain the User List or it is too small.

### [CYBLE\\_API\\_RESULT\\_T](#) CyBle\_WsssSetCharacteristicValue ([CYBLE\\_WSS\\_CHAR\\_INDEX\\_T](#) charIndex, uint8 attrSize, uint8 \* attrValue)

Sets a value for one of two characteristic values of the Weight Scale Service. The characteristic is identified by charIndex.

#### Parameters:

<i>charIndex</i>	The index of a Weight Scale Service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be stored to the GATT database.

#### Returns:

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The characteristic value was written successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.

#### Events

None.

**CYBLE\_API\_RESULT\_T CyBle\_WsssGetCharacteristicValue (CYBLE\_WSS\_CHAR\_INDEX\_T *charIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Reads a characteristic value of the Weight Scale Service, which is identified by *charIndex* from the GATT database.

**Parameters:**

<i>charIndex</i>	The index of the Weight Scale Service characteristic.
<i>attrSize</i>	The size of the Weight Scale Service characteristic value attribute.
<i>attrValue</i>	The pointer to the location where characteristic value data should be stored.

**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The characteristic value was read successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.

**Events**

None.

**CYBLE\_API\_RESULT\_T CyBle\_WsssSetCharacteristicDescriptor (CYBLE\_WSS\_CHAR\_INDEX\_T *charIndex*, CYBLE\_WSS\_DESCR\_INDEX\_T *descrIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Sets the characteristic descriptor of the specified characteristic.

**Parameters:**

<i>charIndex</i>	The index of the service characteristic.
<i>descrIndex</i>	The index of the descriptor.
<i>attrSize</i>	The size of the characteristic descriptor attribute.
<i>attrValue</i>	The pointer to the descriptor value data to be stored in the GATT database.

**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.

**Events**

None.

**CYBLE\_API\_RESULT\_T CyBle\_WsssGetCharacteristicDescriptor (CYBLE\_WSS\_CHAR\_INDEX\_T *charIndex*, CYBLE\_WSS\_DESCR\_INDEX\_T *descrIndex*, uint8 *attrSize*, uint8 \* *attrValue*)**

Reads a a characteristic descriptor of a specified characteristic of the Weight Scale Service from the GATT database.

**Parameters:**

<i>charIndex</i>	The index of the characteristic.
<i>descrIndex</i>	The index of the descriptor.
<i>attrSize</i>	The size of the descriptor value.
<i>attrValue</i>	The pointer to the location where characteristic descriptor value data should be stored.



**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request handled successfully.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The optional descriptor is absent.

**Events**

None.

**CYBLE\_API\_RESULT\_T CyBle\_WsssSendIndication (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_WSS\_CHAR\_INDEX\_T charIndex, uint8 attrSize, uint8 \* attrValue)**

Sends an indication with a characteristic value of the Weight Scale Service, which is a value specified by charIndex, to the client's device.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic.
<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic value data that should be sent to the client's device.

**Returns:**

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The request was handled successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameter failed.
- CYBLE\_ERROR\_INVALID\_OPERATION - This operation is not permitted.
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the client is not established.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_IND\_DISABLED - Indication is not enabled by the client.

**Events**

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the WSS service-specific callback is registered (with CyBle\_WssRegisterAttrCallback):

- CYBLE\_EVT\_WSSS\_INDICATION\_CONFIRMED - If the indication is successfully delivered to the peer device.

Otherwise (if the WSS service-specific callback is not registered):

- CYBLE\_EVT\_GATTS\_HANDLE\_VALUE\_CNF - If the indication is successfully delivered to the peer device.

## WSS Client Functions

### Description

APIs unique to WSS designs configured as a GATT Client role.

A letter 'c' is appended to the API name: CyBle\_Wssc

### Functions

- **CYBLE\_API\_RESULT\_T CyBle\_WsscGetCharacteristicValue (CYBLE\_CONN\_HANDLE\_T connHandle, CYBLE\_WSS\_CHAR\_INDEX\_T charIndex)**





- [CYBLE\\_API\\_RESULT\\_T CyBle\\_WsscSetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T connHandle](#), [CYBLE\\_WSS\\_CHAR\\_INDEX\\_T charIndex](#), [CYBLE\\_WSS\\_DESCR\\_INDEX\\_T descrIndex](#), uint8 attrSize, uint8 \*attrValue)
- [CYBLE\\_API\\_RESULT\\_T CyBle\\_WsscGetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T connHandle](#), [CYBLE\\_WSS\\_CHAR\\_INDEX\\_T charIndex](#), [CYBLE\\_WSS\\_DESCR\\_INDEX\\_T descrIndex](#))

## Function Documentation

### [CYBLE\\_API\\_RESULT\\_T CyBle\\_WsscGetCharacteristicValue](#) ([CYBLE\\_CONN\\_HANDLE\\_T connHandle](#), [CYBLE\\_WSS\\_CHAR\\_INDEX\\_T charIndex](#))

This function is used to read a characteristic value, which is a value identified by charIndex, from the server.

#### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic. Starts with zero.

#### Returns:

A return value is of type CYBLE\_API\_RESULT\_T.

- CYBLE\_ERROR\_OK - The read request was sent successfully.
- CYBLE\_ERROR\_INVALID\_PARAMETER - Validation of the input parameters failed.
- CYBLE\_ERROR\_GATT\_DB\_INVALID\_ATTR\_HANDLE - The peer device doesn't have the particular characteristic.
- CYBLE\_ERROR\_MEMORY\_ALLOCATION\_FAILED - Memory allocation failed.
- CYBLE\_ERROR\_INVALID\_STATE - Connection with the server is not established.
- CYBLE\_ERROR\_INVALID\_OPERATION - Operation is invalid for this characteristic.

#### Events

In case of successful execution (return value = CYBLE\_ERROR\_OK) the next events can appear:

If the WSS service-specific callback is registered (with CyBle\_WssRegisterAttrCallback):

- CYBLE\_EVT\_WSSC\_READ\_CHAR\_RESPONSE - If the requested attribute is successfully written on the peer device, the details (char index , value, etc.) are provided with an event parameter structure of type [CYBLE\\_WSS\\_CHAR\\_VALUE\\_T](#).

Otherwise (if the WSS service-specific callback is not registered):

- CYBLE\_EVT\_GATTC\_READ\_RSP - If the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with an event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - If there is trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

### [CYBLE\\_API\\_RESULT\\_T CyBle\\_WsscSetCharacteristicDescriptor](#) ([CYBLE\\_CONN\\_HANDLE\\_T connHandle](#), [CYBLE\\_WSS\\_CHAR\\_INDEX\\_T charIndex](#), [CYBLE\\_WSS\\_DESCR\\_INDEX\\_T descrIndex](#), uint8 attrSize, uint8 \*attrValue)

This function is used to write the characteristic descriptor to the server, which is identified by charIndex and descrIndex.

#### Parameters:

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic. Starts with zero.
<i>descrIndex</i>	The index of the service characteristic descriptor.



<i>attrSize</i>	The size of the characteristic value attribute.
<i>attrValue</i>	The pointer to the characteristic descriptor value data that should be sent to the server device.

**Returns:**

A return value is of type `CYBLE_API_RESULT_T`.

- `CYBLE_ERROR_OK` - The request was sent successfully.
- `CYBLE_ERROR_INVALID_PARAMETER` - Validation of the input parameters failed.
- `CYBLE_ERROR_INVALID_STATE` - The state is not valid.
- `CYBLE_ERROR_MEMORY_ALLOCATION_FAILED` - Memory allocation failed.
- `CYBLE_ERROR_INVALID_OPERATION` - This operation is not permitted on the specified attribute.

**Events**

In case of successful execution (return value = `CYBLE_ERROR_OK`) the next events can appear:

If the WSS service-specific callback is registered (with `CyBle_WssRegisterAttrCallback`):

- `CYBLE_EVT_WSSC_WRITE_DESCR_RESPONSE` - If the requested attribute is successfully written on the peer device, the details (char index, descr index etc.) are provided with event parameter structure of type [CYBLE\\_WSS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the WSS service-specific callback is not registered):

- `CYBLE_EVT_GATTC_WRITE_RSP` - If the requested attribute is successfully written on the peer device.
- `CYBLE_EVT_GATTC_ERROR_RSP` - If there is trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

**[CYBLE\\_API\\_RESULT\\_T](#) `CyBle_WsscGetCharacteristicDescriptor` ([CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*, [CYBLE\\_WSS\\_CHAR\\_INDEX\\_T](#) *charIndex*, [CYBLE\\_WSS\\_DESCR\\_INDEX\\_T](#) *descrIndex*)**

Sends a request to get the characteristic descriptor of the specified characteristic of the service.

**Parameters:**

<i>connHandle</i>	The connection handle.
<i>charIndex</i>	The index of the service characteristic. Starts with zero.
<i>descrIndex</i>	The index of the service characteristic descriptor.

**Returns:**

- `CYBLE_ERROR_OK` - The request was sent successfully.
- `CYBLE_ERROR_INVALID_PARAMETER` - Validation of the input parameters failed.
- `CYBLE_ERROR_INVALID_STATE` - The state is not valid.
- `CYBLE_ERROR_MEMORY_ALLOCATION_FAILED` - Memory allocation failed.
- `CYBLE_ERROR_INVALID_OPERATION` - This operation is not permitted on the specified attribute.

**Events**

In case of successful execution (return value = `CYBLE_ERROR_OK`) the next events can appear:

If the WSS service-specific callback is registered (with `CyBle_WssRegisterAttrCallback`):

- `CYBLE_EVT_WSSC_READ_DESCR_RESPONSE` - If the requested attribute is successfully written on the peer device, the details (char index, descr index, value, etc.) are provided with an event parameter structure of type [CYBLE\\_WSS\\_DESCR\\_VALUE\\_T](#).

Otherwise (if the WSS service-specific callback is not registered):



- CYBLE\_EVT\_GATTC\_READ\_RSP - If the requested attribute is successfully read on the peer device, the details (handle, value, etc.) are provided with an event parameters structure ([CYBLE\\_GATTC\\_READ\\_RSP\\_PARAM\\_T](#)).
- CYBLE\_EVT\_GATTC\_ERROR\_RSP - If there is trouble with the requested attribute on the peer device, the details are provided with event parameters structure ([CYBLE\\_GATTC\\_ERR\\_RSP\\_PARAM\\_T](#)).

## WSS Definitions and Data Structures

### Description

Contains the WSS specific definitions and data structures used in the WSS APIs.

### Data Structures

- struct [CYBLE\\_WSS\\_CHAR\\_VALUE\\_T](#)
- struct [CYBLE\\_WSS\\_DESCR\\_VALUE\\_T](#)
- struct [CYBLE\\_WSSS\\_CHAR\\_T](#)
- struct [CYBLE\\_WSSS\\_T](#)
- struct [CYBLE\\_WSSC\\_CHAR\\_T](#)
- struct [CYBLE\\_WSSC\\_T](#)

### Enumerations

- enum [CYBLE\\_WSS\\_CHAR\\_INDEX\\_T](#) { [CYBLE\\_WSS\\_WEIGHT\\_SCALE\\_FEATURE](#), [CYBLE\\_WSS\\_WEIGHT\\_MEASUREMENT](#), [CYBLE\\_WSS\\_CHAR\\_COUNT](#) }
- enum [CYBLE\\_WSS\\_DESCR\\_INDEX\\_T](#) { [CYBLE\\_WSS\\_CCCD](#), [CYBLE\\_WSS\\_DESCR\\_COUNT](#) }

### Enumeration Type Documentation

#### enum [CYBLE\\_WSS\\_CHAR\\_INDEX\\_T](#)

WSS Characteristic indexes

##### Enumerator

**CYBLE\_WSS\_WEIGHT\_SCALE\_FEATURE** Weight Scale Feature Characteristic index

**CYBLE\_WSS\_WEIGHT\_MEASUREMENT** Weight Measurement Characteristic index

**CYBLE\_WSS\_CHAR\_COUNT** Total count of WSS Characteristics

#### enum [CYBLE\\_WSS\\_DESCR\\_INDEX\\_T](#)

WSS Characteristic Descriptors indexes

##### Enumerator

**CYBLE\_WSS\_CCCD** Client Characteristic Configuration Descriptor index

**CYBLE\_WSS\_DESCR\_COUNT** Total count of Descriptors

## Custom Service

### Description

This section contains the [CYBLE\\_CUSTOMS\\_INFO\\_T](#) and [CYBLE\\_CUSTOMS\\_T](#) structs used for Custom Services.



**Data Structures**

- struct [CYBLE\\_CUSTOMS\\_INFO\\_T](#)
- struct [CYBLE\\_CUSTOMS\\_T](#)

**Data Structure Documentation****CY\_BLE\_FLASH\_STORAGE Struct Reference****Data Fields**

- uint8 **stackFlashptr** [CYBLE\_STACK\_FLASH\_SIZE]
- uint8 **attValuesCCCDFlashMemory** [CYBLE\_GAP\_MAX\_BONDED\_DEVICE+1u][CYBLE\_GATT\_DB\_FLASH\_CCCD\_COUNT]
- uint8 **cccdCount**
- uint8 **boundedDevCount**

**CYBLE\_ANCS\_CHAR\_VALUE\_T Struct Reference****Description**

ANCS Characteristic Value parameter structure

**Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T](#) **connHandle**
- [CYBLE\\_ANCS\\_CHAR\\_INDEX\\_T](#) **charIndex**
- [CYBLE\\_GATT\\_VALUE\\_T](#)\* **value**
- [CYBLE\\_GATT\\_ERR\\_CODE\\_T](#) **gattErrorCode**

**Field Documentation**

[CYBLE\\_CONN\\_HANDLE\\_T](#) **CYBLE\_ANCS\_CHAR\_VALUE\_T::connHandle**

Peer device handle

[CYBLE\\_ANCS\\_CHAR\\_INDEX\\_T](#) **CYBLE\_ANCS\_CHAR\_VALUE\_T::charIndex**

Index of service characteristic

[CYBLE\\_GATT\\_VALUE\\_T](#)\* **CYBLE\_ANCS\_CHAR\_VALUE\_T::value**

Characteristic value

**CYBLE\_ANCS\_DESCR\_VALUE\_T Struct Reference****Description**

ANCS Characteristic Descriptor Value parameter structure

**Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T](#) **connHandle**
- [CYBLE\\_ANCS\\_CHAR\\_INDEX\\_T](#) **charIndex**



- [CYBLE\\_ANCS\\_DESCR\\_INDEX\\_T descrIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\* value](#)

## Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_ANCS\_DESCR\_VALUE\_T::connHandle

Peer device handle

[CYBLE\\_ANCS\\_CHAR\\_INDEX\\_T](#) CYBLE\_ANCS\_DESCR\_VALUE\_T::charIndex

Index of service characteristic

[CYBLE\\_ANCS\\_DESCR\\_INDEX\\_T](#) CYBLE\_ANCS\_DESCR\_VALUE\_T::descrIndex

Index of service characteristic descriptor

[CYBLE\\_GATT\\_VALUE\\_T\\*](#) CYBLE\_ANCS\_DESCR\_VALUE\_T::value

Descriptor value

## CYBLE\_ANCSC\_CHAR\_T Struct Reference

### Description

ANCS client characteristic structure type

### Data Fields

- uint8 [properties](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) valueHandle
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) descrHandle[CYBLE\_ANCS\_DESCR\_COUNT]
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) endHandle

## Field Documentation

uint8 CYBLE\_ANCSC\_CHAR\_T::properties

Properties for value field

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_ANCSC\_CHAR\_T::valueHandle

Handle of server database attribute value entry

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_ANCSC\_CHAR\_T::descrHandle[CYBLE\_ANCS\_DESCR\_COUNT]

ANCS client char. descriptor handle

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_ANCSC\_CHAR\_T::endHandle

Characteristic End Handle

## CYBLE\_ANCSC\_T Struct Reference

### Description

Structure with discovered attributes information of ANC Service



**Data Fields**

- [CYBLE\\_ANCSC\\_CHAR\\_T charInfo](#)[[CYBLE\\_ANCS\\_CHAR\\_COUNT](#)]

**Field Documentation**

[CYBLE\\_ANCSC\\_CHAR\\_T](#)[CYBLE\\_ANCSC\\_T::charInfo](#)[[CYBLE\\_ANCS\\_CHAR\\_COUNT](#)]

Characteristics handle + properties array

**CYBLE\_ANCSS\_CHAR\_T Struct Reference****Description**

ANC Service Characteristic structure type

**Data Fields**

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T charHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T descrHandle](#)[[CYBLE\\_ANCS\\_DESCR\\_COUNT](#)]

**Field Documentation**

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#)[CYBLE\\_ANCSS\\_CHAR\\_T::charHandle](#)

Handle of characteristic value

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#)[CYBLE\\_ANCSS\\_CHAR\\_T::descrHandle](#)[[CYBLE\\_ANCS\\_DESCR\\_COUNT](#)]

Handle of descriptor

**CYBLE\_ANCSS\_T Struct Reference****Description**

Structure with ANC Service attribute handles

**Data Fields**

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T serviceHandle](#)
- [CYBLE\\_ANCSS\\_CHAR\\_T charInfo](#)[[CYBLE\\_ANCS\\_CHAR\\_COUNT](#)]

**Field Documentation**

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#)[CYBLE\\_ANCSS\\_T::serviceHandle](#)

ANC Service handle

[CYBLE\\_ANCSS\\_CHAR\\_T](#)[CYBLE\\_ANCSS\\_T::charInfo](#)[[CYBLE\\_ANCS\\_CHAR\\_COUNT](#)]

ANC Service characteristics info array

**CYBLE\_ANS\_CHAR\_VALUE\_T Struct Reference****Description**

Alert Notification Service Characteristic Value parameter structure



**Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_ANS\\_CHAR\\_INDEX\\_T charIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\* value](#)

**Field Documentation**

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_ANS\_CHAR\_VALUE\_T::connHandle

Peer device handle

[CYBLE\\_ANS\\_CHAR\\_INDEX\\_T](#) CYBLE\_ANS\_CHAR\_VALUE\_T::charIndex

Index of Alert Notification Service Characteristic

[CYBLE\\_GATT\\_VALUE\\_T\\*](#) CYBLE\_ANS\_CHAR\_VALUE\_T::value

Pointer to Characteristic value

**CYBLE\_ANS\_DESCR\_VALUE\_T Struct Reference****Description**

Alert Notification Service Characteristic Descriptor Value parameter structure

**Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_ANS\\_CHAR\\_INDEX\\_T charIndex](#)
- [CYBLE\\_ANS\\_DESCR\\_INDEX\\_T descrIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\* value](#)

**Field Documentation**

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_ANS\_DESCR\_VALUE\_T::connHandle

Connection handle

[CYBLE\\_ANS\\_CHAR\\_INDEX\\_T](#) CYBLE\_ANS\_DESCR\_VALUE\_T::charIndex

Characteristic index of Service

[CYBLE\\_ANS\\_DESCR\\_INDEX\\_T](#) CYBLE\_ANS\_DESCR\_VALUE\_T::descrIndex

Service Characteristic Descriptor index

[CYBLE\\_GATT\\_VALUE\\_T\\*](#) CYBLE\_ANS\_DESCR\_VALUE\_T::value

Pointer to value of Service Characteristic Descriptor value

**CYBLE\_ANSC\_T Struct Reference****Description**

Structure with discovered attributes information of Alert Notification Service





**Data Fields**

- [CYBLE\\_SRVR\\_FULL\\_CHAR\\_INFO\\_T characteristics](#)[\[CYBLE\\_ANS\\_CHAR\\_COUNT\]](#)

**Field Documentation**

[CYBLE\\_SRVR\\_FULL\\_CHAR\\_INFO\\_T](#)[CYBLE\\_ANSC\\_T::characteristics](#)[\[CYBLE\\_ANS\\_CHAR\\_COUNT\]](#)

Structure with Characteristic handles + properties of Alert Notification Service

**CYBLE\_ANSS\_CHAR\_T Struct Reference****Description**

ANS Characteristic with descriptors

**Data Fields**

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T charHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T descrHandle](#)[\[CYBLE\\_ANS\\_DESCR\\_COUNT\]](#)

**Field Documentation**

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#)[CYBLE\\_ANSS\\_CHAR\\_T::charHandle](#)

Handle of Characteristic value

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#)[CYBLE\\_ANSS\\_CHAR\\_T::descrHandle](#)[\[CYBLE\\_ANS\\_DESCR\\_COUNT\]](#)

Handle of Descriptor

**CYBLE\_ANSS\_T Struct Reference****Description**

Structure with Alert Notification Service attribute handles

**Data Fields**

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T serviceHandle](#)
- [CYBLE\\_ANSS\\_CHAR\\_T charInfo](#)[\[CYBLE\\_ANS\\_CHAR\\_COUNT\]](#)

**Field Documentation**

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#)[CYBLE\\_ANSS\\_T::serviceHandle](#)

Alert Notification Service handle

[CYBLE\\_ANSS\\_CHAR\\_T](#)[CYBLE\\_ANSS\\_T::charInfo](#)[\[CYBLE\\_ANS\\_CHAR\\_COUNT\]](#)

Array of Alert Notification Service Characteristics + Descriptors handles

**CYBLE\_BAS\_CHAR\_VALUE\_T Struct Reference****Description**

Battery Service Characteristic Value parameter structure

**Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- uint8 [serviceIndex](#)
- [CYBLE\\_BAS\\_CHAR\\_INDEX\\_T charIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\* value](#)

**Field Documentation**

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_BAS\_CHAR\_VALUE\_T::connHandle

Peer device handle

uint8 CYBLE\_BAS\_CHAR\_VALUE\_T::serviceIndex

Service instance

[CYBLE\\_BAS\\_CHAR\\_INDEX\\_T](#) CYBLE\_BAS\_CHAR\_VALUE\_T::charIndex

Index of a service characteristic

[CYBLE\\_GATT\\_VALUE\\_T\\*](#) CYBLE\_BAS\_CHAR\_VALUE\_T::value

Characteristic value

**CYBLE\_BAS\_DESCR\_VALUE\_T Struct Reference****Description**

Battery Service Characteristic Descriptor Value parameter structure

**Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- uint8 [serviceIndex](#)
- [CYBLE\\_BAS\\_CHAR\\_INDEX\\_T charIndex](#)
- [CYBLE\\_BAS\\_DESCR\\_INDEX\\_T descrIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\* value](#)

**Field Documentation**

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_BAS\_DESCR\_VALUE\_T::connHandle

Peer device handle

uint8 CYBLE\_BAS\_DESCR\_VALUE\_T::serviceIndex

Service instance

[CYBLE\\_BAS\\_CHAR\\_INDEX\\_T](#) CYBLE\_BAS\_DESCR\_VALUE\_T::charIndex

Index of service characteristic

[CYBLE\\_BAS\\_DESCR\\_INDEX\\_T](#) CYBLE\_BAS\_DESCR\_VALUE\_T::descrIndex

Index of service characteristic descriptor



[CYBLE\\_GATT\\_VALUE\\_T](#)\* CYBLE\_BAS\_DESCR\_VALUE\_T::value

Descriptor value

## CYBLE\_BASC\_T Struct Reference

### Description

Structure with discovered attributes information of Battery Service

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle
- [CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) batteryLevel
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) cpfdHandle
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) cccdHandle
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) rrdHandle

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_BASC\_T::connHandle

Peer device handle

[CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) CYBLE\_BASC\_T::batteryLevel

Battery Level characteristic info

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_BASC\_T::cpfdHandle

Characteristic Presentation Format descriptor handle

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_BASC\_T::cccdHandle

Client Characteristic Configuration descriptor handle

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_BASC\_T::rrdHandle

Report Reference descriptor handle

## CYBLE\_BASS\_NOTIF\_PAR\_T Struct Reference

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle
- uint8 [serviceIndex](#)
- [CYBLE\\_BAS\\_CHAR\\_INDEX\\_T](#) charIndex

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_BASS\_NOTIF\_PAR\_T::connHandle

Peer device handle

uint8 CYBLE\_BASS\_NOTIF\_PAR\_T::serviceIndex

Service instance



**CYBLE\_BAS\_CHAR\_INDEX\_T** **CYBLE\_BASS\_NOTIF\_PAR\_T::charIndex**

Index of a service characteristic

**CYBLE\_BASS\_T Struct Reference****Description**

Structure with Battery Service attribute handles

**Data Fields**

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [serviceHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [batteryLevelHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [cpfdHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [cccdHandle](#)

**Field Documentation****CYBLE\_GATT\_DB\_ATTR\_HANDLE\_T** **CYBLE\_BASS\_T::serviceHandle**

Battery Service handle

**CYBLE\_GATT\_DB\_ATTR\_HANDLE\_T** **CYBLE\_BASS\_T::batteryLevelHandle**

Battery Level characteristic handle

**CYBLE\_GATT\_DB\_ATTR\_HANDLE\_T** **CYBLE\_BASS\_T::cpfdHandle**

Characteristic Presentation Format Descriptor handle

**CYBLE\_GATT\_DB\_ATTR\_HANDLE\_T** **CYBLE\_BASS\_T::cccdHandle**

Client Characteristic Configuration descriptor handle

**CYBLE\_BCS\_CHAR\_VALUE\_T Struct Reference****Description**

BCS Characteristic value parameter structure

**Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T](#) [connHandle](#)
- [CYBLE\\_BCS\\_CHAR\\_INDEX\\_T](#) [charIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T](#)\* [value](#)

**Field Documentation****CYBLE\_CONN\_HANDLE\_T** **CYBLE\_BCS\_CHAR\_VALUE\_T::connHandle**

Peer device handle

**CYBLE\_BCS\_CHAR\_INDEX\_T** **CYBLE\_BCS\_CHAR\_VALUE\_T::charIndex**

Index of service characteristic



[CYBLE\\_GATT\\_VALUE\\_T](#)\* CYBLE\_BCS\_CHAR\_VALUE\_T::value

Characteristic value

## CYBLE\_BCS\_DESCR\_VALUE\_T Struct Reference

### Description

BCS Characteristic descriptor value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle
- [CYBLE\\_BCS\\_CHAR\\_INDEX\\_T](#) charIndex
- [CYBLE\\_BCS\\_DESCR\\_INDEX\\_T](#) descrIndex
- [CYBLE\\_GATT\\_VALUE\\_T](#)\* value

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_BCS\_DESCR\_VALUE\_T::connHandle

Peer device handle

[CYBLE\\_BCS\\_CHAR\\_INDEX\\_T](#) CYBLE\_BCS\_DESCR\_VALUE\_T::charIndex

Index of service characteristic

[CYBLE\\_BCS\\_DESCR\\_INDEX\\_T](#) CYBLE\_BCS\_DESCR\_VALUE\_T::descrIndex

Index of descriptor

[CYBLE\\_GATT\\_VALUE\\_T](#)\* CYBLE\_BCS\_DESCR\_VALUE\_T::value

Characteristic value

## CYBLE\_BCSC\_CHAR\_T Struct Reference

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) valueHandle
- uint8 [properties](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) endHandle

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_BCSC\_CHAR\_T::valueHandle

Handle of characteristic value

uint8 CYBLE\_BCSC\_CHAR\_T::properties

Properties for value field

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_BCSC\_CHAR\_T::endHandle

End handle of a characteristic



## CYBLE\_BCSC\_T Struct Reference

### Description

BCS Characteristic with descriptors

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T serviceHandle](#)
- [CYBLE\\_BCSC\\_CHAR\\_T charInfo\[CYBLE\\_BCS\\_CHAR\\_COUNT\]](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T bodyCompositionMeasurementCccdHandle](#)

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_BCSC\_T::serviceHandle

Body Composition Service handle

[CYBLE\\_BCSC\\_CHAR\\_T](#) CYBLE\_BCSC\_T::charInfo[[CYBLE\\_BCS\\_CHAR\\_COUNT](#)]

Body Composition Service characteristics info structure

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_BCSC\_T::bodyCompositionMeasurementCccdHandle

Body Composition Measurement Client Characteristic Configuration handle

## CYBLE\_BCSS\_CHAR\_T Struct Reference

### Description

Structure with Body Composition Service attribute handles

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T charHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T descrHandle\[CYBLE\\_BCS\\_DESCR\\_COUNT\]](#)

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_BCSS\_CHAR\_T::charHandle

Handle of Characteristic Value

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_BCSS\_CHAR\_T::descrHandle[[CYBLE\\_BCS\\_DESCR\\_COUNT](#)]

Array of Descriptor handles

## CYBLE\_BCSS\_T Struct Reference

### Description

BCS Characteristic with descriptors handles

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T serviceHandle](#)
- [CYBLE\\_BCSS\\_CHAR\\_T charInfo\[CYBLE\\_BCS\\_CHAR\\_COUNT\]](#)



## Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_BCSS\_T::serviceHandle

Body Composition Service handle

[CYBLE\\_BCSS\\_CHAR\\_T](#) CYBLE\_BCSS\_T::charInfo[[CYBLE\\_BCS\\_CHAR\\_COUNT](#)]

Array of characteristics and descriptors handles

## CYBLE\_BLESS\_CLK\_CFG\_PARAMS\_T Struct Reference

### Description

BLE clock configuration parameters

### Data Fields

- [CYBLE\\_BLESS\\_WCO\\_SCA\\_CFG\\_T](#) bleLISca
- [CYBLE\\_BLESS\\_ECO\\_CLK\\_DIV\\_T](#) bleLIClockDiv
- uint16 [ecoXtalStartUpTime](#)

## Field Documentation

[CYBLE\\_BLESS\\_WCO\\_SCA\\_CFG\\_T](#) CYBLE\_BLESS\_CLK\_CFG\_PARAMS\_T::bleLISca

Sleep Clock accuracy in PPM, 32Khz Cycles

[CYBLE\\_BLESS\\_ECO\\_CLK\\_DIV\\_T](#) CYBLE\_BLESS\_CLK\_CFG\_PARAMS\_T::bleLIClockDiv

Link Layer clock divider

uint16 CYBLE\_BLESS\_CLK\_CFG\_PARAMS\_T::ecoXtalStartUpTime

ECO crystal startup time in multiple of 62.5us

## CYBLE\_BLESS\_PWR\_IN\_DB\_T Struct Reference

### Description

Structure to set/get BLE radio power

### Data Fields

- [CYBLE\\_BLESS\\_PWR\\_LVL\\_T](#) blePwrLevelInDbm
- [CYBLE\\_BLESS\\_PHY\\_CH\\_GRP\\_ID\\_T](#) bleSsChId

## Field Documentation

[CYBLE\\_BLESS\\_PWR\\_LVL\\_T](#) CYBLE\_BLESS\_PWR\_IN\_DB\_T::blePwrLevelInDbm

Output Power level

[CYBLE\\_BLESS\\_PHY\\_CH\\_GRP\\_ID\\_T](#) CYBLE\_BLESS\_PWR\_IN\_DB\_T::bleSsChId

Channel group ID for which power level is to be read/written





## CYBLE\_BLS\_CHAR\_VALUE\_T Struct Reference

### Description

Blood Pressure Service Characteristic Value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_BLS\\_CHAR\\_INDEX\\_T charIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\* value](#)

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_BLS\_CHAR\_VALUE\_T::connHandle

Peer device handle

[CYBLE\\_BLS\\_CHAR\\_INDEX\\_T](#) CYBLE\_BLS\_CHAR\_VALUE\_T::charIndex

Index of service characteristic

[CYBLE\\_GATT\\_VALUE\\_T\\*](#) CYBLE\_BLS\_CHAR\_VALUE\_T::value

Characteristic value

## CYBLE\_BLS\_DESCR\_VALUE\_T Struct Reference

### Description

Blood Pressure Service Characteristic Descriptor Value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_BLS\\_CHAR\\_INDEX\\_T charIndex](#)
- [CYBLE\\_BLS\\_DESCR\\_INDEX\\_T descrIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\* value](#)

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_BLS\_DESCR\_VALUE\_T::connHandle

Peer device handle

[CYBLE\\_BLS\\_CHAR\\_INDEX\\_T](#) CYBLE\_BLS\_DESCR\_VALUE\_T::charIndex

Index of service characteristic

[CYBLE\\_BLS\\_DESCR\\_INDEX\\_T](#) CYBLE\_BLS\_DESCR\_VALUE\_T::descrIndex

Index of service characteristic descriptor

[CYBLE\\_GATT\\_VALUE\\_T\\*](#) CYBLE\_BLS\_DESCR\_VALUE\_T::value

Descriptor value



## CYBLE\_BLSC\_CHAR\_T Struct Reference

### Description

Blood Pressure Client Server's Characteristic structure type

### Data Fields

- uint8 [properties](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [valueHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [cccdHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [endHandle](#)

### Field Documentation

uint8 CYBLE\_BLSC\_CHAR\_T::properties

Properties for value field

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_BLSC\_CHAR\_T::valueHandle

Handle of server database attribute value entry

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_BLSC\_CHAR\_T::cccdHandle

Blood Pressure client char. config. descriptor's handle

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_BLSC\_CHAR\_T::endHandle

Characteristic end handle

## CYBLE\_BLSC\_T Struct Reference

### Description

Structure with discovered attributes information of Blood Pressure Service

### Data Fields

- [CYBLE\\_BLSC\\_CHAR\\_T](#) [charInfo](#)[CYBLE\_BLS\_CHAR\_COUNT]

### Field Documentation

[CYBLE\\_BLSC\\_CHAR\\_T](#) CYBLE\_BLSC\_T::charInfo[CYBLE\_BLS\_CHAR\_COUNT]

Structure with Characteristic handles + properties of Blood Pressure Service

## CYBLE\_BLSS\_CHAR\_T Struct Reference

### Description

Characteristic with descriptors

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [charHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [cccdHandle](#)



## Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_BLSS\\_CHAR\\_T::charHandle](#)

Blood Pressure Service characteristic's handle

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_BLSS\\_CHAR\\_T::cccdHandle](#)

Blood Pressure Service char. descriptor's handle

## CYBLE\_BLSS\_T Struct Reference

### Description

Structure with Blood Pressure Service attribute handles

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [serviceHandle](#)
- [CYBLE\\_BLSS\\_CHAR\\_T](#) [charInfo](#)[[CYBLE\\_BLS\\_CHAR\\_COUNT](#)]

## Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_BLSS\\_T::serviceHandle](#)

Blood Pressure Service handle

[CYBLE\\_BLSS\\_CHAR\\_T](#) [CYBLE\\_BLSS\\_T::charInfo](#)[[CYBLE\\_BLS\\_CHAR\\_COUNT](#)]

Array of Blood Pressure Service Characteristics + Descriptors handles

## CYBLE\_BMS\_CHAR\_VALUE\_T Struct Reference

### Description

Service Characteristic value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T](#) [connHandle](#)
- [CYBLE\\_BMS\\_CHAR\\_INDEX\\_T](#) [charIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T](#)\* [value](#)
- [CYBLE\\_GATT\\_ERR\\_CODE\\_T](#) [gattErrorCode](#)

## Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) [CYBLE\\_BMS\\_CHAR\\_VALUE\\_T::connHandle](#)

Peer device handle

[CYBLE\\_BMS\\_CHAR\\_INDEX\\_T](#) [CYBLE\\_BMS\\_CHAR\\_VALUE\\_T::charIndex](#)

Index of service characteristic

[CYBLE\\_GATT\\_VALUE\\_T](#)\* [CYBLE\\_BMS\\_CHAR\\_VALUE\\_T::value](#)

Characteristic value



**CYBLE\_GATT\_ERR\_CODE\_T** **CYBLE\_BMS\_CHAR\_VALUE\_T::gattErrorCode**

GATT error code for checking the authorization code

**CYBLE\_BMS\_DESCR\_VALUE\_T Struct Reference****Description**

Service Characteristic Descriptor Value parameter structure

**Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T](#) **connHandle**
- [CYBLE\\_BMS\\_CHAR\\_INDEX\\_T](#) **charIndex**
- [CYBLE\\_BMS\\_DESCR\\_INDEX\\_T](#) **descrIndex**
- [CYBLE\\_GATT\\_VALUE\\_T\\*](#) **value**

**Field Documentation****CYBLE\_CONN\_HANDLE\_T** **CYBLE\_BMS\_DESCR\_VALUE\_T::connHandle**

Peer device handle

**CYBLE\_BMS\_CHAR\_INDEX\_T** **CYBLE\_BMS\_DESCR\_VALUE\_T::charIndex**

Index of service characteristic

**CYBLE\_BMS\_DESCR\_INDEX\_T** **CYBLE\_BMS\_DESCR\_VALUE\_T::descrIndex**

Index of service characteristic descriptor

**CYBLE\_GATT\_VALUE\_T\*** **CYBLE\_BMS\_DESCR\_VALUE\_T::value**

Descriptor value

**CYBLE\_BMSC\_CHAR\_T Struct Reference****Description**

Client Characteristic structure type

**Data Fields**

- uint8 [properties](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) **valueHandle**
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) **descrHandle** [\[CYBLE\\_BMS\\_DESCR\\_COUNT\]](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) **endHandle**

**Field Documentation****uint8** **CYBLE\_BMSC\_CHAR\_T::properties**

Properties for value field

**CYBLE\_GATT\_DB\_ATTR\_HANDLE\_T** **CYBLE\_BMSC\_CHAR\_T::valueHandle**

Handle of Server database attribute value entry



[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_BMSC\\_CHAR\\_T::descrHandle](#) [\[CYBLE\\_BMS\\_DESCR\\_COUNT\]](#)

Characteristics descriptors handles

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_BMSC\\_CHAR\\_T::endHandle](#)

Characteristic End Handle

## CYBLE\_BMSC\_T Struct Reference

### Description

Service structure type

### Data Fields

- [CYBLE\\_BMSC\\_CHAR\\_T](#) [charInfo](#) [\[CYBLE\\_BMS\\_CHAR\\_COUNT\]](#)

### Field Documentation

[CYBLE\\_BMSC\\_CHAR\\_T](#) [CYBLE\\_BMSC\\_T::charInfo](#) [\[CYBLE\\_BMS\\_CHAR\\_COUNT\]](#)

Characteristics handle + properties array

## CYBLE\_BMSS\_CHAR\_T Struct Reference

### Description

Characteristic with descriptors type

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [charHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [descrHandle](#) [\[CYBLE\\_BMS\\_DESCR\\_COUNT\]](#)

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_BMSS\\_CHAR\\_T::charHandle](#)

Handle of Characteristic value

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_BMSS\\_CHAR\\_T::descrHandle](#) [\[CYBLE\\_BMS\\_DESCR\\_COUNT\]](#)

Handles of Descriptors

## CYBLE\_BMSS\_T Struct Reference

### Description

Structure with Service attribute handles

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [serviceHandle](#)
- [CYBLE\\_BMSS\\_CHAR\\_T](#) [charInfo](#) [\[CYBLE\\_BMS\\_CHAR\\_COUNT\]](#)



## Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_BMSS\\_T::serviceHandle](#)

Service handle

[CYBLE\\_BMSS\\_CHAR\\_T](#) [CYBLE\\_BMSS\\_T::charInfo](#) [[CYBLE\\_BMS\\_CHAR\\_COUNT](#)]

Service characteristics info array

## CYBLE\_BTSS\_INFO\_T Struct Reference

### Description

Contains information about Bootloader Characteristic structure

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [btServiceCharHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [btServiceCharDescriptors](#) [[CYBLE\\_BT\\_SERVICE\\_CHAR\\_DESCRIPTOR\\_COUNT](#)]

## Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_BTSS\\_INFO\\_T::btServiceCharHandle](#)

Bootloader Characteristic handle

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_BTSS\\_INFO\\_T::btServiceCharDescriptors](#) [[CYBLE\\_BT\\_SERVICE\\_CHAR\\_DESCRIPTOR\\_COUNT](#)]

Bootloader Characteristic Descriptors handles

## CYBLE\_BTSS\_T Struct Reference

### Description

Structure with Bootloader Service attribute handles.

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [btServiceHandle](#)
- [CYBLE\\_BTSS\\_INFO\\_T](#) [btServiceInfo](#) [[CYBLE\\_BT\\_SERVICE\\_CHAR\\_COUNT](#)]

## Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_BTSS\\_T::btServiceHandle](#)

Handle of a Bootloader Service

[CYBLE\\_BTSS\\_INFO\\_T](#) [CYBLE\\_BTSS\\_T::btServiceInfo](#) [[CYBLE\\_BT\\_SERVICE\\_CHAR\\_COUNT](#)]

Information about Bootloader Characteristics

## CYBLE\_CGMS\_CHAR\_VALUE\_T Struct Reference

### Description

CGM Service Characteristic value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_CGMS\\_CHAR\\_INDEX\\_T charIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\* value](#)
- [CYBLE\\_GATT\\_ERR\\_CODE\\_T gattErrorCode](#)

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_CGMS\_CHAR\_VALUE\_T::connHandle

Peer device handle

[CYBLE\\_CGMS\\_CHAR\\_INDEX\\_T](#) CYBLE\_CGMS\_CHAR\_VALUE\_T::charIndex

Index of service characteristic

[CYBLE\\_GATT\\_VALUE\\_T\\*](#) CYBLE\_CGMS\_CHAR\_VALUE\_T::value

Characteristic value

[CYBLE\\_GATT\\_ERR\\_CODE\\_T](#) CYBLE\_CGMS\_CHAR\_VALUE\_T::gattErrorCode

GATT error code for access control

## CYBLE\_CGMS\_DESCR\_VALUE\_T Struct Reference

### Description

CGM Service Characteristic descriptor value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_CGMS\\_CHAR\\_INDEX\\_T charIndex](#)
- [CYBLE\\_CGMS\\_DESCR\\_INDEX\\_T descrIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\* value](#)

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_CGMS\_DESCR\_VALUE\_T::connHandle

Peer device handle

[CYBLE\\_CGMS\\_CHAR\\_INDEX\\_T](#) CYBLE\_CGMS\_DESCR\_VALUE\_T::charIndex

Index of service characteristic

[CYBLE\\_CGMS\\_DESCR\\_INDEX\\_T](#) CYBLE\_CGMS\_DESCR\_VALUE\_T::descrIndex

Index of service characteristic descriptor





[CYBLE\\_GATT\\_VALUE\\_T](#)\* CYBLE\_CGMS\_DESCR\_VALUE\_T::value

Descriptor value

## CYBLE\_CGMSC\_CHAR\_T Struct Reference

### Description

CGM Client Characteristic structure type

### Data Fields

- uint8 [properties](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) valueHandle
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) descrHandle[CYBLE\_CGMS\_DESCR\_COUNT]
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) endHandle

### Field Documentation

uint8 CYBLE\_CGMSC\_CHAR\_T::properties

Properties for value field

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_CGMSC\_CHAR\_T::valueHandle

Handle of Server database attribute value entry

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_CGMSC\_CHAR\_T::descrHandle[CYBLE\_CGMS\_DESCR\_COUNT]

Characteristics descriptors handles

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_CGMSC\_CHAR\_T::endHandle

Characteristic End Handle

## CYBLE\_CGMSC\_T Struct Reference

### Description

CGM Service structure type

### Data Fields

- [CYBLE\\_CGMSC\\_CHAR\\_T](#) charInfo[CYBLE\_CGMS\_CHAR\_COUNT]

### Field Documentation

[CYBLE\\_CGMSC\\_CHAR\\_T](#) CYBLE\_CGMSC\_T::charInfo[CYBLE\_CGMS\_CHAR\_COUNT]

Characteristics handle + properties array

## CYBLE\_CGMSS\_CHAR\_T Struct Reference

### Description

Characteristic with descriptors type



**Data Fields**

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [charHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [descrHandle](#)[[CYBLE\\_CGMS\\_DESCR\\_COUNT](#)]

**Field Documentation**

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_CGMSS\\_CHAR\\_T::charHandle](#)

Handle of Characteristic value

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_CGMSS\\_CHAR\\_T::descrHandle](#)[[CYBLE\\_CGMS\\_DESCR\\_COUNT](#)]

Handles of Descriptors

**CYBLE\_CGMSS\_T Struct Reference****Description**

Structure with CGM Service attribute handles

**Data Fields**

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [serviceHandle](#)
- [CYBLE\\_CGMSS\\_CHAR\\_T](#) [charInfo](#)[[CYBLE\\_CGMS\\_CHAR\\_COUNT](#)]

**Field Documentation**

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_CGMSS\\_T::serviceHandle](#)

CGM Service handle

[CYBLE\\_CGMSS\\_CHAR\\_T](#) [CYBLE\\_CGMSS\\_T::charInfo](#)[[CYBLE\\_CGMS\\_CHAR\\_COUNT](#)]

CGM Service characteristics info array

**CYBLE\_CONN\_HANDLE\_T Struct Reference****Description**

Connection Handle

**Data Fields**

- uint8 [bdHandle](#)
- uint8 [attId](#)

**Field Documentation**

uint8 [CYBLE\\_CONN\\_HANDLE\\_T::bdHandle](#)

Identifies the peer device(s) bonded or in current connection. Stack supports [CYBLE\\_GAP\\_MAX\\_BONDED\\_DEVICE](#)+1 devices. first device connected is assigned value [CYBLE\\_GAP\\_MAX\\_BONDED\\_DEVICE](#). If previous device is bonded then current device will be assigned value [CYBLE\\_GAP\\_MAX\\_BONDED\\_DEVICE](#)-1, else [CYBLE\\_GAP\\_MAX\\_BONDED\\_DEVICE](#).



**uint8 CYBLE\_CONN\_HANDLE\_T::attId**

Identifies the ATT Instance. Current implementation supports only one att instance (0) due to availability of only on fixed channel for att. This parameter is introduced as part of connection handle to keep the interface unchanged event if new Bluetooth spect defines more fixed channels for ATT payload.

**CYBLE\_CPS\_CHAR\_VALUE\_T Struct Reference****Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_CPS\\_CHAR\\_INDEX\\_T charIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\* value](#)

**Field Documentation**

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_CPS\_CHAR\_VALUE\_T::connHandle

Peer device handle

[CYBLE\\_CPS\\_CHAR\\_INDEX\\_T](#) CYBLE\_CPS\_CHAR\_VALUE\_T::charIndex

Index of service characteristic

[CYBLE\\_GATT\\_VALUE\\_T\\*](#) CYBLE\_CPS\_CHAR\_VALUE\_T::value

Characteristic value

**CYBLE\_CPS\_DESCR\_VALUE\_T Struct Reference****Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_CPS\\_CHAR\\_INDEX\\_T charIndex](#)
- [CYBLE\\_CPS\\_DESCR\\_INDEX\\_T descrIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\* value](#)

**Field Documentation**

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_CPS\_DESCR\_VALUE\_T::connHandle

Peer device handle

[CYBLE\\_CPS\\_CHAR\\_INDEX\\_T](#) CYBLE\_CPS\_DESCR\_VALUE\_T::charIndex

Index of service characteristic

[CYBLE\\_CPS\\_DESCR\\_INDEX\\_T](#) CYBLE\_CPS\_DESCR\_VALUE\_T::descrIndex

Index of descriptor

[CYBLE\\_GATT\\_VALUE\\_T\\*](#) CYBLE\_CPS\_DESCR\_VALUE\_T::value

Characteristic value



## CYBLE\_CPSC\_CHAR\_T Struct Reference

### Description

Characteristic with descriptors

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T descrHandle](#)[[CYBLE\\_CPS\\_DESCR\\_COUNT](#)]
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T valueHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T endHandle](#)
- uint8 [properties](#)

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_CPSC\\_CHAR\\_T::descrHandle](#)[[CYBLE\\_CPS\\_DESCR\\_COUNT](#)]

Handles of descriptors

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_CPSC\\_CHAR\\_T::valueHandle](#)

Handle of characteristic value

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_CPSC\\_CHAR\\_T::endHandle](#)

End handle of characteristic

uint8 [CYBLE\\_CPSC\\_CHAR\\_T::properties](#)

Properties for value field

## CYBLE\_CPSC\_T Struct Reference

### Description

Structure with discovered attributes information of Cycling Power Service

### Data Fields

- [CYBLE\\_CPSC\\_CHAR\\_T charInfo](#)[[CYBLE\\_CPS\\_CHAR\\_COUNT](#)]

### Field Documentation

[CYBLE\\_CPSC\\_CHAR\\_T](#) [CYBLE\\_CPSC\\_T::charInfo](#)[[CYBLE\\_CPS\\_CHAR\\_COUNT](#)]

Characteristics handles array

## CYBLE\_CPSS\_CHAR\_T Struct Reference

### Description

Characteristic with descriptors

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T charHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T descrHandle](#)[[CYBLE\\_CPS\\_DESCR\\_COUNT](#)]



## Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_CPSS\\_CHAR\\_T::charHandle](#)

Handle of characteristic value

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_CPSS\\_CHAR\\_T::descrHandle](#) [\[CYBLE\\_CPS\\_DESCR\\_COUNT\]](#)

Handle of descriptor

## CYBLE\_CPSS\_T Struct Reference

### Description

Structure with Cycling Power Service attribute handles

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [serviceHandle](#)
- [CYBLE\\_CPSS\\_CHAR\\_T](#) [charInfo](#) [\[CYBLE\\_CPS\\_CHAR\\_COUNT\]](#)

## Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_CPSS\\_T::serviceHandle](#)

Cycling Power Service handle

[CYBLE\\_CPSS\\_CHAR\\_T](#) [CYBLE\\_CPSS\\_T::charInfo](#) [\[CYBLE\\_CPS\\_CHAR\\_COUNT\]](#)

Cycling Power Service Characteristic handles

## CYBLE\_CSCS\_CHAR\_VALUE\_T Struct Reference

### Description

Cycling Speed and Cadence Service Characteristic Value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T](#) [connHandle](#)
- [CYBLE\\_CSCS\\_CHAR\\_INDEX\\_T](#) [charIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T](#)\* [value](#)

## Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) [CYBLE\\_CSCS\\_CHAR\\_VALUE\\_T::connHandle](#)

Peer device handle

[CYBLE\\_CSCS\\_CHAR\\_INDEX\\_T](#) [CYBLE\\_CSCS\\_CHAR\\_VALUE\\_T::charIndex](#)

Index of Cycling Speed and Cadence Service Characteristic

[CYBLE\\_GATT\\_VALUE\\_T](#)\* [CYBLE\\_CSCS\\_CHAR\\_VALUE\\_T::value](#)

Characteristic value



## CYBLE\_CSCS\_DESCR\_VALUE\_T Struct Reference

### Description

Cycling Speed and Cadence Service Characteristic Descriptor Value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_CSCS\\_CHAR\\_INDEX\\_T charIndex](#)
- [CYBLE\\_CSCS\\_DESCR\\_INDEX\\_T descrIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\* value](#)

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_CSCS\_DESCR\_VALUE\_T::connHandle

Connection handle

[CYBLE\\_CSCS\\_CHAR\\_INDEX\\_T](#) CYBLE\_CSCS\_DESCR\_VALUE\_T::charIndex

Characteristic index of the Service

[CYBLE\\_CSCS\\_DESCR\\_INDEX\\_T](#) CYBLE\_CSCS\_DESCR\_VALUE\_T::descrIndex

Characteristic Descriptor index

[CYBLE\\_GATT\\_VALUE\\_T\\*](#) CYBLE\_CSCS\_DESCR\_VALUE\_T::value

Pointer to value of the Service Characteristic Descriptor

## CYBLE\_CSCSC\_SRVR\_FULL\_CHAR\_INFO\_T Struct Reference

### Description

Service full Characteristic information type

### Data Fields

- [CYBLE\\_SRVR\\_CHAR\\_INFO\\_T charInfo](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T descriptors](#)[CYBLE\_CSCS\_DESCR\_COUNT]
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T endHandle](#)

### Field Documentation

[CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) CYBLE\_CSCSC\_SRVR\_FULL\_CHAR\_INFO\_T::charInfo

Characteristic handle and properties

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_CSCSC\_SRVR\_FULL\_CHAR\_INFO\_T::descriptors[[CYBLE\\_CS\\_DESCR\\_COUNT](#)]

Characteristic descriptors handles

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_CSCSC\_SRVR\_FULL\_CHAR\_INFO\_T::endHandle

End handle of Characteristic



## CYBLE\_CSCSC\_T Struct Reference

### Description

Structure with discovered attributes information of Cycling Speed and Cadence Service

### Data Fields

- [CYBLE\\_CSCSC\\_SRVR\\_FULL\\_CHAR\\_INFO\\_T characteristics](#)[[CYBLE\\_CSCS\\_CHAR\\_COUNT](#)]

### Field Documentation

[CYBLE\\_CSCSC\\_SRVR\\_FULL\\_CHAR\\_INFO\\_T](#) [CYBLE\\_CSCSC\\_T::characteristics](#)[[CYBLE\\_CSCS\\_CHAR\\_COUNT](#)]

Characteristics handles array

## CYBLE\_CSCSS\_CHAR\_T Struct Reference

### Description

Characteristic with descriptors type

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T charHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T descrHandle](#)[[CYBLE\\_CSCS\\_DESCR\\_COUNT](#)]

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_CSCSS\\_CHAR\\_T::charHandle](#)

Handle of the Characteristic value

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_CSCSS\\_CHAR\\_T::descrHandle](#)[[CYBLE\\_CSCS\\_DESCR\\_COUNT](#)]

Handles of the Descriptors

## CYBLE\_CSCSS\_T Struct Reference

### Description

Structure with Cycling Speed and Cadence Service attribute handles

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T serviceHandle](#)
- [CYBLE\\_CSCSS\\_CHAR\\_T charInfo](#)[[CYBLE\\_CSCS\\_CHAR\\_COUNT](#)]

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_CSCSS\\_T::serviceHandle](#)

Cycling Speed and Cadence Service handle





**CYBLE\_CSCSS\_CHAR\_T**[CYBLE\\_CSCSS\\_T::charInfo](#)**[CYBLE\_CSCS\_CHAR\_COUNT]**

Array of Cycling Speed and Cadence Service Characteristics and Descriptors handles

**CYBLE\_CTS\_CHAR\_VALUE\_T Struct Reference****Description**

Current Time Service Characteristic Value parameter structure

**Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T](#) `connHandle`
- [CYBLE\\_CTS\\_CHAR\\_INDEX\\_T](#) `charIndex`
- [CYBLE\\_GATT\\_ERR\\_CODE\\_T](#) `gattErrorCode`
- [CYBLE\\_GATT\\_VALUE\\_T\\*](#) `value`

**Field Documentation****CYBLE\_CONN\_HANDLE\_T**[CYBLE\\_CTS\\_CHAR\\_VALUE\\_T::connHandle](#)

Connection handle

**CYBLE\_CTS\_CHAR\_INDEX\_T**[CYBLE\\_CTS\\_CHAR\\_VALUE\\_T::charIndex](#)

Characteristic index of Current Time Service

**CYBLE\_GATT\_ERR\_CODE\_T**[CYBLE\\_CTS\\_CHAR\\_VALUE\\_T::gattErrorCode](#)

GATT error code for access control

**CYBLE\_GATT\_VALUE\_T\***[CYBLE\\_CTS\\_CHAR\\_VALUE\\_T::value](#)

Pointer to value of Current Time Service characteristic

**CYBLE\_CTS\_CURRENT\_TIME\_T Struct Reference****Description**

Current Time Characteristic structure

**Data Fields**

- uint8 [yearLow](#)
- uint8 [yearHigh](#)
- uint8 [month](#)
- uint8 [day](#)
- uint8 [hours](#)
- uint8 [minutes](#)
- uint8 [seconds](#)
- uint8 [dayOfWeek](#)
- uint8 [fractions256](#)
- uint8 [adjustReason](#)



## Field Documentation

**uint8 CYBLE\_CTS\_CURRENT\_TIME\_T::yearLow**

LSB of current year

**uint8 CYBLE\_CTS\_CURRENT\_TIME\_T::yearHigh**

MSB of current year

**uint8 CYBLE\_CTS\_CURRENT\_TIME\_T::month**

Current month

**uint8 CYBLE\_CTS\_CURRENT\_TIME\_T::day**

Current day

**uint8 CYBLE\_CTS\_CURRENT\_TIME\_T::hours**

Current time - hours

**uint8 CYBLE\_CTS\_CURRENT\_TIME\_T::minutes**

Current time - minutes

**uint8 CYBLE\_CTS\_CURRENT\_TIME\_T::seconds**

Current time - seconds

**uint8 CYBLE\_CTS\_CURRENT\_TIME\_T::dayOfWeek**

Current day of week

**uint8 CYBLE\_CTS\_CURRENT\_TIME\_T::fractions256**

The value of 1/256th of second

**uint8 CYBLE\_CTS\_CURRENT\_TIME\_T::adjustReason**

Reason of Current Time service characteristics change

## CYBLE\_CTS\_DESCR\_VALUE\_T Struct Reference

### Description

Current Time Service Characteristic Descriptor Value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_CTS\\_CHAR\\_INDEX\\_T charIndex](#)
- [CYBLE\\_CTS\\_CHAR\\_DESCRIPTOR\\_T descrIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\* value](#)

## Field Documentation

**[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_CTS\_DESCR\_VALUE\_T::connHandle**

Connection handle

**CYBLE\_CTS\_CHAR\_INDEX\_T** CYBLE\_CTS\_DESCR\_VALUE\_T::charIndex

Characteristic index of Current Time Service

**CYBLE\_CTS\_CHAR\_DESCRIPTOR\_T** CYBLE\_CTS\_DESCR\_VALUE\_T::descrIndex

Characteristic index Descriptor of Current Time Service

**CYBLE\_GATT\_VALUE\_T**\* CYBLE\_CTS\_DESCR\_VALUE\_T::value

Pointer to value of Current Time Service characteristic

**CYBLE\_CTS\_LOCAL\_TIME\_INFO\_T Struct Reference****Description**

Local Time Information Characteristic structure

**Data Fields**

- int8 [timeZone](#)
- uint8 [dst](#)

**Field Documentation**

int8 CYBLE\_CTS\_LOCAL\_TIME\_INFO\_T::timeZone

Current Time Zone

uint8 CYBLE\_CTS\_LOCAL\_TIME\_INFO\_T::dst

Daylight Saving Time value

**CYBLE\_CTS\_REFERENCE\_TIME\_INFO\_T Struct Reference****Description**

Reference Time Information Characteristic structure

**Data Fields**

- uint8 [timeSource](#)
- uint8 [timeAccuracy](#)
- uint8 [daysSinceUpdate](#)
- uint8 [hoursSinseUpdate](#)

**Field Documentation**

uint8 CYBLE\_CTS\_REFERENCE\_TIME\_INFO\_T::timeSource

Time update source

uint8 CYBLE\_CTS\_REFERENCE\_TIME\_INFO\_T::timeAccuracy

Time accuracy

uint8 CYBLE\_CTS\_REFERENCE\_TIME\_INFO\_T::daysSinceUpdate

Days since last time update



**uint8 CYBLE\_CTS\_REFERENCE\_TIME\_INFO\_T::hoursSinseUpdate**

Hours since last time update

## CYBLE\_CTSC\_T Struct Reference

### Description

Structure with discovered attributes information of Current Time Service

### Data Fields

- [CYBLE\\_SRVR\\_CHAR\\_INFO\\_T currTimeCharacteristics](#)[\[CYBLE\\_CTS\\_CHAR\\_COUNT\]](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T currTimeCccdHandle](#)

### Field Documentation

[CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#)[CYBLE\\_CTSC\\_T::currTimeCharacteristics](#)[\[CYBLE\\_CTS\\_CHAR\\_COUNT\]](#)

Structure with Characteristic handles + properties of Current Time Service

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#)[CYBLE\\_CTSC\\_T::currTimeCccdHandle](#)

Current Time Client Characteristic Configuration handle of Current Time Service

## CYBLE\_CTSS\_T Struct Reference

### Description

Structure with Current Time Service attribute handles

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T serviceHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T currTimeCharHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T currTimeCccdHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T localTimeInfCharHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T refTimeInfCharHandle](#)

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#)[CYBLE\\_CTSS\\_T::serviceHandle](#)

Current Time Service handle

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#)[CYBLE\\_CTSS\\_T::currTimeCharHandle](#)

Current Time Characteristic handle

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#)[CYBLE\\_CTSS\\_T::currTimeCccdHandle](#)

Current Time Client Characteristic Configuration Characteristic handle

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#)[CYBLE\\_CTSS\\_T::localTimeInfCharHandle](#)

Local Time Information Characteristic handle



**CYBLE\_GATT\_DB\_ATTR\_HANDLE\_T** **CYBLE\_CTSS\_T::refTimeInfCharHandle**

Reference Time Information Characteristic handle

**CYBLE\_CUSTOMS\_INFO\_T Struct Reference****Description**

Contains information about Custom Characteristic structure

**Data Fields**

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [customServCharHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [customServCharDesc](#)[CYBLE\_CUSTOM\_SERVICE\_CHAR\_DESCRIPTOR\_COUNT==0u?1u:CYBLE\_CUSTOM\_SERVICE\_CHAR\_DESCRIPTOR\_COUNT]

**Field Documentation****CYBLE\_GATT\_DB\_ATTR\_HANDLE\_T** **CYBLE\_CUSTOMS\_INFO\_T::customServCharHandle**

Custom Characteristic handle

**CYBLE\_GATT\_DB\_ATTR\_HANDLE\_T** **CYBLE\_CUSTOMS\_INFO\_T::customServCharDesc**[CYBLE\_CUSTOM\_SERVICE\_CHAR\_DESCRIPTOR\_COUNT==0u?1u:CYBLE\_CUSTOM\_SERVICE\_CHAR\_DESCRIPTOR\_COUNT]

Custom Characteristic Descriptors handles

**CYBLE\_CUSTOMS\_T Struct Reference****Description**

Structure with Custom Service attribute handles.

**Data Fields**

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [customServHandle](#)
- [CYBLE\\_CUSTOMS\\_INFO\\_T](#) [customServInfo](#)[CYBLE\_CUSTOM\_SERVICE\_CHAR\_COUNT==0u?1u:CYBLE\_CUSTOM\_SERVICE\_CHAR\_COUNT]

**Field Documentation****CYBLE\_GATT\_DB\_ATTR\_HANDLE\_T** **CYBLE\_CUSTOMS\_T::customServHandle**

Handle of a Custom Service

**CYBLE\_CUSTOMS\_INFO\_T** **CYBLE\_CUSTOMS\_T::customServInfo**[CYBLE\_CUSTOM\_SERVICE\_CHAR\_COUNT==0u?1u:CYBLE\_CUSTOM\_SERVICE\_CHAR\_COUNT]

Information about Custom Characteristics

**CYBLE\_CYPACKED\_ATTR Struct Reference****Data Fields**

- uint16 year



- uint8 **month**
- uint8 **day**
- uint8 **hours**
- uint8 **minutes**
- uint8 **seconds**
- uint16 [crankLength](#)
- uint16 [chainLength](#)
- uint16 [chainWeight](#)
- uint16 [spanLength](#)
- CYBLE\_CPS\_DATE\_TIME\_T [factoryCalibrationDate](#)
- uint8 [samplingRate](#)
- int16 [offsetCompensation](#)

## Field Documentation

### uint16 CYBLE\_CYPACKED\_ATTR::crankLength

In millimeters with a resolution of 1/2 millimeter

### uint16 CYBLE\_CYPACKED\_ATTR::chainLength

In millimeters with a resolution of 1 millimeter

### uint16 CYBLE\_CYPACKED\_ATTR::chainWeight

In grams with a resolution of 1 gram

### uint16 CYBLE\_CYPACKED\_ATTR::spanLength

In millimeters with a resolution of 1 millimeter

### CYBLE\_CPS\_DATE\_TIME\_T CYBLE\_CYPACKED\_ATTR::factoryCalibrationDate

Use the same format as the Date Time characteristic

### uint8 CYBLE\_CYPACKED\_ATTR::samplingRate

In Hertz with a resolution of 1 Hertz

### int16 CYBLE\_CYPACKED\_ATTR::offsetCompensation

Either the raw force in Newton or the raw torque in 1/32 Newton meter based on the server capabilities. 0xFFFF means "Not Available"

## CYBLE\_DIS\_CHAR\_VALUE\_T Struct Reference

### Description

Device Information Service Characteristic Value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_DIS\\_CHAR\\_INDEX\\_T charIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\* value](#)



## Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_DIS\_CHAR\_VALUE\_T::connHandle

Peer device handle

[CYBLE\\_DIS\\_CHAR\\_INDEX\\_T](#) CYBLE\_DIS\_CHAR\_VALUE\_T::charIndex

Index of service characteristic

[CYBLE\\_GATT\\_VALUE\\_T](#)\* CYBLE\_DIS\_CHAR\_VALUE\_T::value

Characteristic value

## CYBLE\_DISC\_CHAR\_INFO\_T Struct Reference

### Description

Characteristic data received with read by type response during discovery process

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) charDeclHandle
- uint8 [properties](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) valueHandle
- [CYBLE\\_UUID\\_T](#) uuid
- uint8 [uuidFormat](#)

## Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_DISC\_CHAR\_INFO\_T::charDeclHandle

Handle for characteristic declaration

uint8 CYBLE\_DISC\_CHAR\_INFO\_T::properties

Properties for value field

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_DISC\_CHAR\_INFO\_T::valueHandle

Handle to server database attribute value entry

[CYBLE\\_UUID\\_T](#) CYBLE\_DISC\_CHAR\_INFO\_T::uuid

Characteristic UUID

uint8 CYBLE\_DISC\_CHAR\_INFO\_T::uuidFormat

UUID Format - 16-bit (0x01) or 128-bit (0x02)

## CYBLE\_DISC\_DESCR\_INFO\_T Struct Reference

### Description

Characteristic descriptor data received with find info response during discovery process

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle





- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T descrHandle](#)
- [CYBLE\\_UUID\\_T uuid](#)
- uint8 [uuidFormat](#)

## Field Documentation

### [CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_DISC\_DESCR\_INFO\_T::connHandle

Handle to server database attribute entry

### [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_DISC\_DESCR\_INFO\_T::descrHandle

Descriptor handle

### [CYBLE\\_UUID\\_T](#) CYBLE\_DISC\_DESCR\_INFO\_T::uuid

Descriptor UUID

### uint8 CYBLE\_DISC\_DESCR\_INFO\_T::uuidFormat

UUID Format - 16-bit (0x01) or 128-bit (0x02)

## CYBLE\_DISC\_INCL\_INFO\_T Struct Reference

### Description

Included service data received with read by type response during discovery process

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) inclDefHandle
- [CYBLE\\_GATT\\_ATTR\\_HANDLE\\_RANGE\\_T](#) inclHandleRange
- [CYBLE\\_UUID\\_T](#) uuid
- uint8 [uuidFormat](#)

## Field Documentation

### [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_DISC\_INCL\_INFO\_T::inclDefHandle

Included definition handle

### [CYBLE\\_GATT\\_ATTR\\_HANDLE\\_RANGE\\_T](#) CYBLE\_DISC\_INCL\_INFO\_T::inclHandleRange

Included declaration handle range

### [CYBLE\\_UUID\\_T](#) CYBLE\_DISC\_INCL\_INFO\_T::uuid

Included UUID

### uint8 CYBLE\_DISC\_INCL\_INFO\_T::uuidFormat

UUID Format - 16-bit (0x01) or 128-bit (0x02)

## CYBLE\_DISC\_SRVC128\_INFO\_T Struct Reference

### Description

Service data received with read by group type response during discovery process including 128 bit UUID



**Data Fields**

- [CYBLE\\_GATT\\_ATTR\\_HANDLE\\_RANGE\\_T](#)range
- [CYBLE\\_UUID\\_T](#)uuid

**CYBLE\_DISC\_SRVC\_INFO\_T Struct Reference****Description**

Service data received with read by group type response during discovery process

**Data Fields**

- [CYBLE\\_GATT\\_ATTR\\_HANDLE\\_RANGE\\_T](#)range
- uint16 uuid

**CYBLE\_DISC\_T Struct Reference****Description**

Structure with discovered attributes information of Device Information Service

**Data Fields**

- [CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) charInfo[CYBLE\_DIS\_CHAR\_COUNT]

**Field Documentation**

[CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) CYBLE\_DISC\_T::charInfo[CYBLE\_DIS\_CHAR\_COUNT]

Characteristics handle + properties array

**CYBLE\_DISS\_T Struct Reference****Description**

Structure with Device Information Service attribute handles

**Data Fields**

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) serviceHandle
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) charHandle[CYBLE\_DIS\_CHAR\_COUNT]

**Field Documentation**

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_DISS\_T::serviceHandle

Device Information Service handle

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_DISS\_T::charHandle[CYBLE\_DIS\_CHAR\_COUNT]

Device Information Service Characteristic handles



## CYBLE\_ESS\_CHAR\_VALUE\_T Struct Reference

### Description

ESS Characteristic value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_ESS\\_CHAR\\_INDEX\\_T charIndex](#)
- uint8 [charInstance](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\*](#) [value](#)

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) [CYBLE\\_ESS\\_CHAR\\_VALUE\\_T::connHandle](#)

Peer device handle

[CYBLE\\_ESS\\_CHAR\\_INDEX\\_T](#) [CYBLE\\_ESS\\_CHAR\\_VALUE\\_T::charIndex](#)

Index of service characteristic

uint8 [CYBLE\\_ESS\\_CHAR\\_VALUE\\_T::charInstance](#)

Instance of specific service characteristic

[CYBLE\\_GATT\\_VALUE\\_T\\*](#) [CYBLE\\_ESS\\_CHAR\\_VALUE\\_T::value](#)

Characteristic value

## CYBLE\_ESS\_DESCR\_VALUE\_T Struct Reference

### Description

ESS Characteristic descriptor value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_ESS\\_CHAR\\_INDEX\\_T charIndex](#)
- uint8 [charInstance](#)
- [CYBLE\\_ESS\\_DESCR\\_INDEX\\_T descrIndex](#)
- [CYBLE\\_GATT\\_ERR\\_CODE\\_T gattErrorCode](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\*](#) [value](#)

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) [CYBLE\\_ESS\\_DESCR\\_VALUE\\_T::connHandle](#)

Peer device handle

[CYBLE\\_ESS\\_CHAR\\_INDEX\\_T](#) [CYBLE\\_ESS\\_DESCR\\_VALUE\\_T::charIndex](#)

Index of service characteristic



**uint8 CYBLE\_ESS\_DESCR\_VALUE\_T::charInstance**

Instance of specific service characteristic

**[CYBLE\\_ESS\\_DESCR\\_INDEX\\_T](#) CYBLE\_ESS\_DESCR\_VALUE\_T::descrIndex**

Index of descriptor

**[CYBLE\\_GATT\\_ERR\\_CODE\\_T](#) CYBLE\_ESS\_DESCR\_VALUE\_T::gattErrorCode**

Error code received from application (optional)

**[CYBLE\\_GATT\\_VALUE\\_T](#)\* CYBLE\_ESS\_DESCR\_VALUE\_T::value**

Characteristic value

## CYBLE\_ESSC\_CHAR\_INFO\_PTR\_T Struct Reference

### Description

Structure to hold pointer to [CYBLE\\_ESSC\\_CHAR\\_T](#)

### Data Fields

- [CYBLE\\_ESSC\\_CHAR\\_T\\*](#) [charInfoPtr](#)

### Field Documentation

**[CYBLE\\_ESSC\\_CHAR\\_T\\*](#) CYBLE\_ESSC\_CHAR\_INFO\_PTR\_T::charInfoPtr**

Pointer to [CYBLE\\_ESSC\\_CHAR\\_T](#) which holds information about specific ES Characteristic.

## CYBLE\_ESSC\_CHAR\_T Struct Reference

### Description

ESS Characteristic with descriptors

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [valueHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [endHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [descrHandle](#)[[CYBLE\\_ESS\\_DESCR\\_COUNT](#)]
- uint8 [properties](#)

### Field Documentation

**[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_ESSC\_CHAR\_T::valueHandle**

Handle of characteristic value

**[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_ESSC\_CHAR\_T::endHandle**

End handle of characteristic

**[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_ESSC\_CHAR\_T::descrHandle[[CYBLE\\_ESS\\_DESCR\\_COUNT](#)]**

Array of Descriptor handles



**uint8 CYBLE\_ESSC\_CHAR\_T::properties**

Properties for value field

**CYBLE\_ESSC\_T Struct Reference****Description**

Structure with discovered attributes information of Environmental Sensing Service.

**Data Fields**

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T serviceHandle](#)
- [CYBLE\\_ESSC\\_CHAR\\_INFO\\_PTR\\_T charInfoAddr\[CYBLE\\_ESS\\_CHAR\\_COUNT\]](#)

**Field Documentation****[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_ESSC\_T::serviceHandle**

Environmental Sensing Service handle

**[CYBLE\\_ESSC\\_CHAR\\_INFO\\_PTR\\_T](#) CYBLE\_ESSC\_T::charInfoAddr[[CYBLE\\_ESS\\_CHAR\\_COUNT](#)]**

Environmental Sensing Service Array with pointers to characteristic information.

**CYBLE\_ESSS\_CHAR\_INFO\_PTR\_T Struct Reference****Description**Structure to hold pointer to [CYBLE\\_ESSS\\_CHAR\\_T](#)**Data Fields**

- [CYBLE\\_ESSS\\_CHAR\\_T\\* charInfoPtr](#)

**Field Documentation****[CYBLE\\_ESSS\\_CHAR\\_T\\*](#) CYBLE\_ESSS\_CHAR\_INFO\_PTR\_T::charInfoPtr**Pointer to [CYBLE\\_ESSS\\_CHAR\\_T](#) which holds information about specific ES Characteristic**CYBLE\_ESSS\_CHAR\_T Struct Reference****Description**

ESS Characteristic with descriptors

**Data Fields**

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T charHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T descrHandle\[CYBLE\\_ESS\\_DESCR\\_COUNT\]](#)

**Field Documentation****[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_ESSS\_CHAR\_T::charHandle**

Handles of Characteristic value



[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_ESSS\\_CHAR\\_T::descrHandle](#) [\[CYBLE\\_ESS\\_DESCR\\_COUNT\]](#)

Array of Descriptor handles

## CYBLE\_ESSS\_T Struct Reference

### Description

Structure with Environmental Sensing Service attribute handles

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [serviceHandle](#)
- [CYBLE\\_ESSS\\_CHAR\\_INFO\\_PTR\\_T](#) [charInfoAddr](#) [\[CYBLE\\_ESS\\_CHAR\\_COUNT\]](#)

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_ESSS\\_T::serviceHandle](#)

Environmental Sensing Service handle

[CYBLE\\_ESSS\\_CHAR\\_INFO\\_PTR\\_T](#) [CYBLE\\_ESSS\\_T::charInfoAddr](#) [\[CYBLE\\_ESS\\_CHAR\\_COUNT\]](#)

Environmental Sensing Service Array with pointers to Characteristic handles.

## CYBLE\_GAP\_AUTH\_INFO\_T Struct Reference

### Description

Authentication Parameters Information

### Data Fields

- uint8 [security](#)
- uint8 [bonding](#)
- uint8 [ekeySize](#)
- [CYBLE\\_GAP\\_AUTH\\_FAILED\\_REASON\\_T](#) [authErr](#)

### Field Documentation

uint8 [CYBLE\\_GAP\\_AUTH\\_INFO\\_T::security](#)

Security Mode setting will be as follows: (CYBLE\_GAP\_SEC\_MODE\_1 | CYBLE\_GAP\_SEC\_LEVEL\_1)  
(CYBLE\_GAP\_SEC\_MODE\_1 | CYBLE\_GAP\_SEC\_LEVEL\_2) (CYBLE\_GAP\_SEC\_MODE\_1 |  
CYBLE\_GAP\_SEC\_LEVEL\_3) (CYBLE\_GAP\_SEC\_MODE\_2 | CYBLE\_GAP\_SEC\_LEVEL\_2)  
(CYBLE\_GAP\_SEC\_MODE\_2 | CYBLE\_GAP\_SEC\_LEVEL\_3)

uint8 [CYBLE\\_GAP\\_AUTH\\_INFO\\_T::bonding](#)

Bonding type setting: CYBLE\_GAP\_BONDING\_NONE CYBLE\_GAP\_BONDING

uint8 [CYBLE\\_GAP\\_AUTH\\_INFO\\_T::ekeySize](#)

Encryption Key Size (octets) Minimum = 7 maximum = 16



**CYBLE\_GAP\_AUTH\_FAILED\_REASON\_T** **CYBLE\_GAP\_AUTH\_INFO\_T::authErr**

Parameter to say if authentication is accepted or rejected with reason. accepted = CYBLE\_GAP\_AUTH\_ERROR\_NONE or error code CYBLE\_GAP\_AUTH\_FAILED\_REASON\_T.

**CYBLE\_GAP\_BD\_ADDR\_T Struct Reference****Description**

Bluetooth Device Address

**Data Fields**

- uint8 [bdAddr](#)[CYBLE\_GAP\_BD\_ADDR\_SIZE]
- uint8 [type](#)

**Field Documentation**

uint8 CYBLE\_GAP\_BD\_ADDR\_T::bdAddr[CYBLE\_GAP\_BD\_ADDR\_SIZE]

Bluetooth device address

uint8 CYBLE\_GAP\_BD\_ADDR\_T::type

public = 0, Random = 1

**CYBLE\_GAP\_BONDED\_DEV\_ADDR\_LIST\_T Struct Reference****Description**

Bluetooth Bonded Device Address list

**Data Fields**

- uint8 [count](#)
- [CYBLE\\_GAP\\_BD\\_ADDR\\_T](#) [bdAddrList](#)[CYBLE\_GAP\_MAX\_BONDED\_DEVICE]

**Field Documentation**

uint8 CYBLE\_GAP\_BONDED\_DEV\_ADDR\_LIST\_T::count

Number of bonded devices

**CYBLE\_GAP\_BD\_ADDR\_T** **CYBLE\_GAP\_BONDED\_DEV\_ADDR\_LIST\_T::bdAddrList**[CYBLE\_GAP\_MAX\_BONDED\_DEVICE]

Pointer to list of bluetooth device addresses of bonded devices, of type '[CYBLE\\_GAP\\_BD\\_ADDR\\_T](#)'. 'CYBLE\_GAP\_MAX\_BONDED\_DEVICE' is a '#define' to be defined during build-time.

**CYBLE\_GAP\_CONN\_PARAM\_UPDATED\_IN\_CONTROLLER\_T Struct Reference****Description**

Current Connection Parameters used by controller





## Data Fields

- uint8 [status](#)
- uint16 [connIntv](#)
- uint16 [connLatency](#)
- uint16 [supervisionTO](#)

## Field Documentation

### uint8 CYBLE\_GAP\_CONN\_PARAM\_UPDATED\_IN\_CONTROLLER\_T::status

status corresponding to this event will be HCI error code as defined in BLE spec 4.1

### uint16 CYBLE\_GAP\_CONN\_PARAM\_UPDATED\_IN\_CONTROLLER\_T::connIntv

Connection interval used on this connection. Range: 0x0006 to 0x0C80 Time Range: 7.5 ms to 4 sec

### uint16 CYBLE\_GAP\_CONN\_PARAM\_UPDATED\_IN\_CONTROLLER\_T::connLatency

Slave latency for the connection in number of connection events. Range: 0x0000 to 0x01F4

### uint16 CYBLE\_GAP\_CONN\_PARAM\_UPDATED\_IN\_CONTROLLER\_T::supervisionTO

Supervision timeout for the LE Link. Supervision timeout will be supervisionTO \* 10 ms Time Range: 100 msec to 32 secs

## CYBLE\_GAP\_CONN\_UPDATE\_PARAM\_T Struct Reference

### Description

GAP Connection Update parameters

### Data Fields

- uint16 [connIntvMin](#)
- uint16 [connIntvMax](#)
- uint16 [connLatency](#)
- uint16 [supervisionTO](#)

## Field Documentation

### uint16 CYBLE\_GAP\_CONN\_UPDATE\_PARAM\_T::connIntvMin

Minimum value for the connection event interval. This shall be less than or equal to conn\_Interval\_Max. Minimum connection interval will be connIntvMin \* 1.25 ms Time Range: 7.5 ms to 4 sec

### uint16 CYBLE\_GAP\_CONN\_UPDATE\_PARAM\_T::connIntvMax

Maximum value for the connection event interval. This shall be greater than or equal to conn\_Interval\_Min. Maximum connection interval will be connIntvMax \* 1.25 ms Time Range: 7.5 ms to 4 sec

### uint16 CYBLE\_GAP\_CONN\_UPDATE\_PARAM\_T::connLatency

Slave latency for the connection in number of connection events. Range: 0x0000 to 0x01F4



**uint16 CYBLE\_GAP\_CONN\_UPDATE\_PARAM\_T::supervisionTO**

Supervision timeout for the LE Link. Supervision timeout will be supervisionTO \* 10 ms Time Range: 100 msec to 32 secs

**CYBLE\_GAP\_PASKEY\_DISP\_INFO\_T Struct Reference****Description**

Passkey display information

**Data Fields**

- uint8 [bdHandle](#)
- uint32 [passkey](#)

**Field Documentation****uint8 CYBLE\_GAP\_PASKEY\_DISP\_INFO\_T::bdHandle**

bd handle of the remote device

**uint32 CYBLE\_GAP\_PASKEY\_DISP\_INFO\_T::passkey**

size = 6, not null terminated

**CYBLE\_GAP\_SMP\_KEY\_DIST\_T Struct Reference****Description**

Security Manager Key Distribution data

**Data Fields**

- uint8 [ltkInfo](#)[CYBLE\_GAP\_SMP\_LTK\_SIZE]
- uint8 [midInfo](#)[CYBLE\_GAP\_SMP\_MID\_INFO\_SIZE]
- uint8 [irkInfo](#)[CYBLE\_GAP\_SMP\_IRK\_SIZE]
- uint8 [idAddrInfo](#)[CYBLE\_GAP\_SMP\_IDADDR\_DATA\_SIZE]
- uint8 [csrInfo](#)[CYBLE\_GAP\_SMP\_CSRK\_SIZE]

**Field Documentation****uint8 CYBLE\_GAP\_SMP\_KEY\_DIST\_T::ltkInfo[CYBLE\_GAP\_SMP\_LTK\_SIZE]**

Long Term Key

**uint8 CYBLE\_GAP\_SMP\_KEY\_DIST\_T::midInfo[CYBLE\_GAP\_SMP\_MID\_INFO\_SIZE]**

Encrypted Diversifier and Random Number

**uint8 CYBLE\_GAP\_SMP\_KEY\_DIST\_T::irkInfo[CYBLE\_GAP\_SMP\_IRK\_SIZE]**

Identity Resolving Key

**uint8 CYBLE\_GAP\_SMP\_KEY\_DIST\_T::idAddrInfo[CYBLE\_GAP\_SMP\_IDADDR\_DATA\_SIZE]**

Public device/Static Random address type



uint8 CYBLE\_GAP\_SMP\_KEY\_DIST\_T::csrInfo[CYBLE\_GAP\_SMP\_CSRK\_SIZE]

Connection Signature Resolving Key

## CYBLE\_GAPC\_ADV\_REPORT\_T Struct Reference

### Description

Advertisement report received by GAP Central

### Data Fields

- [CYBLE\\_GAPC\\_ADV\\_EVENT\\_T eventType](#)
- uint8 [peerAddrType](#)
- uint8 \* [peerBdAddr](#)
- uint8 [dataLen](#)
- uint8 \* [data](#)
- int8 [rssi](#)

### Field Documentation

#### [CYBLE\\_GAPC\\_ADV\\_EVENT\\_T](#) CYBLE\_GAPC\_ADV\_REPORT\_T::eventType

Advertisement event type

- Connectable undirected advertising = 0x00
- Connectable directed advertising = 0x01
- Scannable undirected advertising = 0x02
- Non connectable undirected advertising = 0x03
- Scan Response = 0x04

#### uint8 CYBLE\_GAPC\_ADV\_REPORT\_T::peerAddrType

bd address type of the device advertising.

- CYBLE\_GAP\_ADDR\_TYPE\_PUBLIC (Public device address)
- CYBLE\_GAP\_ADDR\_TYPE\_RANDOM (Random device address)

#### uint8\* CYBLE\_GAPC\_ADV\_REPORT\_T::peerBdAddr

Public Device Address or Random Device Address for each device which responded to scanning.

#### uint8 CYBLE\_GAPC\_ADV\_REPORT\_T::dataLen

length of the data for each device that responded to scanning

#### uint8\* CYBLE\_GAPC\_ADV\_REPORT\_T::data

Pointer to advertising or scan response data

#### int8 CYBLE\_GAPC\_ADV\_REPORT\_T::rssi

Rssi of the responding device. Range: -85 <= N <= 0 Units: dBm



## CYBLE\_GAPC\_CONN\_PARAM\_T Struct Reference

### Description

Connection parameters at the GAP Central end

### Data Fields

- uint16 [scanIntv](#)
- uint16 [scanWindow](#)
- uint8 [initiatorFilterPolicy](#)
- uint8 [peerBdAddr](#)[CYBLE\_GAP\_BD\_ADDR\_SIZE]
- uint8 [peerAddrType](#)
- uint8 [ownAddrType](#)
- uint16 [connIntvMin](#)
- uint16 [connIntvMax](#)
- uint16 [connLatency](#)
- uint16 [supervisionTO](#)
- uint16 [minCeLength](#)
- uint16 [maxCeLength](#)

### Field Documentation

#### uint16 CYBLE\_GAPC\_CONN\_PARAM\_T::scanIntv

The time interval from when last LE scan is started until next subsequent LE scan.

- Time Range: 2.5 ms to 10.24 sec.

#### uint16 CYBLE\_GAPC\_CONN\_PARAM\_T::scanWindow

The time duration of scanning to be performed

- Time Range: 2.5 ms to 10.24 sec

#### uint8 CYBLE\_GAPC\_CONN\_PARAM\_T::initiatorFilterPolicy

Filter policies to be applied during connection procedure

- CYBLE\_GAPC\_CONN\_ALL (White list is not used to determine which advertiser to connect. Peer address is used)
- CYBLE\_GAPC\_CONN\_WHITELIST (White list is used to determine which advertiser to connect to. Peer address shall be ignored)

#### uint8 CYBLE\_GAPC\_CONN\_PARAM\_T::peerBdAddr[CYBLE\_GAP\_BD\_ADDR\_SIZE]

Peer's bd address with whom connection to be established

#### uint8 CYBLE\_GAPC\_CONN\_PARAM\_T::peerAddrType

Peer's bd address type

- CYBLE\_GAP\_ADDR\_TYPE\_PUBLIC (Public device address)
- CYBLE\_GAP\_ADDR\_TYPE\_RANDOM (Random device address)

**uint8 CYBLE\_GAPC\_CONN\_PARAM\_T::ownAddrType**

Own bd address type

- CYBLE\_GAP\_ADDR\_TYPE\_PUBLIC (Public device address)
- CYBLE\_GAP\_ADDR\_TYPE\_RANDOM (Random device address)

**uint16 CYBLE\_GAPC\_CONN\_PARAM\_T::connIntvMin**

Minimum value for the connection event interval. This shall be less than or equal to conn\_Interval\_Max. Minimum connection interval will be connIntvMin \* 1.25 ms Time Range: 7.5 ms to 4 sec

**uint16 CYBLE\_GAPC\_CONN\_PARAM\_T::connIntvMax**

Maximum value for the connection event interval. This shall be greater than or equal to conn\_Interval\_Min. Maximum connection interval will be connIntvMax \* 1.25 ms Time Range: 7.5 ms to 4 sec

**uint16 CYBLE\_GAPC\_CONN\_PARAM\_T::connLatency**

Slave latency for the connection in number of connection events. Range: 0x0000 to 0x01F4

**uint16 CYBLE\_GAPC\_CONN\_PARAM\_T::supervisionTO**

Supervision timeout for the LE Link. Supervision timeout will be supervisionTO \* 10 ms Time Range: 100 msec to 32 secs

**uint16 CYBLE\_GAPC\_CONN\_PARAM\_T::minCeLength**

Minimum length of connection needed for this LE connection. Range: 0x0000 - 0xFFFF

**uint16 CYBLE\_GAPC\_CONN\_PARAM\_T::maxCeLength**

Maximum length of connection needed for this LE connection. Range: 0x0000 - 0xFFFF

**CYBLE\_GAPC\_DISC\_INFO\_T Struct Reference****Description**

Discovery information collected by Client

**Data Fields**

- uint8 [discProcedure](#)
- uint8 [scanType](#)
- uint16 [scanIntv](#)
- uint16 [scanWindow](#)
- uint8 [ownAddrType](#)
- uint8 [scanFilterPolicy](#)
- uint16 [scanTo](#)
- uint8 [filterDuplicates](#)

**Field Documentation****uint8 CYBLE\_GAPC\_DISC\_INFO\_T::discProcedure**

Observation and discovery procedure.

- CYBLE\_GAPC\_OBSER\_PROCEDURE (Observation procedure)
- CYBLE\_GAPC\_LTD\_DISC\_PROCEDURE (Limited discovery procedure)



- CYBLE\_GAPC\_GEN\_DISC\_PROCEDURE (General discovery procedure)

**uint8 CYBLE\_GAPC\_DISC\_INFO\_T::scanType**

Type of scan to perform

- CYBLE\_GAPC\_PASSIVE\_SCANNING (Passive Scanning)
- CYBLE\_GAPC\_ACTIVE\_SCANNING (Active scanning)

**uint16 CYBLE\_GAPC\_DISC\_INFO\_T::scanIntv**

The time interval from when last LE scan is started until next subsequent LE scan.

- Time Range: 2.5 ms to 10.24 sec.

**uint16 CYBLE\_GAPC\_DISC\_INFO\_T::scanWindow**

The time duration of scanning to be performed

- Time Range: 2.5 ms to 10.24 sec

**uint8 CYBLE\_GAPC\_DISC\_INFO\_T::ownAddrType**

Own BD Address Type

- CYBLE\_GAP\_ADDR\_TYPE\_PUBLIC (Public device address)
- CYBLE\_GAP\_ADDR\_TYPE\_RANDOM (Random device address)

**uint8 CYBLE\_GAPC\_DISC\_INFO\_T::scanFilterPolicy**

Filter policies to be applied during scanning procedure

- CYBLE\_GAPC\_ADV\_ACCEPT\_ALL\_PKT (Accept all advertisement packets)
- CYBLE\_GAPC\_ADV\_ACCEPT\_WHITELIST\_PKT (Ignore advertisement packets from devices not in the White List)

**uint16 CYBLE\_GAPC\_DISC\_INFO\_T::scanTo**

Scan timeout. Timeout is in seconds and none zero. If timeout is set as 0, then there will not be any timeout scanTo can be used for all GAP timeouts related to Central operation.

**uint8 CYBLE\_GAPC\_DISC\_INFO\_T::filterDuplicates**

Filter Duplicate Advertisement. The Filter Duplicates parameter controls whether the Link Layer shall filter duplicate advertising reports to the Host, or if the Link Layer should generate advertising reports for each packet received.

- CYBLE\_GAPC\_FILTER\_DUP\_DISABLE (Duplicate filtering disabled)
- CYBLE\_GAPC\_FILTER\_DUP\_ENABLE (Duplicate filtering enabled)

By default, duplicate filtering is enabled

## CYBLE\_GAPC\_T Struct Reference

### Description

GAP Service characteristics server's GATT DB handles structure type

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T deviceNameCharHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T appearanceCharHandle](#)

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [periphPrivacyCharHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [reconnAddrCharHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [prefConnParamCharHandle](#)

## Field Documentation

### [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_GAPC\\_T::deviceNameCharHandle](#)

Handle of the GAPS Device Name Characteristic

### [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_GAPC\\_T::appearanceCharHandle](#)

Handle of the GAPS Appearance Characteristic

### [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_GAPC\\_T::periphPrivacyCharHandle](#)

Handle of the GAPS Peripheral Privacy Flag Parameters Characteristic

### [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_GAPC\\_T::reconnAddrCharHandle](#)

Handle of the GAPS Reconnection Address Characteristic

### [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_GAPC\\_T::prefConnParamCharHandle](#)

Handle of the GAPS Peripheral Preferred Connection Parameters Characteristic

## CYBLE\_GAPP\_DISC\_DATA\_T Struct Reference

### Description

Advertising data

### Data Fields

- uint8 [advData](#)[CYBLE\_GAP\_MAX\_ADV\_DATA\_LEN]
- uint8 [advDataLen](#)

## Field Documentation

### uint8 [CYBLE\\_GAPP\\_DISC\\_DATA\\_T::advData](#)[CYBLE\_GAP\_MAX\_ADV\_DATA\_LEN]

GAP Advertisement Parameters which includes Flags, Service UUIDs and short name

### uint8 [CYBLE\\_GAPP\\_DISC\\_DATA\\_T::advDataLen](#)

length of the advertising data. This should be made zero if there is no data

## CYBLE\_GAPP\_DISC\_MODE\_INFO\_T Struct Reference

### Description

Advertising information

### Data Fields

- uint8 [discMode](#)
- [CYBLE\\_GAPP\\_DISC\\_PARAM\\_T](#)\* [advParam](#)
- [CYBLE\\_GAPP\\_DISC\\_DATA\\_T](#)\* [advData](#)





- [CYBLE\\_GAPP\\_SCAN\\_RSP\\_DATA\\_T\\*](#) [scanRspData](#)
- uint16 [advTo](#)

## Field Documentation

### uint8 CYBLE\_GAPP\_DISC\_MODE\_INFO\_T::discMode

Broadcaster and discoverable mode

- CYBLE\_GAPP\_NONE\_DISC\_BROADCAST\_MODE (Applicable for Broadcaster or non-discoverable mode)
- CYBLE\_GAPP\_LTD\_DISC\_MODE (Limited discovery mode)
- CYBLE\_GAPP\_GEN\_DISC\_MODE (General discovery mode)

### [CYBLE\\_GAPP\\_DISC\\_PARAM\\_T\\*](#) CYBLE\_GAPP\_DISC\_MODE\_INFO\_T::advParam

Advertisement parameters

### [CYBLE\\_GAPP\\_DISC\\_DATA\\_T\\*](#) CYBLE\_GAPP\_DISC\_MODE\_INFO\_T::advData

Advertisement data

### [CYBLE\\_GAPP\\_SCAN\\_RSP\\_DATA\\_T\\*](#) CYBLE\_GAPP\_DISC\_MODE\_INFO\_T::scanRspData

Scan Response data

### uint16 CYBLE\_GAPP\_DISC\_MODE\_INFO\_T::advTo

Advertisement timeout is in seconds. If timeout is set to 0, then there will not be any timeout. Parameter 'advTo' can be used for all GAP timeouts related to peripheral operation. For General discoverable mode, this timer will be ignored. Application is expected to exit from discoverable mode explicitly by calling [CyBle\\_GappExitDiscoveryMode\(\)](#) function. For Limited discoverable mode, 'advTo' should not exceed 180 Sec.

## CYBLE\_GAPP\_DISC\_PARAM\_T Struct Reference

### Description

Advertising parameters

### Data Fields

- uint16 [advIntvMin](#)
- uint16 [advIntvMax](#)
- [CYBLE\\_GAPP\\_ADV\\_T](#) [advType](#)
- uint8 [ownAddrType](#)
- uint8 [directAddrType](#)
- uint8 [directAddr](#)[CYBLE\_GAP\_BD\_ADDR\_SIZE]
- uint8 [advChannelMap](#)
- uint8 [advFilterPolicy](#)

## Field Documentation

### uint16 CYBLE\_GAPP\_DISC\_PARAM\_T::advIntvMin

Minimum advertising interval for undirected and low duty cycle directed advertising.

- Time Range: 20 ms to 10.24 sec



**uint16 CYBLE\_GAPP\_DISC\_PARAM\_T::advIntvMax**

Maximum advertising interval for undirected and low duty cycle directed advertising.

- Time Range: 20 ms to 10.24 sec

**CYBLE\_GAPP\_ADV\_T CYBLE\_GAPP\_DISC\_PARAM\_T::advType**

Type of advertisement

- Connectable undirected advertising (0x00)
- Connectable high duty cycle directed advertising (0x01)
- Scannable undirected advertising (0x02)
- Non connectable undirected advertising (0x03)
- Connectable low duty cycle directed advertising (0x04)

**uint8 CYBLE\_GAPP\_DISC\_PARAM\_T::ownAddrType**

Own BD Address Type

- CYBLE\_GAP\_ADDR\_TYPE\_PUBLIC (Public device address)
- CYBLE\_GAP\_ADDR\_TYPE\_RANDOM (Random device address)

**uint8 CYBLE\_GAPP\_DISC\_PARAM\_T::directAddrType**

Address type of the Bluetooth device address being used for directed advertising, not applicable otherwise

- CYBLE\_PUBLIC\_DEV\_ADDR (Public device address)
- CYBLE\_RANDOM\_DEV\_ADDR (Random device address)

**uint8 CYBLE\_GAPP\_DISC\_PARAM\_T::directAddr[CYBLE\_GAP\_BD\_ADDR\_SIZE]**

This parameter specifies Bluetooth device address of the device to be connected while using directed advertising. In case of none direct advertising, parameter will be 0

**uint8 CYBLE\_GAPP\_DISC\_PARAM\_T::advChannelMap**

Advertising channels that shall be used when transmitting advertising packets. Channel map selection:

- Enable channel 37 = bitmask. xxxxxx1b
- Enable channel 38 = bitmask. xxxxxx1xb
- Enable channel 39 = bitmask. xxxxx1xxb

**uint8 CYBLE\_GAPP\_DISC\_PARAM\_T::advFilterPolicy**

Advertising Filter Policy

- CYBLE\_GAPP\_SCAN\_ANY\_CONN\_ANY (Allow Scan Request from Any, Allow Connect Request from Any (Default))
- CYBLE\_GAPP\_SCAN\_WHITELIST\_CONN\_ANY (Allow Scan Request from White List Only, Allow Connect Request)
- CYBLE\_GAPP\_SCAN\_ANY\_CONN\_WHITELIST (Allow Scan Request from Any, Allow Connect Request from White List Only)
- CYBLE\_GAPP\_SCAN\_CONN\_WHITELIST\_ONLY (Allow Scan Request from White List Only, Allow Connect Request from White List Only)



## CYBLE\_GAPP\_SCAN\_RSP\_DATA\_T Struct Reference

### Description

Scan response data

### Data Fields

- uint8 [scanRspData](#)[CYBLE\_GAP\_MAX\_SCAN\_RSP\_DATA\_LEN]
- uint8 [scanRspDataLen](#)

### Field Documentation

uint8 CYBLE\_GAPP\_SCAN\_RSP\_DATA\_T::scanRspData[CYBLE\_GAP\_MAX\_SCAN\_RSP\_DATA\_LEN]

Static user data transmitted in scan response. This should be made NULL if there is no data. Maximum length of the data is equal to 31 bytes

uint8 CYBLE\_GAPP\_SCAN\_RSP\_DATA\_T::scanRspDataLen

Length of the scan response data. This should be made zero if there is no data

## CYBLE\_GATT\_ATTR\_HANDLE\_RANGE\_T Struct Reference

### Description

GATT Attribute Handle Range type

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T startHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T endHandle](#)

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_GATT\_ATTR\_HANDLE\_RANGE\_T::startHandle

Start Handle

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_GATT\_ATTR\_HANDLE\_RANGE\_T::endHandle

End Handle

## CYBLE\_GATT\_HANDLE\_VALUE\_OFFSET\_PARAM\_T Struct Reference

### Description

GATT Handle Value Pair along with offset type

### Data Fields

- [CYBLE\\_GATT\\_HANDLE\\_VALUE\\_PAIR\\_T handleValuePair](#)
- uint16 [offset](#)



## Field Documentation

[CYBLE\\_GATT\\_HANDLE\\_VALUE\\_PAIR\\_T](#) [CYBLE\\_GATT\\_HANDLE\\_VALUE\\_OFFSET\\_PARAM\\_T::handleValue](#) Pair

Attribute Handle & Value to be Written

**uint16** [CYBLE\\_GATT\\_HANDLE\\_VALUE\\_OFFSET\\_PARAM\\_T::offset](#)

Offset at which Write is to be performed

## CYBLE\_GATT\_HANDLE\_VALUE\_PAIR\_T Struct Reference

### Description

GATT handle - value pair type

### Data Fields

- [CYBLE\\_GATT\\_VALUE\\_T value](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T attrHandle](#)

## Field Documentation

[CYBLE\\_GATT\\_VALUE\\_T](#) [CYBLE\\_GATT\\_HANDLE\\_VALUE\\_PAIR\\_T::value](#)

Attribute Value

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_GATT\\_HANDLE\\_VALUE\\_PAIR\\_T::attrHandle](#)

Attribute Handle of GATT DB

## CYBLE\_GATT\_VALUE\_T Struct Reference

### Data Fields

- **uint8** \* [val](#)
- **uint16** [len](#)
- **uint16** [actualLen](#)

## Field Documentation

**uint8\*** [CYBLE\\_GATT\\_VALUE\\_T::val](#)

Pointer to the value to be packed

**uint16** [CYBLE\\_GATT\\_VALUE\\_T::len](#)

Length of Value to be packed

**uint16** [CYBLE\\_GATT\\_VALUE\\_T::actualLen](#)

Out Parameter Indicating Actual Length Packed and sent over the air. Actual length can be less than or equal to the 'len' parameter value. This provides information to application that what is the actual length of data that is transmitted over the air. Each GATT procedures defines different length of data that can be transmitted over the air. If application sends more than that, all data may not be transmitted over the air.



## CYBLE\_GATT\_XCHG\_MTU\_PARAM\_T Struct Reference

### Description

GATT MTU exchange parameter type

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- uint16 [mtu](#)

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_GATT\_XCHG\_MTU\_PARAM\_T::connHandle

Connection handle

uint16 CYBLE\_GATT\_XCHG\_MTU\_PARAM\_T::mtu

Client/Server Rx/Tx GATT MTU Size

## CYBLE\_GATTC\_ERR\_RSP\_PARAM\_T Struct Reference

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_GATT\\_PDU\\_T opCode](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T attrHandle](#)
- [CYBLE\\_GATT\\_ERR\\_CODE\\_T errorCode](#)

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_GATTC\_ERR\_RSP\_PARAM\_T::connHandle

Connection handle

[CYBLE\\_GATT\\_PDU\\_T](#) CYBLE\_GATTC\_ERR\_RSP\_PARAM\_T::opCode

Opcode which has resulted in Error

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_GATTC\_ERR\_RSP\_PARAM\_T::attrHandle

Attribute Handle in which error is generated

[CYBLE\\_GATT\\_ERR\\_CODE\\_T](#) CYBLE\_GATTC\_ERR\_RSP\_PARAM\_T::errorCode

Error Code describing cause of error

## CYBLE\_GATTC\_EXEC\_WRITE\_RSP\_T Struct Reference

### Description

Execute Write result

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)



- uint8 [result](#)

## Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_GATTC\_EXEC\_WRITE\_RSP\_T::connHandle

Connection handle

uint8 CYBLE\_GATTC\_EXEC\_WRITE\_RSP\_T::result

Result of the execute write request

## CYBLE\_GATTC\_FIND\_BY\_TYPE\_RSP\_PARAM\_T Struct Reference

### Description

GATT find by type value response received from server

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle
- [CYBLE\\_GATT\\_ATTR\\_HANDLE\\_RANGE\\_T\\*](#) range
- uint8 [count](#)

## Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_GATTC\_FIND\_BY\_TYPE\_RSP\_PARAM\_T::connHandle

Connection handle

[CYBLE\\_GATT\\_ATTR\\_HANDLE\\_RANGE\\_T\\*](#) CYBLE\_GATTC\_FIND\_BY\_TYPE\_RSP\_PARAM\_T::range

Handle Range List

uint8 CYBLE\_GATTC\_FIND\_BY\_TYPE\_RSP\_PARAM\_T::count

Size of List

## CYBLE\_GATTC\_FIND\_BY\_TYPE\_VALUE\_REQ\_T Struct Reference

### Description

GATT find by type value request to be sent to Server

### Data Fields

- [CYBLE\\_GATT\\_VALUE\\_T](#) value
- [CYBLE\\_GATT\\_ATTR\\_HANDLE\\_RANGE\\_T](#) range
- [CYBLE\\_UUID16](#) uuid

## Field Documentation

[CYBLE\\_GATT\\_VALUE\\_T](#) CYBLE\_GATTC\_FIND\_BY\_TYPE\_VALUE\_REQ\_T::value

Attribute Value to Find



**CYBLE\_GATT\_ATTR\_HANDLE\_RANGE\_T** **CYBLE\_GATTC\_FIND\_BY\_TYPE\_VALUE\_REQ\_T::range**

Handle Range - Start and End Handle

**CYBLE\_UUID16** **CYBLE\_GATTC\_FIND\_BY\_TYPE\_VALUE\_REQ\_T::uuid**

16-bit UUID to Find

**CYBLE\_GATTC\_FIND\_INFO\_RSP\_PARAM\_T Struct Reference****Description**

GATT find info response received from Server

**Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T](#) `connHandle`
- [CYBLE\\_GATTC\\_HANDLE\\_UUID\\_LIST\\_PARAM\\_T](#) `handleValueList`
- `uint8` [uuidFormat](#)

**Field Documentation****CYBLE\_CONN\_HANDLE\_T** **CYBLE\_GATTC\_FIND\_INFO\_RSP\_PARAM\_T::connHandle**

Connection handle

**CYBLE\_GATTC\_HANDLE\_UUID\_LIST\_PARAM\_T** **CYBLE\_GATTC\_FIND\_INFO\_RSP\_PARAM\_T::handleValueList**

Handle Value List

**`uint8` **CYBLE\_GATTC\_FIND\_INFO\_RSP\_PARAM\_T::uuidFormat****

Format indicating, 16 bit (0x01) or 128 bit (0x02) UUIDs

**CYBLE\_GATTC\_GRP\_ATTR\_DATA\_LIST\_T Struct Reference****Description**

Data Element for Group Response

**Data Fields**

- `uint8 *` [attrValue](#)
- `uint16` [length](#)
- `uint16` [attrLen](#)

**Field Documentation****`uint8*` **CYBLE\_GATTC\_GRP\_ATTR\_DATA\_LIST\_T::attrValue****

attribute handle value pair

**`uint16` **CYBLE\_GATTC\_GRP\_ATTR\_DATA\_LIST\_T::length****

Length of each Attribute Data Element including the Handle Range



uint16 CYBLE\_GATTC\_GRP\_ATTR\_DATA\_LIST\_T::attrLen

Total Length of Attribute Data

## CYBLE\_GATTC\_HANDLE\_LIST\_T Struct Reference

### Description

GATT handle list type

### Data Fields

- uint16 \* [handleList](#)
- uint16 [listCount](#)
- uint16 [actualCount](#)

### Field Documentation

uint16\* CYBLE\_GATTC\_HANDLE\_LIST\_T::handleList

Handle list where the UUID with value Indicated is found

uint16 CYBLE\_GATTC\_HANDLE\_LIST\_T::listCount

Number of Handles in the list

uint16 CYBLE\_GATTC\_HANDLE\_LIST\_T::actualCount

Actual Number of Handles Packed. This is a output parameter

## CYBLE\_GATTC\_HANDLE\_UUID\_LIST\_PARAM\_T Struct Reference

### Description

GATT list of Handle UUID pair parameter type

### Data Fields

- uint8 \* [list](#)
- uint16 [byteCount](#)

### Field Documentation

uint8\* CYBLE\_GATTC\_HANDLE\_UUID\_LIST\_PARAM\_T::list

Handle - UUID Pair list This is a packed byte stream, hence it needs to be unpacked and decoded.

uint16 CYBLE\_GATTC\_HANDLE\_UUID\_LIST\_PARAM\_T::byteCount

Number of elements in the list in bytes

## CYBLE\_GATTC\_HANDLE\_VALUE\_NTF\_PARAM\_T Struct Reference

### Description

Handle value notification data received from server



**Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_GATT\\_HANDLE\\_VALUE\\_PAIR\\_T handleValPair](#)

**Field Documentation**

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_GATTC\_HANDLE\_VALUE\_NTF\_PARAM\_T::connHandle

Connection handle

[CYBLE\\_GATT\\_HANDLE\\_VALUE\\_PAIR\\_T](#) CYBLE\_GATTC\_HANDLE\_VALUE\_NTF\_PARAM\_T::handleValPair

handle value pair, actual length files needs to be ignored

**CYBLE\_GATTC\_READ\_BLOB\_REQ\_T Struct Reference****Description**

Read blob request to be sent to Server

**Data Fields**

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T attrHandle](#)
- uint16 [offset](#)

**Field Documentation**

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_GATTC\_READ\_BLOB\_REQ\_T::attrHandle

Handle on which Read Blob is requested

uint16 CYBLE\_GATTC\_READ\_BLOB\_REQ\_T::offset

Value Offset from which the Read is Requested

**CYBLE\_GATTC\_READ\_BY\_GRP\_RSP\_PARAM\_T Struct Reference****Description**

Read By Group Response received from Server

**Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_GATTC\\_GRP\\_ATTR\\_DATA\\_LIST\\_T attrData](#)

**Field Documentation**

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_GATTC\_READ\_BY\_GRP\_RSP\_PARAM\_T::connHandle

Connection handle

[CYBLE\\_GATTC\\_GRP\\_ATTR\\_DATA\\_LIST\\_T](#) CYBLE\_GATTC\_READ\_BY\_GRP\_RSP\_PARAM\_T::attrData

Group attribute data list



## CYBLE\_GATTC\_READ\_BY\_TYPE\_REQ\_T Struct Reference

### Description

GATT read by type request to be sent to Server

### Data Fields

- [CYBLE\\_GATT\\_ATTR\\_HANDLE\\_RANGE\\_T](#) *range*
- [CYBLE\\_UUID\\_T](#) *uuid*
- uint8 [uuidFormat](#)

### Field Documentation

[CYBLE\\_GATT\\_ATTR\\_HANDLE\\_RANGE\\_T](#) CYBLE\_GATTC\_READ\_BY\_TYPE\_REQ\_T::range

Handle Range

[CYBLE\\_UUID\\_T](#) CYBLE\_GATTC\_READ\_BY\_TYPE\_REQ\_T::uuid

GATT UUID type

uint8 CYBLE\_GATTC\_READ\_BY\_TYPE\_REQ\_T::uuidFormat

Format indicating, 16 bit or 128 bit UUIDs For 16bits UUID format - CYBLE\_GATT\_16\_BIT\_UUID\_FORMAT (0x01) For 128bits UUID format - CYBLE\_GATT\_128\_BIT\_UUID\_FORMAT (0x02)

## CYBLE\_GATTC\_READ\_RSP\_PARAM\_T Struct Reference

### Description

Read response parameter type received from server

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T](#) *connHandle*
- [CYBLE\\_GATT\\_VALUE\\_T](#) *value*

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_GATTC\_READ\_RSP\_PARAM\_T::connHandle

Connection handle

[CYBLE\\_GATT\\_VALUE\\_T](#) CYBLE\_GATTC\_READ\_RSP\_PARAM\_T::value

Attribute Value

## CYBLE\_GATTC\_T Struct Reference

### Data Fields

- [CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) *serviceChanged*
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) *cccdHandle*



## Field Documentation

### [CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) CYBLE\_GATTC\_T::serviceChanged

Handle of the Service Changed characteristic

### [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_GATTC\_T::cccdHandle

Client Characteristic Configuration descriptor handle

## CYBLE\_GATTS\_ATT\_GEN\_VAL\_LEN\_T Struct Reference

### Description

Attribute value type used in GATT database

### Data Fields

- uint16 [actualLength](#)
- void \* [attGenericVal](#)

## Field Documentation

### uint16 CYBLE\_GATTS\_ATT\_GEN\_VAL\_LEN\_T::actualLength

Length in number of bytes for attGenericVal

### void\* CYBLE\_GATTS\_ATT\_GEN\_VAL\_LEN\_T::attGenericVal

Buffer to the store generic characteristic value based on length or complete UUID value if the attribute is of type 128-bit UUID and 32-bit UUID type.

## CYBLE\_GATTS\_ATT\_PACK\_VAL\_LEN\_T Struct Reference

### Description

Attribute value type used in GATT database

### Data Fields

- uint16 [maxAttrLength](#)
- [CYBLE\\_GATTS\\_ATT\\_GEN\\_VAL\\_LEN\\_T](#)\* [attGenericValLen](#)

## Field Documentation

### uint16 CYBLE\_GATTS\_ATT\_PACK\_VAL\_LEN\_T::maxAttrLength

Length in number of bytes for attGenericVal

### [CYBLE\\_GATTS\\_ATT\\_GEN\\_VAL\\_LEN\\_T](#)\* CYBLE\_GATTS\_ATT\_PACK\_VAL\_LEN\_T::attGenericValLen

Buffer to the store generic characteristic value based on length or complete UUID value if the attribute is of type 128-bit UUID and 32-bit UUID type.



## CYBLE\_GATTS\_ATT\_VALUE\_T Union Reference

### Data Fields

- [CYBLE\\_GATTS\\_ATT\\_PACK\\_VAL\\_LEN\\_T](#) attFormatValue
- uint16 attValueUuid

## CYBLE\_GATTS\_CHAR\_VAL\_READ\_REQ\_T Struct Reference

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) attrHandle
- [CYBLE\\_GATT\\_ERR\\_CODE\\_T](#) gattErrorCode

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_GATTS\_CHAR\_VAL\_READ\_REQ\_T::connHandle

Connection handle

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_GATTS\_CHAR\_VAL\_READ\_REQ\_T::attrHandle

Attribute Handle

[CYBLE\\_GATT\\_ERR\\_CODE\\_T](#) CYBLE\_GATTS\_CHAR\_VAL\_READ\_REQ\_T::gattErrorCode

Output Param: Profile/Service specific error code, profile or application need to change this to service specific error based on service/profile requirements.

## CYBLE\_GATTS\_DB\_T Struct Reference

### Description

GATT database structure used in the GAP Server

### Data Fields

- uint16 [attHandle](#)
- uint16 [attType](#)
- uint32 [permission](#)
- uint16 [attEndHandle](#)
- [CYBLE\\_GATTS\\_ATT\\_VALUE\\_T](#) attValue

### Field Documentation

uint16 CYBLE\_GATTS\_DB\_T::attHandle

Start Handle: Act as an index for querying BLE GATT database

uint16 CYBLE\_GATTS\_DB\_T::attType

UUID: 16 bit UUID type for an attribute entry, for 32 bit and 128 bit UUIDs the last 16 bits should be stored in this entry GATT DB access layer shall retrieve complete 128 bit UUID from CYBLE\_GATTS\_ATT\_GENERIC\_VAL\_T structure.



**uint32 CYBLE\_GATTS\_DB\_T::permission**

The permission bits are clubbed in to a 32-bit field. These 32-bits can be grouped in to 4 bytes. The lowest significant byte is byte 0 (B0) and the most significant byte is byte 3 (B3). The bytes where the permissions have been grouped is as given below. Attribute permissions (B0) Characteristic permissions (B1) Implementation specific permission (B3, B2)

**uint16 CYBLE\_GATTS\_DB\_T::attEndHandle**

Attribute end handle, indicating logical boundary of given attribute.

**CYBLE\_GATTS\_ATT\_VALUE\_T CYBLE\_GATTS\_DB\_T::attValue**

Attribute value format, it can be one of following: uint16 16bit - UUID for 16bit service & characteristic declaration CYBLE\_GATTS\_ATT\_GENERIC\_VAL\_T attFormatValue - Buffer containing 32 bit or 128 bit UUID values for service & characteristic declaration CYBLE\_GATTS\_ATT\_GENERIC\_VAL\_T attFormatValue - Buffer containing generic char definition value, or generic descriptor values

**CYBLE\_GATTS\_ERR\_PARAM\_T Struct Reference****Description**

GATT Server Error Response parameter type

**Data Fields**

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T attrHandle](#)
- uint8 [opcode](#)
- [CYBLE\\_GATT\\_ERR\\_CODE\\_T errorCode](#)

**Field Documentation****CYBLE\_GATT\_DB\_ATTR\_HANDLE\_T CYBLE\_GATTS\_ERR\_PARAM\_T::attrHandle**

Handle in which error is generated

**uint8 CYBLE\_GATTS\_ERR\_PARAM\_T::opcode**

Opcode which has resulted in Error Information on ATT/GATT opcodes is available in the Bluetooth specification.

**CYBLE\_GATT\_ERR\_CODE\_T CYBLE\_GATTS\_ERR\_PARAM\_T::errorCode**

Error Code describing cause of error

**CYBLE\_GATTS\_EXEC\_WRITE\_REQ\_T Struct Reference****Description**

Execute Write result

**Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_GATT\\_HANDLE\\_VALUE\\_OFFSET\\_PARAM\\_T](#)\* [baseAddr](#)
- uint8 [prepWriteReqCount](#)
- uint8 [execWriteFlag](#)



- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T attrHandle](#)
- uint8 [gattErrorCode](#)

## Field Documentation

### [CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_GATTS\_EXEC\_WRITE\_REQ\_T::connHandle

Connection handle

### [CYBLE\\_GATT\\_HANDLE\\_VALUE\\_OFFSET\\_PARAM\\_T](#)\* CYBLE\_GATTS\_EXEC\_WRITE\_REQ\_T::baseAddr

Base address of the queue where data is queued. Queue is of type [CYBLE\\_GATT\\_HANDLE\\_VALUE\\_OFFSET\\_PARAM\\_T](#). baseAddr[0].handleValuePair.value.val provides the base address of the total data stored in prepare write queue internally by stack. Application can calculate the total length based on each array element. i.e total length = baseAddr[0].handleValuePair.value.len+ ....+baseAddr[prepWriteReqCount-1].handleValuePair.value.len

### uint8 CYBLE\_GATTS\_EXEC\_WRITE\_REQ\_T::prepWriteReqCount

Total count of prepare request from remote. This parameter can be used to access the data from 'baseAddr[]'. array index will range from 0 to prepWriteReqCount - 1

### uint8 CYBLE\_GATTS\_EXEC\_WRITE\_REQ\_T::execWriteFlag

Execute write flag received from remote

### [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_GATTS\_EXEC\_WRITE\_REQ\_T::attrHandle

Attribute Handle at which error occurred. This is an o/p param

### uint8 CYBLE\_GATTS\_EXEC\_WRITE\_REQ\_T::gattErrorCode

Application provide GATT error code for the procedure. This is an o/p param

## CYBLE\_GATTS\_PREP\_WRITE\_REQ\_PARAM\_T Struct Reference

### Description

Prepare write request parameter received from Client

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_GATT\\_HANDLE\\_VALUE\\_OFFSET\\_PARAM\\_T](#)\* [baseAddr](#)
- uint8 [currentPrepWriteReqCount](#)
- uint8 [gattErrorCode](#)

## Field Documentation

### [CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_GATTS\_PREP\_WRITE\_REQ\_PARAM\_T::connHandle

Connection handle

### [CYBLE\\_GATT\\_HANDLE\\_VALUE\\_OFFSET\\_PARAM\\_T](#)\*

### CYBLE\_GATTS\_PREP\_WRITE\_REQ\_PARAM\_T::baseAddr

Base address of the queue where data is queued, Queue is of type [CYBLE\\_GATT\\_HANDLE\\_VALUE\\_OFFSET\\_PARAM\\_T](#). Each baseAddr[currentPrepWriteReqCount-1].handleValuePair.value.val provides the current data and baseAddr[0].handleValuePair.value.val provides the





base address of the data buffer where full value will be stored. Application can calculate the total length based on each array element. i.e total length up current request = baseAddr[0].handleValuePair.value.len+ ....+baseAddr[currentPrepWriteReqCount-1].handleValuePair.value.len

#### uint8 CYBLE\_GATTS\_PREP\_WRITE\_REQ\_PARAM\_T::currentPrepWriteReqCount

Current count of prepare request from remote. This parameter can be used to access the data from 'baseAddr[]'. Array index will range from 0 to currentPrepWriteReqCount - 1

#### uint8 CYBLE\_GATTS\_PREP\_WRITE\_REQ\_PARAM\_T::gattErrorCode

Application provide GATT error code for the procedure. This is an o/p parameter

## CYBLE\_GATTS\_T Struct Reference

### Description

Structure with Generic Attribute Service (GATTS) attribute handles

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T serviceHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T serviceChangedHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T cccdHandle](#)

### Field Documentation

#### [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_GATTS\_T::serviceHandle

Service handle

#### [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_GATTS\_T::serviceChangedHandle

Handle of the Service Changed characteristic

#### [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_GATTS\_T::cccdHandle

Client Characteristic Configuration descriptor handle

## CYBLE\_GATTS\_WRITE\_REQ\_PARAM\_T Struct Reference

### Description

Write request parameter received from Client

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_GATT\\_HANDLE\\_VALUE\\_PAIR\\_T handleValPair](#)

### Field Documentation

#### [CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_GATTS\_WRITE\_REQ\_PARAM\_T::connHandle

Connection handle

#### [CYBLE\\_GATT\\_HANDLE\\_VALUE\\_PAIR\\_T](#) CYBLE\_GATTS\_WRITE\_REQ\_PARAM\_T::handleValPair

handle value pair



## CYBLE\_GLS\_CHAR\_VALUE\_T Struct Reference

### Description

Glucose Service Characteristic value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_GLS\\_CHAR\\_INDEX\\_T charIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\* value](#)

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_GLS\_CHAR\_VALUE\_T::connHandle

Peer device handle

[CYBLE\\_GLS\\_CHAR\\_INDEX\\_T](#) CYBLE\_GLS\_CHAR\_VALUE\_T::charIndex

Index of service characteristic

[CYBLE\\_GATT\\_VALUE\\_T\\*](#) CYBLE\_GLS\_CHAR\_VALUE\_T::value

Characteristic value

## CYBLE\_GLS\_DESCR\_VALUE\_T Struct Reference

### Description

Glucose Service Characteristic descriptor value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_GLS\\_CHAR\\_INDEX\\_T charIndex](#)
- [CYBLE\\_GLS\\_DESCR\\_INDEX\\_T descrIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\* value](#)

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_GLS\_DESCR\_VALUE\_T::connHandle

Peer device handle

[CYBLE\\_GLS\\_CHAR\\_INDEX\\_T](#) CYBLE\_GLS\_DESCR\_VALUE\_T::charIndex

Index of service characteristic

[CYBLE\\_GLS\\_DESCR\\_INDEX\\_T](#) CYBLE\_GLS\_DESCR\_VALUE\_T::descrIndex

Index of service characteristic descriptor

[CYBLE\\_GATT\\_VALUE\\_T\\*](#) CYBLE\_GLS\_DESCR\_VALUE\_T::value

Descriptor value



## CYBLE\_GLSC\_CHAR\_T Struct Reference

### Description

Glucose Client Characteristic structure type

### Data Fields

- uint8 [properties](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [valueHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [cccdHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [endHandle](#)

### Field Documentation

uint8 CYBLE\_GLSC\_CHAR\_T::properties

Properties for value field

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_GLSC\_CHAR\_T::valueHandle

Handle of server database attribute value entry

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_GLSC\_CHAR\_T::cccdHandle

Glucose client char. descriptor handle

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_GLSC\_CHAR\_T::endHandle

Characteristic End Handle

## CYBLE\_GLSC\_T Struct Reference

### Description

Glucose Service structure type

### Data Fields

- [CYBLE\\_GLSC\\_CHAR\\_T](#) [charInfo](#)[[CYBLE\\_GLS\\_CHAR\\_COUNT](#)]

### Field Documentation

[CYBLE\\_GLSC\\_CHAR\\_T](#) CYBLE\_GLSC\_T::charInfo[[CYBLE\\_GLS\\_CHAR\\_COUNT](#)]

Characteristics handle + properties array

## CYBLE\_GLSS\_CHAR\_T Struct Reference

### Description

Glucose Server Characteristic structure type

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [charHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [cccdHandle](#)



## Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_GLSS\\_CHAR\\_T::charHandle](#)

Glucose Service char handle

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_GLSS\\_CHAR\\_T::cccdHandle](#)

Glucose Service CCCD handle

## CYBLE\_GLSS\_T Struct Reference

### Description

Structure with Glucose Service attribute handles

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [serviceHandle](#)
- [CYBLE\\_GLSS\\_CHAR\\_T](#) [charInfo](#)[[CYBLE\\_GLS\\_CHAR\\_COUNT](#)]

## Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_GLSS\\_T::serviceHandle](#)

Glucose Service handle

[CYBLE\\_GLSS\\_CHAR\\_T](#) [CYBLE\\_GLSS\\_T::charInfo](#)[[CYBLE\\_GLS\\_CHAR\\_COUNT](#)]

Glucose Service characteristics info array

## CYBLE\_HIDS\_CHAR\_VALUE\_T Struct Reference

### Description

HID Service Characteristic value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T](#) [connHandle](#)
- uint8 [serviceIndex](#)
- [CYBLE\\_HIDS\\_CHAR\\_INDEX\\_T](#) [charIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T](#)\* [value](#)

## Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) [CYBLE\\_HIDS\\_CHAR\\_VALUE\\_T::connHandle](#)

Peer device handle

uint8 [CYBLE\\_HIDS\\_CHAR\\_VALUE\\_T::serviceIndex](#)

Index of HID Service

[CYBLE\\_HIDS\\_CHAR\\_INDEX\\_T](#) [CYBLE\\_HIDS\\_CHAR\\_VALUE\\_T::charIndex](#)

Index of HID Service Characteristic



[CYBLE\\_GATT\\_VALUE\\_T](#)\* CYBLE\_HIDS\_CHAR\_VALUE\_T::value

Pointer to Characteristic value

## CYBLE\_HIDS\_DESCR\_VALUE\_T Struct Reference

### Description

HID Service Characteristic descriptor value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle
- uint8 [serviceIndex](#)
- [CYBLE\\_HIDS\\_CHAR\\_INDEX\\_T](#) charIndex
- [CYBLE\\_HIDS\\_DESCR\\_T](#) descrIndex
- [CYBLE\\_GATT\\_VALUE\\_T](#)\* value

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_HIDS\_DESCR\_VALUE\_T::connHandle

Peer device handle

uint8 CYBLE\_HIDS\_DESCR\_VALUE\_T::serviceIndex

Index of HID Service

[CYBLE\\_HIDS\\_CHAR\\_INDEX\\_T](#) CYBLE\_HIDS\_DESCR\_VALUE\_T::charIndex

Index of HID Service Characteristic

[CYBLE\\_HIDS\\_DESCR\\_T](#) CYBLE\_HIDS\_DESCR\_VALUE\_T::descrIndex

Service Characteristic Descriptor index

[CYBLE\\_GATT\\_VALUE\\_T](#)\* CYBLE\_HIDS\_DESCR\_VALUE\_T::value

Pointer to value of Service Characteristic Descriptor value

## CYBLE\_HIDSC\_REPORT\_MAP\_T Struct Reference

### Description

HID client Report map characteristic

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) errdHandle
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) valueHandle
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) endHandle
- uint8 [properties](#)

## Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_HIDSC\\_REPORT\\_MAP\\_T::errdHandle](#)

Handle of Report Map External Report Reference descriptor

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_HIDSC\\_REPORT\\_MAP\\_T::valueHandle](#)

Handle of Report characteristic value

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_HIDSC\\_REPORT\\_MAP\\_T::endHandle](#)

End handle of characteristic

uint8 [CYBLE\\_HIDSC\\_REPORT\\_MAP\\_T::properties](#)

Properties for value field

## CYBLE\_HIDSC\_REPORT\_T Struct Reference

### Description

HID Client Report characteristic

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [cccdHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [rrdHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [valueHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [endHandle](#)
- uint8 [properties](#)

## Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_HIDSC\\_REPORT\\_T::cccdHandle](#)

Handle of Client Characteristic Configuration Descriptor

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_HIDSC\\_REPORT\\_T::rrdHandle](#)

Handle of Report Reference Descriptor

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_HIDSC\\_REPORT\\_T::valueHandle](#)

Handle of Report Characteristic value

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_HIDSC\\_REPORT\\_T::endHandle](#)

End handle of Characteristic

uint8 [CYBLE\\_HIDSC\\_REPORT\\_T::properties](#)

Properties for value field

## CYBLE\_HIDSC\_T Struct Reference

### Description

Structure with discovered attributes information of HID Service



## Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_SRVR\\_CHAR\\_INFO\\_T protocolMode](#)
- [CYBLE\\_HIDSC\\_REPORT\\_T bootReport](#)[CYBLE\_HIDS\_BOOT\_REPORT\_COUNT]
- [CYBLE\\_HIDSC\\_REPORT\\_MAP\\_T reportMap](#)
- [CYBLE\\_SRVR\\_CHAR\\_INFO\\_T information](#)
- [CYBLE\\_SRVR\\_CHAR\\_INFO\\_T controlPoint](#)
- [CYBLE\\_HIDSC\\_REPORT\\_T report](#)[CYBLE\_HIDSC\_REPORT\_COUNT]
- uint8 [reportCount](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T includeHandle](#)

## Field Documentation

### [CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_HIDSC\_T::connHandle

Peer device handle

### [CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) CYBLE\_HIDSC\_T::protocolMode

Protocol Mode Characteristic handle and properties

### [CYBLE\\_HIDSC\\_REPORT\\_T](#) CYBLE\_HIDSC\_T::bootReport[CYBLE\_HIDS\_BOOT\_REPORT\_COUNT]

Boot Report Characteristic info

### [CYBLE\\_HIDSC\\_REPORT\\_MAP\\_T](#) CYBLE\_HIDSC\_T::reportMap

Report Map Characteristic handle and descriptors

### [CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) CYBLE\_HIDSC\_T::information

Information Characteristic handle and properties

### [CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) CYBLE\_HIDSC\_T::controlPoint

Control Point Characteristic handle and properties

### [CYBLE\\_HIDSC\\_REPORT\\_T](#) CYBLE\_HIDSC\_T::report[CYBLE\_HIDSC\_REPORT\_COUNT]

Report Characteristic info

### uint8 CYBLE\_HIDSC\_T::reportCount

Number of report Characteristics

### [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_HIDSC\_T::includeHandle

Included declaration handle

## CYBLE\_HIDSS\_INFORMATION\_T Struct Reference

### Description

HID Information characteristic value

### Data Fields

- uint16 [bcdHID](#)





- uint8 [bCountryCode](#)
- uint8 [flags](#)

## Field Documentation

### uint16 CYBLE\_HIDSS\_INFORMATION\_T::bcdHID

Version number of HIDSe USB HID Specification implemented by HID Device

### uint8 CYBLE\_HIDSS\_INFORMATION\_T::bCountryCode

Identifies which country hardware is localized for

### uint8 CYBLE\_HIDSS\_INFORMATION\_T::flags

Bit 0: RemoteWake - Indicates whether HID Device is capable of sending wake-signal to HID Host. Bit 1: NormallyConnectable - Indicates whether HID Device will be advertising when bonded but not connected.

## CYBLE\_HIDSS\_REPORT\_REF\_T Struct Reference

### Description

HID server Report Reference descriptor value - Report ID and Report Type

### Data Fields

- uint8 [reportId](#)
- uint8 [reportType](#)

## Field Documentation

### uint8 CYBLE\_HIDSS\_REPORT\_REF\_T::reportId

Non-zero value if there are more than one instance of the same Report Type

### uint8 CYBLE\_HIDSS\_REPORT\_REF\_T::reportType

Type of Report characteristic

## CYBLE\_HIDSS\_REPORT\_T Struct Reference

### Description

HID Server Report characteristic

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T reportHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T cccdHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T rrdHandle](#)

## Field Documentation

### [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_HIDSS\_REPORT\_T::reportHandle

Handle of Report characteristic value



**CYBLE\_GATT\_DB\_ATTR\_HANDLE\_T CYBLE\_HIDSS\_REPORT\_T::cccdHandle**

Handle of Client Characteristic Configuration descriptor

**CYBLE\_GATT\_DB\_ATTR\_HANDLE\_T CYBLE\_HIDSS\_REPORT\_T::rrdHandle**

Handle of Report Reference descriptor

**CYBLE\_HIDSS\_T Struct Reference****Description**

Structure with HID Service attribute handles

**Data Fields**

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [serviceHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [protocolModeHandle](#)
- uint8 [reportCount](#)
- const [CYBLE\\_HIDSS\\_REPORT\\_T](#)\* [reportArray](#)
- [CYBLE\\_HIDSS\\_REPORT\\_T](#) [bootReportArray](#)[CYBLE\_HIDS\_BOOT\_REPORT\_COUNT]
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [reportMapHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [reportMapErrdHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [informationHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [controlPointHandle](#)

**Field Documentation****CYBLE\_GATT\_DB\_ATTR\_HANDLE\_T CYBLE\_HIDSS\_T::serviceHandle**

Handle of HID service

**CYBLE\_GATT\_DB\_ATTR\_HANDLE\_T CYBLE\_HIDSS\_T::protocolModeHandle**

Handle of Protocol Mode Characteristic

**uint8 CYBLE\_HIDSS\_T::reportCount**

Number of report Characteristics

**const CYBLE\_HIDSS\_REPORT\_T\* CYBLE\_HIDSS\_T::reportArray**

Info about report Characteristics

**CYBLE\_HIDSS\_REPORT\_T CYBLE\_HIDSS\_T::bootReportArray[CYBLE\_HIDS\_BOOT\_REPORT\_COUNT]**

Info about Boot Report Characteristics

**CYBLE\_GATT\_DB\_ATTR\_HANDLE\_T CYBLE\_HIDSS\_T::reportMapHandle**

Handle of Report Map Characteristic

**CYBLE\_GATT\_DB\_ATTR\_HANDLE\_T CYBLE\_HIDSS\_T::reportMapErrdHandle**

Handle of Report Map External Report Reference descr.

**CYBLE\_GATT\_DB\_ATTR\_HANDLE\_T CYBLE\_HIDSS\_T::informationHandle**

Handle of HID Information Characteristic



**CYBLE\_GATT\_DB\_ATTR\_HANDLE\_T** CYBLE\_HIDSS\_T::controlPointHandle

Handle of HID Control Point Characteristic

**CYBLE\_HRS\_CHAR\_VALUE\_T Struct Reference****Description**

HRS Characteristic value parameter structure

**Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle
- [CYBLE\\_HRS\\_CHAR\\_INDEX\\_T](#) charIndex
- [CYBLE\\_GATT\\_VALUE\\_T](#)\* value

**Field Documentation****CYBLE\_CONN\_HANDLE\_T** CYBLE\_HRS\_CHAR\_VALUE\_T::connHandle

Peer device handle

**CYBLE\_HRS\_CHAR\_INDEX\_T** CYBLE\_HRS\_CHAR\_VALUE\_T::charIndex

Index of service characteristic

**CYBLE\_GATT\_VALUE\_T**\* CYBLE\_HRS\_CHAR\_VALUE\_T::value

Characteristic value

**CYBLE\_HRS\_DESCR\_VALUE\_T Struct Reference****Description**

HRS Characteristic descriptor value parameter structure

**Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T](#) connHandle
- [CYBLE\\_HRS\\_CHAR\\_INDEX\\_T](#) charIndex
- [CYBLE\\_HRS\\_DESCR\\_INDEX\\_T](#) descrIndex
- [CYBLE\\_GATT\\_VALUE\\_T](#)\* value

**Field Documentation****CYBLE\_CONN\_HANDLE\_T** CYBLE\_HRS\_DESCR\_VALUE\_T::connHandle

Peer device handle

**CYBLE\_HRS\_CHAR\_INDEX\_T** CYBLE\_HRS\_DESCR\_VALUE\_T::charIndex

Index of service characteristic

**CYBLE\_HRS\_DESCR\_INDEX\_T** CYBLE\_HRS\_DESCR\_VALUE\_T::descrIndex

Index of service characteristic descriptor



[CYBLE\\_GATT\\_VALUE\\_T](#)\* [CYBLE\\_HRS\\_DESCR\\_VALUE\\_T::value](#)

Descriptor value

## CYBLE\_HRSC\_T Struct Reference

### Description

Structure with discovered attributes information of Heart Rate Service

### Data Fields

- [CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) [charInfo](#)[[CYBLE\\_HRS\\_CHAR\\_COUNT](#)]
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [hrmCccdHandle](#)

### Field Documentation

[CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) [CYBLE\\_HRSC\\_T::charInfo](#)[[CYBLE\\_HRS\\_CHAR\\_COUNT](#)]

Heart Rate Service characteristics handles and properties array

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_HRSC\\_T::hrmCccdHandle](#)

Heart Rate Measurement client char. config. descriptor Handle

## CYBLE\_HRSS\_T Struct Reference

### Description

Structure with Heart Rate Service attribute handles

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [serviceHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [charHandle](#)[[CYBLE\\_HRS\\_CHAR\\_COUNT](#)]
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [hrmCccdHandle](#)

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_HRSS\\_T::serviceHandle](#)

Heart Rate Service handle

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_HRSS\\_T::charHandle](#)[[CYBLE\\_HRS\\_CHAR\\_COUNT](#)]

Heart Rate Service characteristics handles and properties array

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_HRSS\\_T::hrmCccdHandle](#)

Heart Rate Measurement client char. config. descriptor Handle

## CYBLE\_HTS\_CHAR\_VALUE\_T Struct Reference

### Description

HTS Characteristic value parameter structure

**Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T](#) [connHandle](#)
- [CYBLE\\_HTS\\_CHAR\\_INDEX\\_T](#) [charIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T](#)\* [value](#)

**Field Documentation**

[CYBLE\\_CONN\\_HANDLE\\_T](#) [CYBLE\\_HTS\\_CHAR\\_VALUE\\_T::connHandle](#)

Peer device handle

[CYBLE\\_HTS\\_CHAR\\_INDEX\\_T](#) [CYBLE\\_HTS\\_CHAR\\_VALUE\\_T::charIndex](#)

Index of service characteristic

[CYBLE\\_GATT\\_VALUE\\_T](#)\* [CYBLE\\_HTS\\_CHAR\\_VALUE\\_T::value](#)

Characteristic value

**CYBLE\_HTS\_DESCR\_VALUE\_T Struct Reference****Description**

HTS Characteristic descriptor value parameter structure

**Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T](#) [connHandle](#)
- [CYBLE\\_HTS\\_CHAR\\_INDEX\\_T](#) [charIndex](#)
- [CYBLE\\_HTS\\_DESCR\\_INDEX\\_T](#) [descrIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T](#)\* [value](#)

**Field Documentation**

[CYBLE\\_CONN\\_HANDLE\\_T](#) [CYBLE\\_HTS\\_DESCR\\_VALUE\\_T::connHandle](#)

Peer device handle

[CYBLE\\_HTS\\_CHAR\\_INDEX\\_T](#) [CYBLE\\_HTS\\_DESCR\\_VALUE\\_T::charIndex](#)

Index of service characteristic

[CYBLE\\_HTS\\_DESCR\\_INDEX\\_T](#) [CYBLE\\_HTS\\_DESCR\\_VALUE\\_T::descrIndex](#)

Index of descriptor

[CYBLE\\_GATT\\_VALUE\\_T](#)\* [CYBLE\\_HTS\\_DESCR\\_VALUE\\_T::value](#)

Characteristic value

**CYBLE\_HTS\_FLOAT32 Struct Reference****Data Fields**

- int8 [exponent](#)
- int32 [mantissa](#)



## Field Documentation

**int8 CYBLE-HTS\_FLOAT32::exponent**

Base 10 exponent

**int32 CYBLE-HTS\_FLOAT32::mantissa**

Mantissa, should be using only 24 bits

## CYBLE-HTSC\_CHAR\_T Struct Reference

### Description

HTS Characteristic with descriptors

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T descrHandle](#)[CYBLE-HTS\_DESCR\_COUNT]
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T valueHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T endHandle](#)
- uint8 [properties](#)

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE-HTSC\_CHAR\_T::descrHandle[CYBLE-HTS\_DESCR\_COUNT]

Handle of descriptor

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE-HTSC\_CHAR\_T::valueHandle

Handle of Report characteristic value

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE-HTSC\_CHAR\_T::endHandle

End handle of characteristic

uint8 CYBLE-HTSC\_CHAR\_T::properties

Properties for value field

## CYBLE-HTSC\_T Struct Reference

### Description

Structure with discovered attributes information of Health Thermometer Service

### Data Fields

- [CYBLE-HTSC\\_CHAR\\_T charInfo](#)[CYBLE-HTS\_CHAR\_COUNT]

### Field Documentation

[CYBLE-HTSC\\_CHAR\\_T](#) CYBLE-HTSC\_T::charInfo[CYBLE-HTS\_CHAR\_COUNT]

Characteristics handles array

## CYBLE\_HTSS\_CHAR\_T Struct Reference

### Description

HTS Characteristic with descriptors

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T charHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T descrHandle](#)[[CYBLE HTS\\_DESCR\\_COUNT](#)]

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_HTSS\_CHAR\_T::charHandle

Handle of characteristic value

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_HTSS\_CHAR\_T::descrHandle[[CYBLE HTS\\_DESCR\\_COUNT](#)]

Handle of descriptor

## CYBLE\_HTSS\_T Struct Reference

### Description

Structure with Health Thermometer Service attribute handles

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T serviceHandle](#)
- [CYBLE\\_HTSS\\_CHAR\\_T charInfo](#)[[CYBLE HTS\\_CHAR\\_COUNT](#)]

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_HTSS\_T::serviceHandle

Health Thermometer Service handle

[CYBLE\\_HTSS\\_CHAR\\_T](#) CYBLE\_HTSS\_T::charInfo[[CYBLE HTS\\_CHAR\\_COUNT](#)]

Health Thermometer Service Characteristic handles

## CYBLE\_IAS\_CHAR\_VALUE\_T Struct Reference

### Description

Immediate Alert Service Characteristic Value parameters structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_IAS\\_CHAR\\_INDEX\\_T charIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T](#)\* value



## Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) [CYBLE\\_IAS\\_CHAR\\_VALUE\\_T::connHandle](#)

Connection handle

[CYBLE\\_IAS\\_CHAR\\_INDEX\\_T](#) [CYBLE\\_IAS\\_CHAR\\_VALUE\\_T::charIndex](#)

Characteristic index of Immediate Alert Service

[CYBLE\\_GATT\\_VALUE\\_T](#)\* [CYBLE\\_IAS\\_CHAR\\_VALUE\\_T::value](#)

Pointer to value of Immediate Alert Service characteristic

## CYBLE\_IASC\_T Struct Reference

### Description

Structure with discovered attributes information of Immediate Alert Service

### Data Fields

- [CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) [alertLevelChar](#)

## Field Documentation

[CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) [CYBLE\\_IASC\\_T::alertLevelChar](#)

Handle of Alert Level Characteristic of Immediate Alert Service

## CYBLE\_IASS\_T Struct Reference

### Description

Structure with Immediate Alert Service attribute handles

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [serviceHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [alertLevelCharHandle](#)

## Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_IASS\\_T::serviceHandle](#)

Immediate Alert Service handle

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_IASS\\_T::alertLevelCharHandle](#)

Handle of Alert Level Characteristic

## CYBLE\_L2CAP\_CBFC\_CONN\_CNF\_PARAM\_T Struct Reference

### Description

Connect confirmation parameter



## Data Fields

- uint8 [bdHandle](#)
- uint16 [lCid](#)
- uint16 [response](#)
- [CYBLE\\_L2CAP\\_CBFC\\_CONNECT\\_PARAM\\_T](#) [connParam](#)

## Field Documentation

uint8 CYBLE\_L2CAP\_CBFC\_CONN\_CNF\_PARAM\_T::bdHandle

bd handle of the remote device

uint16 CYBLE\_L2CAP\_CBFC\_CONN\_CNF\_PARAM\_T::lCid

Local CID

uint16 CYBLE\_L2CAP\_CBFC\_CONN\_CNF\_PARAM\_T::response

Response codes for Connection parameter update request

[CYBLE\\_L2CAP\\_CBFC\\_CONNECT\\_PARAM\\_T](#) CYBLE\_L2CAP\_CBFC\_CONN\_CNF\_PARAM\_T::connParam

L2CAP Credit based flow Connection parameter

## CYBLE\_L2CAP\_CBFC\_CONN\_IND\_PARAM\_T Struct Reference

### Description

Connect indication parameter

### Data Fields

- uint8 [bdHandle](#)
- uint16 [lCid](#)
- uint16 [psm](#)
- [CYBLE\\_L2CAP\\_CBFC\\_CONNECT\\_PARAM\\_T](#) [connParam](#)

## Field Documentation

uint8 CYBLE\_L2CAP\_CBFC\_CONN\_IND\_PARAM\_T::bdHandle

bd handle of the remote device

uint16 CYBLE\_L2CAP\_CBFC\_CONN\_IND\_PARAM\_T::lCid

Local CID

uint16 CYBLE\_L2CAP\_CBFC\_CONN\_IND\_PARAM\_T::psm

PSM value for the Protocol

[CYBLE\\_L2CAP\\_CBFC\\_CONNECT\\_PARAM\\_T](#) CYBLE\_L2CAP\_CBFC\_CONN\_IND\_PARAM\_T::connParam

L2CAP Credit based flow Connection parameter



## CYBLE\_L2CAP\_CBFC\_CONNECT\_PARAM\_T Struct Reference

### Description

L2CAP Credit based flow Connection parameter

### Data Fields

- uint16 [mtu](#)
- uint16 [mps](#)
- uint16 [credit](#)

### Field Documentation

#### uint16 CYBLE\_L2CAP\_CBFC\_CONNECT\_PARAM\_T::mtu

L2CAP MTU - Maximum SDU Size

The L2CAP MTU field specifies the maximum SDU size (in octets) that the L2CAP layer entity sending the LE Credit Based Connection Request can receive on this channel. L2CAP implementations shall support a minimum L2CAP MTU size of 23 octets.

#### uint16 CYBLE\_L2CAP\_CBFC\_CONNECT\_PARAM\_T::mps

MPS - Maximum PDU Size

The MPS field specifies the maximum payload size (in octets) that the L2CAP layer entity sending the LE Credit Based Connection Request is capable of receiving on this channel. L2CAP implementations shall support a minimum MPS of 23 octets and may support an MPS up to 65488 octets.

#### uint16 CYBLE\_L2CAP\_CBFC\_CONNECT\_PARAM\_T::credit

Initial number of Credits

The initial credit value indicates the number of LE-frames that the peer device can send to the L2CAP layer entity sending the LE Credit Based Connection Request. The initial credit value shall be in the range of 0 to 1.

## CYBLE\_L2CAP\_CBFC\_DATA\_WRITE\_PARAM\_T Struct Reference

### Description

Data Write parameter

### Data Fields

- uint16 [lCid](#)
- [CYBLE\\_L2CAP\\_RESULT\\_PARAM\\_T result](#)
- uint8 \* [buffer](#)
- uint16 [bufferLength](#)

### Field Documentation

#### uint16 CYBLE\_L2CAP\_CBFC\_DATA\_WRITE\_PARAM\_T::lCid

Local CID



**CYBLE\_L2CAP\_RESULT\_PARAM\_T CYBLE\_L2CAP\_CBFC\_DATA\_WRITE\_PARAM\_T::result**

The result field indicates the outcome of the connection request. The result value of 0x0000 indicates success while a non-zero value indicates the connection request failed or is pending.

**uint8\* CYBLE\_L2CAP\_CBFC\_DATA\_WRITE\_PARAM\_T::buffer**

Currently NULL. For future usage

**uint16 CYBLE\_L2CAP\_CBFC\_DATA\_WRITE\_PARAM\_T::bufferLength**

Currently 0. For future usage

**CYBLE\_L2CAP\_CBFC\_DISCONN\_CNF\_PARAM\_T Struct Reference****Description**

Disconnect confirmation parameter

**Data Fields**

- uint16 [lCid](#)
- [CYBLE\\_L2CAP\\_RESULT\\_PARAM\\_T result](#)

**Field Documentation****uint16 CYBLE\_L2CAP\_CBFC\_DISCONN\_CNF\_PARAM\_T::lCid**

Local CID

**CYBLE\_L2CAP\_RESULT\_PARAM\_T CYBLE\_L2CAP\_CBFC\_DISCONN\_CNF\_PARAM\_T::result**

The result field indicates the outcome of the connection request. The result value of 0x0000 indicates success while a non-zero value indicates the connection request failed or is pending.

**CYBLE\_L2CAP\_CBFC\_LOW\_RX\_CREDIT\_PARAM\_T Struct Reference****Description**

Rx credit info parameter

**Data Fields**

- uint16 [lCid](#)
- uint16 [credit](#)

**Field Documentation****uint16 CYBLE\_L2CAP\_CBFC\_LOW\_RX\_CREDIT\_PARAM\_T::lCid**

Local CID

**uint16 CYBLE\_L2CAP\_CBFC\_LOW\_RX\_CREDIT\_PARAM\_T::credit**

The number of credits (LE-frames)



## CYBLE\_L2CAP\_CBFC\_LOW\_TX\_CREDIT\_PARAM\_T Struct Reference

### Description

Tx credit info parameter

### Data Fields

- uint16 [lCid](#)
- [CYBLE\\_L2CAP\\_RESULT\\_PARAM\\_T result](#)
- uint16 [credit](#)

### Field Documentation

uint16 CYBLE\_L2CAP\_CBFC\_LOW\_TX\_CREDIT\_PARAM\_T::lCid

Local CID

[CYBLE\\_L2CAP\\_RESULT\\_PARAM\\_T](#) CYBLE\_L2CAP\_CBFC\_LOW\_TX\_CREDIT\_PARAM\_T::result

A result value of 0x0000 indicates success, while a non-zero value indicates an error condition (e.g. credit overflow, if total number of credits crosses specification defined maximum limit of 0xFFFF)

uint16 CYBLE\_L2CAP\_CBFC\_LOW\_TX\_CREDIT\_PARAM\_T::credit

The number of credits (LE-frames)

## CYBLE\_L2CAP\_CBFC\_RX\_PARAM\_T Struct Reference

### Description

Receive Data parameter

### Data Fields

- uint16 [lCid](#)
- [CYBLE\\_L2CAP\\_RESULT\\_PARAM\\_T result](#)
- uint8 \* [rxData](#)
- uint16 [rxDataLength](#)

### Field Documentation

uint16 CYBLE\_L2CAP\_CBFC\_RX\_PARAM\_T::lCid

Local CID

[CYBLE\\_L2CAP\\_RESULT\\_PARAM\\_T](#) CYBLE\_L2CAP\_CBFC\_RX\_PARAM\_T::result

A result value of 0x0000 indicates success, while a non-zero value indicates an error condition (e.g. peer device violating credit flow, or L2CAP MTU size limit)

uint8\* CYBLE\_L2CAP\_CBFC\_RX\_PARAM\_T::rxData

Received L2cap Data

uint16 CYBLE\_L2CAP\_CBFC\_RX\_PARAM\_T::rxDataLength

Received L2cap Data Length



## CYBLE\_LLS\_CHAR\_VALUE\_T Struct Reference

### Description

Link Loss Service Characteristic Value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_LLS\\_CHAR\\_INDEX\\_T charIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\* value](#)

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_LLS\_CHAR\_VALUE\_T::connHandle  
Connection handle

[CYBLE\\_LLS\\_CHAR\\_INDEX\\_T](#) CYBLE\_LLS\_CHAR\_VALUE\_T::charIndex  
Characteristic index of Link Loss Service

[CYBLE\\_GATT\\_VALUE\\_T\\*](#) CYBLE\_LLS\_CHAR\_VALUE\_T::value  
Pointer to value of Link Loss Service characteristic

## CYBLE\_LLSC\_T Struct Reference

### Description

Structure with discovered attributes information of Link Loss Service

### Data Fields

- [CYBLE\\_SRVR\\_CHAR\\_INFO\\_T alertLevelChar](#)

### Field Documentation

[CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) CYBLE\_LLSC\_T::alertLevelChar  
Handle of Alert Level Characteristic of Link Loss Service

## CYBLE\_LLSS\_T Struct Reference

### Description

Structure with Link Loss Service attribute handles

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T serviceHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T alertLevelCharHandle](#)

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_LLSS\_T::serviceHandle  
Link Loss Service handle



[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_LLSS\\_T::alertLevelCharHandle](#)

Handle of Alert Level Characteristic

## CYBLE\_LNS\_CHAR\_VALUE\_T Struct Reference

### Description

LNS Characteristic Value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T](#) [connHandle](#)
- [CYBLE\\_LNS\\_CHAR\\_INDEX\\_T](#) [charIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T](#)\* [value](#)

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) [CYBLE\\_LNS\\_CHAR\\_VALUE\\_T::connHandle](#)

Peer device handle

[CYBLE\\_LNS\\_CHAR\\_INDEX\\_T](#) [CYBLE\\_LNS\\_CHAR\\_VALUE\\_T::charIndex](#)

Index of service characteristic

[CYBLE\\_GATT\\_VALUE\\_T](#)\* [CYBLE\\_LNS\\_CHAR\\_VALUE\\_T::value](#)

Characteristic value

## CYBLE\_LNS\_DESCR\_VALUE\_T Struct Reference

### Description

LNS Characteristic Descriptor Value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T](#) [connHandle](#)
- [CYBLE\\_LNS\\_CHAR\\_INDEX\\_T](#) [charIndex](#)
- [CYBLE\\_LNS\\_DESCR\\_INDEX\\_T](#) [descrIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T](#)\* [value](#)

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) [CYBLE\\_LNS\\_DESCR\\_VALUE\\_T::connHandle](#)

Peer device handle

[CYBLE\\_LNS\\_CHAR\\_INDEX\\_T](#) [CYBLE\\_LNS\\_DESCR\\_VALUE\\_T::charIndex](#)

Index of service characteristic

[CYBLE\\_LNS\\_DESCR\\_INDEX\\_T](#) [CYBLE\\_LNS\\_DESCR\\_VALUE\\_T::descrIndex](#)

Index of service characteristic descriptor



[CYBLE\\_GATT\\_VALUE\\_T](#)\* [CYBLE\\_LNS\\_DESCR\\_VALUE\\_T::value](#)

Descriptor value

## CYBLE\_LNSC\_CHAR\_T Struct Reference

### Description

Location and Navigation Client Characteristic structure type

### Data Fields

- uint8 [properties](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [valueHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [descrHandle](#)[[CYBLE\\_LNS\\_DESCR\\_COUNT](#)]
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [endHandle](#)

### Field Documentation

uint8 [CYBLE\\_LNSC\\_CHAR\\_T::properties](#)

Properties for value field

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_LNSC\\_CHAR\\_T::valueHandle](#)

Handle of server database attribute value entry

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_LNSC\\_CHAR\\_T::descrHandle](#)[[CYBLE\\_LNS\\_DESCR\\_COUNT](#)]

Location and Navigation client char. descriptor handle

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_LNSC\\_CHAR\\_T::endHandle](#)

Characteristic End Handle

## CYBLE\_LNSC\_T Struct Reference

### Description

Structure with discovered attributes information of Location and Navigation Service

### Data Fields

- [CYBLE\\_LNSC\\_CHAR\\_T](#) [charInfo](#)[[CYBLE\\_LNS\\_CHAR\\_COUNT](#)]

### Field Documentation

[CYBLE\\_LNSC\\_CHAR\\_T](#) [CYBLE\\_LNSC\\_T::charInfo](#)[[CYBLE\\_LNS\\_CHAR\\_COUNT](#)]

Characteristics handle + properties array

## CYBLE\_LNSS\_CHAR\_T Struct Reference

### Description

Location and Navigation Server Characteristic structure type



**Data Fields**

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [charHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [descrHandle](#)[[CYBLE\\_LNS\\_DESCR\\_COUNT](#)]

**Field Documentation**

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_LNSS\\_CHAR\\_T::charHandle](#)

Handle of characteristic value

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_LNSS\\_CHAR\\_T::descrHandle](#)[[CYBLE\\_LNS\\_DESCR\\_COUNT](#)]

Handle of descriptor

**CYBLE\_LNSS\_T Struct Reference****Description**

Structure with Location and Navigation Service attribute handles

**Data Fields**

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [serviceHandle](#)
- [CYBLE\\_LNSS\\_CHAR\\_T](#) [charInfo](#)[[CYBLE\\_LNS\\_CHAR\\_COUNT](#)]

**Field Documentation**

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_LNSS\\_T::serviceHandle](#)

Location and Navigation Service handle

[CYBLE\\_LNSS\\_CHAR\\_T](#) [CYBLE\\_LNSS\\_T::charInfo](#)[[CYBLE\\_LNS\\_CHAR\\_COUNT](#)]

Location and Navigation Service characteristics info array

**CYBLE\_NDCS\_CHAR\_VALUE\_T Struct Reference****Description**

Next DST Change Service Characteristic Value parameter structure

**Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T](#) [connHandle](#)
- [CYBLE\\_NDCS\\_CHAR\\_INDEX\\_T](#) [charIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\*](#) [value](#)

**Field Documentation**

[CYBLE\\_CONN\\_HANDLE\\_T](#) [CYBLE\\_NDCS\\_CHAR\\_VALUE\\_T::connHandle](#)

Peer device handle

[CYBLE\\_NDCS\\_CHAR\\_INDEX\\_T](#) [CYBLE\\_NDCS\\_CHAR\\_VALUE\\_T::charIndex](#)

Index of Next DST Change Service Characteristic





[CYBLE\\_GATT\\_VALUE\\_T](#)\* [CYBLE\\_NDCS\\_CHAR\\_VALUE\\_T::value](#)

Characteristic value

## CYBLE\_NDCSC\_T Struct Reference

### Description

Structure with discovered attributes information of Next DST Change Service

### Data Fields

- [CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) [charInfo](#)[[CYBLE\\_NDCS\\_CHAR\\_COUNT](#)]

### Field Documentation

[CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) [CYBLE\\_NDCSC\\_T::charInfo](#)[[CYBLE\\_NDCS\\_CHAR\\_COUNT](#)]

Characteristic handle and properties

## CYBLE\_NDCSS\_T Struct Reference

### Description

Structure with Device Information Service attribute handles

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [serviceHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [timeWithDst](#)

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_NDCSS\\_T::serviceHandle](#)

Handle of the Next DST Change Service

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_NDCSS\\_T::timeWithDst](#)

Handle of the Time with DST Characteristic

## CYBLE\_PASS\_CHAR\_VALUE\_T Struct Reference

### Description

Phone Alert Status Service Characteristic value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T](#) [connHandle](#)
- [CYBLE\\_PASS\\_CHAR\\_INDEX\\_T](#) [charIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T](#)\* [value](#)

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) [CYBLE\\_PASS\\_CHAR\\_VALUE\\_T::connHandle](#)

Peer device handle



[CYBLE\\_PASS\\_CHAR\\_INDEX\\_T](#) [CYBLE\\_PASS\\_CHAR\\_VALUE\\_T::charIndex](#)

Index of service characteristic

[CYBLE\\_GATT\\_VALUE\\_T\\*](#) [CYBLE\\_PASS\\_CHAR\\_VALUE\\_T::value](#)

Characteristic value

## CYBLE\_PASS\_DESCR\_VALUE\_T Struct Reference

### Description

Phone Alert Status Service Characteristic descriptor value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T](#) [connHandle](#)
- [CYBLE\\_PASS\\_CHAR\\_INDEX\\_T](#) [charIndex](#)
- [CYBLE\\_PASS\\_DESCR\\_INDEX\\_T](#) [descrIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\*](#) [value](#)

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) [CYBLE\\_PASS\\_DESCR\\_VALUE\\_T::connHandle](#)

Peer device handle

[CYBLE\\_PASS\\_CHAR\\_INDEX\\_T](#) [CYBLE\\_PASS\\_DESCR\\_VALUE\\_T::charIndex](#)

Index of service characteristic

[CYBLE\\_PASS\\_DESCR\\_INDEX\\_T](#) [CYBLE\\_PASS\\_DESCR\\_VALUE\\_T::descrIndex](#)

Index of service characteristic descriptor

[CYBLE\\_GATT\\_VALUE\\_T\\*](#) [CYBLE\\_PASS\\_DESCR\\_VALUE\\_T::value](#)

Descriptor value

## CYBLE\_PASSC\_CHAR\_T Struct Reference

### Description

Phone Alert Status Client Server's Characteristic structure type

### Data Fields

- uint8 [properties](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [valueHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [descrHandle](#) [\[CYBLE\\_PASS\\_DESCR\\_COUNT\]](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [endHandle](#)

### Field Documentation

uint8 [CYBLE\\_PASSC\\_CHAR\\_T::properties](#)

Properties for value field



**[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_PASSC\\_CHAR\\_T::valueHandle](#)**

Handle of Server database attribute value entry

**[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_PASSC\\_CHAR\\_T::descrHandle](#) [CYBLE\\_PASS\\_DESCR\\_COUNT](#)**

Phone Alert Status Client characteristics descriptors handles

**[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_PASSC\\_CHAR\\_T::endHandle](#)**

Characteristic End Handle

**CYBLE\_PASSC\_T Struct Reference****Description**

Structure with discovered attributes information of Phone Alert Status Service

**Data Fields**

- [CYBLE\\_PASSC\\_CHAR\\_T charInfo](#) [\[CYBLE\\_PASS\\_CHAR\\_COUNT\]](#)

**Field Documentation****[CYBLE\\_PASSC\\_CHAR\\_T](#) [CYBLE\\_PASSC\\_T::charInfo](#) [\[CYBLE\\_PASS\\_CHAR\\_COUNT\]](#)**

Characteristics handle and properties array

**CYBLE\_PASSS\_CHAR\_T Struct Reference****Description**

Structure with Phone Alert Status Service characteristics and descriptors attribute handles

**Data Fields**

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T charHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T descrHandle](#) [\[CYBLE\\_PASS\\_DESCR\\_COUNT\]](#)

**Field Documentation****[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_PASSS\\_CHAR\\_T::charHandle](#)**

Handle of characteristic value

**[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_PASSS\\_CHAR\\_T::descrHandle](#) [\[CYBLE\\_PASS\\_DESCR\\_COUNT\]](#)**

Handle of descriptor

**CYBLE\_PASSS\_T Struct Reference****Description**

Structure with Phone Alert Status Service attribute handles



**Data Fields**

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [serviceHandle](#)
- [CYBLE\\_PASSS\\_CHAR\\_T](#) [charInfo](#)[[CYBLE\\_PASS\\_CHAR\\_COUNT](#)]

**Field Documentation**

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_PASSS\\_T::serviceHandle](#)

Phone Alert Status Service handle

[CYBLE\\_PASSS\\_CHAR\\_T](#) [CYBLE\\_PASSS\\_T::charInfo](#)[[CYBLE\\_PASS\\_CHAR\\_COUNT](#)]

Phone Alert Status Service characteristics info array

**CYBLE\_RSCS\_CHAR\_VALUE\_T Struct Reference****Description**

Running Speed and Cadence Service Characteristic Value parameter structure

**Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T](#) [connHandle](#)
- [CYBLE\\_RSCS\\_CHAR\\_INDEX\\_T](#) [charIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\*](#) [value](#)

**Field Documentation**

[CYBLE\\_CONN\\_HANDLE\\_T](#) [CYBLE\\_RSCS\\_CHAR\\_VALUE\\_T::connHandle](#)

Peer device handle

[CYBLE\\_RSCS\\_CHAR\\_INDEX\\_T](#) [CYBLE\\_RSCS\\_CHAR\\_VALUE\\_T::charIndex](#)

Index of Running Speed and Cadence Service Characteristic

[CYBLE\\_GATT\\_VALUE\\_T\\*](#) [CYBLE\\_RSCS\\_CHAR\\_VALUE\\_T::value](#)

Characteristic value

**CYBLE\_RSCS\_DESCR\_VALUE\_T Struct Reference****Description**

Running Speed and Cadence Service Characteristic Descriptor Value parameter structure

**Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T](#) [connHandle](#)
- [CYBLE\\_RSCS\\_CHAR\\_INDEX\\_T](#) [charIndex](#)
- [CYBLE\\_RSCS\\_DESCR\\_INDEX\\_T](#) [descrIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\*](#) [value](#)

## Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) [CYBLE\\_RSCS\\_DESCR\\_VALUE\\_T::connHandle](#)

Connection handle

[CYBLE\\_RSCS\\_CHAR\\_INDEX\\_T](#) [CYBLE\\_RSCS\\_DESCR\\_VALUE\\_T::charIndex](#)

Characteristic index of the Service

[CYBLE\\_RSCS\\_DESCR\\_INDEX\\_T](#) [CYBLE\\_RSCS\\_DESCR\\_VALUE\\_T::descrIndex](#)

Characteristic index Descriptor the Service

[CYBLE\\_GATT\\_VALUE\\_T](#)\* [CYBLE\\_RSCS\\_DESCR\\_VALUE\\_T::value](#)

Pointer to value of the Service Characteristic Descriptor

## CYBLE\_RSCSC\_SRVR\_FULL\_CHAR\_INFO\_T Struct Reference

### Description

RSCS Service Full characteristic information type

### Data Fields

- [CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) [charInfo](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [descriptors](#) [\[CYBLE\\_RSCS\\_DESCR\\_COUNT\]](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [endHandle](#)

## Field Documentation

[CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) [CYBLE\\_RSCSC\\_SRVR\\_FULL\\_CHAR\\_INFO\\_T::charInfo](#)

Characteristic handle + properties

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_RSCSC\\_SRVR\\_FULL\\_CHAR\\_INFO\\_T::descriptors](#) [\[CYBLE\\_RSCS\\_DESCR\\_COUNT\]](#)

Characteristic descriptors handles handle

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_RSCSC\\_SRVR\\_FULL\\_CHAR\\_INFO\\_T::endHandle](#)

End handle of characteristic

## CYBLE\_RSCSC\_T Struct Reference

### Description

Structure with discovered attributes information of Running Speed and Cadence Service

### Data Fields

- [CYBLE\\_RSCSC\\_SRVR\\_FULL\\_CHAR\\_INFO\\_T](#) [characteristics](#) [\[CYBLE\\_RSCS\\_CHAR\\_COUNT\]](#)



## Field Documentation

[CYBLE\\_RSCSC\\_SRVR\\_FULL\\_CHAR\\_INFO\\_T](#) [CYBLE\\_RSCSC\\_T::characteristics](#) [[CYBLE\\_RSCS\\_CHAR\\_COUNT](#)]

Characteristics handles array

## CYBLE\_RSCSS\_CHAR\_T Struct Reference

### Description

RSCS Characteristic with descriptors

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [charHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [descrHandle](#) [[CYBLE\\_RSCS\\_DESCR\\_COUNT](#)]

## Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_RSCSS\\_CHAR\\_T::charHandle](#)

Handle of the characteristic value

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_RSCSS\\_CHAR\\_T::descrHandle](#) [[CYBLE\\_RSCS\\_DESCR\\_COUNT](#)]

Handle of the descriptor

## CYBLE\_RSCSS\_T Struct Reference

### Description

Structure with Running Speed and Cadence Service attribute handles

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [serviceHandle](#)
- [CYBLE\\_RSCSS\\_CHAR\\_T](#) [charInfo](#) [[CYBLE\\_RSCS\\_CHAR\\_COUNT](#)]

## Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_RSCSS\\_T::serviceHandle](#)

Running Speed and Cadence Service handle

[CYBLE\\_RSCSS\\_CHAR\\_T](#) [CYBLE\\_RSCSS\\_T::charInfo](#) [[CYBLE\\_RSCS\\_CHAR\\_COUNT](#)]

Array of Running Speed and Cadence Service Characteristics + Descriptors handles

## CYBLE\_RTUS\_CHAR\_VALUE\_T Struct Reference

### Description

Reference Time Update Service Characteristic Value parameter structure



**Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T](#) [connHandle](#)
- [CYBLE\\_RTUS\\_CHAR\\_INDEX\\_T](#) [charIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T](#)\* [value](#)

**Field Documentation**

[CYBLE\\_CONN\\_HANDLE\\_T](#) [CYBLE\\_RTUS\\_CHAR\\_VALUE\\_T::connHandle](#)

Peer device handle

[CYBLE\\_RTUS\\_CHAR\\_INDEX\\_T](#) [CYBLE\\_RTUS\\_CHAR\\_VALUE\\_T::charIndex](#)

Index of Reference Time Update Service Characteristic

[CYBLE\\_GATT\\_VALUE\\_T](#)\* [CYBLE\\_RTUS\\_CHAR\\_VALUE\\_T::value](#)

Characteristic value

**CYBLE\_RTUS\_TIME\_UPDATE\_STATE\_T Struct Reference****Description**

Time Update State Characteristic structure

**Data Fields**

- uint8 [currentState](#)
- uint8 [result](#)

**Field Documentation**

uint8 [CYBLE\\_RTUS\\_TIME\\_UPDATE\\_STATE\\_T::currentState](#)

Current state

uint8 [CYBLE\\_RTUS\\_TIME\\_UPDATE\\_STATE\\_T::result](#)

Result of Time update

**CYBLE\_RTUSC\_T Struct Reference****Description**

Structure with discovered attributes information of Reference Time Update Service

**Data Fields**

- [CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) [charInfo](#)[[CYBLE\\_RTUS\\_CHAR\\_COUNT](#)]

**Field Documentation**

[CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) [CYBLE\\_RTUSC\\_T::charInfo](#)[[CYBLE\\_RTUS\\_CHAR\\_COUNT](#)]

Characteristic handle and properties



## CYBLE\_RTUSS\_T Struct Reference

### Description

Structure with Reference Time Update Service attribute handles

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T serviceHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T timeUpdateCpHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T timeUpdateStateHandle](#)

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_RTUSS\_T::serviceHandle

Handle of the Reference Time Update Service

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_RTUSS\_T::timeUpdateCpHandle

Handle of the Time Update Control Point Characteristic

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_RTUSS\_T::timeUpdateStateHandle

Handle of the Time Update State Characteristic

## CYBLE\_SCPS\_CHAR\_VALUE\_T Struct Reference

### Description

Scan Parameters Service Characteristic Value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_SCPS\\_CHAR\\_INDEX\\_T charIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\* value](#)

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_SCPS\_CHAR\_VALUE\_T::connHandle

Peer device handle

[CYBLE\\_SCPS\\_CHAR\\_INDEX\\_T](#) CYBLE\_SCPS\_CHAR\_VALUE\_T::charIndex

Index of service characteristic

[CYBLE\\_GATT\\_VALUE\\_T\\*](#) CYBLE\_SCPS\_CHAR\_VALUE\_T::value

Characteristic value

## CYBLE\_SCPS\_DESCR\_VALUE\_T Struct Reference

### Description

Scan Parameters Service Characteristic Descriptor Value parameter structure





**Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T](#) `connHandle`
- [CYBLE\\_SCPS\\_CHAR\\_INDEX\\_T](#) `charIndex`
- [CYBLE\\_SCPS\\_DESCR\\_INDEX\\_T](#) `descrIndex`
- [CYBLE\\_GATT\\_VALUE\\_T\\*](#) `value`

**Field Documentation**

[CYBLE\\_CONN\\_HANDLE\\_T](#) `CYBLE_SCPS_DESCR_VALUE_T::connHandle`

Peer device handle

[CYBLE\\_SCPS\\_CHAR\\_INDEX\\_T](#) `CYBLE_SCPS_DESCR_VALUE_T::charIndex`

Index of service characteristic

[CYBLE\\_SCPS\\_DESCR\\_INDEX\\_T](#) `CYBLE_SCPS_DESCR_VALUE_T::descrIndex`

Index of service characteristic descriptor

[CYBLE\\_GATT\\_VALUE\\_T\\*](#) `CYBLE_SCPS_DESCR_VALUE_T::value`

Descriptor value

**CYBLE\_SCPSC\_T Struct Reference****Description**

Structure with discovered attributes information of Scan Parameters Service

**Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T](#) `connHandle`
- [CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) `intervalWindowChar`
- [CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) `refreshChar`
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) `refreshCccdHandle`

**Field Documentation**

[CYBLE\\_CONN\\_HANDLE\\_T](#) `CYBLE_SCPSC_T::connHandle`

Peer device handle

[CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) `CYBLE_SCPSC_T::intervalWindowChar`

Handle + properties of Scan Interval Window Characteristic

[CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) `CYBLE_SCPSC_T::refreshChar`

Handle + properties of Scan Refresh Characteristic

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) `CYBLE_SCPSC_T::refreshCccdHandle`

Handle of Client Characteristic Configuration Descriptor



## CYBLE\_SCPSS\_T Struct Reference

### Description

Structure with Scan Parameters Service attribute handles

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T serviceHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T intervalWindowCharHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T refreshCharHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T refreshCccdHandle](#)

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_SCPSS\_T::serviceHandle

Scan Parameter Service handle

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_SCPSS\_T::intervalWindowCharHandle

Handle of Scan Interval Window Characteristic

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_SCPSS\_T::refreshCharHandle

Handle of Scan Refresh Characteristic

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_SCPSS\_T::refreshCccdHandle

Handle of Client Characteristic Configuration Descriptor

## CYBLE\_SRVR\_CHAR\_INFO\_T Struct Reference

### Description

Characteristic Attribute handle + properties structure

### Data Fields

- uint8 [properties](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T valueHandle](#)

### Field Documentation

uint8 CYBLE\_SRVR\_CHAR\_INFO\_T::properties

Properties for value field

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_SRVR\_CHAR\_INFO\_T::valueHandle

Handle of server database attribute value entry

## CYBLE\_SRVR\_FULL\_CHAR\_INFO\_T Struct Reference

### Description

Service Full characteristic information type



**Data Fields**

- [CYBLE\\_SRVR\\_CHAR\\_INFO\\_T charInfo](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T endHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T descriptors](#)[\[CYBLE\\_ANS\\_DESCR\\_COUNT\]](#)

**Field Documentation**

[CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) [CYBLE\\_SRVR\\_FULL\\_CHAR\\_INFO\\_T::charInfo](#)

Characteristic handle + properties

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_SRVR\\_FULL\\_CHAR\\_INFO\\_T::endHandle](#)

End handle of characteristic

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_SRVR\\_FULL\\_CHAR\\_INFO\\_T::descriptors](#)[\[CYBLE\\_ANS\\_DESCR\\_COUNT\]](#)

Characteristic descriptors handles

**CYBLE\_STACK\_LIB\_VERSION\_T Struct Reference****Description**

This structure is used to hold version information of the BLE Stack Library

**Data Fields**

- uint8 [majorVersion](#)
- uint8 [minorVersion](#)
- uint8 [patch](#)
- uint8 [buildNumber](#)

**Field Documentation**

uint8 [CYBLE\\_STACK\\_LIB\\_VERSION\\_T::majorVersion](#)

The major version of the library

uint8 [CYBLE\\_STACK\\_LIB\\_VERSION\\_T::minorVersion](#)

The minor version of the library

uint8 [CYBLE\\_STACK\\_LIB\\_VERSION\\_T::patch](#)

The patch number of the library

uint8 [CYBLE\\_STACK\\_LIB\\_VERSION\\_T::buildNumber](#)

The build number of the library

**CYBLE\_STK\_APP\_DATA\_BUFF\_T Struct Reference****Description**

Set of buffers to be allocated by stack for stack operation



**Data Fields**

- uint16 [bufferSize](#)
- uint8 [bufferUnits](#)

**Field Documentation**

**uint16 CYBLE\_STK\_APP\_DATA\_BUFF\_T::bufferSize**

Size of the buffer chunk

**uint8 CYBLE\_STK\_APP\_DATA\_BUFF\_T::bufferUnits**

Number of the buffers units of 'bufferSize'

**CyBLE\_timerConfig Struct Reference****Data Fields**

- uint32 [timerPeriod](#)
- uint8 [timerMode](#)

**Field Documentation**

**uint32 CyBLE\_timerConfig::timerPeriod**

In ms

**uint8 CyBLE\_timerConfig::timerMode**

One shot, continuous.

**CYBLE\_TPS\_CHAR\_VALUE\_T Struct Reference****Description**

Tx Power Service Characteristic Value parameter structure

**Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T](#) [connHandle](#)
- [CYBLE\\_TPS\\_CHAR\\_INDEX\\_T](#) [charIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\*](#) [value](#)

**Field Documentation**

**[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_TPS\_CHAR\_VALUE\_T::connHandle**

Connection handle

**[CYBLE\\_TPS\\_CHAR\\_INDEX\\_T](#) CYBLE\_TPS\_CHAR\_VALUE\_T::charIndex**

Characteristic index of Tx Power Service

**[CYBLE\\_GATT\\_VALUE\\_T\\*](#) CYBLE\_TPS\_CHAR\_VALUE\_T::value**

Pointer to value of Tx Power Service characteristic



## CYBLE\_TPS\_DESCR\_VALUE\_T Struct Reference

### Description

Tx Power Service Characteristic Descriptor Value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_TPS\\_CHAR\\_INDEX\\_T charIndex](#)
- [CYBLE\\_TPS\\_CHAR\\_DESCRIPTOR\\_T descrIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\* value](#)

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_TPS\_DESCR\_VALUE\_T::connHandle

Connection handle

[CYBLE\\_TPS\\_CHAR\\_INDEX\\_T](#) CYBLE\_TPS\_DESCR\_VALUE\_T::charIndex

Characteristic index of Tx Power Service

[CYBLE\\_TPS\\_CHAR\\_DESCRIPTOR\\_T](#) CYBLE\_TPS\_DESCR\_VALUE\_T::descrIndex

Characteristic index Descriptor of Tx Power Service

[CYBLE\\_GATT\\_VALUE\\_T\\*](#) CYBLE\_TPS\_DESCR\_VALUE\_T::value

Pointer to value of Tx Power Service characteristic

## CYBLE\_TPSC\_T Struct Reference

### Description

Structure with discovered attributes information of Tx Power Service

### Data Fields

- [CYBLE\\_SRVR\\_CHAR\\_INFO\\_T txPowerLevelChar](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T txPowerLevelCccdHandle](#)

### Field Documentation

[CYBLE\\_SRVR\\_CHAR\\_INFO\\_T](#) CYBLE\_TPSC\_T::txPowerLevelChar

Tx Power Level Characteristic handle

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_TPSC\_T::txPowerLevelCccdHandle

Tx Power Level Client Characteristic Configuration Descriptor handle

## CYBLE\_TPSS\_T Struct Reference

### Description

Structure with Tx Power Service attribute handles



**Data Fields**

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [serviceHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [txPowerLevelCharHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [txPowerLevelCccdHandle](#)

**Field Documentation**

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_TPSS\\_T::serviceHandle](#)

Tx Power Service handle

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_TPSS\\_T::txPowerLevelCharHandle](#)

Tx Power Level Characteristic handle

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_TPSS\\_T::txPowerLevelCccdHandle](#)

Tx Power Level Client Characteristic Configuration Descriptor handle

**CYBLE\_UDS\_CHAR\_VALUE\_T Struct Reference****Description**

UDS Characteristic Value parameter structure

**Data Fields**

- [CYBLE\\_CONN\\_HANDLE\\_T](#) [connHandle](#)
- [CYBLE\\_UDS\\_CHAR\\_INDEX\\_T](#) [charIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\*](#) [value](#)
- [CYBLE\\_GATT\\_ERR\\_CODE\\_T](#) [gattErrorCode](#)

**Field Documentation**

[CYBLE\\_CONN\\_HANDLE\\_T](#) [CYBLE\\_UDS\\_CHAR\\_VALUE\\_T::connHandle](#)

Peer device handle

[CYBLE\\_UDS\\_CHAR\\_INDEX\\_T](#) [CYBLE\\_UDS\\_CHAR\\_VALUE\\_T::charIndex](#)

Index of service characteristic

[CYBLE\\_GATT\\_VALUE\\_T\\*](#) [CYBLE\\_UDS\\_CHAR\\_VALUE\\_T::value](#)

Characteristic value

[CYBLE\\_GATT\\_ERR\\_CODE\\_T](#) [CYBLE\\_UDS\\_CHAR\\_VALUE\\_T::gattErrorCode](#)

GATT error code for access control

**CYBLE\_UDS\_DESCR\_VALUE\_T Struct Reference****Description**

UDS Characteristic Descriptor Value parameter structure



## Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T](#) `connHandle`
- [CYBLE\\_UDS\\_CHAR\\_INDEX\\_T](#) `charIndex`
- [CYBLE\\_UDS\\_DESCR\\_INDEX\\_T](#) `descrIndex`
- [CYBLE\\_GATT\\_VALUE\\_T\\*](#) `value`

## Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) `CYBLE_UDS_DESCR_VALUE_T::connHandle`

Peer device handle

[CYBLE\\_UDS\\_CHAR\\_INDEX\\_T](#) `CYBLE_UDS_DESCR_VALUE_T::charIndex`

Index of service characteristic

[CYBLE\\_UDS\\_DESCR\\_INDEX\\_T](#) `CYBLE_UDS_DESCR_VALUE_T::descrIndex`

Index of service characteristic descriptor

[CYBLE\\_GATT\\_VALUE\\_T\\*](#) `CYBLE_UDS_DESCR_VALUE_T::value`

Descriptor value

## CYBLE\_UDSC\_CHAR\_T Struct Reference

### Description

User Data Client Characteristic structure type

### Data Fields

- `uint8` [properties](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) `valueHandle`
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) `descrHandle` [[CYBLE\\_UDS\\_DESCR\\_COUNT](#)]
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) `endHandle`

## Field Documentation

`uint8` `CYBLE_UDSC_CHAR_T::properties`

Properties for value field

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) `CYBLE_UDSC_CHAR_T::valueHandle`

Handle of server database attribute value entry

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) `CYBLE_UDSC_CHAR_T::descrHandle` [[CYBLE\\_UDS\\_DESCR\\_COUNT](#)]

User Data client char. descriptor handle

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) `CYBLE_UDSC_CHAR_T::endHandle`

Characteristic End Handle



## CYBLE\_UDSC\_T Struct Reference

### Description

Structure with discovered attributes information of User Data Service

### Data Fields

- [CYBLE\\_UDSC\\_CHAR\\_T charInfo](#)[[CYBLE\\_UDS\\_CHAR\\_COUNT](#)]

### Field Documentation

[CYBLE\\_UDSC\\_CHAR\\_T](#) [CYBLE\\_UDSC\\_T::charInfo](#)[[CYBLE\\_UDS\\_CHAR\\_COUNT](#)]

Characteristics handle + properties array

## CYBLE\_UDSS\_CHAR\_T Struct Reference

### Description

User Data Server Characteristic structure type

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T charHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T descrHandle](#)[[CYBLE\\_UDS\\_DESCR\\_COUNT](#)]

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_UDSS\\_CHAR\\_T::charHandle](#)

Handle of characteristic value

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_UDSS\\_CHAR\\_T::descrHandle](#)[[CYBLE\\_UDS\\_DESCR\\_COUNT](#)]

Handle of descriptor

## CYBLE\_UDSS\_T Struct Reference

### Description

Structure with User Data Service attribute handles

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T serviceHandle](#)
- [CYBLE\\_UDSS\\_CHAR\\_T charInfo](#)[[CYBLE\\_UDS\\_CHAR\\_COUNT](#)]

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_UDSS\\_T::serviceHandle](#)

User Data Service handle

[CYBLE\\_UDSS\\_CHAR\\_T](#) [CYBLE\\_UDSS\\_T::charInfo](#)[[CYBLE\\_UDS\\_CHAR\\_COUNT](#)]

User Data Service characteristics info array





## CYBLE\_UUID128\_T Struct Reference

### Description

GATT 128 Bit UUID type

### Data Fields

- uint8 **value** [CYBLE\_GATT\_128\_BIT\_UUID\_SIZE]

## CYBLE\_UUID\_T Union Reference

### Description

GATT UUID type

### Data Fields

- [CYBLE\\_UUID16 uuid16](#)
- [CYBLE\\_UUID128\\_T uuid128](#)

### Field Documentation

[CYBLE\\_UUID16](#) CYBLE\_UUID\_T::uuid16

16 Bit UUID

[CYBLE\\_UUID128\\_T](#) CYBLE\_UUID\_T::uuid128

128 Bit UUID

## CYBLE\_WPTS\_CHAR\_VALUE\_T Struct Reference

### Description

WPTS Characteristic value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_WPTS\\_CHAR\\_INDEX\\_T charIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\* value](#)

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_WPTS\_CHAR\_VALUE\_T::connHandle

Peer device handle

[CYBLE\\_WPTS\\_CHAR\\_INDEX\\_T](#) CYBLE\_WPTS\_CHAR\_VALUE\_T::charIndex

Index of service characteristic

[CYBLE\\_GATT\\_VALUE\\_T\\*](#) CYBLE\_WPTS\_CHAR\_VALUE\_T::value

Characteristic value



## CYBLE\_WPTS\_DESCR\_VALUE\_T Struct Reference

### Description

WPTS Characteristic descriptor value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T connHandle](#)
- [CYBLE\\_WPTS\\_CHAR\\_INDEX\\_T charIndex](#)
- [CYBLE\\_WPTS\\_DESCR\\_INDEX\\_T descrIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T\\* value](#)

### Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) CYBLE\_WPTS\_DESCR\_VALUE\_T::connHandle

Peer device handle

[CYBLE\\_WPTS\\_CHAR\\_INDEX\\_T](#) CYBLE\_WPTS\_DESCR\_VALUE\_T::charIndex

Index of service characteristic

[CYBLE\\_WPTS\\_DESCR\\_INDEX\\_T](#) CYBLE\_WPTS\_DESCR\_VALUE\_T::descrIndex

Index of descriptor

[CYBLE\\_GATT\\_VALUE\\_T\\*](#) CYBLE\_WPTS\_DESCR\_VALUE\_T::value

Characteristic value

## CYBLE\_WPTSC\_CHAR\_T Struct Reference

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T descrHandle](#) [\[CYBLE\\_WPTS\\_DESCR\\_COUNT\]](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T valueHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T endHandle](#)
- uint8 [properties](#)

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_WPTSC\_CHAR\_T::descrHandle [\[CYBLE\\_WPTS\\_DESCR\\_COUNT\]](#)

Handles of descriptors

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_WPTSC\_CHAR\_T::valueHandle

Handle of characteristic value

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_WPTSC\_CHAR\_T::endHandle

End handle of a characteristic

uint8 CYBLE\_WPTSC\_CHAR\_T::properties

Properties for value field



## CYBLE\_WPTSC\_T Struct Reference

### Description

WPTS Characteristic with descriptors

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T serviceHandle](#)
- [CYBLE\\_WPTSC\\_CHAR\\_T charInfo](#)[[CYBLE\\_WPTS\\_CHAR\\_COUNT](#)]

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_WPTSC\\_T::serviceHandle](#)

Wireless Power Transfer Service handle

[CYBLE\\_WPTSC\\_CHAR\\_T](#) [CYBLE\\_WPTSC\\_T::charInfo](#)[[CYBLE\\_WPTS\\_CHAR\\_COUNT](#)]

Wireless Power Transfer Service characteristics info structure

## CYBLE\_WPTSS\_CHAR\_T Struct Reference

### Description

Characteristic with descriptors

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T charHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T descrHandle](#)[[CYBLE\\_WPTS\\_DESCR\\_COUNT](#)]

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_WPTSS\\_CHAR\\_T::charHandle](#)

Handle of characteristic value

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_WPTSS\\_CHAR\\_T::descrHandle](#)[[CYBLE\\_WPTS\\_DESCR\\_COUNT](#)]

Handle of descriptor

## CYBLE\_WPTSS\_T Struct Reference

### Description

Structure with Wireless Power Transfer Service attribute handles

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T serviceHandle](#)
- [CYBLE\\_WPTSS\\_CHAR\\_T charInfo](#)[[CYBLE\\_WPTS\\_CHAR\\_COUNT](#)]



## Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_WPTSS\\_T::serviceHandle](#)

Wireless Power Transfer Service handle

[CYBLE\\_WPTSS\\_CHAR\\_T](#) [CYBLE\\_WPTSS\\_T::charInfo](#) [[CYBLE\\_WPTS\\_CHAR\\_COUNT](#)]

Wireless Power Transfer Characteristic handles

## CYBLE\_WSS\_CHAR\_VALUE\_T Struct Reference

### Description

WSS Characteristic value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T](#) [connHandle](#)
- [CYBLE\\_WSS\\_CHAR\\_INDEX\\_T](#) [charIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T](#)\* [value](#)

## Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) [CYBLE\\_WSS\\_CHAR\\_VALUE\\_T::connHandle](#)

Peer device handle

[CYBLE\\_WSS\\_CHAR\\_INDEX\\_T](#) [CYBLE\\_WSS\\_CHAR\\_VALUE\\_T::charIndex](#)

Index of service characteristic

[CYBLE\\_GATT\\_VALUE\\_T](#)\* [CYBLE\\_WSS\\_CHAR\\_VALUE\\_T::value](#)

Characteristic value

## CYBLE\_WSS\_DESCR\_VALUE\_T Struct Reference

### Description

WSS Characteristic descriptor value parameter structure

### Data Fields

- [CYBLE\\_CONN\\_HANDLE\\_T](#) [connHandle](#)
- [CYBLE\\_WSS\\_CHAR\\_INDEX\\_T](#) [charIndex](#)
- [CYBLE\\_WSS\\_DESCR\\_INDEX\\_T](#) [descrIndex](#)
- [CYBLE\\_GATT\\_VALUE\\_T](#)\* [value](#)

## Field Documentation

[CYBLE\\_CONN\\_HANDLE\\_T](#) [CYBLE\\_WSS\\_DESCR\\_VALUE\\_T::connHandle](#)

Peer device handle

[CYBLE\\_WSS\\_CHAR\\_INDEX\\_T](#) [CYBLE\\_WSS\\_DESCR\\_VALUE\\_T::charIndex](#)

Index of service characteristic



[CYBLE\\_WSS\\_DESCR\\_INDEX\\_T](#) [CYBLE\\_WSS\\_DESCR\\_VALUE\\_T::descrIndex](#)

Index of descriptor

[CYBLE\\_GATT\\_VALUE\\_T](#)\* [CYBLE\\_WSS\\_DESCR\\_VALUE\\_T::value](#)

Characteristic value

## CYBLE\_WSSC\_CHAR\_T Struct Reference

### Description

WSS Service Full characteristic information structure

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [valueHandle](#)
- uint8 [properties](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [endHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [descrHandle](#)[[CYBLE\\_WSS\\_DESCR\\_COUNT](#)]

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_WSSC\\_CHAR\\_T::valueHandle](#)

Handle of characteristic value

uint8 [CYBLE\\_WSSC\\_CHAR\\_T::properties](#)

Properties for value field

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_WSSC\\_CHAR\\_T::endHandle](#)

End handle of characteristic

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_WSSC\\_CHAR\\_T::descrHandle](#)[[CYBLE\\_WSS\\_DESCR\\_COUNT](#)]

Array of descriptor handles

## CYBLE\_WSSC\_T Struct Reference

### Description

Structure with discovered attributes information of Weight Scale Service

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [serviceHandle](#)
- [CYBLE\\_WSSC\\_CHAR\\_T](#) [charInfo](#)[[CYBLE\\_WSS\\_CHAR\\_COUNT](#)]

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) [CYBLE\\_WSSC\\_T::serviceHandle](#)

Weight Scale Service handle

[CYBLE\\_WSSC\\_CHAR\\_T](#) [CYBLE\\_WSSC\\_T::charInfo](#)[[CYBLE\\_WSS\\_CHAR\\_COUNT](#)]

Weight Scale Service characteristics info structure



## CYBLE\_WSSS\_CHAR\_T Struct Reference

### Description

Structure with Weight Scale Service attribute handles

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T charHandle](#)
- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T descrHandle](#)[[CYBLE\\_WSS\\_DESCR\\_COUNT](#)]

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_WSSS\_CHAR\_T::charHandle

Handle of characteristic value

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_WSSS\_CHAR\_T::descrHandle[[CYBLE\\_WSS\\_DESCR\\_COUNT](#)]

Array of descriptor handles

## CYBLE\_WSSS\_T Struct Reference

### Description

WSS Characteristic with descriptors handles

### Data Fields

- [CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T serviceHandle](#)
- [CYBLE\\_WSSS\\_CHAR\\_T charInfo](#)[[CYBLE\\_WSS\\_CHAR\\_COUNT](#)]

### Field Documentation

[CYBLE\\_GATT\\_DB\\_ATTR\\_HANDLE\\_T](#) CYBLE\_WSSS\_T::serviceHandle

Weight Scale Service handle

[CYBLE\\_WSSS\\_CHAR\\_T](#) CYBLE\_WSSS\_T::charInfo[[CYBLE\\_WSS\\_CHAR\\_COUNT](#)]

Array of characteristics and descriptors handles

## Resources

The BLE Component uses one BLESS block, two external crystals, interrupt(s), and an optional SCB Block:

Configuration	Resource Type				
	BLESS	SCB <sup>[1]</sup>	Interrupt	ECO	WCO <sup>[2]</sup>
Profile Mode	1	-	1	1	1
HCI Mode	1	1	2	1	1

## DC and AC Electrical Characteristics

Specifications are valid for  $-40\text{ }^{\circ}\text{C} \leq T_A \leq 85\text{ }^{\circ}\text{C}$  and  $T_J \leq 100\text{ }^{\circ}\text{C}$ , except where noted.  
Specifications are valid for 1.71 V to 5.5 V, except where noted.

Parameter	Description	Min	Typ	Max	Units	Details/Conditions
<b>RF Receiver Specification</b>						
RXS, IDLE	RX sensitivity with idle transmitter	–	–89	–	dBm	
	RX sensitivity with idle transmitter excluding Balun loss	–	–91	–	dBm	Guaranteed by design simulation
RXS, DIRTY	RX sensitivity with dirty transmitter	–	–87	–70	dBm	RF-PHY Specification (RCV-LE/CA/01/C)
RXS, HIGHGAIN	RX sensitivity in high-gain mode with idle transmitter	–	–91	–	dBm	
PRXMAX	Maximum input power	–10	–1	–	dBm	RF-PHY Specification (RCV-LE/CA/06/C)
CI1	Cochannel interference, Wanted signal at –67 dBm and Interferer at FRX	–	9	21	dB	RF-PHY Specification (RCV-LE/CA/03/C)
CI2	Adjacent channel interference Wanted signal at –67 dBm and Interferer at FRX $\pm 1$ MHz	–	3	15	dB	RF-PHY Specification (RCV-LE/CA/03/C)
CI3	Adjacent channel interference Wanted signal at –67 dBm and Interferer at FRX $\pm 2$ MHz	–	–29	–	dB	RF-PHY Specification (RCV-LE/CA/03/C)

<sup>1</sup> The BLE Component instantiates an SCB Component when configured in HCI Mode. Refer to the SCB Component datasheet for its resource usage.

<sup>2</sup> WCO is optional. It is used if Component deep sleep is required. If WCO is not used, then ILO is used as the LFCLK source.



Parameter	Description	Min	Typ	Max	Units	Details/Conditions
CI4	Adjacent channel interference Wanted signal at –67 dBm and Interferer at $\geq \text{FRX} \pm 3$ MHz	–	–39	–	dB	RF-PHY Specification (RCV- LE/CA/03/C)
CI5	Adjacent channel interference Wanted Signal at –67 dBm and Interferer at Image frequency ( $F_{\text{IMAGE}}$ )	–	–20	–	dB	RF-PHY Specification (RCV- LE/CA/03/C)
CI3	Adjacent channel interference Wanted signal at –67 dBm and Interferer at Image frequency ( $F_{\text{IMAGE}} \pm 1$ MHz)	–	–30	–	dB	RF-PHY Specification (RCV- LE/CA/03/C)
OBB1	Out-of-band blocking, Wanted signal at –67 dBm and Interferer at $F = 30\text{--}2000$ MHz	–30	–27	–	dBm	RF-PHY Specification (RCV- LE/CA/04/C)
OBB2	Out-of-band blocking, Wanted signal at –67 dBm and Interferer at $F = 2003\text{--}2399$ MHz	–35	–27	–	dBm	RF-PHY Specification (RCV- LE/CA/04/C)
OBB3	Out-of-band blocking, Wanted signal at –67 dBm and Interferer at $F = 2484\text{--}2997$ MHz	–35	–27	–	dBm	RF-PHY Specification (RCV- LE/CA/04/C)
OBB4	Out-of-band blocking, Wanted signal a –67 dBm and Interferer at $F = 3000\text{--}12750$ MHz	–30	–27	–	dBm	RF-PHY Specification (RCV- LE/CA/04/C)
IMD	Intermodulation performance Wanted signal at –64 dBm and 1- Mbps BLE, third, fourth, and fifth offset channel	–50	–	–	dBm	RF-PHY Specification (RCV- LE/CA/05/C)
RXSE1	Receiver spurious emission 30 MHz to 1.0 GHz	–	–	–57	dBm	100-kHz measurement bandwidth ETSI EN300 328 V1.8.1
RXSE2	Receiver spurious emission 1.0 GHz to 12.75 GHz	–	–	–47	dBm	1-MHz measurement bandwidth ETSI EN300 328 V1.8.1
<b>RF Transmitter Specifications</b>						
TXP, ACC	RF power accuracy	–	–	$\pm 4$	dB	
TXP, RANGE	RF power control range	–	20	–	dB	
TXP, 0dBm	Output power, 0-dB Gain setting (PA7)	–4	0	3	dBm	
TXP, MAX	Output power, maximum power setting (PA10)	–1	3	6	dBm	
TXP, MIN	Output power, minimum power setting (PA1)	–	–18	–	dBm	
F2AVG	Average frequency deviation for 10101010 pattern	185	–	–	kHz	RF-PHY Specification (TRM- LE/CA/05/C)



Parameter	Description	Min	Typ	Max	Units	Details/Conditions
F1AVG	Average frequency deviation for 11110000 pattern	225	250	275	kHz	RF-PHY Specification (TRM-LE/CA/05/C)
EO	Eye opening = $\Delta F2AVG/\Delta F1AVG$	0.8	–	–		RF-PHY Specification (TRM-LE/CA/05/C)
FTX, ACC	Frequency accuracy	–150	–	150	kHz	RF-PHY Specification (TRM-LE/CA/06/C)
FTX, MAXDR	Maximum frequency drift	–50	–	50	kHz	RF-PHY Specification (TRM-LE/CA/06/C)
FTX, INITDR	Initial frequency drift	–20	–	20	kHz	RF-PHY Specification (TRM-LE/CA/06/C)
FTX, DR	Maximum drift rate	–20	–	20	kHz/ 50 $\mu$ s	RF-PHY Specification (TRM-LE/CA/06/C)
IBSE1	In-band spurious emission at 2-MHz offset	–	–	–20	dBm	RF-PHY Specification (TRM-LE/CA/03/C)
IBSE2	In-band spurious emission at $\geq 3$ -MHz offset	–	–	–30	dBm	RF-PHY Specification (TRM-LE/CA/03/C)
TXSE1	Transmitter spurious emissions (average), <1.0 GHz	–	–	–55.5	dBm	FCC-15.247
TXSE2	Transmitter spurious emissions (average), >1.0 GHz	–	–	–41.5	dBm	FCC-15.247
<b>RF Current Specifications</b>						
IRX	Receive current in normal mode	–	18.7	–	mA	
IRX_RF	Radio receive current in normal mode	–	16.4	–	mA	Measured at $V_{DDR}$
IRX, HIGHGAIN	Receive current in high-gain mode	–	21.5	–	mA	
ITX, 3dBm	TX current at 3-dBm setting (PA10)	–	20	–	mA	
ITX, 0dBm	TX current at 0-dBm setting (PA7)	–	16.5	–	mA	
ITX_RF, 0dBm	Radio TX current at 0 dBm setting (PA7)	–	15.6	–	mA	Measured at $V_{DDR}$
ITX_RF, 0dBm	Radio TX current at 0 dBm excluding Balun loss	–	14.2	–	mA	Guaranteed by design simulation
ITX,-3dBm	TX current at –3-dBm setting (PA4)	–	15.5	–	mA	
ITX,-6dBm	TX current at –6-dBm setting (PA3)	–	14.5	–	mA	
ITX,-12dBm	TX current at –12-dBm setting (PA2)	–	13.2	–	mA	
ITX,-18dBm	TX current at –18-dBm setting (PA1)	–	12.5	–	mA	
lavg_1sec, 0dBm	Average current at 1-second BLE connection interval	–	18.9	–	$\mu$ A	TXP: 0 dBm; $\pm 20$ -ppm master and slave clock accuracy.
lavg_4sec, 0dBm	Average current at 4-second BLE connection interval	–	6.25	–	$\mu$ A	TXP: 0 dBm; $\pm 20$ -ppm master and slave clock accuracy.



Parameter	Description	Min	Typ	Max	Units	Details/Conditions
<b>General RF Specifications</b>						
FREQ	RF operating frequency	2400	–	2482	MHz	
CHBW	Channel spacing	–	2	–	MHz	
DR	On-air data rate	–	1000	–	kbps	
IDLE2TX	BLE.IDLE to BLE. TX transition time	–	120	140	µs	
IDLE2RX	BLE.IDLE to BLE. RX transition time	–	75	120	µs	
<b>RSSI Specifications</b>						
RSSI, ACC	RSSI accuracy	–	±5	–	dB	
RSSI, RES	RSSI resolution	–	1	–	dB	
RSSI, PER	RSSI sample period	–	6	–	µs	

The following table summarizes the different measurements of the time taken by the BLE firmware stack to perform / initiate different BLE operations. The measurements have been performed with IMO set to 12 MHz and connection interval set to 7.5ms.

Operation	Duration (µs)
'CyBle_ProcessEvents' execution time (Best case)	4
Worst case BLE ISR Execution time	86.3
Start Scan execution time	1860
Passive Scan receive advertisement duration	168
Active Scan receive {Advertisement + Scan Response} duration	320
Read request processing time on GATT Server (Attribute MTU = 512 Bytes)	23600
Write request processing time on GATT Server (Attribute MTU = 512 Bytes)	16800
Connection time on GAP Central	2690
Connection time on GAP Peripheral	1300
Start advertisement execution time	2960
'CyBle_EnterLPM' execution time	342
Notification processing time on GATT Server (Attribute MTU = 23 Bytes)	673
Write command processing time on GATT Server (Attribute MTU = 23 Bytes)	646

## Updating to BLE v2.x

If you are updating to BLE v2.x from version v1.0, 1.10 or 1.20 and if you have used *CYBLE\_EVT\_GATTS\_PREP\_WRITE\_REQ* or *CYBLE\_EVT\_GATTS\_EXEC\_WRITE\_REQ* events in your existing design, it is likely that your design will not build after the update.

The reason for this is that the mechanism for the events generation and the event parameters were modified to allow the *CYBLE\_EVT\_GATTS\_PREP\_WRITE\_REQ* and *CYBLE\_EVT\_GATTS\_EXEC\_WRITE\_REQ* events to be used by the Long Write Value and Reliable Write procedures.

The following table shows the changes between version 2.x and older versions of the BLE component.

#	v1.0-1.20	v2.x
1	Single <i>CYBLE_EVT_GATTS_PREP_WRITE_REQ</i> event is generated.	Multiple <i>CYBLE_EVT_GATTS_PREP_WRITE_REQ</i> events are generated
2	Multiple <i>CYBLE_EVT_GATTS_EXEC_WRITE_REQ</i> events are generated	Single <i>CYBLE_EVT_GATTS_EXEC_WRITE_REQ</i> event is generated.
3	<p>The <i>CYBLE_EVT_GATTS_PREP_WRITE_REQ</i> event has the following parameter structure:</p> <pre>typedef struct {     CYBLE_CONN_HANDLE_T connHandle;     CYBLE_GATT_DB_ATTR_HANDLE_T     attrHandle; } CYBLE_GATTS_PREP_WRITE_REQ_PARAM_T</pre>	<p>The <i>CYBLE_EVT_GATTS_PREP_WRITE_REQ</i> event has the following parameter structure:</p> <pre>typedef struct {     CYBLE_CONN_HANDLE_T connHandle;     CYBLE_GATT_HANDLE_VALUE_OFFSET_     PARAM_T * baseAddr;     uint8 currentPrepWriteReqCount;     uint8 gattErrorCode; } CYBLE_GATTS_PREP_WRITE_REQ_PARAM_T</pre>
4	<p>The <i>CYBLE_EVT_GATTS_EXEC_WRITE_REQ</i> event has the following parameter structure:</p> <pre>typedef struct {     CYBLE_CONN_HANDLE_T connHandle;     CYBLE_GATT_DB_ATTR_HANDLE_T     attrHandle;     uint16 length;     uint16 offset;     uint8 result; } CYBLE_GATTS_EXEC_WRITE_REQ_T</pre>	<p>The <i>CYBLE_EVT_GATTS_EXEC_WRITE_REQ</i> event has the following parameter structure:</p> <pre>typedef struct {     CYBLE_CONN_HANDLE_T connHandle;     CYBLE_GATT_HANDLE_VALUE_OFFSET_     PARAM_T * baseAddr;     uint8 prepWriteReqCount;     uint8 execWriteFlag;     CYBLE_GATT_DB_ATTR_HANDLE_T     attrHandle;     uint8 gattErrorCode; } CYBLE_GATTS_EXEC_WRITE_REQ_T</pre>

The following are detailed descriptions of the changes described in the table, and how they may impact your design:



**Item #1:**

In the older versions of the BLE component, the *CYBLE\_EVT\_GATTS\_PREP\_WRITE\_REQ* event was generated only once when the device received the first Prepare Write Request of a Long Write Value procedure. For responding to the *CYBLE\_EVT\_GATTS\_PREP\_WRITE\_REQ* event, the *CyBle\_GattsPrepWriteReqSupport()* function should be called by the application to inform the Client if the Server supports Long Writes. This functionality remains in BLE v2.x component.

In BLE v2.x, the *CyBle\_GattsPrepWriteReqSupport()* function should be called each time the device receives the first *CYBLE\_EVT\_GATTS\_PREP\_WRITE\_REQ* event of Long Write Value procedure. For the Reliable Write Procedure, the *CYBLE\_EVT\_GATTS\_PREP\_WRITE\_REQ* event is generated for each unique attribute handle, and therefore it requires calling the *CyBle\_GattsPrepWriteReqSupport()* function.

**Item #2:**

In the older versions of the BLE component, the *CYBLE\_EVT\_GATTS\_EXEC\_WRITE\_REQ* event was generated multiple times, and the number of events was dependent on the attribute MTU size and the length of the long attribute. This event contained the burst data of the long attribute, with the length and offset specified in the event parameter structure. When the last *CYBLE\_EVT\_GATTS\_EXEC\_WRITE\_REQ* was received, the event signaled that the data was actually written to the GATT database.

In the BLE v2.x component, the event is generated once for each Long Write Value procedure, and the event parameter provides the pointer to the start of the buffer where the data is temporarily stored. The data will be written to the GATT database only if there is a successful indication from the user, or if *gattErrorCode* equals to *CYBLE\_GATT\_ERR\_NONE*.

**Item #3:**

In the older BLE component versions, the *CYBLE\_GATTS\_PREP\_WRITE\_REQ\_PARAM\_T* event included the *eventParam -> attrHandle* parameter that included the attribute handle of a long attribute value that has been written.

In the BLE v2.x component, this parameter is placed in the following location of the event parameter structure:

```
eventParam -> baseAddr[eventParam ->
currentPrepWriteReqCount].handleValuePair.attrHandle.
```

For detailed description of each element, refer to the *CYBLE\_GATTS\_PREP\_WRITE\_REQ\_PARAM\_T* section.

**Item #4:**

In the older BLE component versions, the *CYBLE\_GATTS\_EXEC\_WRITE\_REQ\_T* event included the *eventParam* -> *length* and *eventParam* -> *offset* parameters. These are respectively equivalent to *eventParam* -> *baseAddr[n].handleValuePair.value.len* and *eventParam* -> *baseAddr[n].offset* in the BLE v2.x Component.

The *n* means the number of the burst to which the entire long value is divided. Both the older versions and BLE v2.x components include *eventParam* -> *attrHandle* parameters. However, in the BLE v2.x component, the parameter has a different purpose. The attribute handle is stored in the *eventParam* -> *baseAddr[n].handleValuePair.attrHandle* similar to *CYBLE\_GATTS\_PREP\_WRITE\_REQ\_PARAM\_T* struct. In the BLE v2.x component, the *eventParam* -> *result* was renamed to *eventParam* -> *execWriteFlag*.

For detailed description of each element, refer to the *CYBLE\_GATTS\_EXEC\_WRITE\_REQ\_T* section.

**Component Errata**

This section lists known problems with the component.

Cypress ID	Component Version	Problem	Workaround
210832	2.0, 2.10, 2.20, 2.30	Application using IMO to source HFCLK (at 3 MHz) for low power state may lead to CPU not waking up from deep sleep upon disconnection.	As per AN92584 (001-92584 *A), application should use ECO sourced HFCLK (at 3 MHz) instead of IMO. No workaround exists if customer insists on using IMO to source HFCLK instead of ECO for low power application.
224335	2.30	Scanning does not stop some times when the application is frequently switching between scanning and advertising operations.	Implement the application level timeout to restart scanning. This issue is fixed in the BLE 3.0 component.
225509	2.30	When the application tries to send L2CAP data, data transfer fails due to memory allocation failure. The issue occurs only when L2CAP is configured for MTU = 512 and MPS = 23. Issue does not occur in other configurations.	Recommendation is to use MPS, such that MTU/MPS <=10. This issue will be fixed in the BLE 3.0 component production release.



## BLE Stack Changes

This section lists changes made to the BLE Stack.

Version	Description of Changes	Reason for Changes / Impact
2.3.0.46	Updated internal operation of the CyBle_GapStopAdvertisement() API to wait on BLESS hardware ADV_ON_STATUS bit until advertising is actually stopped. It is done to reflect integrated "Advertising Status" for BLESS hardware and BLE Stack to support correct ADV stop operation to support all different IMO and BLESS frequency ranges.	BLESS DSM entry was not happening when a device advertisement of type high duty cycle ADV_DIRECT_IND was stopped by the application and the CPU was running at 7 MHz or less frequency.
	Updated description of GapcSetHostChannelClassification() API. Updated the HCI event handler function to return HCI Status event to application, when invalid parameters are passed to the function.	API description was not clear enough to use this API. Host was not returning the HCI status event for invalid input parameters.
	Updated the description for the CyBle_L2capChannelDataWrite() API. BLE Stack will return error code 'CYBLE_ERROR_INVALID_PARAMETER' when data input size is higher than permitted in the channel.	'CYBLE_ERROR_INVALID_PARAMETER' error code is more accurate than default 'CYBLE_ERROR_MAX' for this condition.
	Changed a default random address to Static random address in the BLE configuration data file.	The default random address, returned by the Stack, did not meet the criteria for a random address. Note that application is expected to set the random address and not use a default random address.
	All References to MTU in BLE Stack header files are replaced with either GATT MTU or L2CAP MTU explicitly.	MTU is used for both ATT and L2CAP MTU references.
	Removed 'CYBLE_ERROR_NO_DEVICE_ENTITY' error code from CyBle_GapRemoveOldestDeviceFromBondedList() API Description.	'CYBLE_ERROR_NO_DEVICE_ENTITY' error code is never returned by BLE Stack.
	Added descriptions for the following ENUM definitions: CYBLE_EVT_HOST_INVALID CYBLE_BLESS_PWR_LVL_T CYBLE_BLESS_ECO_CLK_DIV_T	Provide meaningful description to ENUMs.
	SMP FSM handler was modified to update negotiated authentication parameters to authenticated property, if OOB is used.	Core v4.1, Vol 3, Part H, Section 2.3.5.1 "If the out of band authentication method is used the key is assumed to be Authenticated MITM Protection."

Version	Description of Changes	Reason for Changes / Impact
	Changed number of bits used to generate random number for passkey display from 16 bits to 20 bits. Change is made in SMP FSM handler.	Passkey generated to display was never larger than 65535. As per spec (Core v4.2, Vol 3, Part C, Section 3.2.3.3) value should be between 000000 – 999999.
	BLE Stack updated to filter duplicate “scannable unidirect” type of advertising packets.	BLE device continuously receives Advertisement report if Filter Policy is set to "Scan Request: White list"
	Documentation update for the following functions: CyBle_EnterLPM() CyBle_ExitLPM() CyBle_ProcessEvents()	Documented usage of CPU Sleep Mode in BLE Stack while BLESS force exit is issued by BLE Stack when BLESS is in BLE Deep Sleep Mode. More clarity is added in all BLESS Low Power Mode APIs as call to CyBle_ProcessEvents(), CYBLE_ExitLPM() can cause BLESS force DSM exit.
	Updated the BT Timer code to handle timer creation with any order of timeouts.	If two timers were started simultaneously, the timeout didn't happen as per timeout provided. If a second timer was started with a lesser timeout thsn first, then second timer did not work as expected.
	L2CAP data path is modified for allocation and freeing of L2CAP data queue element.	Functional issue was found when bidirectional continuous large MTU size data transfer over L2CAP-CBFC was interrupted frequently.
2.2.0.36	Updated Synth Delay to interop with HP laptop and to avoid the extra modulated stream on '0's.	Touch Mouse was not able to establish connection with HP laptop which has Ralink RT3290 BLE4.0 Chipset.
	Clear the disconnection status in LL Connection Entity every time upon CONN_FAILED interrupt. UNSPECIFIED ERROR passed to application for any other possible corner case for application to remain in synch with BLE Component/Stack.	Sometime application never receives disconnect event even when the peer device is powered off.
	Changed the sequence of enabling/disabling interrupts during SCAN start and SCAN stop to avoid race condition where high priority interrupts occur to avoid SCAN FIFO becomes full.	Central hangs in scanning mode when lots of devices are advertising. GAPC_SCAN_PROGRESS_RESULT event is never generated.
2.1.0.30.	Updated existing interface between BLE component and BLE stack CyBle_StackInit() API for providing the flash address for storing the information with respect to bonding	To allow to retain the information of bonding when application is updated using OTA.
	Reduced the BLE stack start up time by removing the delay of 10ms used for FPGA. Reducing redundant HCI command exchanges between the Host and Controller layer during initialization in SoC mode	Reduced the BLE stack start up time which reduces the power during initialization.
	Dynamic memory usage within BLE Stack is optimized.	Effective RAM utilization





Version	Description of Changes	Reason for Changes / Impact
	Enhancement to register multiple L2CAP PSM specified during the Ble stack initialization.	Enhancement
	Memory corruption due to out of bound copying during read request is fixed.	Defect fix.
	Defect fixed to enable retrieving SMP keys using IDADDR.	Privacy 1.1: Device was not able to identify the device when connected with a public address which was previously Bonded with random address.
2.0.0.81	Removed autonomous initiation of VERSION_EXCHANGE after connection establishment from BLE Stack.	Resolves the interoperability issue with MI4 phone Bluetooth host. No impact to existing functionality.
	Added configurability for optimal RAM usage and consequently updated following. Updated existing interface between BLE Component and BLE Stack for CyBle_StackInit() API Added CyBle_L2capSetConfig() API	Added configurability for optimal RAM usage in BLE Component and Stack based on application configuration/requirement for usage of MTU and L2CAP features.  CyBle_L2capSetConfig() API is added to configure the BLE Stack for following L2CAP configuration:  Total dynamic channels (CIDs) required by application.  Total number of Credit Based Flow Control (CBFC) Protocol Service Multiplexing (PSM) channels required.  L2CAP Signaling transactions related timeout
	Updated handling of "CYBLE_EVT_GAPC_SCAN_PROGRESS_RESULT" in to filter and do not propagate advertising reports of type ADV_DIR_IND.	ADV_DIR_IND shall be sent to application only during observation procedure. This was being sent when the device is performing Limited or General Discovery procedure.
	Updated CyBle_GapcSetRemoteAddr() API	CyBle_GapcSetRemoteAddr was failing on subsequent call when same peer device changes its address between public and random. API is the updated to fix the issue.
	Updated CyBle_GapRemoveOldestDeviceFromBondedList() API.	The oldest device from the bond list was not getting removed from retention memory. It was only getting removed from RAM.  Added error code return value CYBLE_ERROR_NO_DEVICE_ENTITY to caller API in case where no device is present in bond list and the API is invoked.
	Updated CyBle_GapcResolveDevice() API	The CyBle_GapcResolveDevice() API had a side-effect, as the value of the input parameter identity resolution key "uint8 *irk" was getting changed after API execution.



Version	Description of Changes	Reason for Changes / Impact
	Updated CyBle_SetTxPower API	The API is changed for user convenience to avoid the value change of input parameter "CYBLE_BLESS_PWR_IN_DB_T *bleSsPwrLvl" after API execution.
	Updated handling of internal low power operation when simultaneous operation for ADV, CONN and SCAN is in progress.	Updated the internal low power operation for CONN to sustain when non-connectable ADV or passive SCAN is going on.
	Added event "CYBLE_EVT_GATTC_STOP_CMD_COMPLETE" Updated internal handling of GATT stop procedure to propagate "CYBLE_EVT_GATTC_STOP_CMD_COMPLETE" to application.	Added event "CYBLE_EVT_GATTC_STOP_CMD_COMPLETE" to indicate CyBle_GattcStopCmd() API operation is complete.
	GATT Database is enhanced to support varying length characteristic at run time.	Upcoming profile application such as User Data Service (UDS) require supporting varying length characteristic.  Previous approach had current attribute length store in FLASH and hence prevented run time modification.
	Updated BLE Stack to give timeout event CYBLE_EVT_TIMEOUT correctly for discovery procedure or observation procedure.	Observation procedure timeout did not occur after step 3: Connect with peer device and start any GATT procedure (MTU Exchange). Disconnect from peer device Start observation procedure with timeout
	Bonded device list handling is updated for clearing bond device operation.	Sixth time connection was failing after following steps are performed for 5-6 times Change local device address Connect and bond with peer device Disconnect and clear bonding info
	Updated BLE Stack to return CYBLE_ERROR_INVALID_PARAMETER when GATT write operation with invalid length is performed.	Error code "CYBLE_ERROR_INVALID_PARAMETER" was not given when GATT write characteristic operation was performed with invalid length with respect to set MTU size.
	L2CAP module modified to fix memory leak	Memory leak in L2CAP credit based flow control (CBFC) data path is fixed
1.0.0.184	Updated the CyBle_GattcDiscoverCharacteristicByUuid API to achieve characteristic discovery with 128-bit UUID using this API.	Defect fix
	Optimized the BLE Stack to reduce the system power consumption for BLE solutions.	Power optimization for BLE solutions

Version	Description of Changes	Reason for Changes / Impact
	Corrected the GATT server access error code when the attribute is not found.	Defect fix
	Provided more clarification for CYBLE_EVT_STACK_BUSY_STATUS event handling.	Better user experience.
1.0.0.181	Update internal device settings.	Fix for BLE RF link (transmit/receive) issues observed on some devices. Increase of ~0.3 mA on Rx current.
1.0.0.169	Initial BLE Stack version.	

## Component Changes

This section lists the major changes in the component from the previous version.

Version	Description of Changes	Reason for Changes / Impact
2.30.b	Updated the <a href="#">Component Errata</a> section to add two more items.	Added descriptions for Cypress IDs 224335 and 225509.
2.30.a	Edited the datasheet.	Updated the description for <a href="#">BLE Stack Changes</a> .
2.30	Added validation of the TX power level in the component GUI. 3 dBm value can be set only for both Adv/Scan TX power level and Connection TX power level simultaneously.	Hardware limitations.
	The new QD ID and Declaration ID# for BLE component Profiles were added in the table of <a href="#">Bluetooth Qualification</a> section	New QD ID and Declaration ID# were introduced to include qualification details about UDS, WSS, WSP, BCS and CTS (v1.1).
	The generation of an erroneous value length for a Custom Descriptor with 32-bit or 128-bit UUID was fixed.	In case when 32-bit or 128-bit UUID was used for the Custom Descriptor and BLE device was acting as a GATT Server, a wrong Descriptor UUID and value length were generated by the component.
	Updated the CyBle_NdcssGetCharacteristicValue() and CyBle_RtussGetCharacteristicValue() functions. They were always returning CYBLE_ERROR_INVALID_PARAMETER.	The reason for this was an incorrect condition check that was done after the value was written to the GATT database.
	Updated the following services: HIDS, SCPS, ESS, BMS, UDS, CTS. In cases of security mode usage, where pairing is required, these services were generating WRITE CHARACTERISTIC/DESCRIPTOR, NOTIFICATION or INDICATION ENABLED/DISABLED events even though the device wasn't paired. Also, the data wasn't written to the GATT DB.	Due to erroneous code, the events were generated prior to checking security settings.

Version	Description of Changes	Reason for Changes / Impact
	BLE Stack was updated to version 2.3.0.46.	See <a href="#">BLE Stack Changes</a> .
2.20	Support of the following profiles/services was added to the component: Apple Notification Center Service (ANCS) Body Composition Service (BCS) Bootloader Service (BTS) User Data Service (UDS) Weight Scale Profile (WSP) Weight Scale Service (WSS)	New feature-support added.
	BLE Code Snippets feature description added.	New feature-support added.
	A defect in the Current Time Service was fixed. The optional write permission of the Current Time and Local Time Information characteristics are now controlled by the corresponding permission flags in the BLE component customizer GUI.	In previous BLE component versions, the Current Time and Local Time Information characteristics were always writable regardless of permission flag settings.  If you write the Current Time and/or Local Time Information characteristics in your projects, make sure to update the corresponding permission flags properly, because by default the optional write permission is disabled.
	BLE stack was updated to version 2.2.0.36.	See <a href="#">BLE Stack Changes</a> .
2.10.a	Added the Component Errata section	Document known issues.
2.10	Support of the Wireless Power Transfer (WPT) Profile was added to the component.	New feature-support added.
	BLE stack was updated to version 2.1.0.30.	See <a href="#">BLE Stack Changes</a> .
2.0.a	Minor datasheet edits.	Fixed several typos.
2.0	Support of the following profiles was added to the component: Environmental Sensing Profile (ESP) Continuous Glucose Monitoring Profile (CGMP) Bond Management Service (BMS) Internet Protocol Support Profile (IPSP)	New feature-support added.
	Updated CyBle_StoreBondingData API description. New BLE device with 256K of Flash memory is not affected by modification of the clock settings.	New flash memory type doesn't require clock settings modification.

Version	Description of Changes	Reason for Changes / Impact
	<p>Changed long write and reliable write procedures.</p> <p>Refer to the <a href="#">Updating to v2.x</a> section for more information on the design impact of this change.</p>	<p>The component addresses a defect, where the application did not have the option to validate the data and only one prepare write event and multiple execute write events were going to the application.</p> <p>User impact:</p> <p>This change may have backward compatibility issues for some designs. The details are described in the <a href="#">Updating to v2.x</a> section.</p> <p>The following structures are modified:</p> <p>'CYBLE_GATTS_PREP_WRITE_REQ_PARAM_T'</p> <p>'CYBLE_GATTS_EXEC_WRITE_REQ_T'</p>
	BLE stack was updated to version 2.0.0.81	See <a href="#">BLE Stack Changes</a> .
1.20	Improved TX power level performance for +3 dBm option.	+3 dBm Tx Power level had no effect compared to 0 dBm
	Fixed Advertising Channel Map bit mask for "Channel 39" and "Channels 37 and 38" items.	Advertising Channel Map bit masks generated for "Channel 39" and "Channels 37 and 38" items were swapped.
	Changed the functions CyBle_CscsGetCharacteristicDescriptor() and CyBle_RscsGetCharacteristicDescriptor() to use CyBle_GattsReadAttributeValue() instead of CyBle_GattsWriteAttributeValue().	This corrected the functions that were not working.
	For Health Thermometer Service the "Out of Range" error code changed from 0xff (defined by Supplement to Bluetooth Core Specification) to 0x80 which is defined by HEALTH THERMOMETER SERVICE specification.	The change was made to bring the implementation in accordance with the Health Thermometer Service specification.
	<p>Added CyBle_ChangeAdDeviceAddress API to update the Bluetooth device address in the advertisement or scan response data structure.</p> <p>Added CyBle_GattGetBusyStatus API description in datasheet</p>	Device address was not updated in advertisement packet when silicon generated option selected in customizer.
	Fixed scanning state in Central role to reflect the customizer selection.	BLE Scan Type was always set to active scan.
	<p>Extended values input range for several characteristics to include "Unknown" value:</p> <ul style="list-style-type: none"> <li>- Time Zone</li> <li>- DST Offset</li> <li>- Day of Week</li> </ul>	Characteristics for CTS did not allow 'Unknown' settings
	Simplified the usage of CyBLE_GapUpdateAdvData API. Now CyBLE_GapUpdateAdvData API works in all BLESS states.	Better user experience.

Version	Description of Changes	Reason for Changes / Impact
	BLE stack was updated to version 1.0.1.184	See <a href="#">BLE Stack Changes</a> .
1.10	BLE Stack was updated to version 1.0.0.181.	See <a href="#">BLE Stack Changes</a> .
1.0.b	Support of the following profiles was added to the component: <ul style="list-style-type: none"> <li>Phone Alert Status Profile (PASP)</li> <li>Location and Navigation Profile (LNP)</li> <li>Cycling Speed and Cadence Profile (CSCP)</li> <li>Cycling Power Profile (CPP)</li> </ul>	New feature-support added.
	The <code>CYBLE_L2CAP_COMMAND_REJ_REASON_T</code> event was renamed to <code>CYBLE_EVT_L2CAP_COMMAND_REJ</code> .	The event was renamed to be consistent with other event name formats.
	The <code>CYBLE_EVT_GAP_RESOLVE_PVT_ADDR_VERIFY_CN</code> event was removed.	The event became obsolete.
	Removed WDT from the BLE Component.	In the preliminary release of the BLE Component, the protocol procedure timeout functionality was implemented using the WDT. For the production release, the Component was optimized to use the BLESS Link Layer timer.
	Edits to the datasheet.	Update Configure dialog screen captures. Added the <a href="#">APIs</a> into the datasheet. Added <a href="#">Unsupported Features</a> section. Added characterization data. Addressed all Errata from the preliminary version of the datasheet and removed the section.
	The following members of the <code>CYBLE_API_RESULT_T</code> structure were deprecated: <pre> CYBLE_ERROR_GATT_DB_INVALID_OFFSET, CYBLE_ERROR_GATT_DB_NULL_PARAMETER_NOT_ALLOWED, CYBLE_ERROR_GATT_DB_UNSUPPORTED_GROUP_TYPE, CYBLE_ERROR_GATT_DB_INSUFFICIENT_BUFFER_LEN, CYBLE_ERROR_GATT_DB_MORE_MATCHING_RESULT_FOUND, CYBLE_ERROR_GATT_DB_NO_MATCHING_RESULT, CYBLE_ERROR_GATT_DB_HANDLE_NOT_FOUND, CYBLE_ERROR_GATT_DB_HANDLE_NOT_IN_RANGE, </pre>	The elements weren't used as return values in any of the API functions.

Version	Description of Changes	Reason for Changes / Impact
	CYBLE_ERROR_GATT_DB_HANDLE_IN_GROUP_RANGE, CYBLE_ERROR_GATT_DB_INVALID_OPERATION, CYBLE_ERROR_GATT_DB_UUID_NOT_IN_BT_SPACE, CYBLE_ERROR_GATT_DB_INVALID_ATTR_HANDLE, CYBLE_ERROR_GATT_DB_INSUFFICIENT_SECURITY, CYBLE_ERROR_GATT_DB_INSUFFICIENT_ENC_KEY_SIZE, CYBLE_ERROR_GATT_DB_INVALID_INSTANCE, CYBLE_ERROR_GATT_DB_INCORRECT_UUID_FORMAT, CYBLE_ERROR_GATT_DB_UUID_FMT_UNSUPPORTED, CYBLE_ERROR_GATT_DB_TYPE_MISMATCH, CYBLE_ERROR_GATT_DB_INSUFFICIENT_ENCRYPTION, CYBLE_ERROR_L2CAP_NOT_ENOUGH_CREDITS	
1.0.a	Edits to the datasheet.	Added sections to describe WDT counter and interrupt. Clarified descriptions for several APIs and GUIs. Added Errata section. Moved API documentation to separate CHM file. Updated Functional Description section.
1.0	Initial document for new Component.	
	Initial BLE Stack version 1.0.0.169.	

© Cypress Semiconductor Corporation, 2015. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress product. Nor does it convey or imply any license under patent or other rights. Cypress products are not warranted nor intended to be used for medical, life support, life saving, critical control or safety applications, unless pursuant to an express written agreement with Cypress. Furthermore, Cypress does not authorize its products for use as critical Components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

PSoC® is a registered trademark, and PSoC Creator™ and Programmable System-on-Chip™ are trademarks of Cypress Semiconductor Corp. All other trademarks or registered trademarks referenced herein are property of the respective corporations.

Any Source Code (software and/or firmware) is owned by Cypress Semiconductor Corporation (Cypress) and is protected by and subject to worldwide patent protection (United States and foreign), United States copyright laws and international treaty provisions. Cypress hereby grants to licensee a personal, non-exclusive, non-transferable license to copy, use, modify, create derivative works of, and compile the Cypress Source Code and derivative works for the sole purpose of creating custom software and/or firmware in support of licensee product to be used only in conjunction with a Cypress integrated circuit as specified in the applicable agreement. Any reproduction, modification, translation, compilation, or representation of this Source Code except as specified above is prohibited without the express written permission of Cypress.

Disclaimer: CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Cypress reserves the right to make changes without further notice to the materials described herein. Cypress does not assume any liability arising out of the application or use of any product or circuit described herein. Cypress does not authorize its products for use as critical Components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress' product in a life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Use may be limited by and subject to the applicable Cypress software license agreement.

