


Operational Amplifier (Opamp)

1.70

Features

- Follower or Opamp configuration
- Unity gain bandwidth > 3.0 MHz
- Input offset voltage 2.0 mV max
- Rail-to-rail inputs and output
- Output direct low resistance connection to pin
- 25-mA output current
- Programmable power and bandwidth
- Internal connection for follower (saves pin)



General Description

The Opamp component provides a low-voltage, low-power operational amplifier and may be internally connected as a voltage follower. The inputs and output may be connected to internal routing nodes, directly to pins, or a combination of internal and external signals. The Opamp is suitable for interfacing with high-impedance sensors, buffering the output of voltage DACs, driving up to 25 mA; and building active filters in any standard topology.

Input/Output Connections

This section describes the various input and output connections for the Opamp. An asterisk (*) in the list of I/Os indicates that the I/O may be hidden on the symbol under the conditions listed in the description of that I/O.

Noninverting – Analog

When the Opamp is configured as a follower, this I/O is the voltage input. If the Opamp is configured as an Opamp, this I/O acts as the standard Opamp noninverting input.

Inverting – Analog *


When the Opamp component is configured for Opamp mode, this I/O is the normal inverting input. When the Opamp is configured for Follower mode, this I/O is hard-connected to the output and the I/O is unavailable.

Vout – Analog

The output is directly connected to a pin. It can drive 25 mA and can be connected to internal loads using the analog routing fabric. When used for internal routing, the output remains connected to the pin.


Schematic Macro Information

The default Opamp in the Component Catalog is a schematic macro using an Opamp component with default settings. The Opamp component is connected to an analog Pin component named Vout_1.

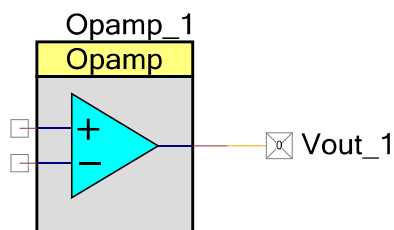

Component Parameters

Drag an Opamp component onto your design and double-click it to open the **Configure** dialog.

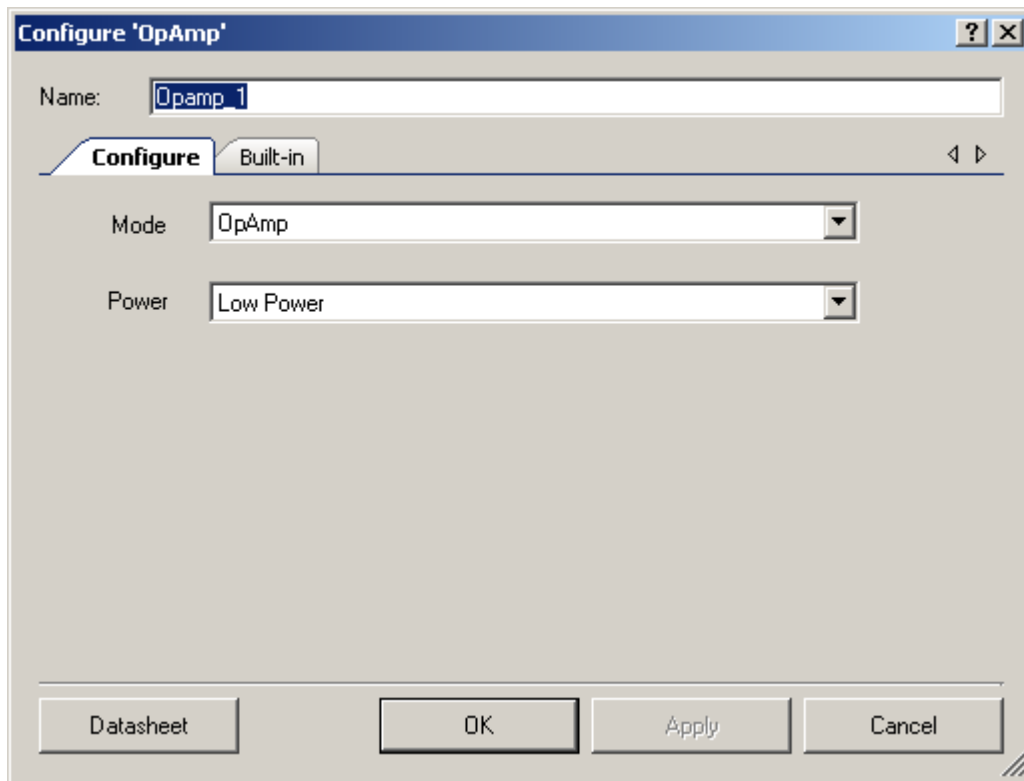


The Opamp has the following parameters:

Mode

This parameter allows you to select between two configurations: **OpAmp** and **Follower**. **Opamp** is the default configuration. In this mode, all three terminals are available for connection. In follower mode, the inverting input is internally connected to the output to create a voltage follower.

Figure 1. Configuration Options

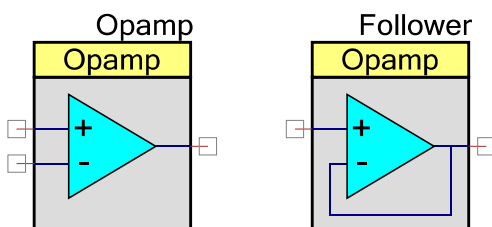

Power

The Opamp works over a wide range of operating currents. Higher operating current increases Opamp bandwidth. The **Power** parameter allows you to select the power level:

- In **High Power** and **Med Power** modes, the output is a class AB stage, enabling direct drive of high output currents.
- In **Low Power** mode, the output is a class A stage with limited current drive.
- In **Low Power Over Compensated** (LPOC) mode, the output is a class A stage.

For PSoC 3 Production silicon, the LPOC mode is used for low-power transimpedance amplifiers (TIAs). This mode has the same drive capability as low power, but includes added compensation for circuit topologies with higher than normal input capacitance, as seen in photo sensors and other current-output sensors of various types.

Wider-bandwidth TIAs can be implemented using the medium or high-power settings. In this case, exercise the usual care in dealing with compensation for capacitively loaded sources.

Note The above description of LPOC mode is correct for PSoC 3 Production silicon only. For PSoC 3 ES2 silicon, LPOC mode is not supported; use High Power mode instead. For PSoC 3 ES2 silicon, the High Power setting enables the 1.024-V Vref on the positive input. Any design with an Opamp that needs this Vref must include at least one Opamp that uses this High Power mode setting. Only High Power mode is supported on PSoC 5 silicon.

Placement

Each Opamp is directly connected to specific GPIOs.

	Noninverting Input	Inverting Input	Output
opamp_0	P0[2]	P0[3]	P0[1]
opamp_1	P3[5]	P3[4]	P3[6]
opamp_2	P0[4]	P0[5]	P0[0]
opamp_3	P3[3]	P3[2]	P3[7]

Refer to the device datasheet for the part being used for the specific physical pin connections.


Input signals may use the analog global routing buses in addition to the dedicated input pins. Using the direct connections uses fewer internal routing resources and results in lower route resistance and capacitance. The output pin associated with each specific location will always be driven by the Opamp, when enabled.

Ports P0[3] and P3[2] are also used for connection to a capacitor for bypassing the bandgap reference supplied to the ADC, for a reference output, or for an input from an external reference. When these reference connections are used, routing to the Opamp inverting inputs must be done through the analog global routing buses.



Figure 2 shows one example of how the Opamp may be connected using the Design-Wide Resources Pin Editor.

Figure 2. Example Placement

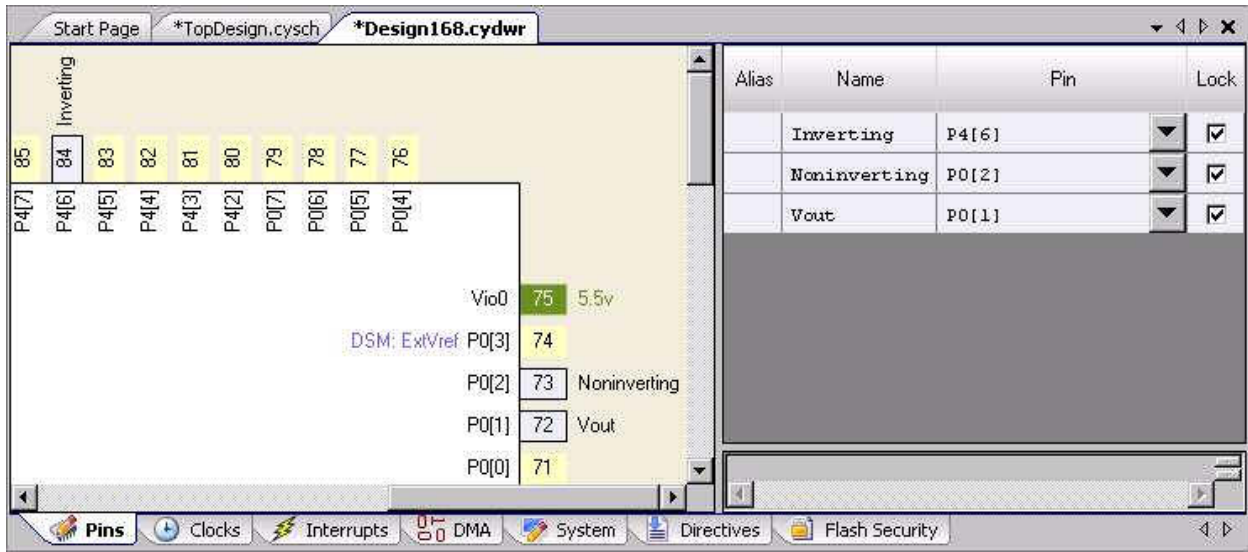

Resources

The Opamp component uses one Opamp resource per instance. When used in the Opamp mode with external components (that is, not routing the output through the analog globals), no routing resources are used.

Analog Blocks	Digital Blocks					API Memory (Bytes)		Pins (per External I/O)
	Datapaths	Macro cells	Status Registers	Control Registers	Counter7	Flash	RAM	
1 Opamp fixed block	N/A	N/A	N/A	N/A	N/A	202	2	3

Application Programming Interface

Application Programming Interface (API) routines allow you to configure the component using software. The following table lists and describes the interface to each function. The subsequent sections cover each function in more detail.

By default, PSoC Creator assigns the instance name “Opamp_1” to the first instance of a component in a given design. You can rename it to any unique value that follows the syntactic rules for identifiers. The instance name becomes the prefix of every global function name, variable, and constant symbol. For readability, the instance name used in the following table is “Opamp.”



Function	Description
Opamp_Start()	Turns on the Opamp and sets the power level to the value chosen during the parameter selection.
Opamp_Stop()	Disables Opamp (power down).
Opamp_SetPower()	Sets the power level.
Opamp_Sleep()	Stops and saves the user configuration.
Opamp_Wakeup()	Restores and enables the user configuration.
Opamp_Init()	Initializes or restores default Opamp configuration.
Opamp_Enable()	Enables the Opamp.
Opamp_SaveConfig()	Empty function. Provided for future use.
Opamp_RestoreConfig()	Empty function. Provided for future use.

Global Variables

Variable	Description
Opamp_initVar	Indicates whether the Opamp has been initialized. The variable is initialized to 0 and set to 1 the first time Opamp_Start() is called. This allows the component to restart without reinitialization after the first call to the Opamp_Start() routine. If reinitialization of the component is required, then the Opamp_Init() function can be called before the Opamp_Start() or Opamp_Enable() function.

void Opamp_Start(void)

Description: Turns on the Opamp and sets the power level to the value chosen during the parameter selection.

Parameters: None

Return Value: None

Side Effects: None

void Opamp_Stop(void)

Description: Turns off the Opamp and enable its lowest power state.

Parameters: None

Return Value: None

Side Effects: None



void Opamp_SetPower(uint8 power)**Description:** Sets the power level.**Note** Only High Power mode is supported on PSoC 5 silicon.**Parameters:** uint8 power: Sets the power level to one of four settings: LPOC, Low, Medium, or High.

Power Setting	Notes
Opamp_LPOCPOWER	Least power, compensated for TIA
Opamp_LOWPOWER	Least power, reduced bandwidth
Opamp_MEDPOWER	
Opamp_HIGHPower	Highest bandwidth

Return Value: None**Side Effects:** None**void Opamp_Sleep(void)****Description:** This is the preferred routine to prepare the component for sleep. The Opamp_Sleep() routine saves the current component state. Then it calls the Opamp_Stop() function and calls Opamp_SaveConfig() to save the hardware configuration.Call the Opamp_Sleep() function before calling the CyPmSleep() or the CyPmHibernate() function. Refer to the PSoC Creator *System Reference Guide* for more information about power management functions.**Parameters:** None**Return Value:** None**Side Effects:** None**void Opamp_Wakeup(void)****Description:** This is the preferred routine to restore the component to the state when Opamp_Sleep() was called. The Opamp_Wakeup() function calls the Opamp_RestoreConfig() function to restore the configuration. If the component was enabled before the Opamp_Sleep() function was called, the Opamp_Wakeup() function will also re-enable the component.**Parameters:** None**Return Value:** None**Side Effects:** Calling the Opamp_Wakeup() function without first calling the Opamp_Sleep() or Opamp_SaveConfig() function may produce unexpected behavior.

void Opamp_Init(void)

- Description:** Initializes or restores the component according to the customizer Configure dialog settings. It is not necessary to call Opamp_Init() because the Opamp_Start() routine calls this function and is the preferred method to begin component operation.
- Parameters:** None
- Return Value:** None
- Side Effects:** All registers will be set to values according to the customizer Configure dialog.

void Opamp_Enable(void)

- Description:** Activates the hardware and begins component operation. It is not necessary to call Opamp_Enable() because the Opamp_Start() routine calls this function, which is the preferred method to begin component operation.
- Parameters:** None
- Return Value:** None
- Side Effects:** If the initVar variable is already set, this function only calls the Opamp_Enable() function.

void Opamp_SaveConfig(void)

- Description:** Empty function. Provided for future use.
- Parameters:** None
- Return Value:** None
- Side Effects:** None

void Opamp_RestoreConfig(void)

- Description:** Empty function. Provided for future use.
- Parameters:** None
- Return Value:** None
- Side Effects:** None

Sample Firmware Source Code

PSoC Creator provides many example projects that include schematics and example code in the Find Example Project dialog. For component-specific examples, open the dialog from the Component Catalog or an instance of the component in a schematic. For general examples, open the dialog from the Start Page or **File** menu. As needed, use the **Filter Options** in the dialog to narrow the list of projects available to select.

Refer to the “Find Example Project” topic in the PSoC Creator Help for more information.

DC and AC Electrical Characteristics for PSoC 3

The following values are based on characterization data. Specifications are valid for $-40\text{ }^{\circ}\text{C} \leq T_A \leq 85\text{ }^{\circ}\text{C}$ and $T_J \leq 100\text{ }^{\circ}\text{C}$ except where noted. Unless otherwise specified in the tables below, all Typical values are for $T_A = 25\text{ }^{\circ}\text{C}$, $V_{DDA} = 5.0\text{ V}$, Power = High, output referenced to analog ground, V_{SSA} .

5.0-V/3.3-V DC Electrical Characteristics


Parameter	Description	Conditions	Min	Typ	Max	Units
V_I	Input voltage range		V_{SSA}	–	V_{DDA}	V
V_{IOFF}	Input offset voltage	Temp = $-40\text{ }^{\circ}\text{C}$ to $+70\text{ }^{\circ}\text{C}$	–	0.5	2	mV
TCVos	Input offset voltage drift with temperature	Power mode = high	–	± 12	± 30	$\mu\text{V}/^{\circ}\text{C}$
A_{VOL}	Open-loop gain	Power mode = high	90	–	–	dB
$Ge1$	Gain error, unity gain buffer mode	$R_{LOAD} = 1\text{ k}\Omega$	–	–	± 0.1	%
R_{IN}	Input resistance	Positive gain, noninverting input	–	–	–	$M\Omega$
C_{IN}	Input capacitance	Routing from pin	–	–	18	pF
V_O	Output voltage range	1 mA, source or sink, power mode = high	$V_{SSA} + 0.05$	–	$V_{DDA} - 0.05$	V
		100 K to $V_{DDA}/2$, $G = 1$	–	–	–	V
I_{OUT}	Output current, source or sink	$V_{SSA} + 500\text{ mV} \leq V_{OUT} \leq V_{DDA} - 500\text{ mV}$, $V_{DDA} > 2.7\text{ V}$	25	–	–	mA
		$V_{SSA} + 500\text{ mV} \leq V_{out} \leq V_{DDA} - 500\text{ mV}$, $1.7\text{ V} = V_{DDA} \leq 2.7\text{ V}$	16	–	–	mA
I_{DD}	Quiescent current	Power mode = min	–	200	270	μA
		Power mode = low	–	250	400	μA
		Power mode = med	–	330	950	μA




Parameter	Description	Conditions	Min	Typ	Max	Units
		Power mode = high	–	1160	2500	μA
CMRR	Common mode rejection ratio		80	–	–	dB
PSRR	Power supply rejection ratio	$V_{DDA} \geq 2.7\text{ V}$	85	–	–	dB
		$V_{DDA} \leq 2.7\text{ V}$	70	–	–	

Figures


Histogram Input Offset Voltage
 $T = 25^\circ\text{C}$, $V_{DDA} = 5.0\text{ V}$

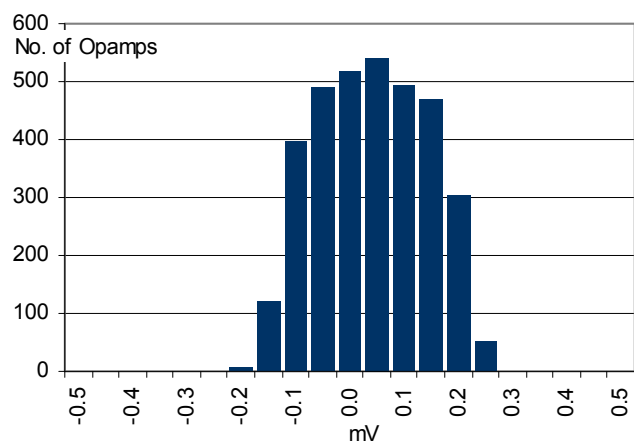


Opamp Operating Current versus V_{DDA} , and Power Mode

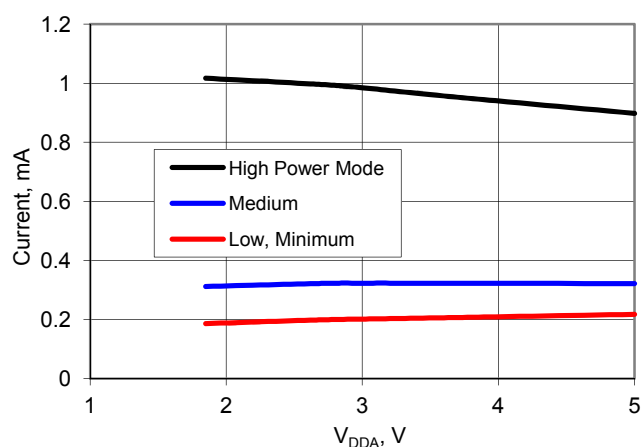


Operating Current versus Temperature, $V_{DD} = 5.0\text{ V}$

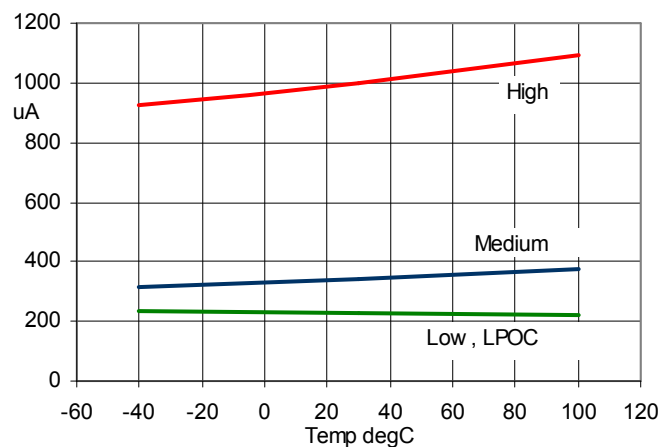


Operating Current versus Voltage $T = 25^\circ\text{C}$

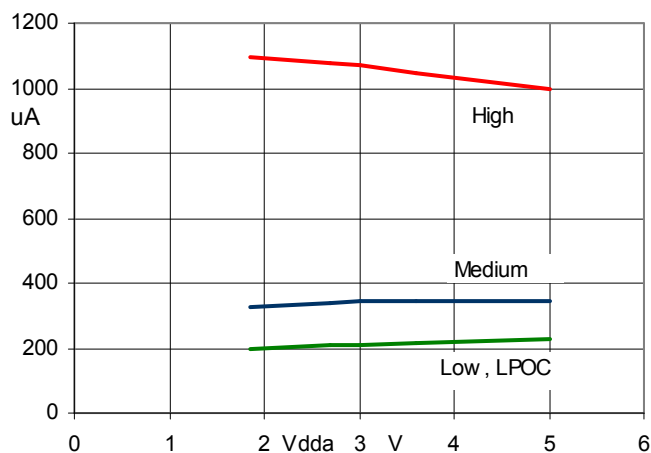


Output Voltage versus Load Current,
 $V_{DDA} = 1.71 \text{ V}$, Power = High

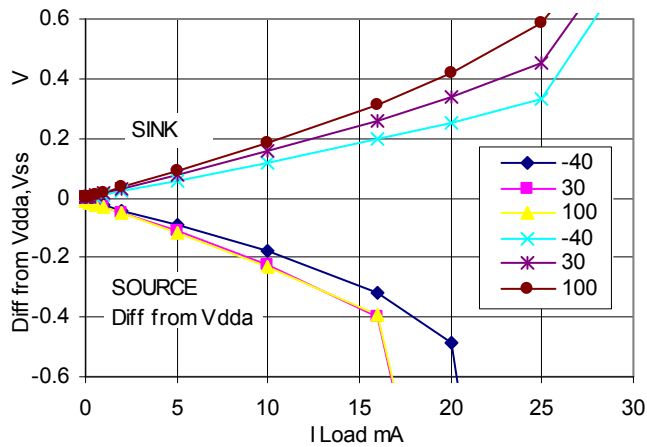


Output Voltage versus Load Current,
 $V_{DDA} = 5.0 \text{ V}$, Power = High

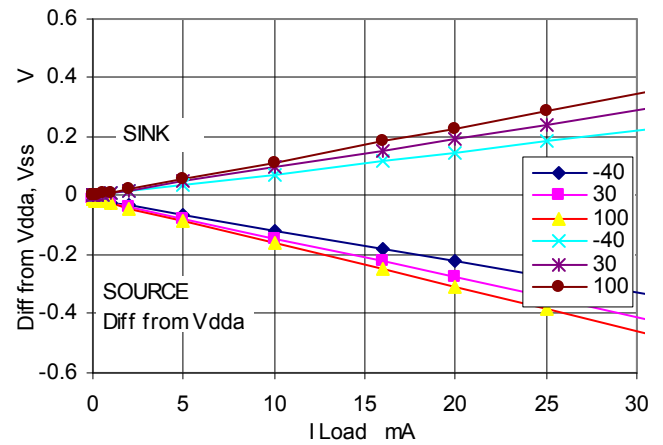


Output Voltage versus Load Current,
 $V_{DDA} = 2.7 \text{ V}$, Power = Med

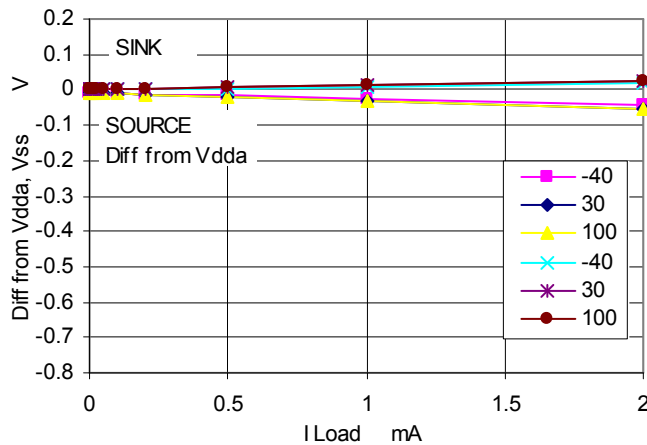


Output Voltage versus Load Current
 $V_{DDA} = 5.0 \text{ V}$, Power = Medium

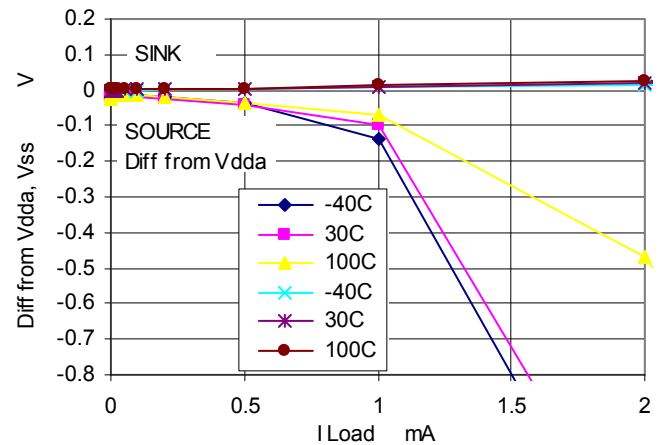


Output Voltage versus Load Current,
 $V_{DDA} = 2.7 \text{ V}$, Power = Low

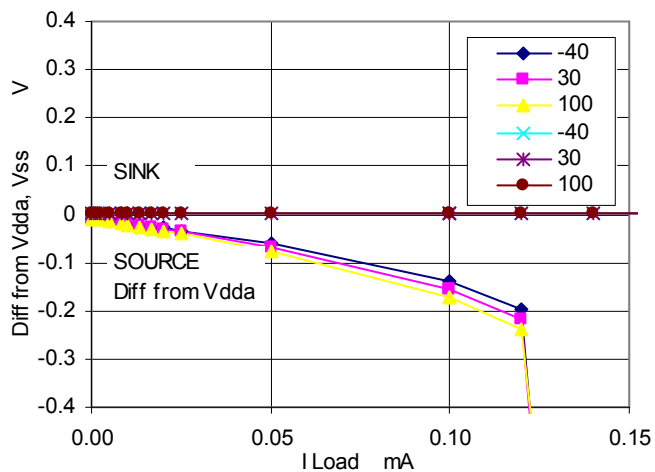

Output Voltage versus Load Current,
 $V_{DDA} = 5.0 \text{ V}$, Power = Low

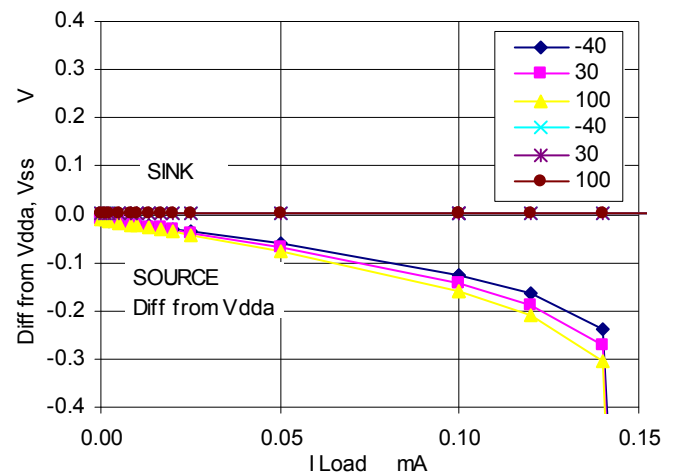

Input Offset Voltage versus Temperature
Power = High, $V_{DDA} = 5.0\text{ V}$

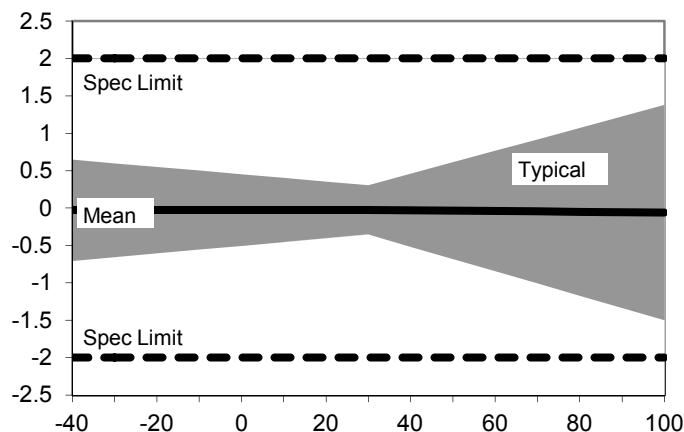


5.0 V/3.3 V AC Electrical Characteristics

Parameter	Description	Conditions	Min	Typ	Max	Units
GBW	Gain-bandwidth product	Power mode = minimum, 100 mV pk-pk, 15-pF load	1	5.4	–	MHz
		Power mode = low, 100 mV pk-pk, 15-pF load	2	5.1	–	MHz
		Power mode = medium, 100 mV pk-pk, 15-pF load	1	3.5	–	MHz
		Power mode = high, 100 mV pk-pk, 200-pF load	3	8	–	MHz
SR	Slew Rate	Power mode = low, 15-pF load	1.1	2.4	–	V/μs
		Power mode = medium, 15-pF load	0.9	1.4	–	V/μs
		Power mode = high, 200-pF load	3	4.3	–	V/μs
e_n	Input noise density	Power mode = high, $V_{DDA} = 5\text{ V}$, at 100 kHz	–	45	–	nV/sqrtHz

Figures

Input Voltage Noise Density

$T = 25\text{ }^{\circ}\text{C}$, $V_{DDA} = 5.0\text{ V}$, Power = high

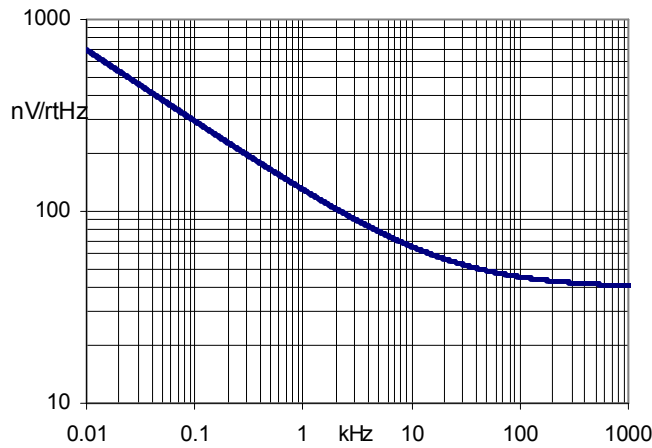

DC and AC Electrical Characteristics for PSoC 5

The following values are based on characterization data. Specifications are valid for $-40\text{ }^{\circ}\text{C} \leq T_A \leq 85\text{ }^{\circ}\text{C}$ and $T_J \leq 100\text{ }^{\circ}\text{C}$ except where noted. Unless otherwise specified in the tables below, all Typical values are for $T_A = 25\text{ }^{\circ}\text{C}$, $V_{DDA} = 5.0\text{ V}$, Power = High, output referenced to analog ground, V_{SSA} .

5.0-V/3.3-V DC Electrical Characteristics

Parameter	Description	Conditions	Min	Typ	Max	Units
V_I	Input voltage range		V_{SSA}	–	V_{DDA}	V
V_{OS}	Input offset voltage	Operating temperature $> 70\text{ }^{\circ}\text{C}$	–	–	3	mV
		Operating temperature $-40\text{ }^{\circ}\text{C}$ to $70\text{ }^{\circ}\text{C}$	–	–	2	mV
TCVos	Input offset voltage drift with temperature		–	± 12	± 30	$\mu\text{V}/^{\circ}\text{C}$
Ge1	Gain error, unity gain buffer mode	$R_{LOAD} = 1\text{ k}\Omega$	–	–	± 0.1	%
C_{IN}	Input capacitance	Routing from pin	–	–	18	pF
V_O	Output voltage range	1 mA, source or sink	$V_{SSA} + 0.05$	–	$V_{DDA} - 0.05$	V
I_{OUT}	Output current, source or sink	$V_{SSA} + 500\text{ mV} \leq V_{out} \leq V_{DDA} - 500\text{ mV}$	10	–	–	mA



Parameter	Description	Conditions	Min	Typ	Max	Units
I _{DD}	Quiescent current	$V_{SSA} + 50 \text{ mV} \leq V_{OUT} \leq V_{DDA} - 500 \text{ mV}$	–	1	2.5	mA
CMRR	Common mode rejection ratio		80	–	–	dB
PSRR	Power supply rejection ratio		75	–	–	dB

5.0 V/3.3 V AC Electrical Characteristics

Parameter	Description	Conditions	Min	Typ	Max	Units
GBW	Gain-bandwidth product	200 pF load	3	–	–	MHz
SR	Slew Rate	200 pF load	3	–	–	V/μs
e _n	Input noise density	V _{DDA} = 5 V, at 100 kHz	–	45	–	nV/sqrtHz

Component Changes

This section lists the major changes in the component from the previous version.

Version	Description of Changes	Reason for Changes / Impact
1.70.a	Added PSoC 5 DC and AC characteristics	
1.70	Removed Low Power mode DRC error for PSoC 3 Production	Low power mode is supported in PSoC 3 Production
	Implemented DRC error to allow only High Power mode for PSoC 5	Only High Power mode is supported in PSoC 5
	Edited Opamp_SetPower() API to allow only High Power mode for PSoC 5	
	Debug window support added	New feature added
1.60	Added a GUI Configuration Editor	For easier use a GUI has been added to set the two parameters from a drop down
	Added characterization data to datasheet	
	Minor datasheet edits and updates	
1.50	Added Sleep/Wakeup and Init/Enable APIs.	To support low power modes, as well as to provide common interfaces to separate control of initialization and enabling of most components.

© Cypress Semiconductor Corporation, 2011. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress product. Nor does it convey or imply any license under patent or other rights. Cypress products are not warranted nor intended to be used for medical, life support, life saving, critical control or safety applications, unless pursuant to an express written agreement with Cypress. Furthermore, Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

PSoC® is a registered trademark, and PSoC Creator™ and Programmable System-on-Chip™ are trademarks of Cypress Semiconductor Corp. All other trademarks or registered trademarks referenced herein are property of the respective corporations.

Any Source Code (software and/or firmware) is owned by Cypress Semiconductor Corporation (Cypress) and is protected by and subject to worldwide patent protection (United States and foreign), United States copyright laws and international treaty provisions. Cypress hereby grants to licensee a personal, non-exclusive, non-transferable license to copy, use, modify, create derivative works of, and compile the Cypress Source Code and derivative works for the sole purpose of creating custom software and or firmware in support of licensee product to be used only in conjunction with a Cypress integrated circuit as specified in the applicable agreement. Any reproduction, modification, translation, compilation, or representation of this Source Code except as specified above is prohibited without the express written permission of Cypress.

Disclaimer: CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Cypress reserves the right to make changes without further notice to the materials described herein. Cypress does not assume any liability arising out of the application or use of any product or circuit described herein. Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress' product in a life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Use may be limited by and subject to the applicable Cypress software license agreement.

