

SiC MOSFET

CoolSiC™ MOSFET 750 V G2

Built on Infineon's robust 2nd generation Silicon Carbide trench technology, the 750 V CoolSiC™ MOSFET delivers unparalleled performance, superior reliability, and great ease of use. It enables cost effective, highly efficient, and simplified designs to fulfill the ever-growing system and market needs.

Features

- Highly robust 750V technology, 100% avalanche tested
- Best-in-class $R_{DS(on)} \times Q_{fr}$
- Excellent $R_{DS(on)} \times Q_{oss}$ and $R_{DS(on)} \times Q_G$
- Unique combination of low C_{rss}/C_{iss} and high $V_{GS(th)}$
- Infineon proprietary die attach technology
- Cutting edge TSC package with material group I
- Driver source pin available
- Best-in-class $R_{DS(on)}$ in SMD device

Benefits

- Enhanced robustness and reliability for bus voltages beyond 500 V
- Superior efficiency in hard switching
- Robustness against parasitic turn on for unipolar gate driving
- Best-in-class thermal dissipation

Potential applications

- Solid state relays and circuit breakers
- EV charging infrastructure (Only in AC line frequency rectification)
- Telecom and Server SMPS (Only in AC line frequency rectification)

Product validation

Qualified for industrial applications according to the relevant tests of JEDEC JESD47, JESD22 and J-STD-020.

Please note: Dual chip product, not recommended for high frequency (kHz) switching applications. The source and driver source pins are not exchangeable. Their exchange might lead to malfunction. When paralleling MOSFETs the placement of the gate resistor is generally recommended to be in series to the Driver Source instead of the Gate.

Table 1 Key performance parameters

Parameter	Value	Unit
V_{DSS} over full $T_{j,range}$	750	V
$R_{DS(on),typ}$	3.5	mΩ
$R_{DS(on),max}$	5	mΩ
$Q_{G,typ}$	342	nC
$I_{D,pulse}$	1699	A
$Q_{oss,typ}$ @ 500 V	723	nC
$E_{oss,typ}$ @ 500 V	123.9	μJ

Part number	Package	Marking	Related links
IMDQ75R004M2H	PG-HDSOP-22	75R004M2	see Appendix A

Q-DPAK



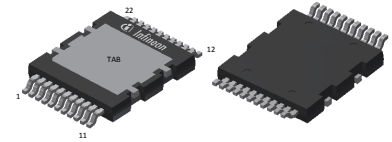


Table of contents

Description	1
Maximum ratings	3
Thermal characteristics	4
Operating range	5
Electrical characteristics	6
Electrical characteristics diagrams	8
Test circuits	13
Package outlines	14
Appendix A	17
Revision history	18
Trademarks	19
Disclaimer	19

1 Maximum ratings

at $T_j = 25^\circ\text{C}$, unless otherwise specified.

Note: for optimum lifetime and reliability, Infineon recommends operating conditions that do not exceed 80% of the maximum ratings stated in this datasheet.

“Linear mode” operation is not recommended. For assessment of potential “linear mode” operation, please contact Infineon sales office.

Table 2 Maximum ratings

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Drain-source voltage	V_{DSS}	-	-	750	V	static, $T_j = -55^\circ\text{C}$ to 175°C
Continuous DC drain current ¹⁾	I_{DDC}	-	-	357	A	$T_c = 25^\circ\text{C}$
				283		$T_c = 100^\circ\text{C}$
Peak drain current ²⁾	I_{DM}	-	-	1699	A	$T_c = 25^\circ\text{C}$, $V_{\text{GS}} = 18\text{ V}$
Avalanche energy, single pulse	E_{AS}	-	-	1071	mJ	$I_{\text{D}} = 39.6\text{ A}$, $V_{\text{DD}} = 50\text{ V}$; see table 11
Avalanche energy, repetitive	E_{AR}			5.35		
Avalanche current, single pulse	I_{AS}	-	-	500	A	$L = 1\text{ }\mu\text{H}$, $V_{\text{DD}} = 50\text{ V}$
MOSFET dv/dt ruggedness	dv/dt	-	-	200	V/ns	$V_{\text{DS}} = 0 \dots 500\text{ V}$
Gate source voltage (static) ³⁾	V_{GS}	-7	-	23	V	-
Gate source voltage (transient)	V_{GS}	-11	-	25	V	$t_p \leq 500\text{ ns}$, duty cycle $\leq 1\%$
Power dissipation	P_{tot}	-	-	1499	W	$T_c = 25^\circ\text{C}$
Storage temperature	T_{stg}	-55	-	150	$^\circ\text{C}$	-
Operating junction temperature	T_j			175		
Extended operating junction temperature ⁴⁾	T_j	-	-	200	$^\circ\text{C}$	$\leq 100\text{ h}$ in the application lifetime
Mounting torque	-	-	-	n.a	Ncm	-
Continuous reverse drain current ¹⁾	I_{SDC}	-	-	357	A	$V_{\text{GS}} = 18\text{ V}$, $T_c = 25^\circ\text{C}$
				289		$V_{\text{GS}} = 0\text{ V}$, $T_c = 25^\circ\text{C}$
Peak reverse drain current ²⁾	I_{SM}	-	-	1699	A	$T_c = 25^\circ\text{C}$, $t_p \leq 250\text{ ns}$
				494		$T_c = 25^\circ\text{C}$
Insulation withstand voltage	V_{ISO}	-	-	n.a.	V	V_{rms} , $T_c = 25^\circ\text{C}$, $t = 1\text{ min}$

¹⁾ Limited by $T_{j,\text{max}}$.

²⁾ Pulse width t_{pulse} limited by $T_{j,\text{max}}$.

³⁾ The maximum gate-source voltage in the application design should be in accordance to IPC-9592B.

⁴⁾ Up to 7500 temperature cycles, where maximum delta T is limited to 100K.

2 Thermal characteristics

Table 3 Thermal characteristics

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Thermal resistance, junction - case	$R_{th(j-c)}$	-	0.07	0.1	°C/W	Not subject to production test. Parameter verified by design/characterization according to JESD51-14.
Soldering temperature, reflow soldering allowed	T_{sold}	-	-	260	°C	reflow MSL1

3 Operating range

Table 4 **Operating range**

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Recommended turn-on voltage	$V_{GS(on)}$	-	18	-	V	-
Recommended turn-off voltage	$V_{GS(off)}$		0			

4 Electrical characteristics

at $T_j = 25^\circ\text{C}$, unless otherwise specified

Table 5 Static characteristics

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Drain-source breakdown voltage ⁵⁾	$V_{(BR)DSS}$	840	-	-	V	$V_{GS} = 0\text{ V}$, $I_D = 5.77\text{ mA}$
Gate threshold voltage ⁶⁾	$V_{GS(th)}$	3.5	4.5	5.6	V	$V_{DS} = V_{GS}$, $I_D = 57.7\text{ mA}$, $T_j = 25^\circ\text{C}$
		-	3.3	-		$V_{DS} = V_{GS}$, $I_D = 57.7\text{ mA}$, $T_j = 175^\circ\text{C}$
Zero gate voltage drain current	I_{DSS}	-	2	150	μA	$V_{DS} = 750\text{ V}$, $V_{GS} = 0\text{ V}$, $T_j = 25^\circ\text{C}$
			20	-		$V_{DS} = 750\text{ V}$, $V_{GS} = 0\text{ V}$, $T_j = 175^\circ\text{C}$
Gate-source leakage current	I_{GSS}	-	-	200	nA	$V_{GS} = 23\text{ V}$, $V_{DS} = 0\text{ V}$, $T_j = 25^\circ\text{C}$
				-200		$V_{GS} = -7\text{ V}$, $V_{DS} = 0\text{ V}$, $T_j = 25^\circ\text{C}$
Forward transconductance	g_{fs}	-	152	-	S	$I_D = 262.4\text{ A}$, $V_{DS} = 20\text{ V}$
Drain-source on-state resistance	$R_{DS(on)}$	-	4.6	-	m Ω	$V_{GS} = 15\text{ V}$, $I_D = 170\text{ A}$, $T_j = 25^\circ\text{C}$
			3.5	5		$V_{GS} = 18\text{ V}$, $I_D = 170\text{ A}$, $T_j = 25^\circ\text{C}$
			3.2	-		$V_{GS} = 20\text{ V}$, $I_D = 170\text{ A}$, $T_j = 25^\circ\text{C}$
Drain-source on-state resistance ⁷⁾	$R_{DS(on)}$	-	5.7	8	m Ω	$V_{GS} = 18\text{ V}$, $I_D = 170\text{ A}$, $T_j = 150^\circ\text{C}$
Drain-source on-state resistance	$R_{DS(on)}$	-	6.5	-	m Ω	$V_{GS} = 18\text{ V}$, $I_D = 170\text{ A}$, $T_j = 175^\circ\text{C}$
Internal gate resistance	$R_{G,int}$	-	0.8	-	Ω	$f = 1\text{ MHz}$

⁵⁾ Provided as measure of robustness under abnormal operating conditions and not recommended for normal operation.

⁶⁾ Tested after pre-conditioning pulse at $V_{GS} = +20\text{ V}$. "Linear mode" operation is not recommended. For assessment of potential "linear mode" operation, please contact Infineon sales office.

⁷⁾ Specified by design, not subject to production test.

Table 6 Dynamic characteristics

External parasitic elements (PCB layout) influence switching behavior significantly.

Stray inductances and coupling capacitances must be minimized.

For layout recommendations please use provided application notes or contact Infineon sales office.

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Input capacitance	C_{iss}	-	11844	-	pF	$V_{GS} = 0\text{ V}$, $V_{DS} = 500\text{ V}$, $f = 250\text{ kHz}$
Reverse transfer capacitance	C_{rss}		62	-		
Output capacitance ⁸⁾	C_{oss}		773	1005		
Output charge ⁸⁾	Q_{oss}	-	723	940	nC	calculation based on C_{oss}
Effective output capacitance, energy related ⁹⁾	$C_{o(er)}$	-	991	-	pF	$V_{GS} = 0\text{ V}$, $V_{DS} = 0 \dots 500\text{ V}$
Effective output capacitance, time related ¹⁰⁾	$C_{o(tr)}$	-	1447	-	pF	$I_D = \text{constant}$, $V_{GS} = 0\text{ V}$, $V_{DS} = 0 \dots 500\text{ V}$

Table 6 Dynamic characteristics

External parasitic elements (PCB layout) influence switching behavior significantly.
 Stray inductances and coupling capacitances must be minimized.
 For layout recommendations please use provided application notes or contact Infineon sales office.

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Turn-on delay time	$t_{d(on)}$	-	24	-	ns	$V_{DD} = 500\text{ V}$, $V_{GS} = 0/18\text{ V}$, $I_D = 262.4\text{ A}$, $R_{G,ext} = 1.8\text{ }\Omega$, $L_{stray} = 15\text{ nH}$; see table 10
Rise time	t_r		24		ns	
Turn-off delay time	$t_{d(off)}$		56		ns	
Fall time	t_f		13		ns	
Turn-ON switching losses ¹¹⁾	E_{on}		416		μJ	
Turn-OFF switching losses ¹¹⁾	E_{off}		2044		μJ	
Total switching losses ¹¹⁾	E_{tot}		2461		μJ	

⁸⁾ Maximum specification is defined by calculated six sigma upper confidence bound.

⁹⁾ $C_{o(er)}$ is a fixed capacitance that gives the same stored energy as C_{oss} while V_{DS} is rising from 0 to 500 V.

¹⁰⁾ $C_{o(tr)}$ is a fixed capacitance that gives the same charging time as C_{oss} while V_{DS} is rising from 0 to 500 V.

¹¹⁾ MOSFET used in half-bridge configuration without external diode. Parameter verified by characterization according to IEC 60747-8.

Table 7 Gate charge characteristics

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Plateau gate to source charge	$Q_{GS(pl)}$	-	86	-	nC	$V_{DD} = 500\text{ V}$, $I_D = 262.4\text{ A}$, $V_{GS} = 0\text{ to }18\text{ V}$
Gate to drain charge	Q_{GD}		74			
Total gate charge	Q_G		342			

Table 8 Reverse diode characteristics

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Drain-source reverse voltage	V_{SD}	-	3.7	5	V	$V_{GS} = 0\text{ V}$, $I_S = 170\text{ A}$, $T_j = 25^\circ\text{C}$
			3.4	-		$V_{GS} = 0\text{ V}$, $I_S = 170\text{ A}$, $T_j = 175^\circ\text{C}$
MOSFET forward recovery time	t_{fr}	-	31	-	ns	$V_{DD} = 500\text{ V}$, $I_S = 262.4\text{ A}$, $di_S/dt = 4000\text{ A}/\mu\text{s}$; see table 9
MOSFET forward recovery charge ¹²⁾	Q_{fr}		1087		nC	
MOSFET peak forward recovery current	I_{frm}		71		A	

¹²⁾ Q_{fr} includes Q_{oss} .

5 Electrical characteristics diagrams



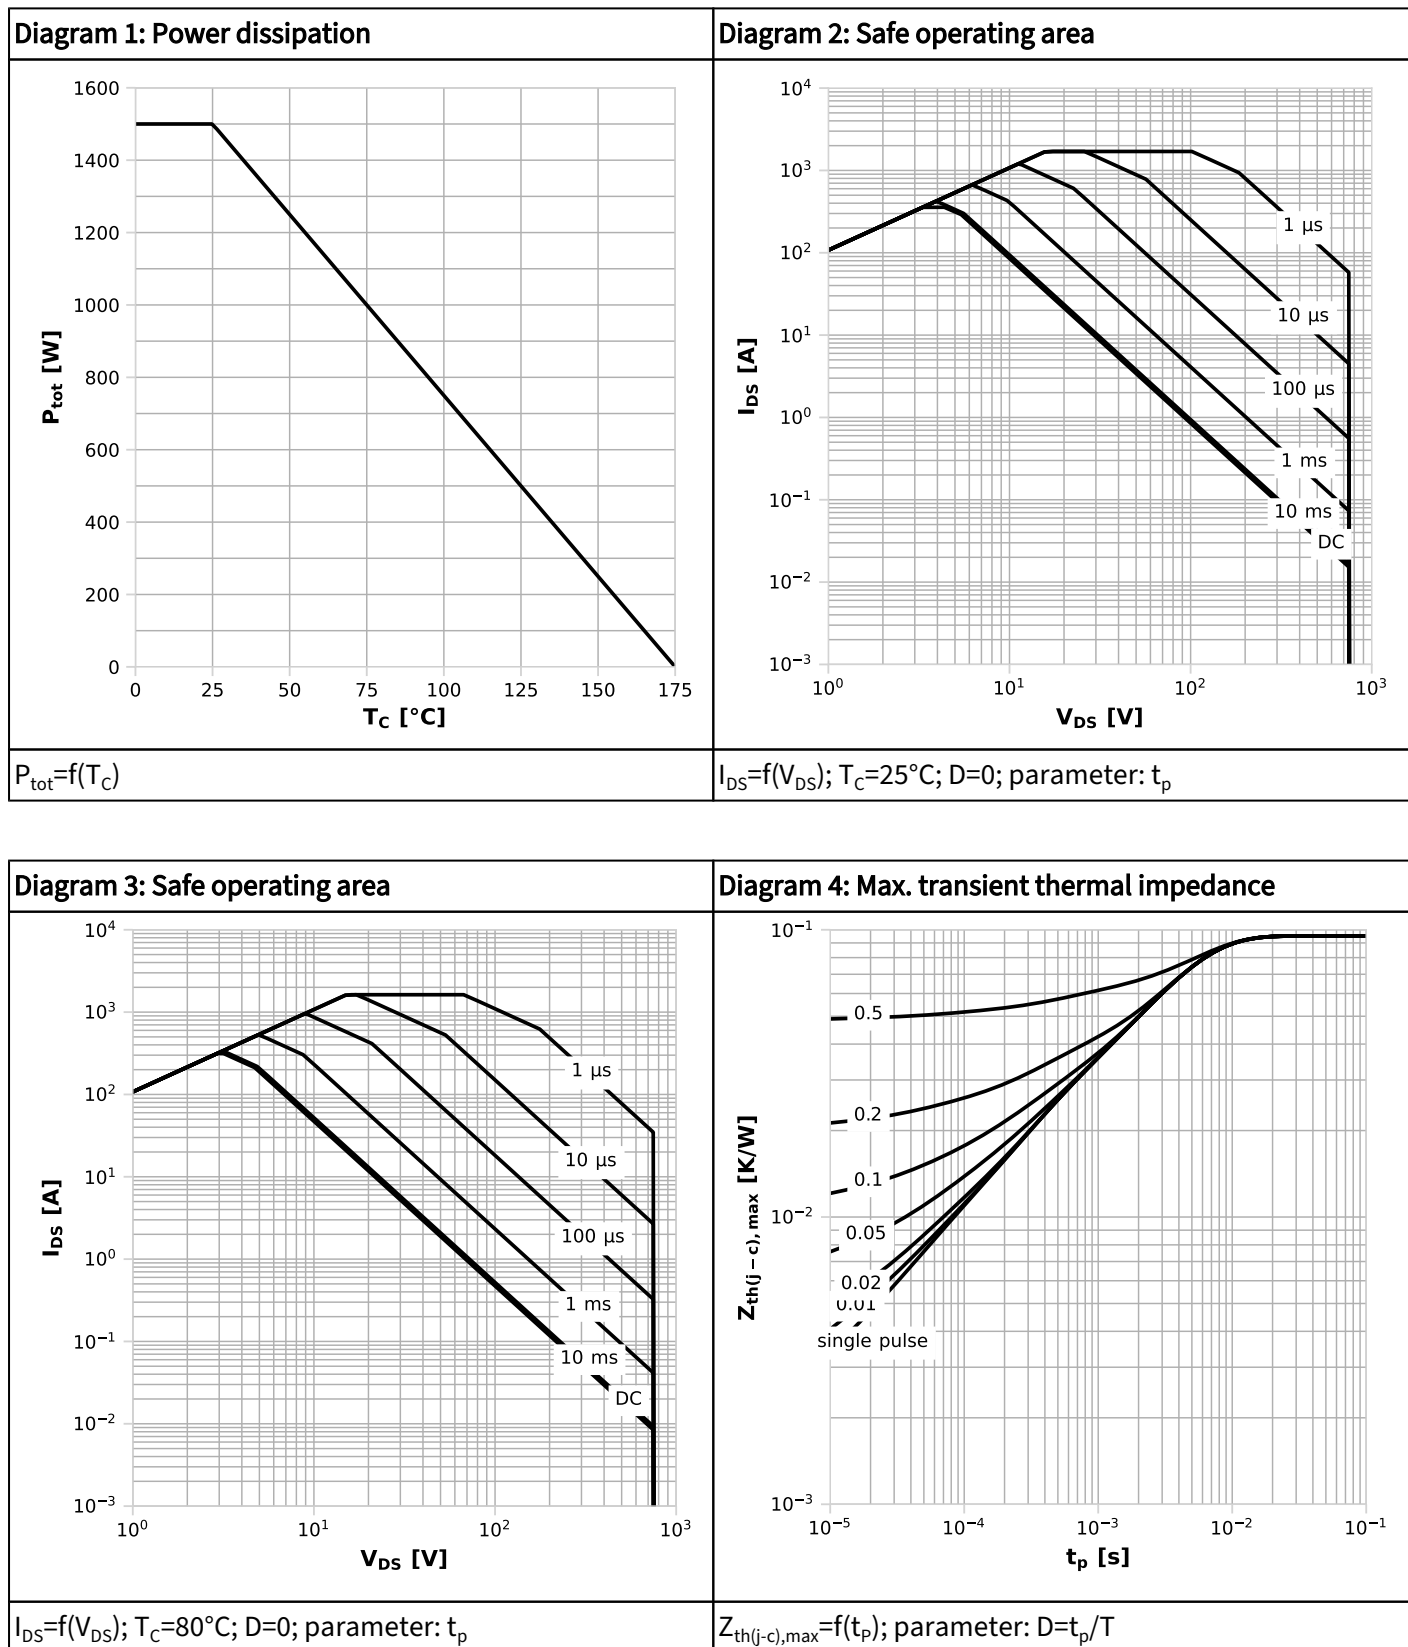


Diagram 5: Typ. output characteristics

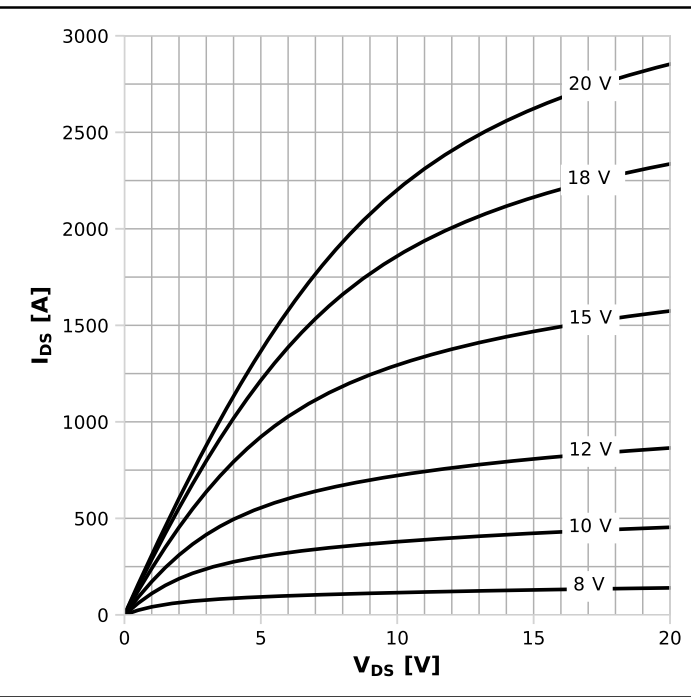


$I_{DS}=f(V_{DS})$; $T_j=25^\circ\text{C}$; parameter: V_{GS}

Diagram 6: Typ. output characteristics

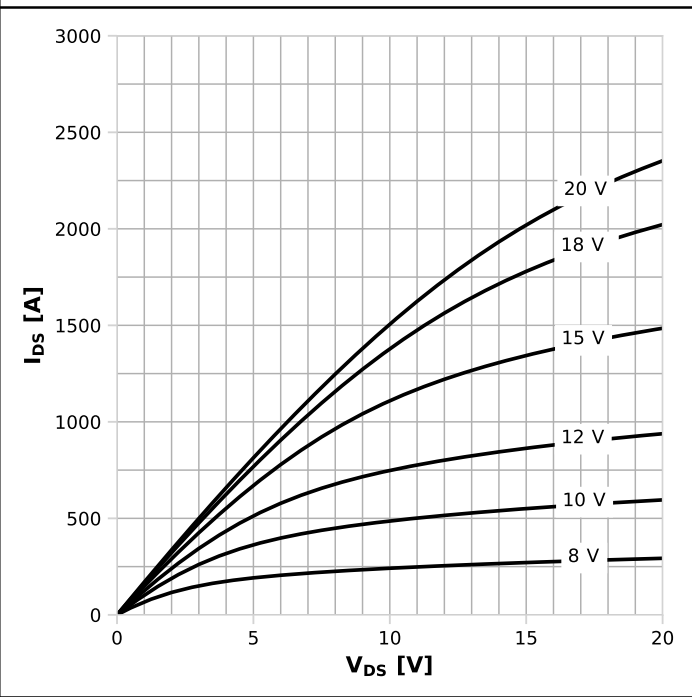


$I_{DS}=f(V_{DS})$; $T_j=175^\circ\text{C}$; parameter: V_{GS}

Diagram 7: Typ. drain-source on-state resistance

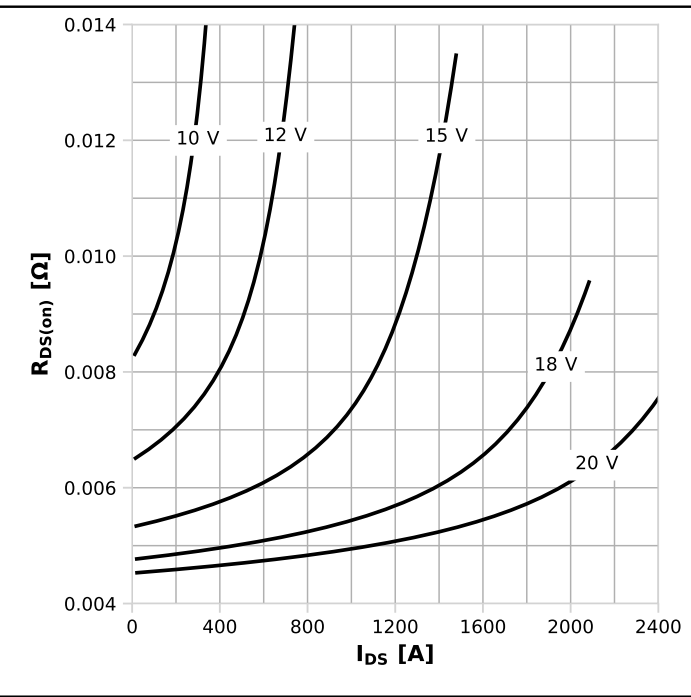


$R_{DS(on)}=f(I_{DS})$; $T_j=125^\circ\text{C}$; parameter: V_{GS}

Diagram 8: Drain-source on-state resistance

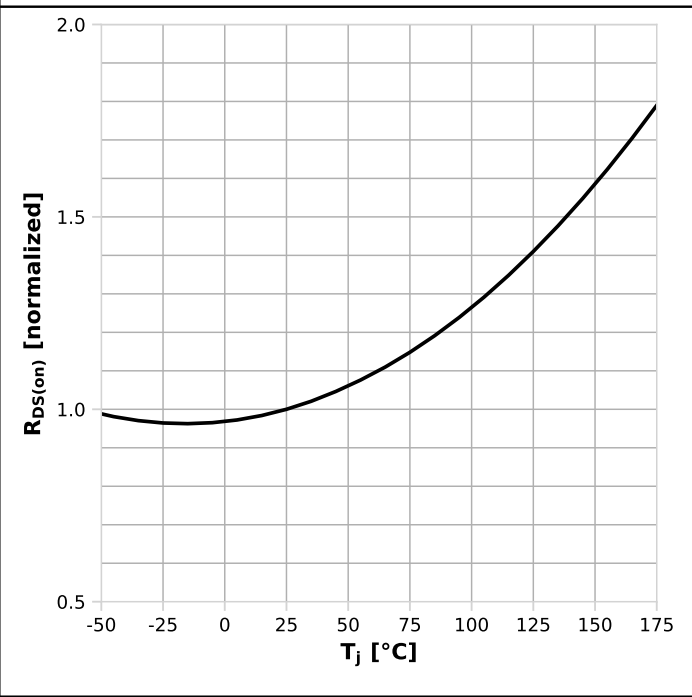


$R_{DS(on)}=f(T_j)$; $I_D=170.0$ A; $V_{GS}=18$ V

Diagram 9: Typ. transfer characteristics

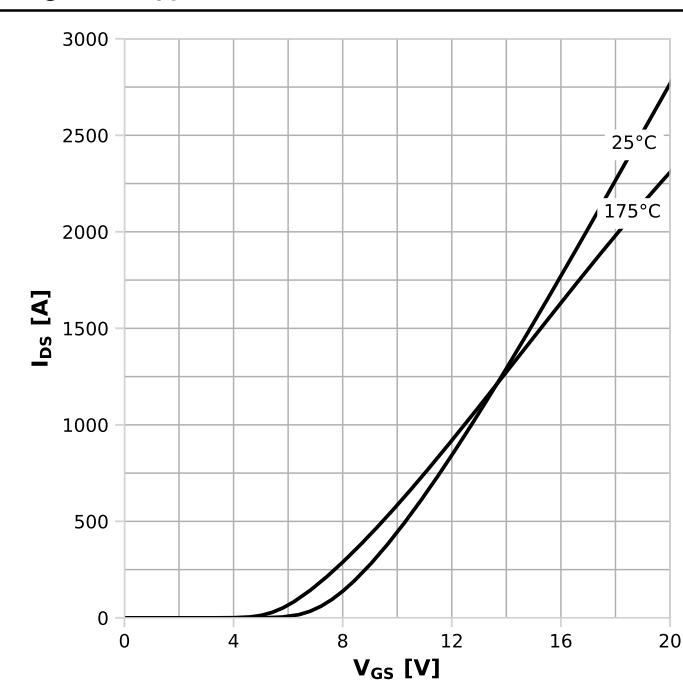


$I_{DS}=f(V_{GS})$; $V_{DS}=20$ V; parameter: T_j

Diagram 10: Typ. gate charge

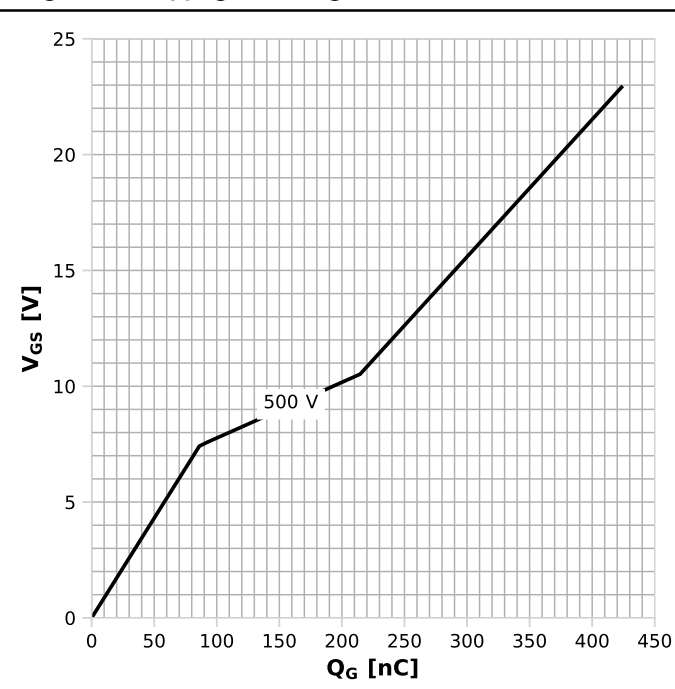


$V_{GS}=f(Q_G)$; $I_D=262.4$ A pulsed; parameter: V_{DD}

Diagram 11: Typ. reverse drain current characteristics

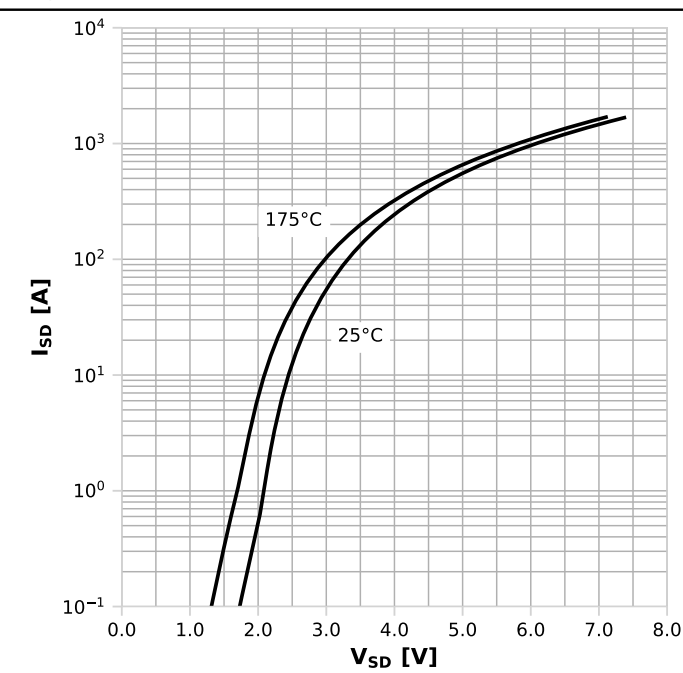


$I_{SD}=f(V_{SD})$; $V_{GS}=0$ V; parameter: T_j

Diagram 12: Typ. reverse drain current characteristics

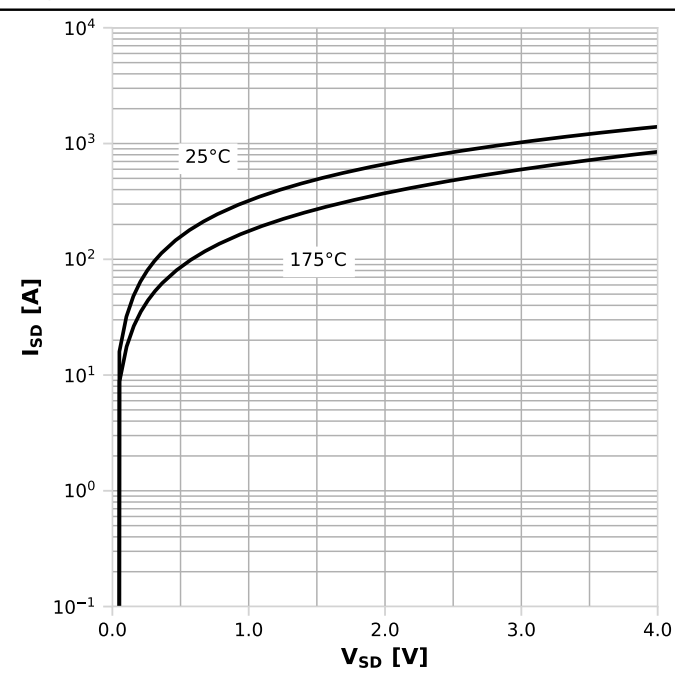


$I_{SD}=f(V_{SD})$; $V_{GS}=18$ V; parameter: T_j

Diagram 13: Avalanche energy

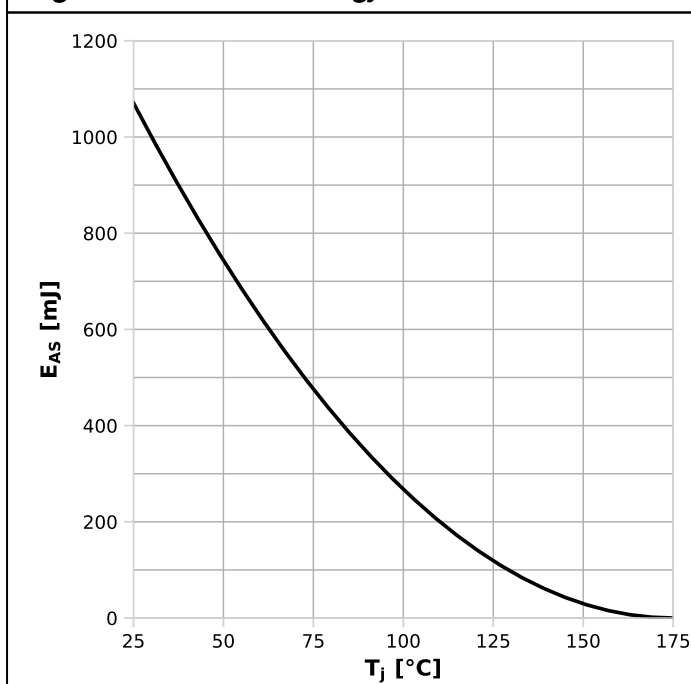


$E_{AS}=f(T_J); I_D=39.6 \text{ A}; V_{DD}=50 \text{ V}$

Diagram 14: Drain-source breakdown voltage

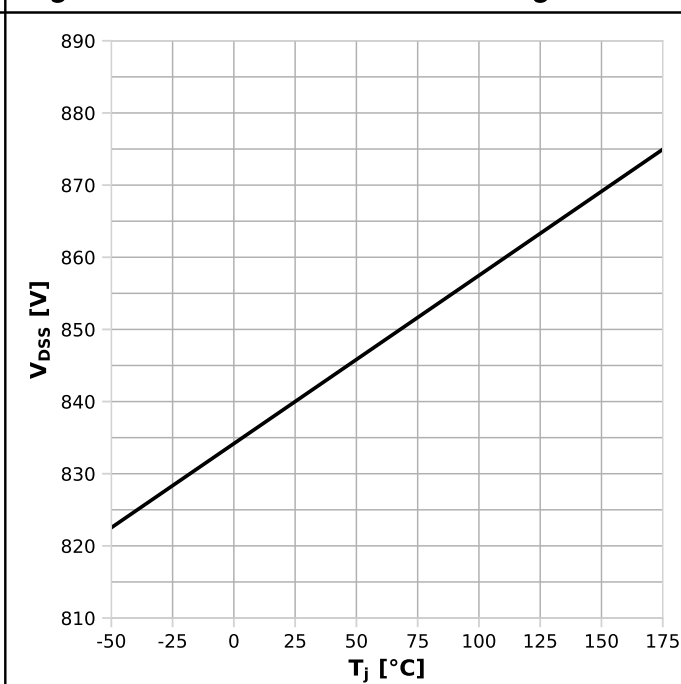


$V_{DSS}=f(T_J); I_D=5.77 \text{ mA}$

Diagram 15: Typ. capacitances

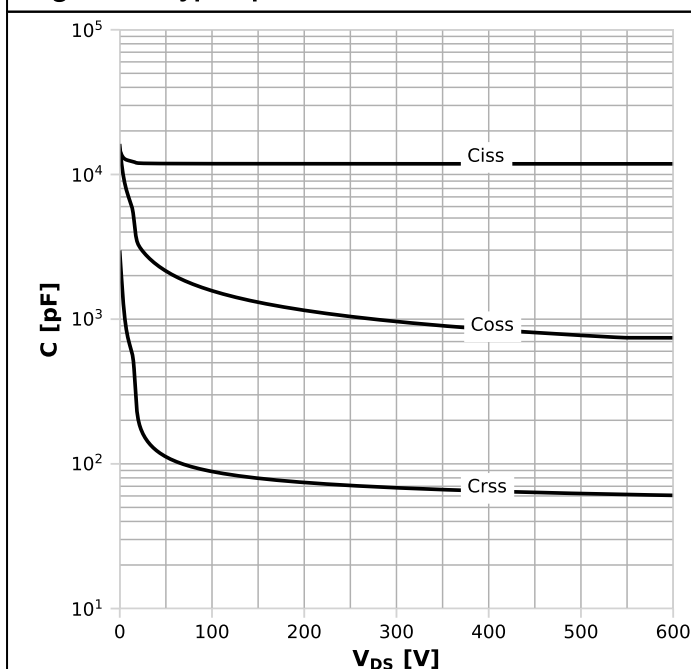


$C=f(V_{DS}); V_{GS}=0 \text{ V}; f=250 \text{ kHz}$

Diagram 16: Typ. Coss stored energy

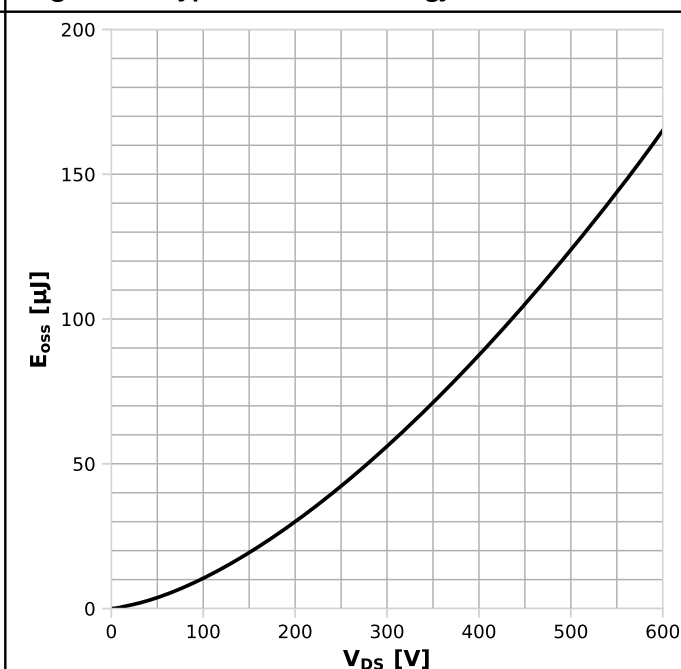

$E_{OSS}=f(V_{DS})$

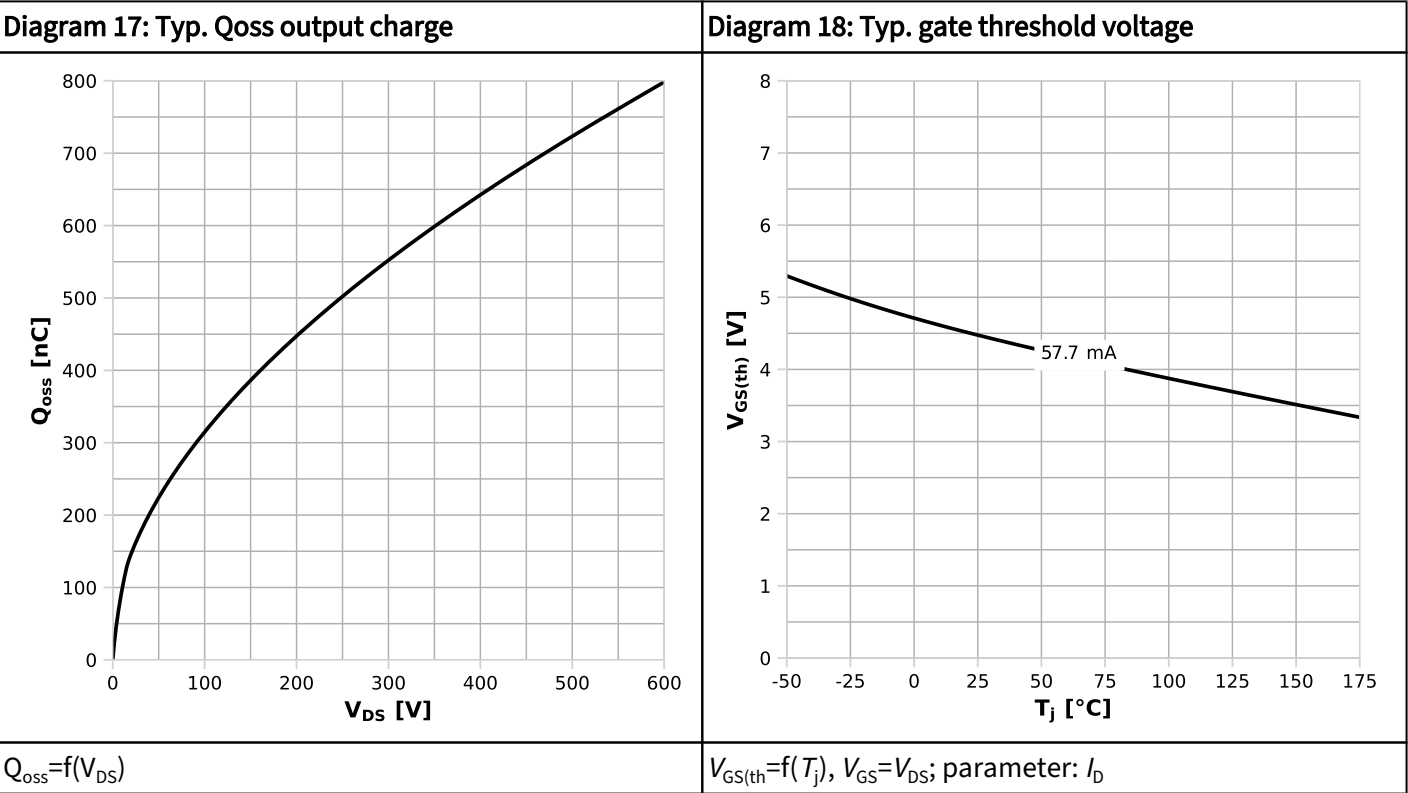

6 Test circuits

Table 9 Body diode characteristics


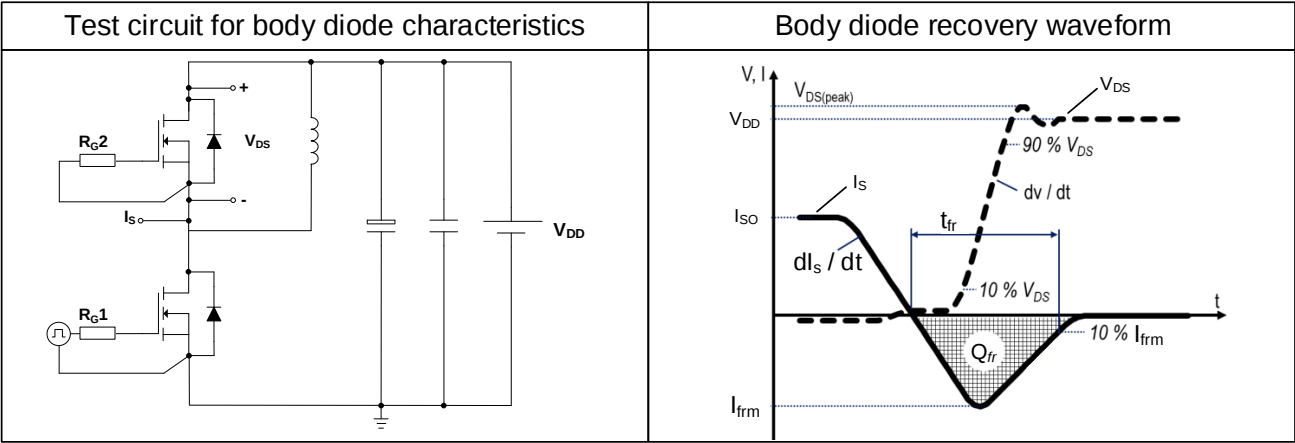


Table 10 Switching times



Table 11 Unclamped inductive load

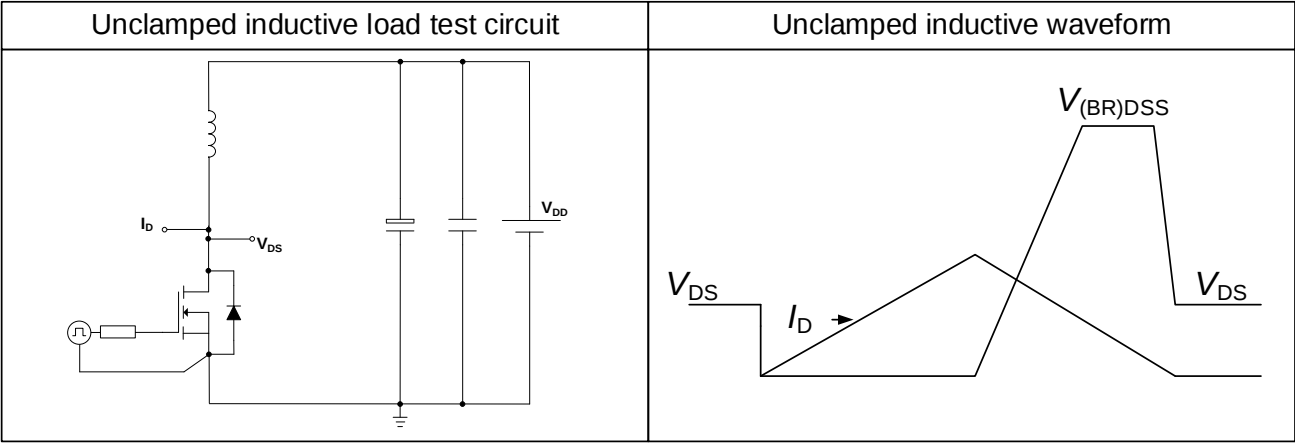

7 Package outlines

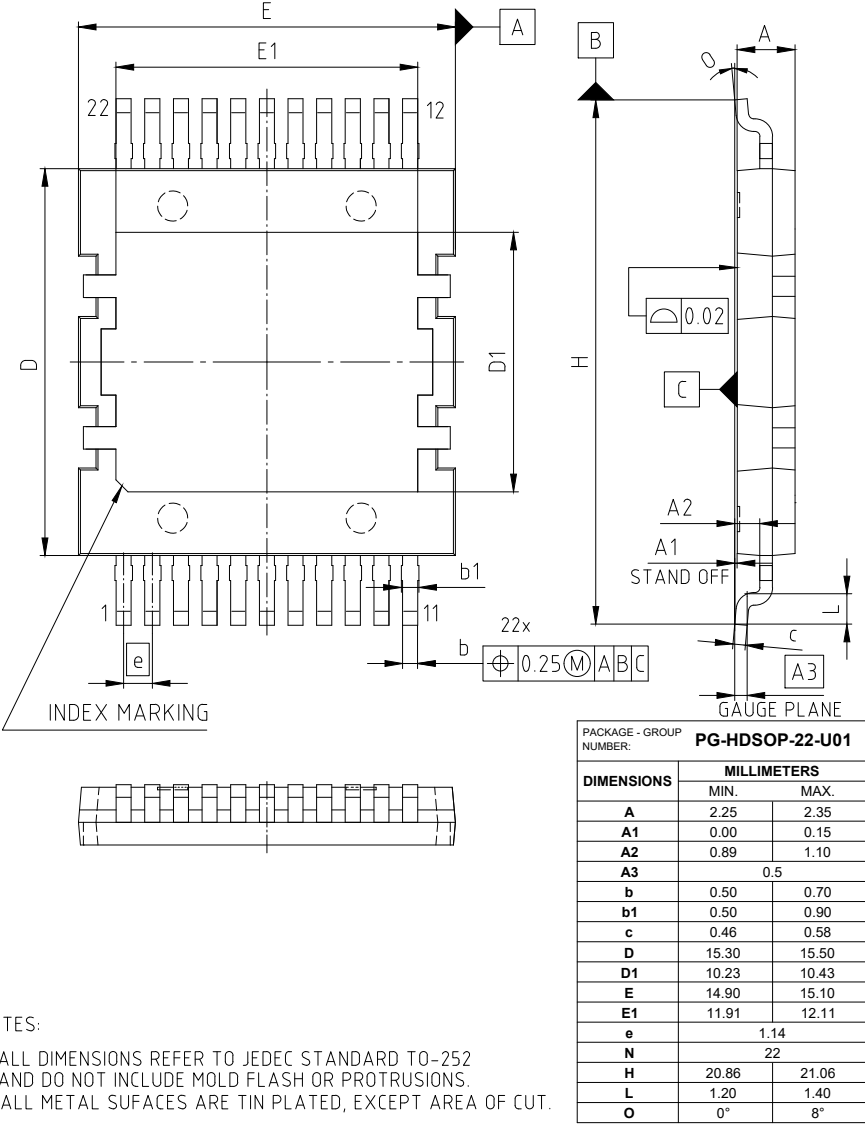


Figure 1 Outline PG-HDSOP-22, dimensions in mm

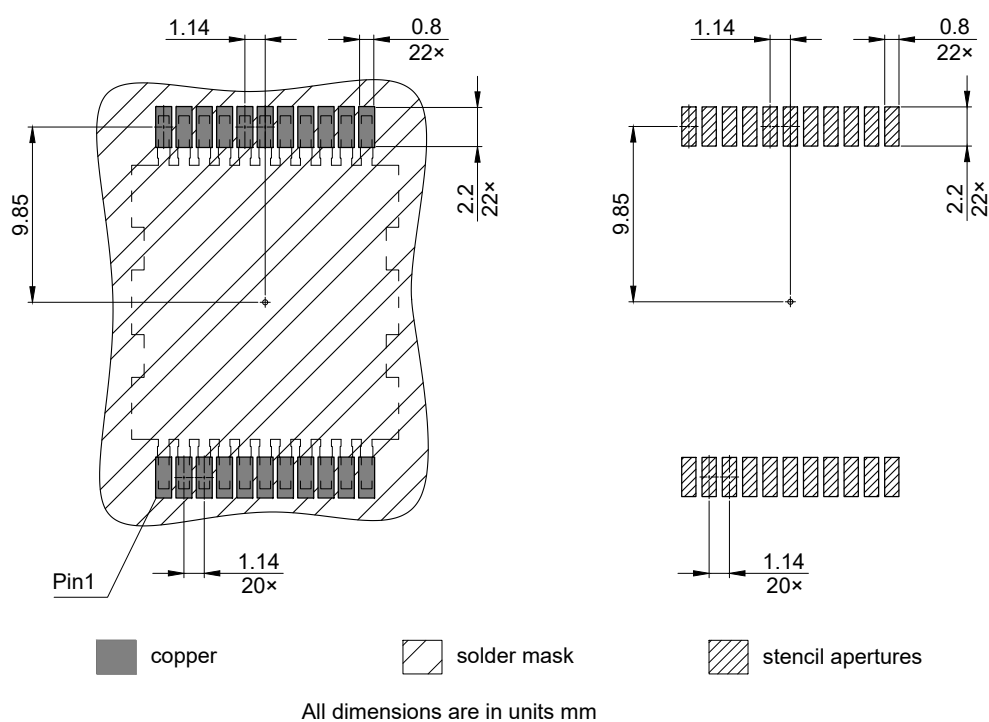


Figure 2 Footprint drawing PG-HDSOP-22, dimensions in mm

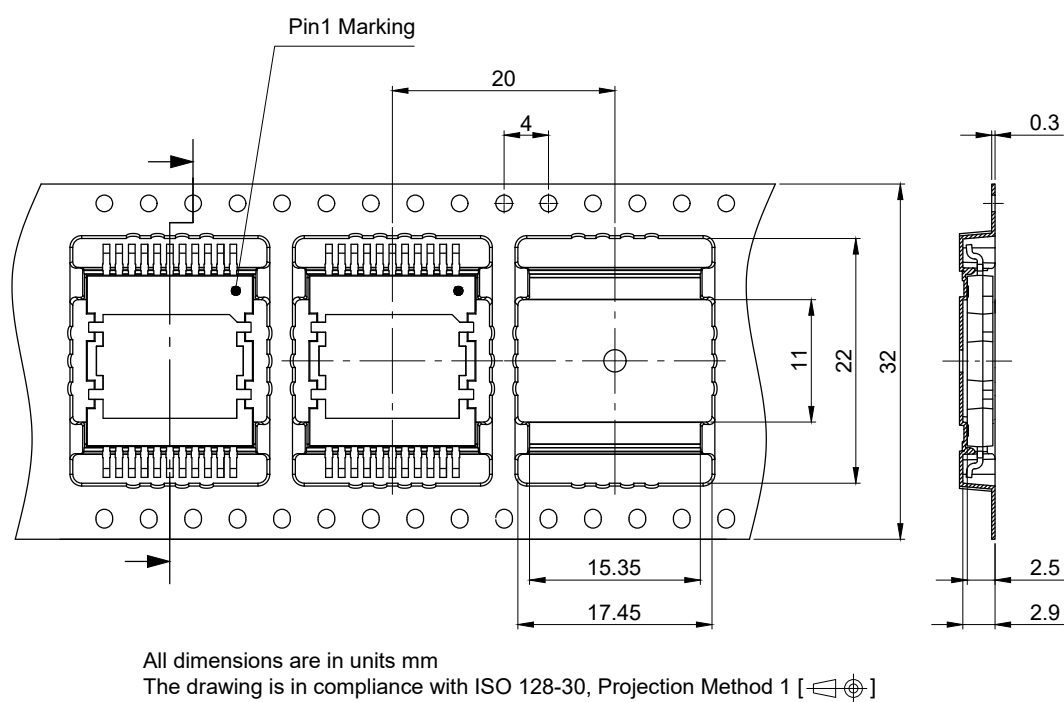


Figure 3 Packaging variant PG-HDSOP-22, dimensions in mm

8 Appendix A

Table 12 **Related links**

- [IFX CoolSiC CoolSiC™ MOSFET 750 V G2 Webpage](#)
- [IFX CoolSiC CoolSiC™ MOSFET 750 V G2 Application Note](#)
- [IFX CoolSiC CoolSiC™ MOSFET 750 V G2 Simulation Model](#)
- [IFX Design tools](#)

Revision history

IMDQ75R004M2H

Revision 2025-06-05, Rev. 2.1

Previous revisions

Revision	Date	Subjects (major changes since last revision)
2.0	2025-03-07	Release of final version
2.1	2025-06-05	Inclusion of drain-source static and breakdown voltage and typical R_{thjc} ; Clarification on footnote 1 and front page with list of benefits and potential applications.

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

We Listen to Your Comments Any information within this document that you feel is wrong, unclear or missing at all? Your feedback will help us to continuously improve the quality of this document. Please send your proposal (including a reference to this document) to: erratum@infineon.com

Published by

Infineon Technologies AG
81726 München, Germany
© 2025 Infineon Technologies AG
All Rights Reserved.

Important notice

The products which may also include samples and may be comprised of hardware or software or both ("Product") are sold or provided and delivered by Infineon Technologies AG and its affiliates ("Infineon") subject to the terms and conditions of the frame supply contract or other written agreement(s) executed by a customer and Infineon or, in the absence of the foregoing, the applicable Sales Conditions of Infineon. General terms and conditions of a customer or deviations from applicable Sales Conditions of Infineon shall only be binding for Infineon if and to the extent Infineon has given its express written consent.

For the avoidance of doubt, Infineon disclaims all warranties of non-infringement of third-party rights and implied warranties such as warranties of fitness for a specific use/purpose or merchantability.

Infineon shall not be responsible for any information with respect to samples, the application or customer's specific use of any Product or for any examples or typical values given in this document.

The data contained in this document is exclusively intended for technically qualified and skilled customer representatives. It is the responsibility of the customer to evaluate the suitability of the Product for the intended application and the customer's specific use and to verify all relevant technical data contained in this document in the intended application and the customer's specific use. The customer is responsible for properly designing, programming, and testing the functionality and safety of the intended application, as well as complying with any legal requirements related to its use.

Unless otherwise explicitly approved by Infineon, Products may not be used in any application where a failure of the Product or any consequences of the use thereof can reasonably be expected to result in personal injury. However, the foregoing shall not prevent the customer from using any Product in such fields of use that Infineon has explicitly designed and sold it for, provided that the overall responsibility for the application lies with the customer.

If the Product includes security features:

Because no computing device can be absolutely secure, and despite security measures implemented in the Product, Infineon does not guarantee that the Product will be free from intrusion, data theft or loss, or other breaches ("Security Breaches"), and Infineon shall have no liability arising out of any Security Breaches.

If this document includes or references software:

The software is owned by Infineon under the intellectual property laws and treaties of the United States, Germany, and other countries worldwide. All rights reserved. Therefore, you may use the software only as provided in the software license agreement accompanying the software. If no software license agreement applies, Infineon hereby grants you a personal, non-exclusive, non-transferable license (without the right to sublicense) under its intellectual property rights in the software (a) for software provided in source code form, to modify and reproduce the software solely for use with Infineon hardware products, only internally within your organization, and (b) to distribute the software in binary code form externally to end users, solely for use on Infineon hardware products. Any other use, reproduction, modification, translation, or compilation of the software is prohibited.

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).