

# TLD5191IVREG-EVAL evaluation board

## User Manual

### About this document

#### Board description

- TLD5191: 4 switches buck boost DC-DC controller designed for automotive applications
- Constant current (LED) and constant voltage regulation
- High power, high efficiency buck-boost architecture
- Embedded PWM engine for digital dimming
- EMC optimized device: Spread spectrum

#### Scope and purpose

Scope of this user manual is to provide to the audience instructions on usage of the TLD5191ES device evaluation board TLD5191IVREG-EVAL schematic version S02 PCB version P01.

The TLD5191IVREG-EVAL is an evaluation platform for the TLD5191ES, which can work as buck-boost LED driver, or as a voltage regulator.

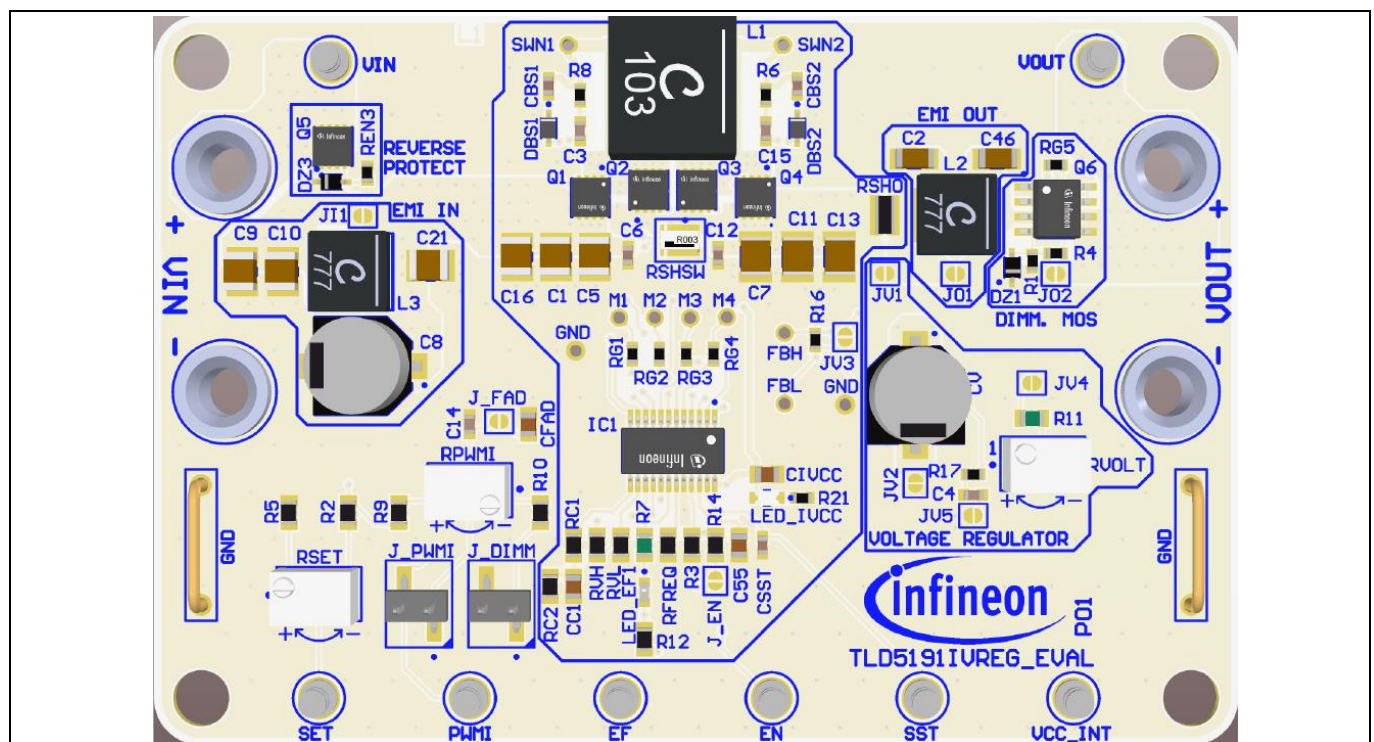


Figure 1 TLD5191IVREG-EVAL device evaluation board

#### Intended audience

Hardware engineers.

## 1 Table of contents


About this document.....	1
<b>1 Table of contents .....</b>	<b>2</b>
<b>2 Description.....</b>	<b>3</b>
<b>3 Quick start procedure .....</b>	<b>4</b>
3.1 Setup as LED driver .....	4
3.1.1 Embedded PWM engine .....	5
3.2 Set up as voltage regulator .....	6
<b>4 Operating range.....</b>	<b>7</b>
<b>5 Electrical characteristics.....</b>	<b>8</b>
<b>6 Efficiency measurements .....</b>	<b>9</b>
<b>7 Bill of material, layout and schematic.....</b>	<b>11</b>
<b>8 Revision history .....</b>	<b>13</b>

## 2 Description

The 4 switches buck-boost converter architecture is among the most efficient buck-boost topologies for high current applications. The TLD5191ES provides digital and analog dimming control and one flag for diagnostic.

The TLD5191IVREG-EVAL is an evaluation platform for the TLD5191ES as LED driver or voltage regulator.

The default configuration is constant current LED driver with 1.5 A maximum output current. The output current can be increased up to 6 A by changing resistor RSHO. If higher currents are needed, the output filter has to be bypassed.

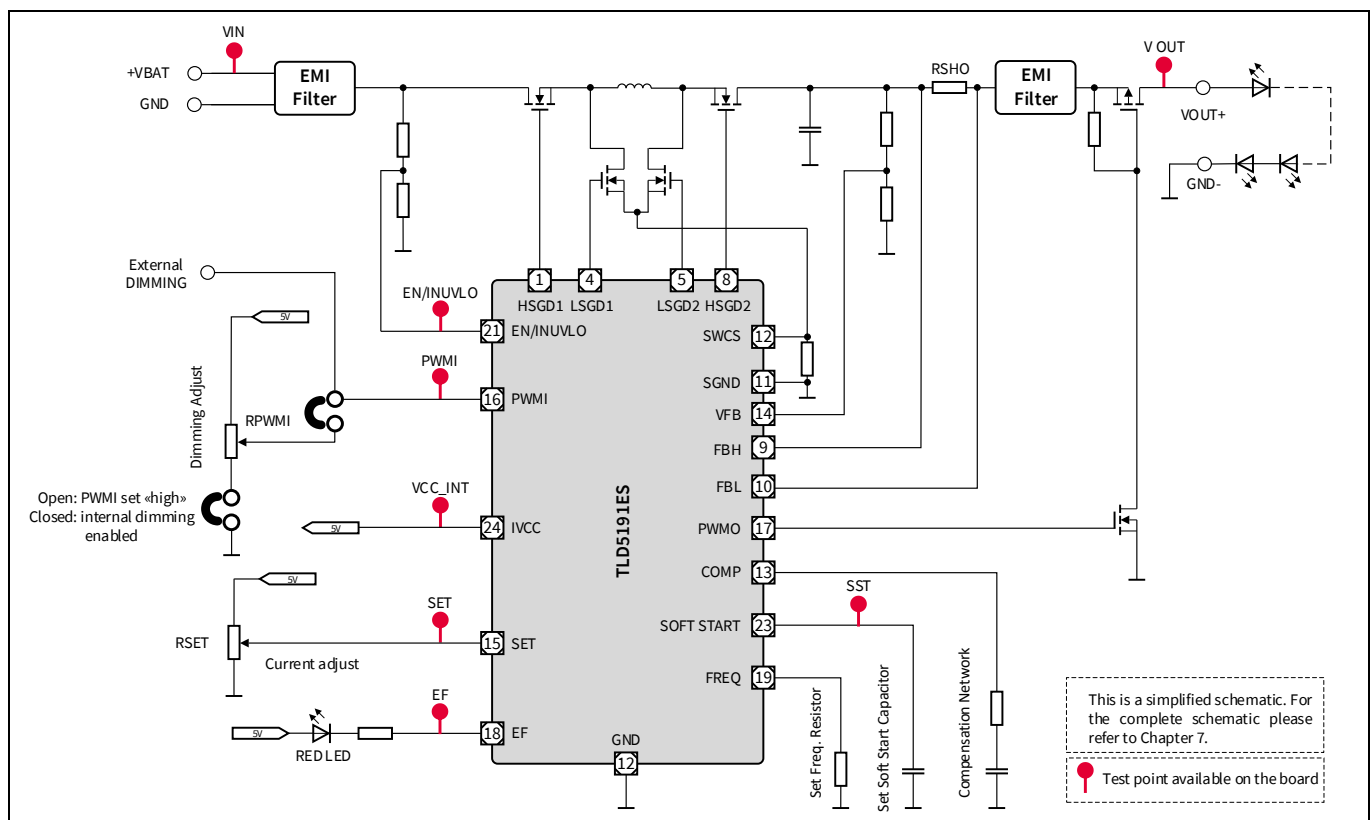

**Figure 2 TLD5191IVREG\_EVAL board simplified schematic in constant current mode (LED driver)**

By reconfiguring few solder jumpers, the board can be used as powerful voltage regulator.

The board can be configured with several trimmers and also contains two status LEDs:

- Trimmer to adjust output voltage when set as voltage regulator
- Trimmer to adjust output current (via SET pin)
- Trimmer to adjust the PWM duty cycle of embedded PWM engine (via PWMI pin)
- Two LEDs:
  - One blue LED showing TLD5191ES power on status (IVCC)
  - One red LED showing TLD5191ES faults status (EF)

## 3 Quick start procedure

Step-by-step procedures are laid out for setup and running the TLD5191IVREG-EVAL in all available configurations.


In all configurations solder jumper J\_EN has to be closed in order to enable the device via input supply lines. Open J\_EN to apply an external enable signal using EN test point.

### 3.1 Setup as LED driver

To configure the board as LED driver the following jumpers needs to be configured:

**Table 1 Jumper position**

Jumper name	Condition	Meaning
J_PWMI	Closed	Enable the embedded PWM engine
J_DIMM	Closed	Enable the embedded PWM engine duty cycle adjustment
JV1	Open	Enable the output current regulation
JV2	Open	Remove output bulk capacitance for constant voltage regulation
JV3	Closed	Disable output voltage regulation
JV4	Open	Disable output voltage regulation
JV5	Open	Disable output voltage feed forward
JO2	Open	Enable PMOS for PWM dimming

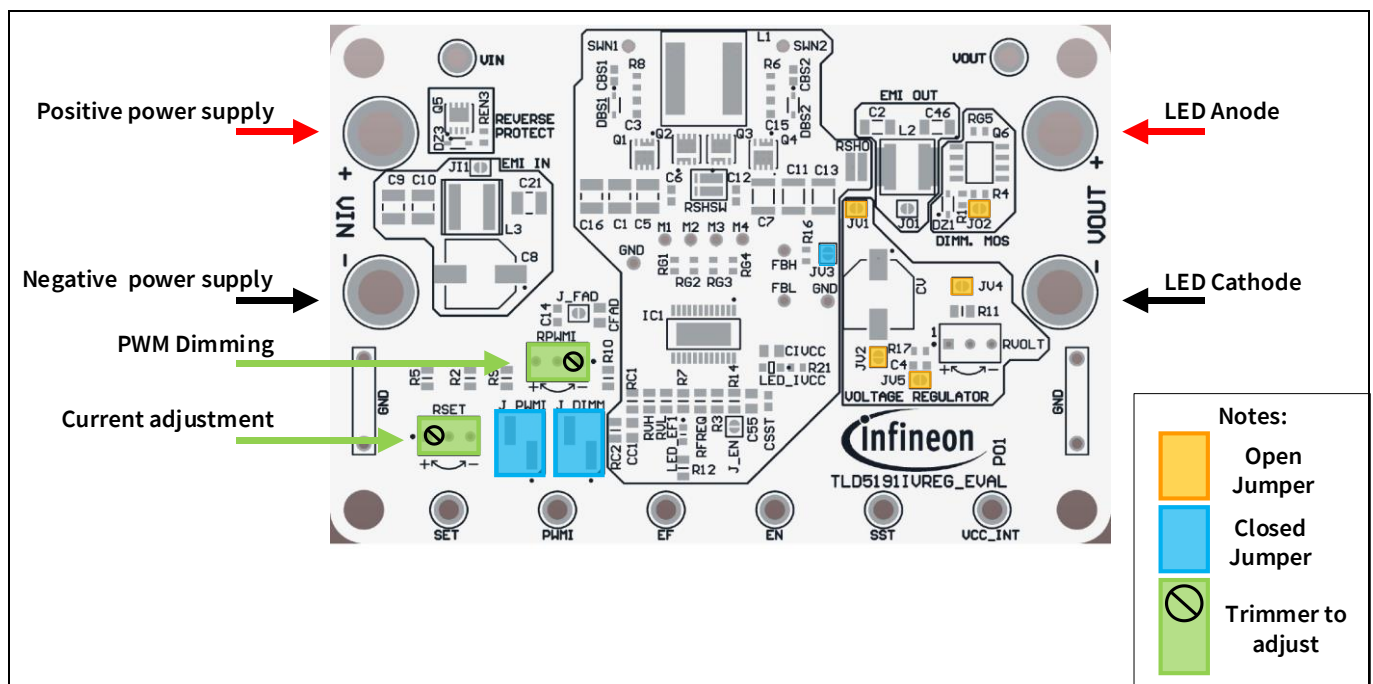

**Figure 3 Constant current (LED driver) configuration**

1. If the an external PWM signal is intended to be used, open J\_PWMI jumper
2. Connect the LED load
3. Connect a 12 V power supply to the  $V_{IN}$  connector → the blue LED should turn on indicating  $V_{VCC}$  present

### About this document

4. Adjust  $I_{OUT}$  via RSET (>150 mA suggested for better accuracy and transient response)
5. Adjust PWM duty cycle via RPWMI if enabled (see Chapter 3.1.1).

#### NOTE:

*If the output voltage is below 6V (i.e. load of just one LED) it is recommended to close JO2 to bypass the PMOS for PWM dimming in order to avoid excessive power dissipation on the PMOS.*

### 3.1.1 Embedded PWM engine


The embedded PWM engine provides an internal PWM signal without any external dimming signal required. It is enabled when jumper J\_PWMI is closed. If jumper J\_DIMM is open, the PWMI pin is biased at 5 V and then the duty cycle is 100%. Closing jumper J\_DIMM, the duty cycle is adjustable by means of trimmer RPWMI. The PWM frequency is fixed at nominal value of 270 Hz.

### 3.2 Set up as voltage regulator

To configure the board as voltage regulator the following jumpers needs to be configured:

**Table 2 Jumper position**

Jumper name	Condition	Meaning
J_PWMI	Closed	Enable on board PWMI setting
J_DIMM	Open	Set PWMI at 5 V
JV1	Closed	Disable the output current regulation
JV2	Closed	Add output bulk capacitance for constant voltage regulation
JV3	Open	Enable output voltage regulation
JV4	Closed	Enable output voltage regulation
JV5	Closed	Enable output voltage feed forward
JO2	Closed	Bypass PMOS for PWM dimming

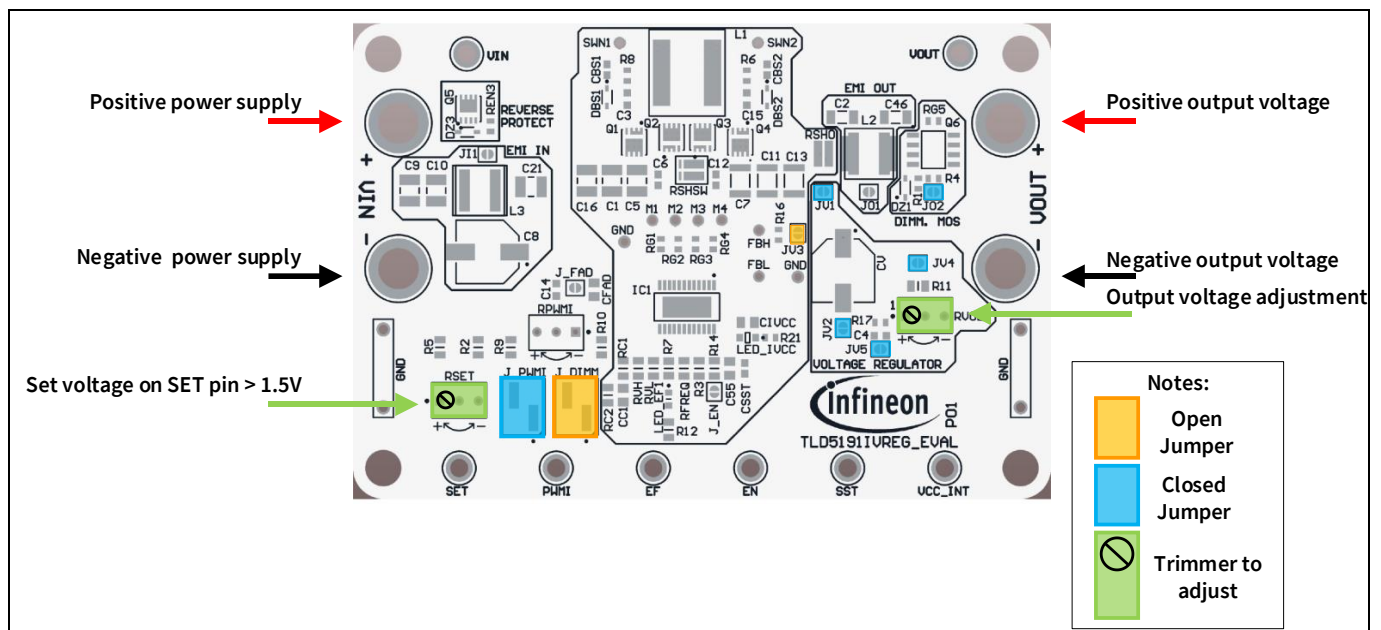

**Figure 4 Voltage regulator configuration**

1. Connect a 12 V power supply to the  $V_{IN}$  connector
2. Rotate RSET trimmer fully clockwise (100% analog dimming, improves transient response and accuracy)
3. Rotate RVOLT trimmer to obtain the desired  $V_{OUT}$
4. Connect the load


#### NOTE:

*It is possible to adjust output voltage from 0 to full scale (previously set by RVOLT) by rotating RSET, but the best transient response is obtained when analog dimming is set to 100%.*

## 4 Operating range

The TLD5191IVREG-EVAL has very high efficiency, so it can deliver up to 60 W at the output without a heat sink at  $T_A = 25^\circ\text{C}$ ,  $V_{IN} = 12\text{ V}$ .

Please note that the module does not implement thermal protection, so ensure proper cooling when output power exceeds 60W or input voltage decrease below 9V. The heat sink has to be positioned below the switching MOSFETs as shown in Figure 5.

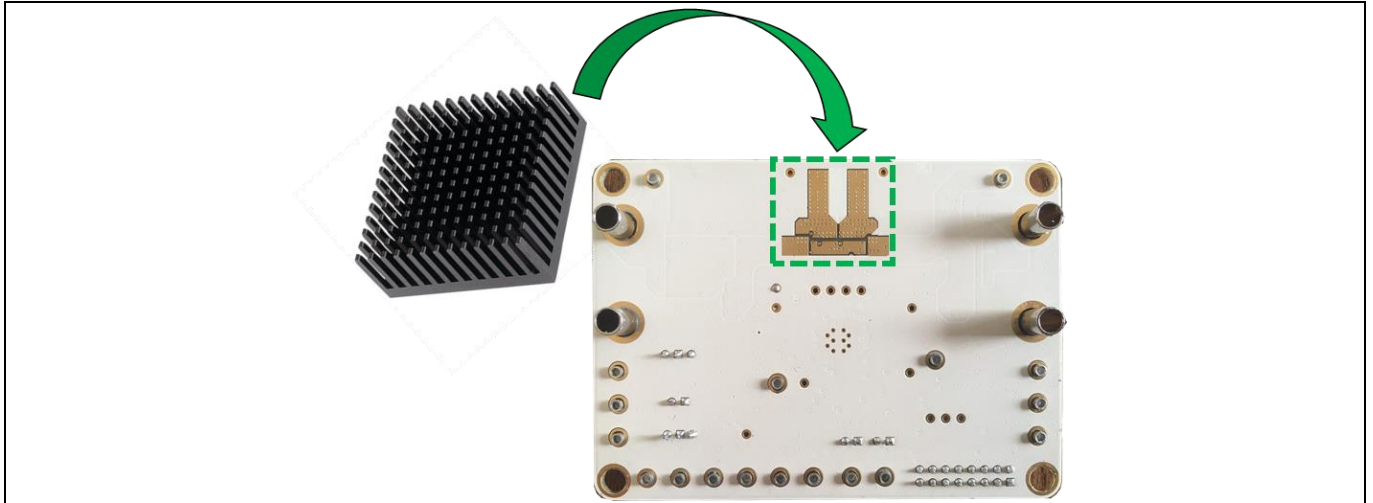

**Figure 5** Heat sink placement (optional)

The heat sink shall be electrically insulated from the PCB by means of a thermal pad.

## 5 Electrical characteristics

**Table 3** TLD5191IVREG-EVAL version S02 P01 – electrical characteristics


Parameter	Symbol	Value			Unit	Note/Test Condition
		Min.	Typ.	Max.		
Input voltage	$V_{IN}$	6.2	–	35	V	Minimum value set by resistor divider on the EN/INUVLO pin
Out voltage	$V_{OUT}$	2.15	–	41.8	V	LED driver mode: max value set by the resistor divider on VFB pin (overvoltage protection)
		6.2		22.5		Voltage mode: max value set by RVOLT trimmer
Output current	$I_{OUT}$	150	–	1500	mA	LED driver mode (up to 6 A by changing RSHO)
		0		6		Voltage mode
Output power	$P_{OUT}$	–	–	60	W	$V_{IN}$ 12 V to 35 V, $T_A = 25^\circ\text{C}$ See Chapter 4 for power derating curve
Switching frequency	Switching frequency	–	385	–	kHz	Spread spectrum deviation is present
PWM frequency	$PWM_{freq}$	75 220	– 275	– 330	Hz	External PWM signal applied Embedded PWM engine enabled



## 6 Efficiency measurements

The following efficiency measurements has been taken in constant current configuration (LED driver). The efficiency discontinuities are given by the controller mode changes from buck to buck-boost and from buck-boost to boost. Indeed, in buck-boost mode all the four external MOSFET are switching, increasing the total losses, while in buck or boost mode only two external MOSFETs are switching.

In particular the change from boost to buck-boost mode is visible for 5 and 6 LEDs. The change from buck-boost to buck mode is visible for 2 and 3 LEDs. Both the changes from boost to buck-boost mode and form buck-boost to buck mode are visible for the 4 LEDs curve.

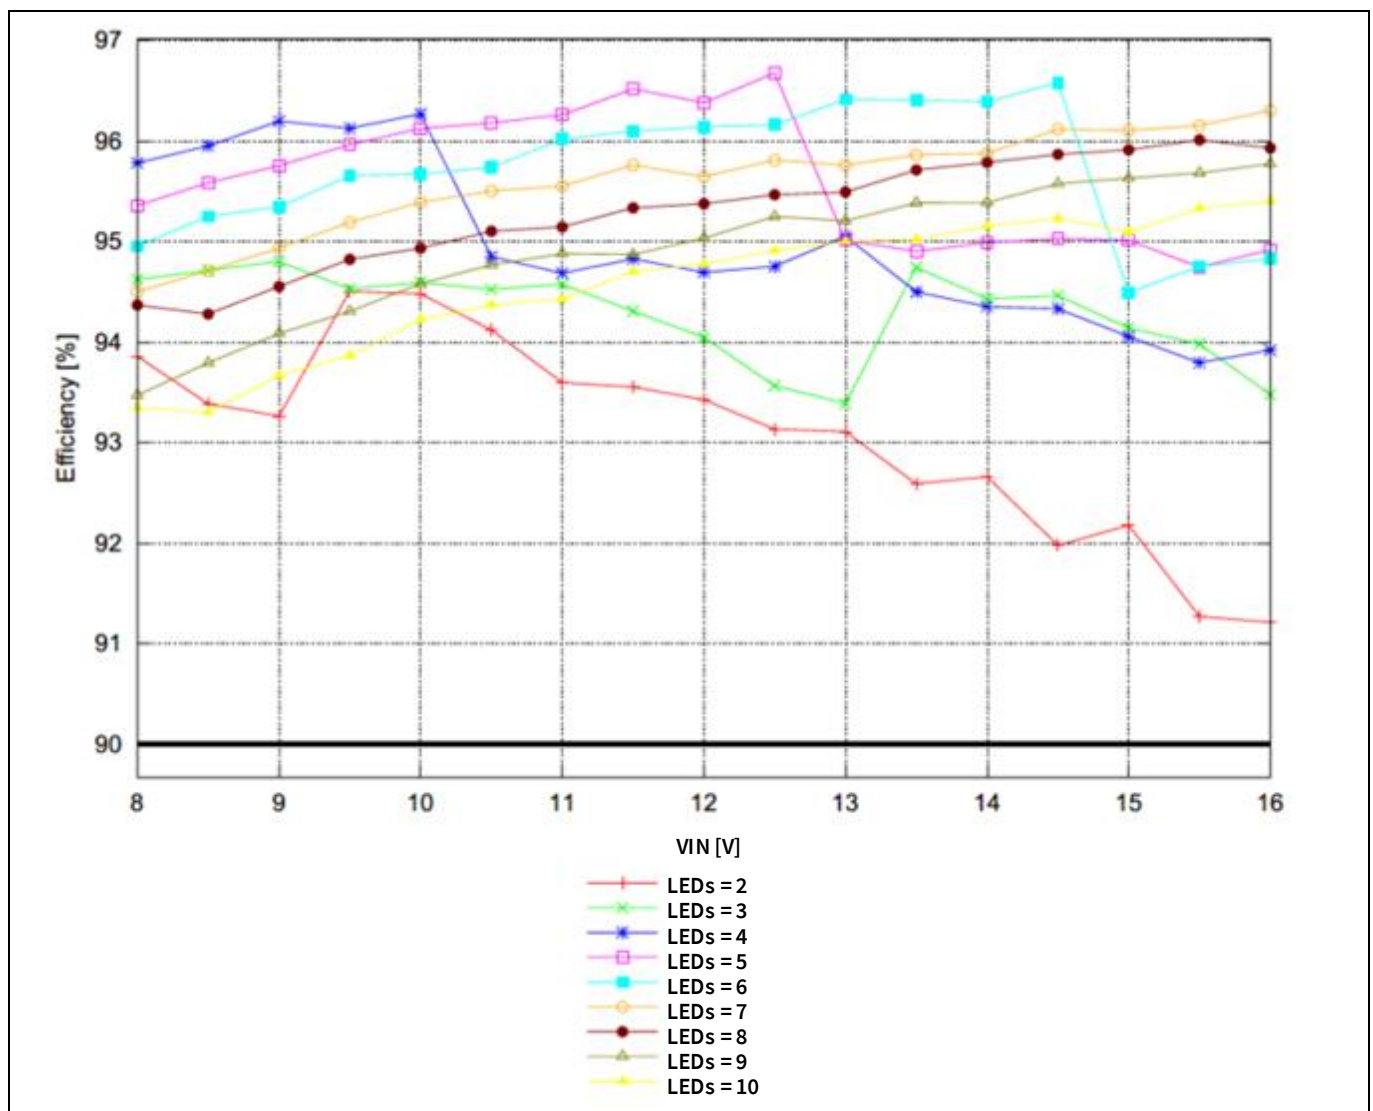

**Figure 6** Efficiency vs input voltage for different loads

The efficiency performances have been obtained with the following configuration:

**Table 4** Efficiency measurement configuration

EMI filters	Bypassed by closing solder jumpers JI1 and JO1
PMOS dimming	Bypassed by closing solder jumper JO2

### About this document

EMI filters	Bypassed by closing solder jumpers JI1 and JO1
Digital dimming	Duty cycle set to 100% by closing J_PWMI jumper and by opening J_DIMM jumper
Analog dimming	Output current set to 1A via RSET trimmer

## 7 Bill of material, layout and schematic

**Table 5 BOM**

Designator	Value	Footprint	Quantity
C1, C5, C9, C10, C16, C21	10uF	C1210	6
C2, C46	470nF	C1206	2
C3, C15	470pF	C0603	2
C4, C14	10nF	C0603	2
C6, C12, CBS1, CBS2	100nF	C0603	4
C7, C11, C13	4.7uF	C1210	3
C8, CV	220uF	CAPAE830X1050N	2
C55	1uF	C0805	1
CC1	22nF	C0805	1
CIVCC	10uF	C0805	1
CSST	22nF	C0603	1
DBS1, DBS2	BAT46WJ,115	SOD323F	2
DZ1, DZ3	10V	SOD323	2
IC1	TLD5191ES	TSDSO24	1
J_DIMM, J_PWMI	TSM-102-01-S-SV	CON-M-SMD-TSM-102-01-S-SV	2
L1	10uH	Coilcraft XAL1010	1
L2, L3	1.8uH	Coilcraft XAL6030	2
LED_EF1	Red	LED 0805	1
LED_IVCC	Blue	LED 0805	1
Q1, Q2	IPZ40N04S5L-7R4	PG-TSDSON-8-32	2
Q3, Q4	IAUZ30N06S5L140	PG-TSDSON-8-32	2
Q5	BSZ086P03NS3 G	PG-TSDSON-8	1
Q6	BSO615CGXUMA1	PG-DSO-8	1
REN3	10kΩ	R0603	1
R2	44.2kΩ	R0805	1
R3	2.2kΩ	R0805	1
R5	910Ω	R0805	1
R6, R8	4.7Ω	R0603	2
R7, R11	10kΩ	R0805	2
R9	22kΩ	R0805	1
R10	470Ω	R0805	1
R12, RVH	47kΩ	R0805	2
R14	5.6kΩ	R0805	1
R1, R4,	5.6kΩ	R0603	2
R16	150Ω	R0603	1
R17	1.5kΩ	R0603	1

**About this document**


---

<b>Designator</b>	<b>Value</b>	<b>Footprint</b>	<b>Quantity</b>
R21	2.2k $\Omega$	R0603	1
RC1	1k $\Omega$	R0805	1
RC2	3.3M $\Omega$	R0805	1
RFREQ	27k $\Omega$	R0805	1
RG1, RG2, RG3, RG4	10 $\Omega$	R0603	4
RG5	0 $\Omega$	R0603	1
RPWMI, RSET, RVOLT	Bourns 3266Y-1-203LF	-	3
RSHO	100m $\Omega$	R0612	1
RSHSW	7m $\Omega$	R1206	1
RVL	1.5k $\Omega$	R0805	1



TLD5191IVREG\_EVAL\_S02.SchDoc

VOLTAGE REGULATOR:  
to convert the board in to a voltage regulator, change  
blue circled Jumpers as specified by VReg->Open/Close

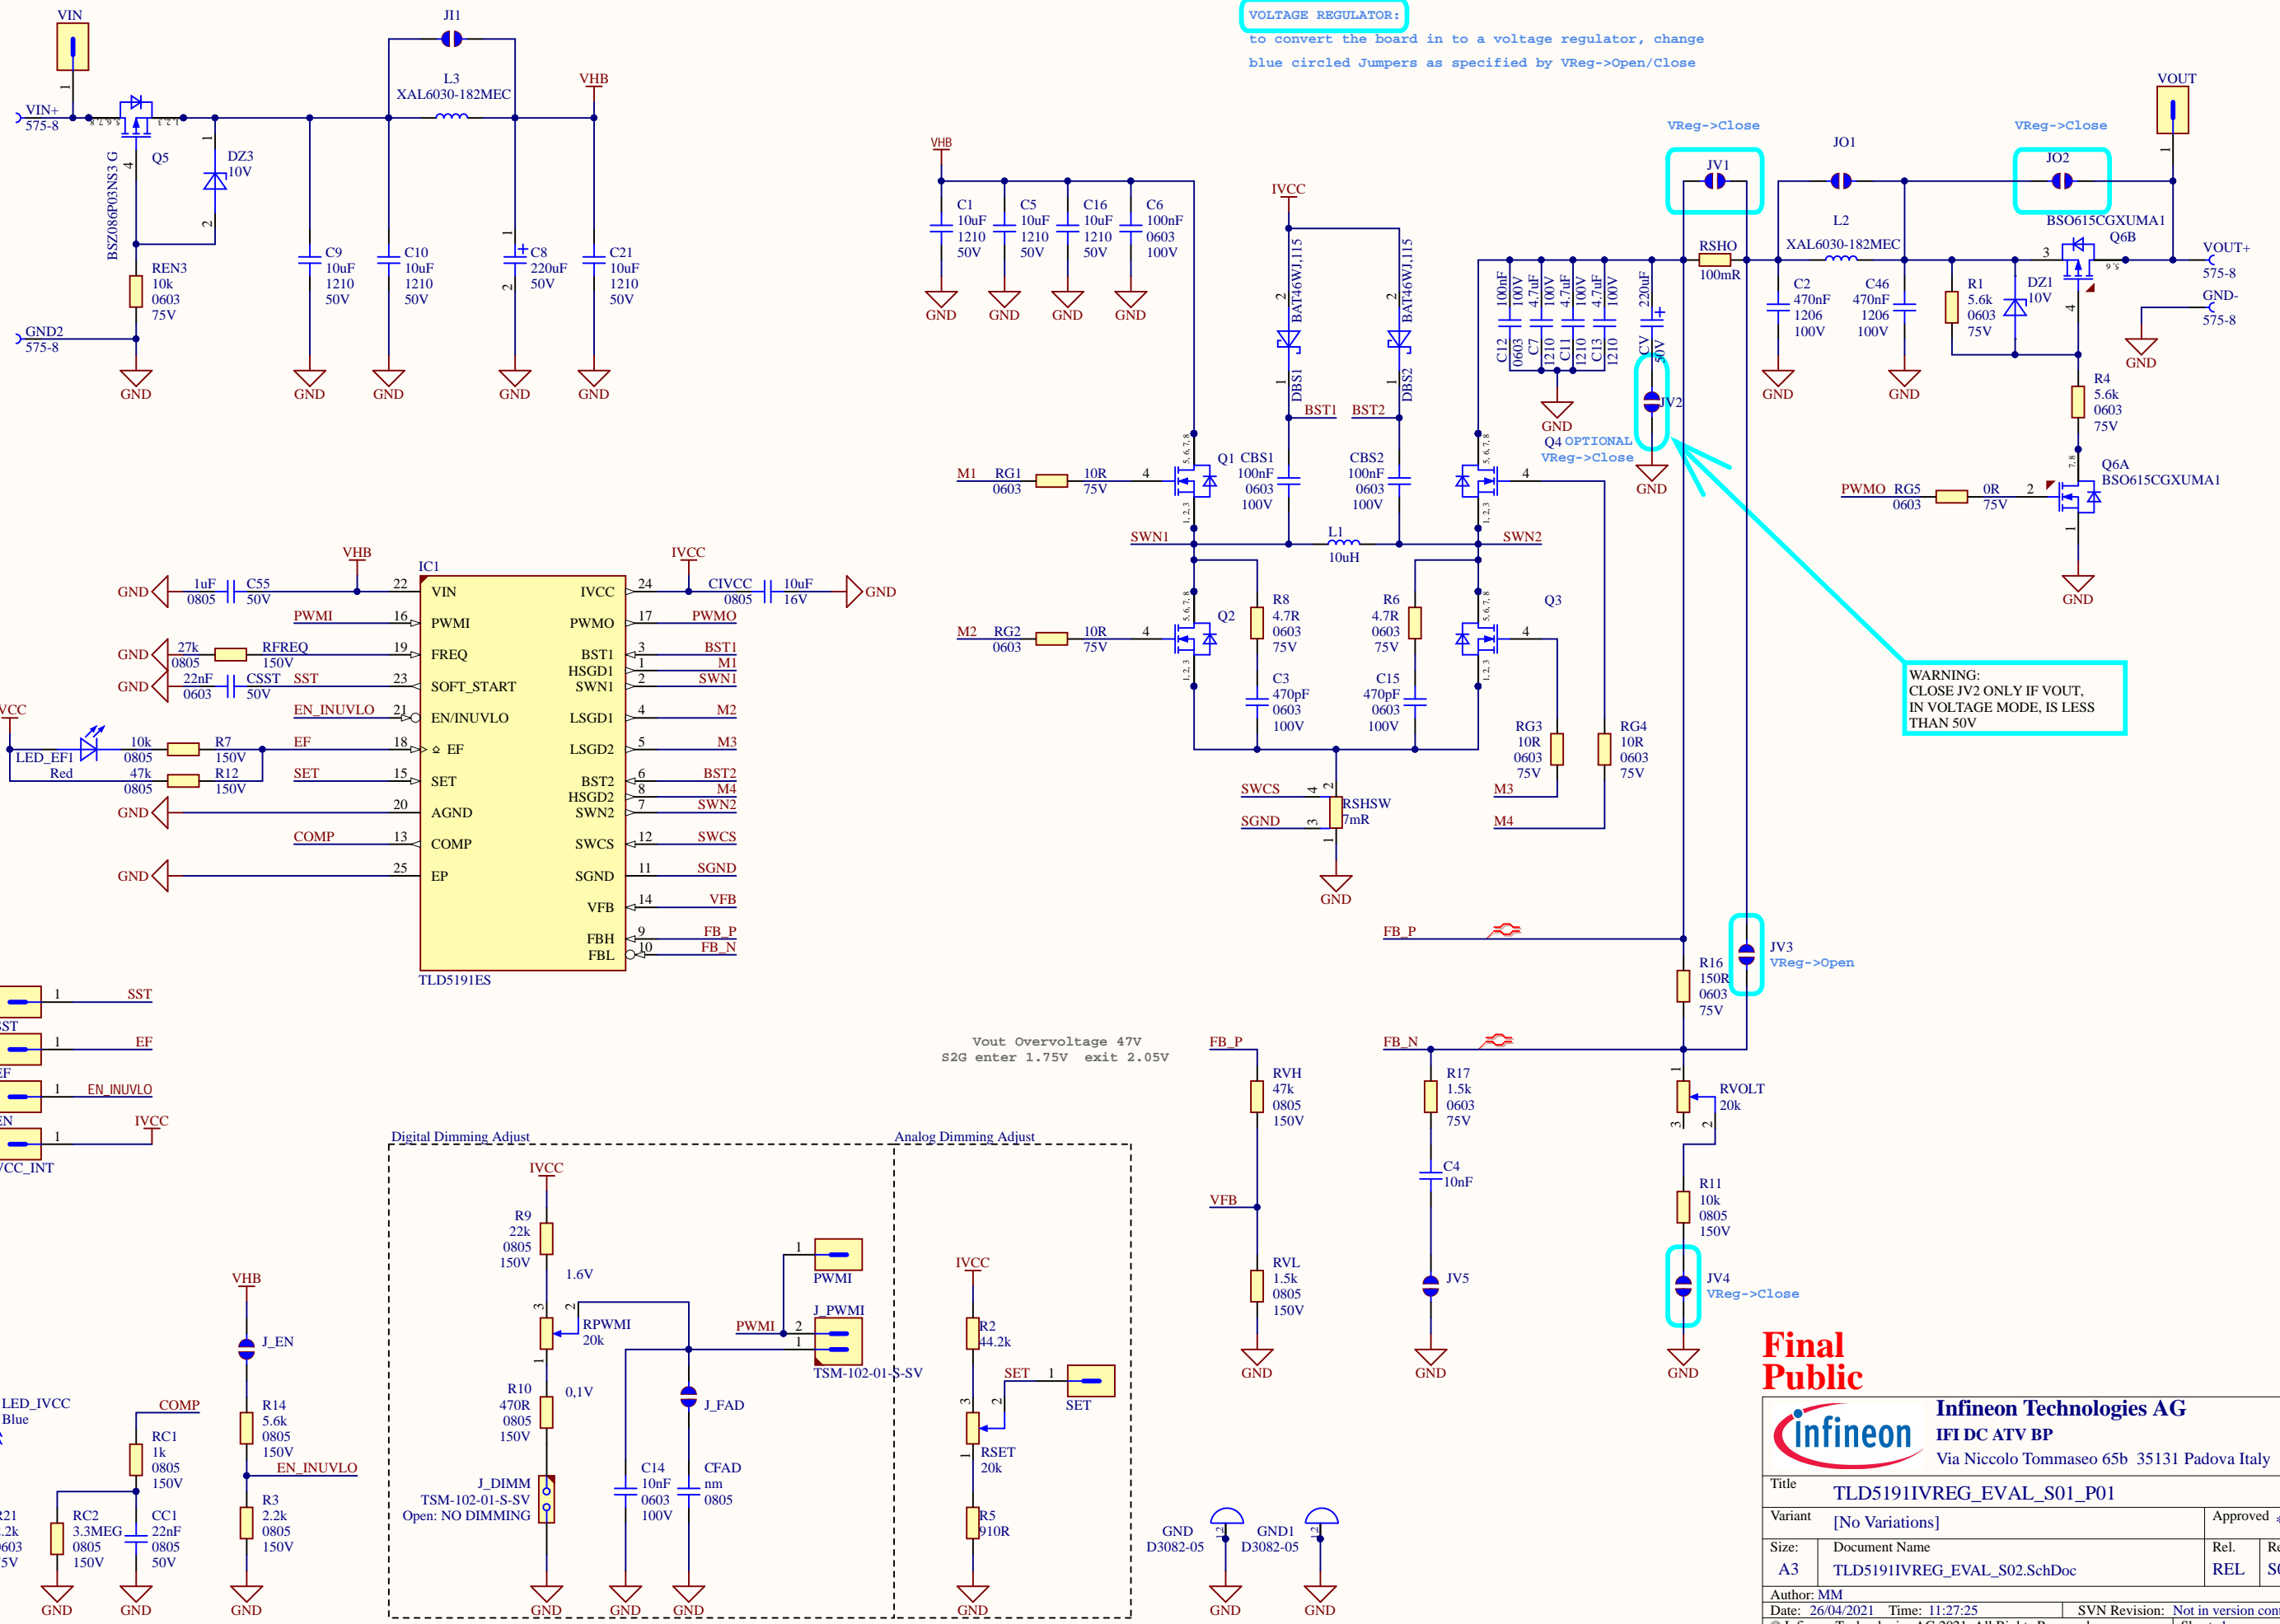

## **8 Revision history**

<b>Document version</b>	<b>Date of release</b>	<b>Description of changes</b>
Rev. 1.00	2021-04-13	Initial User Manual

**Trademarks**

All referenced product or service names and trademarks are the property of their respective owners.

**Edition 2021-04-13**

**Published by**

**Infineon Technologies AG**

**81726 Munich, Germany**

**© 2021 Infineon Technologies AG.**

**All Rights Reserved.**

**Do you have a question about this document?**

**Email:** [erratum@infineon.com](mailto:erratum@infineon.com)

**Document reference**

**UM TLD5191IVREG\_eval**

**IMPORTANT NOTICE**

The information contained in this application note is given as a hint for the implementation of the product only and shall in no event be regarded as a description or warranty of a certain functionality, condition or quality of the product. Before implementation of the product, the recipient of this application note must verify any function and other technical information given herein in the real application. Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind (including without limitation warranties of non-infringement of intellectual property rights of any third party) with respect to any and all information given in this application note.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office ([www.infineon.com](http://www.infineon.com)).

**WARNINGS**

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.