

CoolMOS™ in ThinPAK 8x8

The new leadless SMD package for CoolMOS™

Infineon Technologies introduces the ThinPAK™ 8x8, a new leadless SMD package for HV MOSFETs. The new package has a very small footprint of only 64 mm² (vs. 150 mm² for the D²PAK) and a very low profile with only 1 mm height (vs. 4.4 mm for the D²PAK). This significantly smaller package size in combination with its benchmark low parasitic inductances can be used as a new and effective way to decrease system solution size in power-density driven designs.

The ThinPAK 8x8 package is characterized by a very low source inductance 2nH (vs. 6nH for D²PAK), separate driver source connection (clean gate signal) as well as a similar thermal performance as D²PAK. The package hence enables faster and thus more efficient switching of Power MOSFETs and is easier to handle in terms of switching behaviour and EMI.

Applications

- Servers
- Adapters
- UPS
- HID Lighting


Features

- Small footprint (8x8 mm²)
- Low profile (1 mm)
- Low parasitic inductance
- Separate driver source pin
- RoHS compliant
- Halogen free mold compound

Benefits

- Reduced board space consumption
- Increased power density
- Short commutation loop
- Smooth switching waveform
- Easy to use products
- Environmentally friendly

Comparison between the standard SMD package D²PAK and the new leadless SMD package ThinPAK 8x8

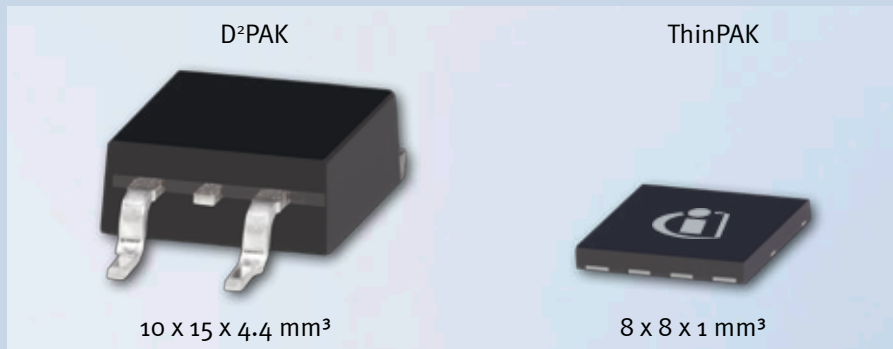


60 % footprint reduction - 80 % height reduction

CoolMOS™ in ThinPAK 8x8


The new leadless SMD package for CoolMOS™

ThinPAK 8x8 and thermal design

To achieve high power capability it is of significant importance to have a well designed thermal system. The recommended design is a thin PCB with many vias and a heatsink attached to the backside of the PCB. A high number of vias is needed to reduce the thermal conduction resistance through the board. To decrease the overall thermal resistance R_{thja} forced convection is beneficial. Thermal measurements show that with this system thermal resistances of 10 K/W and even lower can be achieved for typical applications. 10 K/W would allow for ~ 7 W for typical thermal boundary conditions ($T_{ambient} = 50^{\circ}C$, $T_{max} = 120^{\circ}C$).

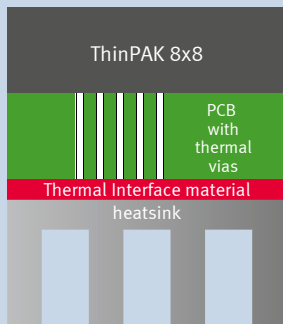



Thermal cooling system for ThinPAK 8x8

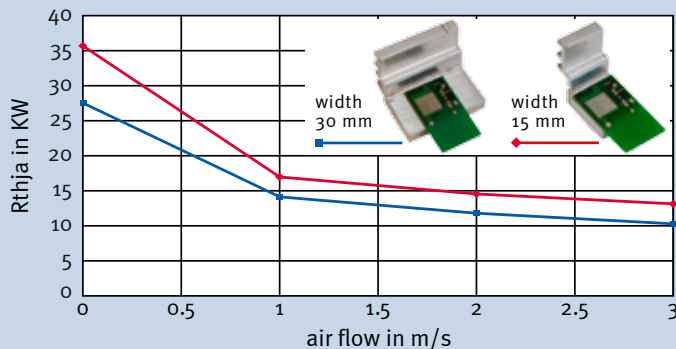

Measurement of the thermal resistance junction to ambient: R_{thja}

Electrical switching behaviour

A low inductive package shows lower ringing at the gate and results in a smooth switching waveform.

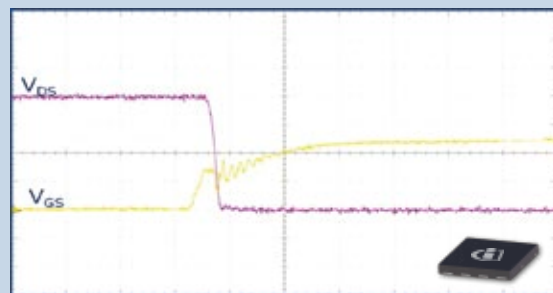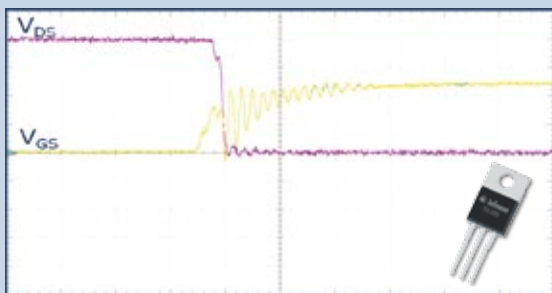

Switching waveform for TO-220 (left) and ThinPAK (right)

Product Portfolio for 600V CoolMOS™ CP in ThinPAK 8x8

Part Number	Maximum Ratings		$R_{DS(on)}$ (mOhm)		Qg (nC) typ.
	V_{DSS} (V)	I_D (A)	Typ	Max.	
IPL60R199CP	600	16	180	199	32
IPL60R299CP	600	11	270	299	22
IPL60R385CP	600	9	350	385	17

How to reach us:
<http://www.infineon.com>

Published by
 Infineon Technologies AG
 81726 Munich, Germany

© 2009 Infineon Technologies AG
 All Rights Reserved.

Legal Disclaimer The information given in this Product Brief shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office. Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.