



Product Brief

TRENCHSTOP™ Performance IGBT

Improved performance for switching speed up to 30 kHz, 5 µsec short circuit and low EMI

The new 600 V TRENCHSTOP™ Performance has been developed based on 600 V TRENCHSTOP™ IGBT technology. The new IGBT series combines the best trade-off between conduction and switch-off energy with outstanding robustness and excellent EMI behavior.

The 600 V TRENCHSTOP™ Performance IGBT enables higher efficiency in motor control, air conditioning compressors, HVAC motor drives, UPS, solar power converters and all power conversion applications working up to 30 kHz in hard-switching topologies. The product portfolio consists of 30 A, 40 A and 50 A single IGBT and 30 A, 40 A, 50 A IGBT co-packed with a Rapid 1 diode in TO-247 package.

Reduced total switching losses, low EMI, 5 µsec short-circuit withstand time, 175°C extended operating junction temperature, tight parameters distribution and low thermal dependency of the main electrical parameters are key features of the new IGBT.


Key features and benefits

600 V TRENCHSTOP™ Performance is the new medium speed switching IGBT with 5 µsec short circuit capability.


The new TRENCHSTOP™ Performance enables a **1:1 replacement** of predecessor TRENCHSTOP™ products offering:

- > lower total switching losses (E_{ts}) i.e. better efficiency IGBT
 - 7% lower P_{tot} for switching speed of 8 kHz
 - 11% lower P_{tot} for switching speed of 15 kHz
- > Low speed dV/dt switching (< 5 V/ns)
- > Low EMI
- > Improved cell design for higher reliability

Trade-off $V_{CE(sat)}$ versus E_{off} at 25°C

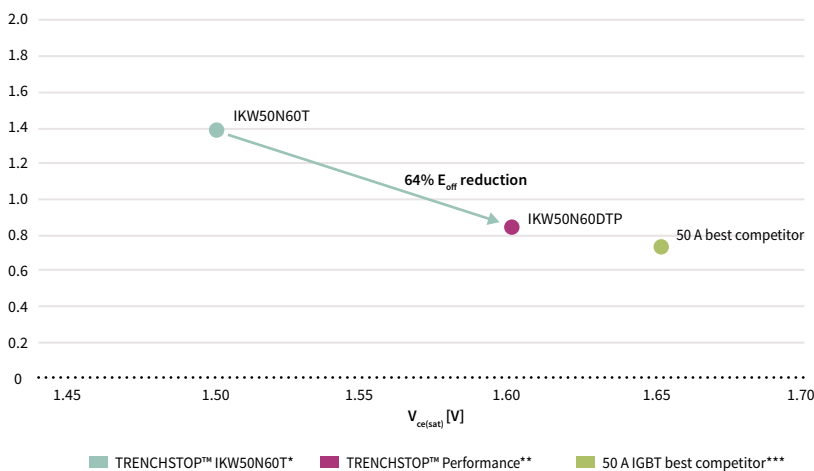


E_{off} Conditions: * $V_{cc} = 400$ V, $I_c = 50$ A, $R_G = 10$ Ω, $T_j = 25^\circ$ C
 ** $V_{cc} = 400$ V, $I_c = 50$ A, $R_G = 7$ Ω, $T_j = 25^\circ$ C
 *** $V_{cc} = 400$ V, $I_c = 50$ A, $R_G = 6.0$ Ω, $T_j = 25^\circ$ C

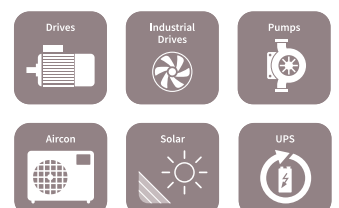

TRENCHSTOP™ Performance IGBT


Improved performance for switching speed up to 30 kHz, 5 µsec short circuit and low EMI

Efficiency in B6-test board*

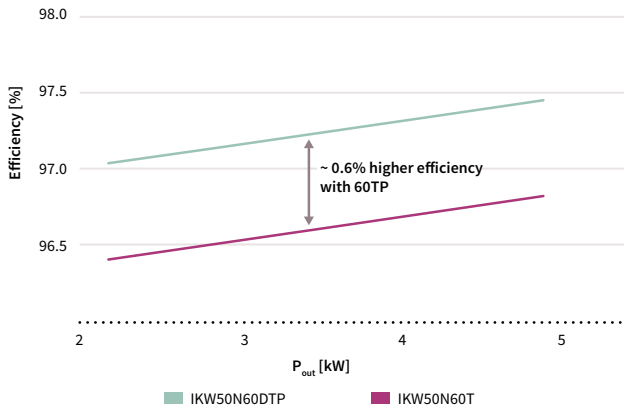

* V_{BUS} = 400 V, f_{sw} = 15 kHz, P_{out} = 2.2/5 kW, three-phase motor with generator as break, dead time = 1 µsec, modulation index 99%

Space vector power loss modulation-losses distribution at T_j = 120°C**

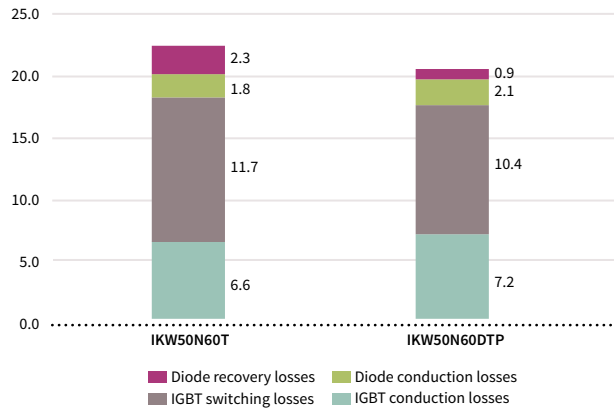

** B6 inverter with motor load. V_{BUS} = 400 V, f_{sw} = 15 kHz, P_{out} = 6 kW, M = 1, cos phi = 0.9

The 600 V TRENCHSTOP™ Performance is an attractive alternative for predecessor TRENCHSTOP™ IGBT from Infineon as well as for its main competitors. Internal study showed that plug-and-play replacement of TRENCHSTOP™ IGBT with the new TRENCHSTOP™ Performance allowed to improve efficiency by 0.6 percent in 5 kW three-phase B6 inverter working at switching frequency of 15 kHz. The new TRENCHSTOP™ Performance IGBT provides customers with improved efficiency, tight parameters distribution, low EMI and high reliability at a very competitive price.

Product portfolio

	Product name***	I _c at 100°C [A]	V _{CE(sat)} [V]	E _{on} [mJ]	E _{off} [mJ]	Q ₆ [nC]	I _F at 100°C [A]	Q _{rr} [µC]
Single IGBT	IGW30N60TP	38	1.6	0.71	0.42	130	-	-
	IGW40N60TP	48	1.6	1.06	0.61	177	-	-
	IGW50N60TP	61	1.6	1.53	0.85	249	-	-
IGBT + Rapid 1 diode	IKW30N60DTP	38	1.6	0.71	0.42	130	24	0.45
	IKW40N60DTP	48	1.6	1.06	0.61	177	35	0.56
	IKW50N60DTP	61	1.6	1.53	0.85	249	39	0.75

*** Datasheet parameters at 25°C unless other is specified

Published by
Infineon Technologies Austria AG
9500 Villach, Austria

© 2016 Infineon Technologies AG.
All Rights Reserved.

Please note!

THIS DOCUMENT IS FOR INFORMATION PURPOSES ONLY AND ANY INFORMATION GIVEN HEREIN SHALL IN NO EVENT BE REGARDED AS A WARRANTY, GUARANTEE OR DESCRIPTION OF ANY FUNCTIONALITY, CONDITIONS AND/OR QUALITY OF OUR PRODUCTS OR ANY SUITABILITY FOR A PARTICULAR PURPOSE. WITH REGARD TO THE TECHNICAL SPECIFICATIONS OF OUR PRODUCTS, WE KINDLY ASK YOU TO REFER TO THE RELEVANT PRODUCT DATA SHEETS PROVIDED BY US. OUR CUSTOMERS AND THEIR TECHNICAL DEPARTMENTS ARE REQUIRED TO EVALUATE THE SUITABILITY OF OUR PRODUCTS FOR THE INTENDED APPLICATION.

WE RESERVE THE RIGHT TO CHANGE THIS DOCUMENT AND/OR THE INFORMATION GIVEN HEREIN AT ANY TIME.

Additional information

For further information on technologies, our products, the application of our products, delivery terms and conditions and/or prices, please contact your nearest Infineon Technologies office (www.infineon.com).

Warnings

Due to technical requirements, our products may contain dangerous substances. For information on the types in question, please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by us in a written document signed by authorized representatives of Infineon Technologies, our products may not be used in any life-endangering applications, including but not limited to medical, nuclear, military, life-critical or any other applications where a failure of the product or any consequences of the use thereof can result in personal injury.