

SLE 66R35E7 with 7-byte UID

Short Product Overview

Features

- Intelligent 1 kByte Memory Chip with NRG (ISO/IEC 14443-3 type A with CRYPTO1) compatibility and 7-byte Unique Identification Number
- Physical Interface and Anticollision compliant to ISO/IEC14443-2 and -3 Type A
 - Operation frequency 13.56 MHz; data rate 106 kbit/s
 - Contactless transmission of data and supply energy
 - Anticollision logic: several cards may be operated in the field simultaneously
 - Features Short-Cut Anticollision scheme to realize backward compatibility to installed infrastructures supporting 4-byte single size UIDs only
- Read and Write Distance up to 10 cm and more (influenced by external circuitry i.e. reader and inlay design)
- Short transaction times: typical ticketing transaction < 100 ms; transaction possible when card is moving

Applications

- Weekly or seasonal cards for Automatic Fare Collection (AFC)
- Event ticketing
- Access Control
- Micropayment

System Overview

The system consists of a host system, which is a contactless Read / Write Device connected to a background system, the antenna and one or more SLE 66R35E7 based tags or other ISO/IEC 14443-3 Type A compliant cards.

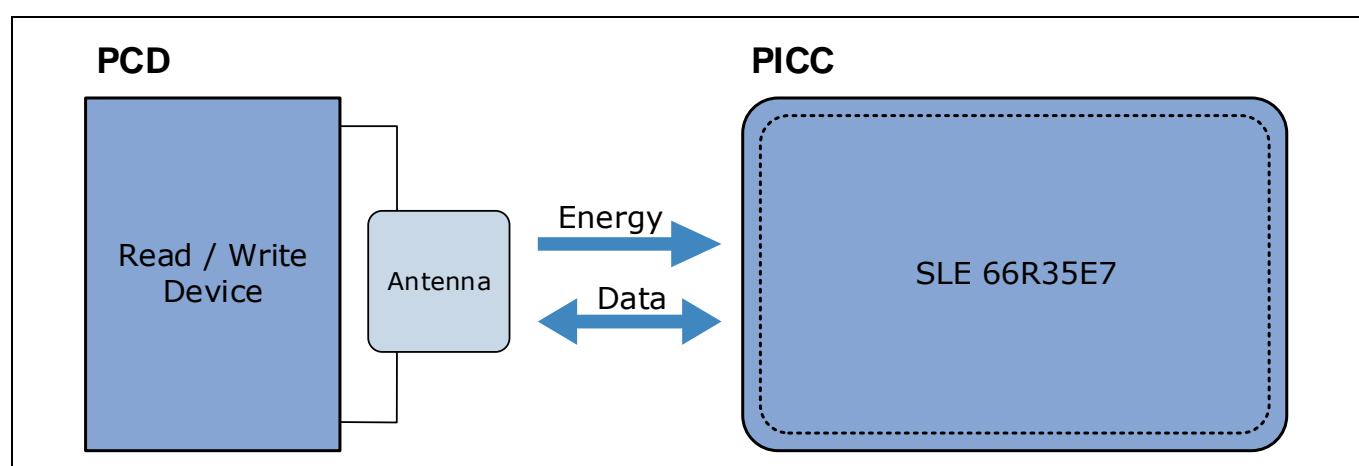


Figure 1 System Overview

Description

The system consists of a smart card and a card reader together with an antenna. The card's antenna consists of a simple coil with a few turns embedded in plastic. The operating distance between card and reader antenna is up to 10 cm and more (influenced by external circuitry i.e. reader-antenna configuration).

The RF communication interface transmits at 106 kbit/s resulting in short transaction times, the effect being that a card user can move freely through a reader gate with minimum disruption. A typical ticketing transaction can be handled in less than 100 ms. Robust contactless transmission means that the card with SLE 66R35E7 may also remain in the wallet of the user even if there are coins in it.

The chip serial number is unique for each card and cannot be changed. The SLE 66R35E7 supports additional UID configurations allowing to operate SLE 66R35E7 in infrastructures running 4-byte (single cascade) anticollision schemes only (short-cut anticollision, Random Number, FNUID). An intelligent anticollision function enables to operate more than one card in the field simultaneously. The anticollision algorithm selects each card individually and ensures that the execution of a transaction with a selected card is performed correctly without data corruption resulting from other cards in the field.

The SLE 66R35E7 is designed to operate in a NRG (ISO/IEC 14443-3 type A with CRYPTO1) system. Each data transmission is enciphered. Protection from misuse is done by configurable access conditions that are protected by secret keys used for memory operations such as read or write.

Product name	SLE 66R35E7
Product description	Intelligent 1 kByte Memory Chip with NRG (ISO/IEC 14443-3 type A with CRYPTO1) compatibility
Interfaces	ISO/IEC 14443-3 Type A
Symmetrical cryptography	Mutual three-pass authentication between card and reader for basic security
Ambient temperature	-25 ... +70°C for the chip
System Features	NRG (ISO/IEC 14443-3 type A with CRYPTO1)
Delivery forms	Sawn wafer 120 or 150 µm, NiAu bump 20 µm MCC8-2-6 MCC2-2-1
Typical applications	Transport ticketing, Access Control systems, Automatic Fare Collection (AFC) systems and other smart card security applications

For further information on technology, delivery forms and conditions please contact your local Infineon Technologies sales representative (www.infineon.com).

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2019-08-01

Published by

**Infineon Technologies AG
81726 München, Germany**

**© 2019 Infineon Technologies AG.
All Rights Reserved.**

Do you have a question about this document?

Email: erratum@infineon.com

Document reference

ifx1

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffungsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology delivery terms and conditions and prices please contact your nearest Infineon Technologies office (www.infineon.com).

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.