

Product brief

SLM 97/SLI 97 SOLID FLASH™

Connectivity with high quality

With a vast experience in security, telecommunications and automotive, Infineon is offering an extensive portfolio for eSIM applications where high quality, endurance and security are key success factors. Infineon's product portfolio for the cellular IoT market has been specially designed to be a perfect match for Industrial and in-car connectivity.

SLM 97 – Driving the adoption of Industrial IoT solutions

Smart connectivity through the cellular network is at the heart of the next industrial revolution, where intelligent machines, systems and networks are capable of exchanging information to manage complete industrial production processes. In order to enable secure and reliable cellular connectivity for industrial environments, Infineon has developed the SLM 97 family of industrial-grade security controllers optimized for the operation in difficult environmental and usage conditions, providing robustness to keep connectivity up and running in every operational condition. The SLM 97 product family fully complies with the Embedded SIM (eUICC) specifications according to ETSI and GSMA, increasing flexibility and simplifying the deployment of new IoT solutions.

SLI 97 – Linking the automotive and telecommunications worlds

In a connected car, the SIM is the linking element between the automotive and the telecommunication worlds. While automakers have a strong focus on meeting the highest quality levels, MNOs focus on protecting their security credentials against theft and cloning. In addition, the remote management capabilities of the embedded SIM allow automakers to reduce logistic complexity and easily deploy new services for their customers during the vehicle's lifetime. Infineon answers to these challenging requirements with the SLI 97 product family, which is tailored to the automotive industry by supporting an extended temperature range, extended quality and AEC-Q100 qualification. The SLI 97 provides a set of hardware crypto-coprocessors supporting all relevant crypto schemes and is targeted for common criteria EAL 5+ High certification, making it a perfect solution for secure in-car connectivity.

Features

- › ARM® SecurCore® SC300™ enhanced by Infineon's cache and security technology
- › Up to 1 MB SOLID FLASH™ allowing fast prototyping and short time-to-market
- › Very high endurance NVM (500 K) for best quality products
- › Symmetric and asymmetric crypto processors
- › ISO7816, SWP, USB, I2C, SPI
- › CC EAL 5+ High

Key features for M2M

- › Extended temperature range: -40 to 105°C
- › SLM 97: Industrial-grade qualification (JEDEC)
- › SLI 97: AEC-Q100 qualification and PPAP documentation
- › Extended quality gates and test scope to reduce failure rates
- › Standard embedded M2M delivery form: MFF2
- › Miniaturized industrial chip-scale package: WFWLB-16-5

SLM 97/SLI 97 SOLID FLASH™

Connectivity with high quality


Key applications

Vehicle telematics	SLI 97 enables secure cellular connectivity for intelligent telematics to provide advanced usage-based services and to improve driver's safety in solutions such as eCall.
Industrial production	SLM 97 allows secure and reliable cellular connectivity between manufacturing equipment for the optimization and automation of manufacturing processes .
Smart utilities	SLM 97 and SLI 97 are both well suitable for any IoT solution where security, endurance and reliability are key success factors, like smart meters, vending machines and asset tracking.

Product overview

Sales code ¹⁾	SOLID FLASH™ [kB]	Cryptography	Interfaces	Typical applications
SLM 97C(N)FxxxxPE	608/800/1024	-	ISO7816 (SWP)	Industrial IoT
SLM 97C(N)FXxxxxPE	608/800/1024	Yes	ISO7816 (SWP)	
SLM 97C(N)UFxxxxPE	608/800/1024	Yes	ISO7816 (SWP), USB	
SLM 97CI(N)FXxxxxPE	608/800/1024	Yes	ISO7816 (SWP), I ² C	
SLM 97CSI(N)FXxxxxPE	800/1024	Yes	ISO7816 (SWP), I ² C, SPI	
SLI 97C(N)FxxxxPE	608/800/1024	-	ISO7816 (SWP)	eCall
SLI 97C(N)FXxxxxPE	608/800/1024	Yes	ISO7816 (SWP)	
SLI 97C(N)UFxxxxPE	608/800/1024	Yes	ISO7816 (SWP), USB	
SLI 97CI(N)FXxxxxPE	608/800/1024	Yes	ISO7816 (SWP), I ² C	V2X
SLI 97CSI(N)FXxxxxPE	800/1024	Yes	ISO7816 (SWP), I ² C, SPI	

1) Example of derivatives

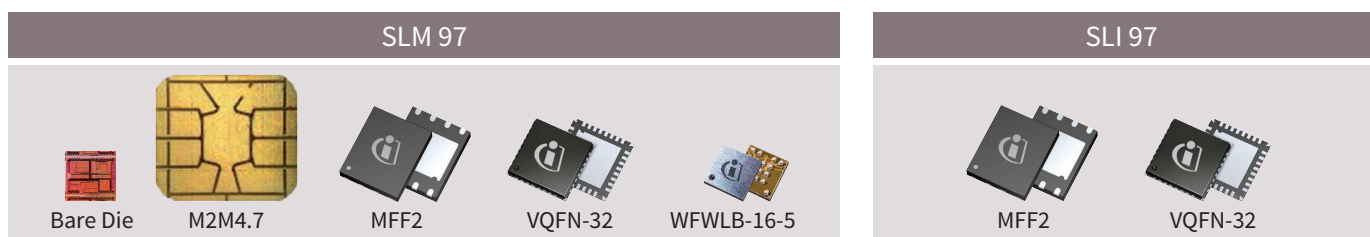

For other SLM 97 and SLI 97 derivatives, further information on technology, delivery forms and conditions please contact your nearest Infineon Technologies sales representative.

Published by
Infineon Technologies AG
81726 Munich, Germany

© 2019 Infineon Technologies AG.
All Rights Reserved.

Please note!

THIS DOCUMENT IS FOR INFORMATION PURPOSES ONLY AND ANY INFORMATION GIVEN HEREIN SHALL IN NO EVENT BE REGARDED AS A WARRANTY, GUARANTEE OR DESCRIPTION OF ANY FUNCTIONALITY, CONDITIONS AND/OR QUALITY OF OUR PRODUCTS OR ANY SUITABILITY FOR A PARTICULAR PURPOSE. WITH REGARD TO THE TECHNICAL SPECIFICATIONS OF OUR PRODUCTS, WE KINDLY ASK YOU TO REFER TO THE RELEVANT PRODUCT DATA SHEETS PROVIDED BY US. OUR CUSTOMERS AND THEIR TECHNICAL DEPARTMENTS ARE REQUIRED TO EVALUATE THE SUITABILITY OF OUR PRODUCTS FOR THE INTENDED APPLICATION.

WE RESERVE THE RIGHT TO CHANGE THIS DOCUMENT AND/OR THE INFORMATION GIVEN HEREIN AT ANY TIME.

Additional information

For further information on technologies, our products, the application of our products, delivery terms and conditions and/or prices, please contact your nearest Infineon Technologies office (www.infineon.com).

Warnings

Due to technical requirements, our products may contain dangerous substances. For information on the types in question, please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by us in a written document signed by authorized representatives of Infineon Technologies, our products may not be used in any life-endangering applications, including but not limited to medical, nuclear, military, life-critical or any other applications where a failure of the product or any consequences of the use thereof can result in personal injury.