

## Product Brief

# TLE7258LE

## Basic LIN Transceiver Starting up in Stand-By Mode

The TLE7258LE is a transceiver for the Local Interconnect Network (LIN) with integrated wake-up and protection features in small leadless PG-TSON-8 package. It is designed for in-vehicle networks, using data transmission rates up to 20kbps. The TLE7258LE operates as a bus driver between the protocol controller and the physical bus of the LIN network. Compliant to all LIN standards and with a wide operational voltage supply range, the TLE7258LE can be used in all automotive applications.

The usage of different operation modes and the INH output allows the TLE7258LE to control external components like e.g. voltage regulators. In Sleep mode the TLE7258LE draws typically less than 10µA of quiescent current while still being able to wake-up when detecting LIN bus traffic. The very low leakage current on the Bus pin makes the TLE7258LE especially suitable for partially supplied networks.

The TLE7258LE provides excellent ESD robustness together with a very high Electro-magnetic Compatibility (EMC). It reaches a very low level of Electromagnetic Emission (EME) within a broad frequency range and independent from the battery voltage. The TLE7258LE is AEC qualified and tailored to withstand the harsh conditions of the automotive environment.

### Applications

- Body controllers and gateway modules
- Switch panels
- Wiper or window lift modules
- Door and seat control modules
- Engine management units


### Key Features

- Data rates up to 20kbaud
- Compliant to ISO 17987-4, LIN specification 2.2A and SAE J2602
- Very high ESD robustness of ±10kV according IEC61000-4-2 and HBM
- Worldwide OEM approval
- Low electromagnetic emission
- High immunity against EMI
- Very low current consumption in sleep mode (10µA)
- Digital I/O levels compatible for 3.3V and 5V microcontrollers
- INH output to control external voltage regulator
- Bus short to  $V_{BAT}$  protection and bus short to GND handling
- AEC Qualified


# TLE7258LE

## Basic LIN Transceiver Starting up in Stand-By Mode

Block Diagram TLE7258LE

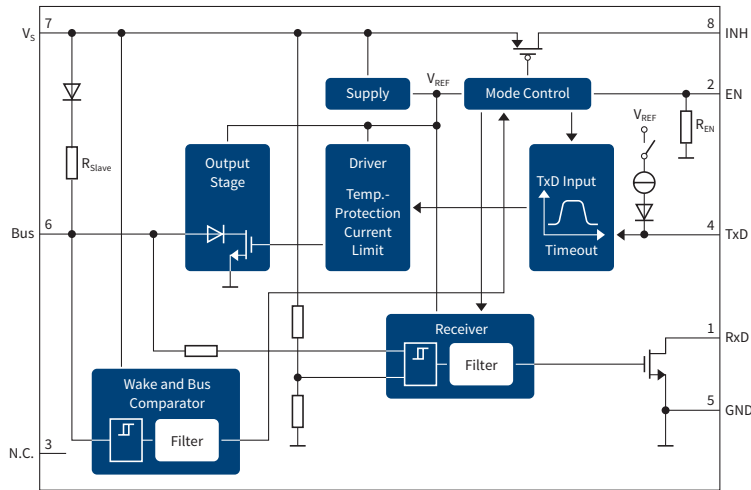

### Application Example: Seat Control Module

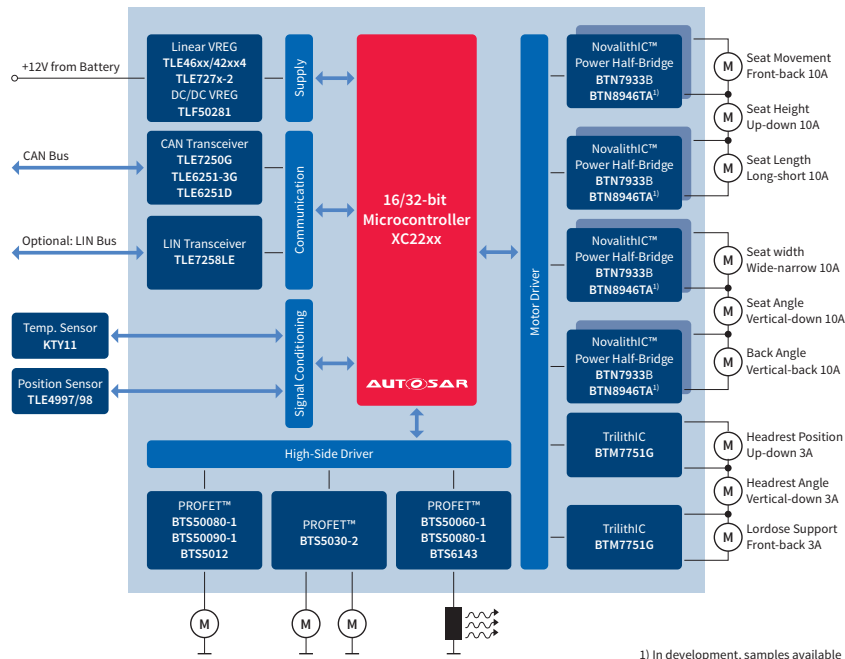

1) In development, samples available

Published by  
Infineon Technologies AG  
85579 Neubiberg, Germany

© 2014 Infineon Technologies AG.  
All Rights Reserved.

Visit us:  
[www.infineon.com](http://www.infineon.com)

**Attention please!**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

**Information**

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

**Warnings**

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office. Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.