

Product brief

TLE9012DQU

Li-Ion battery monitoring and balancing IC

The TLE9012DQU is a multi-channel battery monitoring and balancing IC designed for Li-Ion battery packs used in many applications on the automotive world (electric vehicles of any kind MHEV, HEV, PHEV and BEV, etc), industrial (Energy storage systems) and consumer (i.e. e-bike BMS, home energy storage, etc).

TLE9012DQU fulfills four main functions: cell voltage measurement, temperature measurement, cell balancing and isolated communication to main battery controller. Additionally, TLE9012DQU provides the necessary diagnostic tools to ensure proper function guaranteeing the safety of the persons around the controlled battery.

Summary of Features

- > Voltage monitoring of up to 12 battery cells connected in series
- > Hot plugging support
- > Dedicated 16-bit delta-sigma ADC for each cell with the selectable measurement mode
- > High-accuracy measurement for SoC and SoH calculation
- > Integrated stress sensor with digital compensation algorithm and temperature-compensated measurements
- > Secondary ADC with same averaging filter characteristics as advanced End-to-End safety mechanism
- > Five temperature measurement channels for external NTCs
- > Internal temperature sensors
- > Integrated balancing switch allows up to 200 mA balancing current
- > Differential robust serial 2 Mbit/s communication interface
- > Additional four GPIO pins to e.g. connect an external EEPROM
- > Internal round-robin cycle routine triggers the majority of diagnostics mechanisms
 - Automatic balancing over- and undercurrent detection scheme
 - Automatic open load and open-wire detection scheme
 - Automatic NTC measurement unit monitoring scheme
- > End-to-end CRC secured iso UART/UART communication
- > Emergency mode for communication
- > ISO 26262 Safety Element out of Context for safety requirements up to ASIL D
- > Green Product (RoHS compliant)


Key Benefits

- > Best in class Application Robustness: Infineon technology and device architecture guarantee best performances under noise
- > High accuracy voltage measurement: Reliable and precise battery cell monitoring for highly accurate SoC and SoH
- > Lowest system cost: Small package (TQFP-48) & high feature integration for a lean external BOM

Target Applications

- > Battery Electric Vehicle (BEV)
- > Mild Hybrid Electric Vehicle (MHEV)
- > Hybrid Electric Vehicle (HEV)
- > Plug-in Hybrid Electric Vehicle (PHEV)
- > 12V Li-Ion battery systems
- > Energy Storage System (ESS)
- > Home Energy Storage system

Diagram

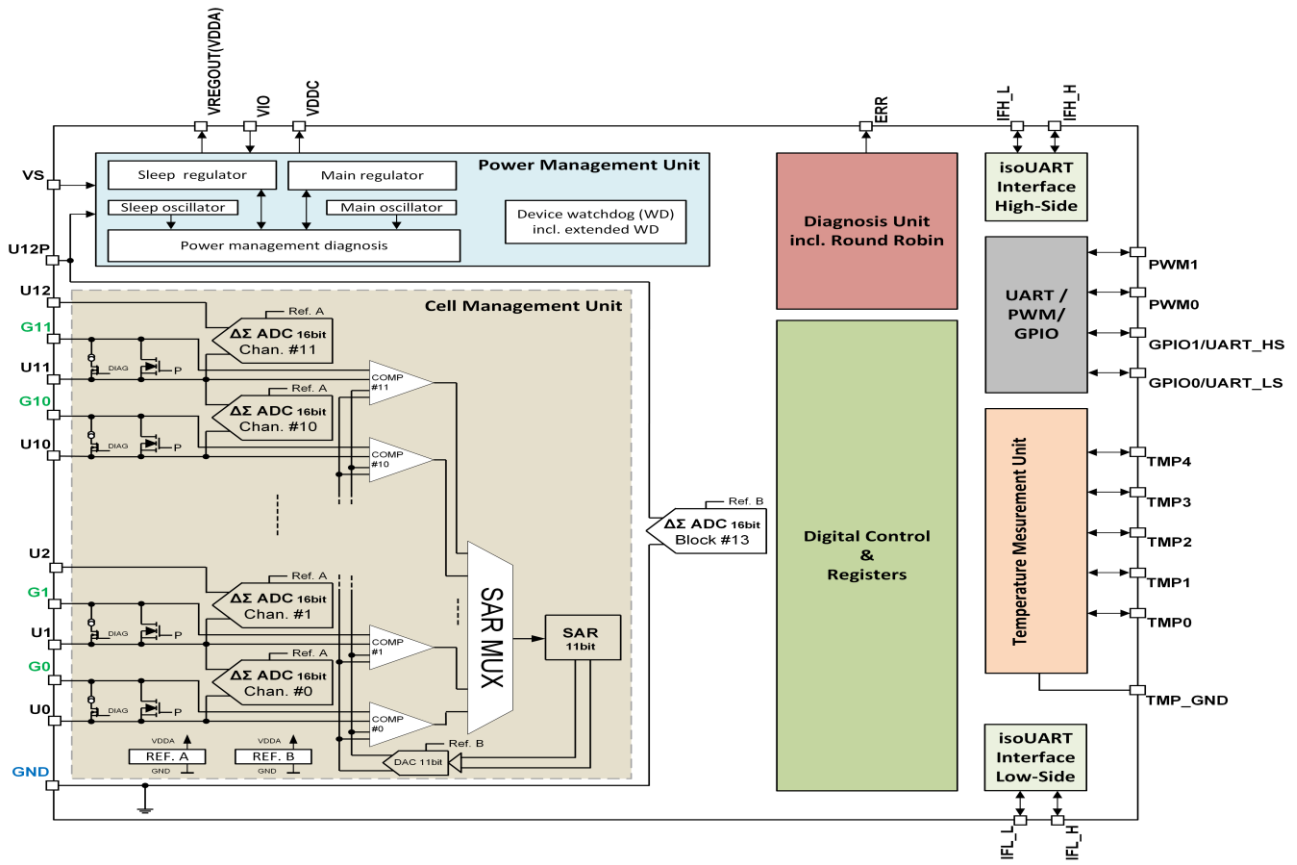

Product Table

Product	Balancing Current max (mA)	Cell Voltage max(V)	Driver Selection	ESD Protection (kV)	ISO UART Interfaces	Isolated Communication Interface	Non-isolated Communication Interface	Standby Current (µA)	Tj max (°C)	Temperature Measurement Channels	UART Interfaces	Voltage Class (V)	Voltage Class (Macro) (V)	Voltage Measurement Channels
TLE9012DQU Li-ion monitoring and balancing IC	200	7	-	4	-	Iso UART	UART	2.5	150	5	-	75	75.0	12
TLE9015DQU iso UART transceiver IC	-	-	-	4	2	Iso UART	UART	3	150	-	2	75	75.0	-

UART = Universal asynchronous receiver-transmitter

Published by
Infineon Technologies AG
81726 Munich, Germany

© 2022 Infineon Technologies AG.
All Rights Reserved.

Please note!

This Document is for information purposes only and any information given herein shall in no event be regarded as a warranty, guarantee or description of any functionality, conditions and/or quality of our products or any suitability for a particular purpose. With regard to the technical specifications of our products, we kindly ask you to refer to the relevant product data sheets provided by us. Our customers and their technical departments are required to evaluate the suitability of our products for the intended application.

We reserve the right to change this document and/or the information given herein at any time.

Additional information

For further information on technologies, our products, the application of our products, delivery terms and conditions and/or prices, please contact your nearest Infineon Technologies office (www.infineon.com).

Warnings

Due to technical requirements, our products may contain dangerous substances. For information on the types in question, please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by us in a written document signed by authorized representatives of Infineon Technologies, our products may not be used in any life-endangering applications, including but not limited to medical, nuclear, military, life-critical or any other applications where a failure of the product or any consequences of the use thereof can result in personal injury.