

Application Note

TLE8250XSJ

About this document

Scope and purpose

This document provides application information for the transceiver TLE8250XSJ from Infineon Technologies AG as Physical Medium Attachment within a Controller Area Network (CAN).

This document contains information about:

- set-ups for CAN application
- improved CAN FD parameters
- mode control
- fail safe behavior
- power supply concepts
- power consumption aspects
- PCB recommendations for CAN FD applications
- pin FMEA

This document refers to the data sheet of the Infineon CAN Transceiver TLE8250XSJ.

Note: The following information is given as a hint for the implementation of our devices only and shall not be regarded as a description or warranty of a certain functionality, condition or quality of the device.

Intended audience

This document is intended for engineers who develop applications.

Table of Contents

	About this document	1
	Table of Contents	2
1	CAN Application	4
2	TLE8250XSJ Description	6
2.1	Features	6
2.2	Mode Description	6
2.3	TLE825x-Family Pin-out Compatibility	7
3	In-Vehicle Network Applications	8
3.1	Clamp 30 and Clamp 15	8
3.2	Baud Rate versus Bus Length	9
4	CAN FD	11
4.1	General Information	11
4.2	TLE8250XSJ Improved CAN FD Parameters	12
4.3	TLE8250XSJ Approval in Conjunction with Common Mode Choke	13
5	Pin Description	14
5.1	V_{IO} Pin	14
5.2	V_{CC} Pin	14
5.3	GND Pin	14
5.4	RxD Pin	14
5.5	TxD Pin	14
5.6	RM Pin	15
5.6.1	RM pin not connected	15
5.7	CANH and CANL Pins	16
6	Transceiver Supply	17
6.1	Voltage Regulator	17
6.2	External Circuitry	17
6.3	Power-up Sequence for V_{IO} and V_{CC}	17
6.4	V_{IO} Feature	17
6.4.1	V_{IO} 3.0 V - 5.5 V Power Supply Concept	18
6.4.2	V_{IO} 3.3 V Power Supply	18
6.4.3	V_{IO} 5 V Supply	18
6.4.4	Dual 5 V Supply Concept	19
6.5	Current Consumption	19
6.6	Loss of Battery (Unsupplied Transceiver)	19
6.7	Loss of Ground	19
6.8	Ground Shift	20
7	Transceiver Control	21
7.1	Mode Change by RM	21
7.2	Mode Change Delay	21
7.3	Mode Change due to V_{CC} Undervoltage	22
8	Failure Management	23
8.1	TxD Dominant Time-out Detection	23
8.2	Minimum Baud Rate and Maximum TxD Dominant Phase	24



8.3	Short Circuit	24
8.4	TLE8250XSJ Junction Temperature	25
9	Thermal Simulation	27
10	PCB Layout Recommendations for CAN FD	28
11	Pin FMEA	29
12	References	32
	Terms and Abbreviations	32
13	Revision History	33

CAN Application

1 CAN Application

With the growing number of electronic modules in cars the amount of communication between modules increases. In order to reduce wires between the modules CAN was developed. CAN is a Class-C, multi master serial bus system. All nodes on the bus system are connected via a two wire bus. A termination of $R_T = 120\ \Omega$ or a split termination ($R_{T/2} = 60\ \Omega$ and $C_T = 4.7\ \text{nF}$) on two nodes within the bus system is recommended.

An ECU typically consists of:

- power supply
- microcontroller with integrated CAN protocol controller
- CAN transceiver

The CAN protocol uses a lossless bit-wise arbitration method of conflict resolution called CSMA/CA (Carrier Sense Multiple Access/ Collision Avoidance). This requires all CAN nodes to be synchronized. The complexity of the network can range from a point-to-point connection to hundreds of nodes. A simple network concept using CAN is shown in **Figure 1**.

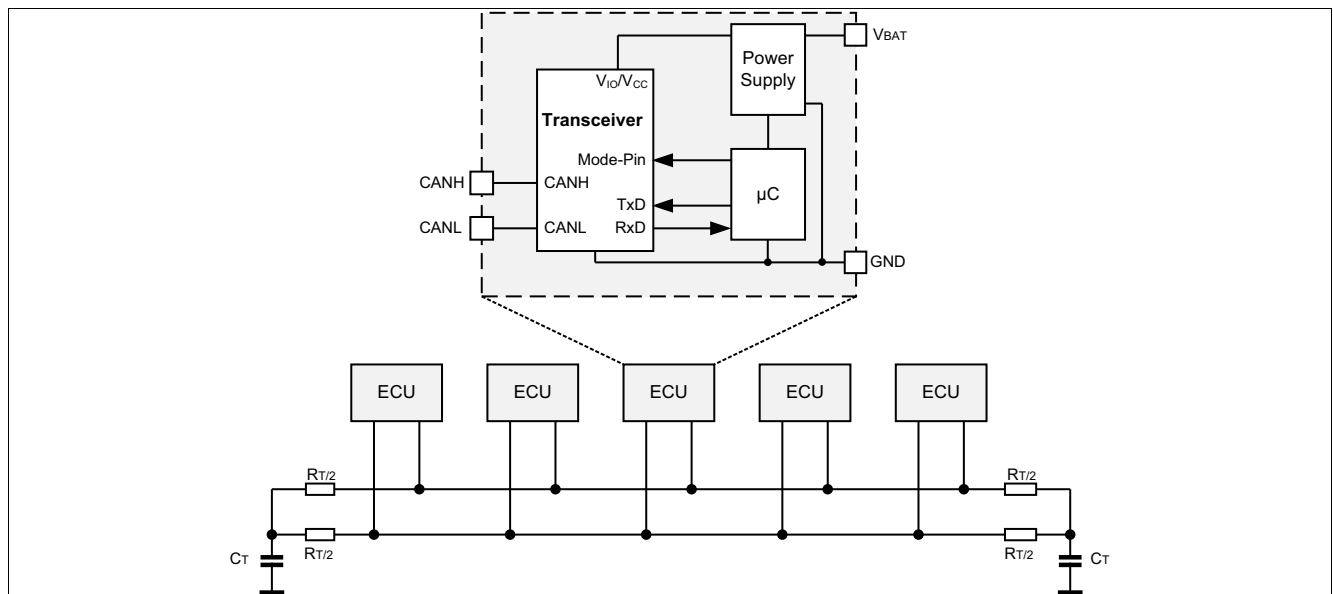


Figure 1 CAN Example with Typical ECU Using TLE8250XSJ

The CAN bus physical layer can have the following states (see **Figure 2**):

- dominant:
 - TxD pin set to “low” generates dominant state
 - voltage at CANH changes towards V_{CC}
 - voltage at CANL changes towards GND
- recessive:
 - CANH and CANL are biased to $V_{CC}/2$

See **Table 1** for voltage levels specified for dominant and recessive state.

CAN Application

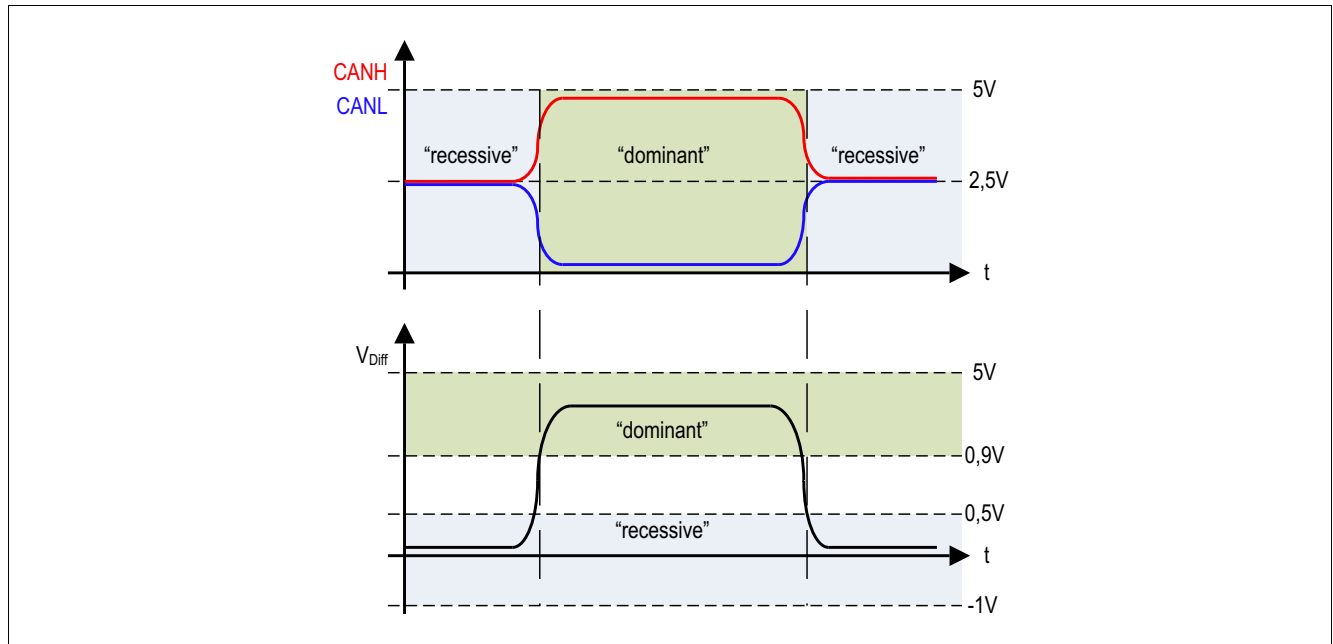


Figure 2 Voltage Levels according to ISO 11898-2

Table 1 Voltage Levels according to ISO 11898-2

Parameter	Symbol	Values			Unit	Note or Test Condition
		Min.	Typ.	Max.		
Recessive State						
Output Bus Voltage	$V_{CANL,H}$	2.0	2.5	3.0	V	No load
Differential Output Bus Voltage	$V_{Diff_R_NM}$	-500	–	50	mV	No load
Differential Input Bus Voltage	$V_{Diff_R_Range}$	-3.0	–	0.5	V	–
Dominant State						
Output Bus Voltage	V_{CANH}	2.75	3.5	4.5	V	$50\ \Omega < R_L < 65\ \Omega$
	V_{CANL}	0.5	1.5	2.25	V	$50\ \Omega < R_L < 65\ \Omega$
Differential Output Bus Voltage	$V_{Diff_D_NM}$	1.5	2.0	3.0	V	$50\ \Omega < R_L < 65\ \Omega$
Differential Input Voltage	$V_{Diff_D_Range}$	0.9	–	8.0	V	–

ISO 11898-2 describes the CAN physical layer. The CAN transceiver TLE8250XSJ fulfills all parameters defined in ISO 11898-2. This document describes CAN applications with the TLE8250XSJ. It provides application hints and recommendations for the design of CAN electronic control units (ECUs) using the CAN transceiver TLE8250XSJ from Infineon.

TLE8250XSJ Description

2 TLE8250XSJ Description

The transceiver TLE8250XSJ represents the physical medium attachment, that is the interface between the CAN protocol controller and the CAN transmission medium. The CAN transceiver converted the transmit data stream of the protocol controller at the TxD input to a bus signal. The receiver of the TLE8250XSJ detects the data stream on the CAN bus and transmits it to the protocol controller via the RxD pin.

2.1 Features

The main features of the TLE8250XSJ are:

- Baud rate up to 2 Mbit/s with improved CAN FD parameters (see [Chapter 4.2](#))
- Very low Electromagnetic Emission (EME) and high Electromagnetic Immunity (EMI)
- Excellent ESD performance according to HBM (+/-10 kV) and IEC (+/-8 kV)
- Transmit data (TxD) dominant time-out function
- Supply voltage range 4.5 V to 5.5 V
- Control input levels compatible with 3.3 V and 5 V devices

2.2 Mode Description

The TLE8250XSJ supports three different modes of operation. The mode of operation depends on the status of the reference power supply and the status of the mode selection pin RM:

Table 2 Description of Modes

Mode	Use Cases
Normal-operating mode	<ul style="list-style-type: none"> • Used for communication on the HS CAN bus • Transmit and receive data on the bus
Receive-only mode	<ul style="list-style-type: none"> • Allows diagnostics (to avoid the acknowledge bit (ACK) implemented by software), to check modules connections or to avoid communication errors on the bus due to microcontroller failure. • Blocks babbling idiots from disturbing communication • Used for Pretended Networking to set ECU and microcontroller to low-power mode, waiting for a specific message to switch to Normal-operating mode. Pretended Networking reduces current consumption of ECUs.
Forced-power-save mode	<ul style="list-style-type: none"> • Fail-safe mode for V_{CC} undervoltage condition • Reduced current consumption in afterrun when there is no communication on the HS CAN bus with ECU still active. • Emergency undervoltage state when the microcontroller detects undervoltage and starts saving internal information.

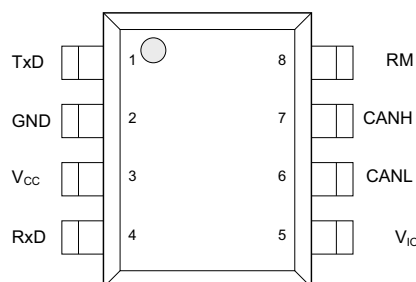


Figure 3 Pin Configuration of the TLE8250XSJ

TLE8250XSJ Description

2.3 TLE825x-Family Pin-out Compatibility

The TLE825x-Family is pin-out and functional compatible to existing Infineon CAN transceivers (see [Figure 4](#)). The TLE825x-Family consists of:

- TLE8250SJ
- TLE8250VSJ
- TLE8250XSJ
- TLE8251VSJ

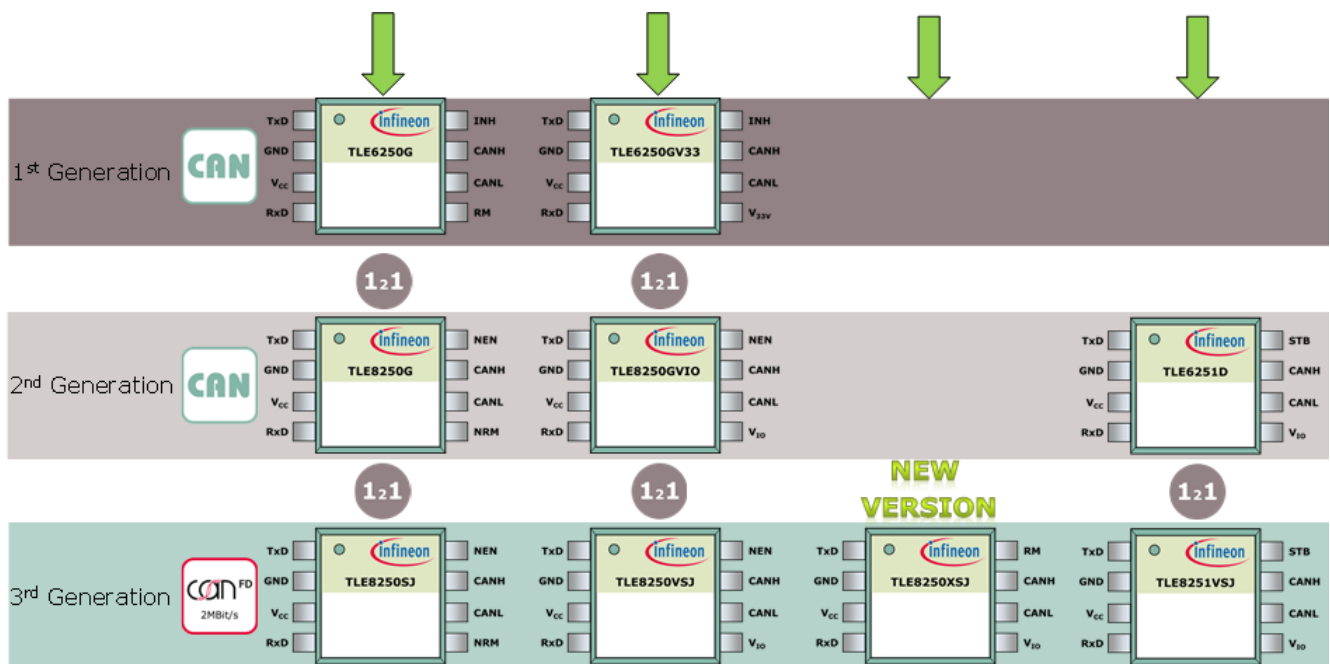


Figure 4 TLE825x-Family Pin-out Compatibility

3 In-Vehicle Network Applications

The TLE8250/51-Family offers a perfect match for various ECU requirements. TLE8250XSJ offers improved loop delay symmetry to support CAN FD data frames up to 2 MBit/s (see [Chapter 4.2](#)). For partially supplied ECUs (Clamp 15) the TLE8250XSJ is suitable. According to the requirements of automobile manufacturers, the modules can either be permanently supplied or unsupplied when the car is parked. The main purpose for unsupplied modules is saving battery energy. A CAN message can wake up permanently supplied modules.

3.1 Clamp 30 and Clamp 15

Clamp 30 (permanently supplied networks, connected to battery)

Body applications such as door modules, RF keyless entry receivers require permanently supplied modules. Permanently supplied modules are still powered when the car is not in use. The supply line from the battery is called clamp 30. Because battery voltage is present permanently, the voltage regulator, transceiver and microcontroller are always supplied. Voltage regulators, transceivers and microcontrollers need to be set to low-power mode. Low power mode reduces current consumption and prevents the battery from draining.

Clamp 15 (partially supplied networks, connected to ignition)

Under hood applications such as ECUs typically use partially supplied modules. When the car is parked a main switch or ignition key switches off the battery supply. This supply line is called clamp 15. When the battery voltage is not present, the voltage regulator and transceiver are switched off.

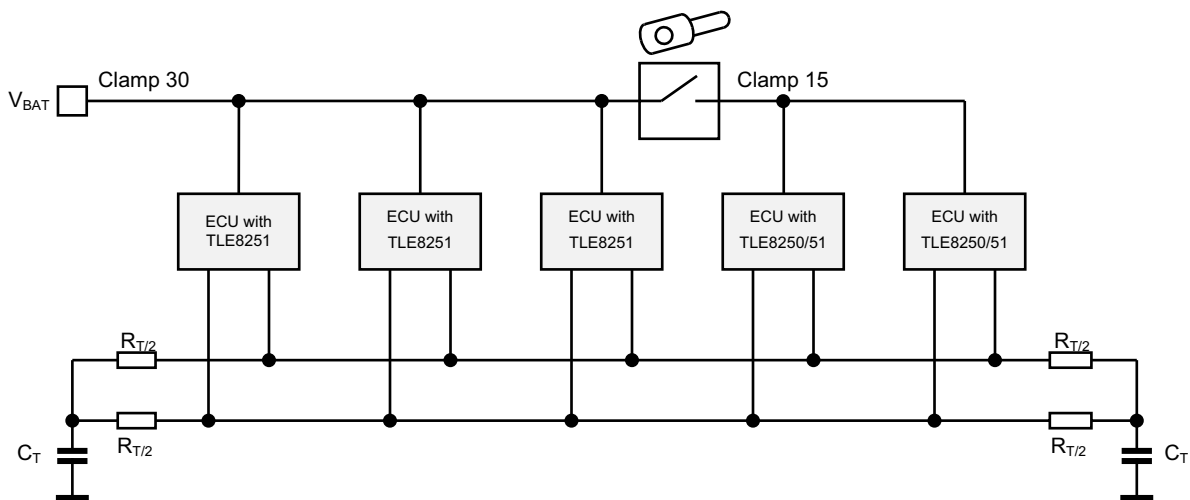


Figure 5 CAN with ECUs Using TLE8250XSJ

In Clamp 15 applications there is no for transceivers with bus wake-up feature. Therefore TLE8250XSJ offers three different modes that make applications more flexible (see [Chapter 2.2](#)). For applications that do not use the bus wake-up feature, the TLE8250XSJ offers a Power-save mode with very low current consumption. If the TLE8250XSJ is disconnected from the power supply, current consumption of the ECU decreases further. The perfect passive bus behavior of the TLE8250XSJ does not affect CAN bus communication while the TLE8250XSJ is not supplied.

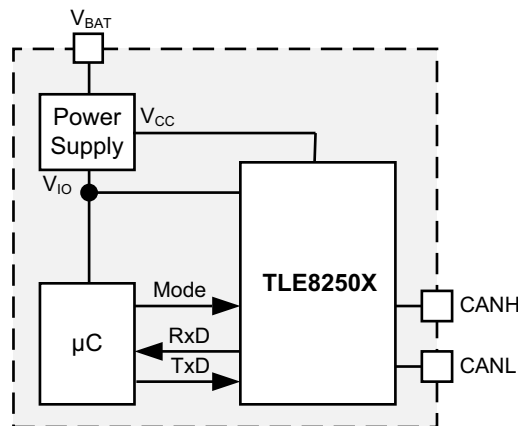


Figure 6 Example ECU with TLE8250XSJ

3.2 Baud Rate versus Bus Length

Table 3 Recommended Baud Rate versus Bus Length

Baud Rate (kbit/s)	Bus Length (m) Maximum Distance between two Nodes
1000	10
500	40
250	120
125	500
50	1000

Baud rate is limited by:

- bus length
- ringing
- propagation delay of cables
- propagation delay of the CAN controller of the transceiver

The two most distant nodes (A and B) in a CAN network are the limiting factor in transmission speed. The propagation delays must be considered because a round trip has to be made from the two most distant CAN controllers on the bus. Propagation delay of the cable depends on cable length and on temperature.

In the worst case scenario node A starts transmitting a dominant signal and it takes a certain period of time ($t = t_{\text{CANcontroller}} + t_{\text{Transceiver}} + t_{\text{Cable}}$) until the signal reaches node B.

Propagation delay is the sum of:

- CAN controller delay
- transceiver delay
- bus length delay

Assumption: 70 ns for CAN controller, 255 ns for transceiver, 5 ns per meter of cable. Example with 50 m cable length:

$$t_{\text{prop}} = t_{\text{CANcontroller}} + t_{\text{Transceiver}} + t_{\text{Cable}} + t_{\text{CANcontroller}} + t_{\text{Transceiver}} + t_{\text{Cable}} = 70 \text{ ns} + 255 \text{ ns} + 50 \text{ m} \times 5 \text{ ns/m} + 70 \text{ ns} + 255 \text{ ns} + 50 \text{ m} \times 5 \text{ ns/m} = 1150 \text{ ns}$$

In-Vehicle Network Applications

With a total propagation delay of 1150 ns and assuming a nominal bit time of 2000 ns, the timing window for the sampling point is reduced to 850 ns not taking into account ringing or reflections. For correct bit sampling this timing window should include additional timing margin.

Other factors of strong influence on the maximum baud rate are:

- cable capacitance
- oscillator tolerance
- ringing
- reflections, depending on the network topology

The shorter the bus length, the timing window margin increases and a higher data rate can be achieved. Wire resistance increases with bus length and therefore the bus signal amplitude may be degraded. For additional information please refer to [The Physical Layer in the CAN FD World](#).

CAN FD

4 CAN FD

CAN FD (Flexible Data Rate) is the advanced version of classical CAN.

CAN FD saves transmission time compared to classical CAN:

- increased data transmission rate
- increased payload per message

CAN FD includes additional timing parameters.

Table 4 Classical CAN vs. CAN FD

	Data transmission rate [Mbit/s]	Maximum payload message length [byte]
Classical CAN	1	8
CAN FD	2	64

4.1 General Information

CAN FD uses the same physical layer as classical CAN does. During the arbitration phase and checksum the data transmission rate is identical to classical CAN (1 Mbit/s). As soon as one node in the CAN FD network starts transmitting the payload, the data rate is increased (2 Mbit/s). The increased baud rate is possible, because only one node transmits during the data transmission phase. All other nodes listen to the data on the CAN bus. In order to ensure reliable data transmission, CAN FD requires a CAN transceiver with full ISO 11898-2 specification for Flexible Data rate up to 2 Mbit/s.

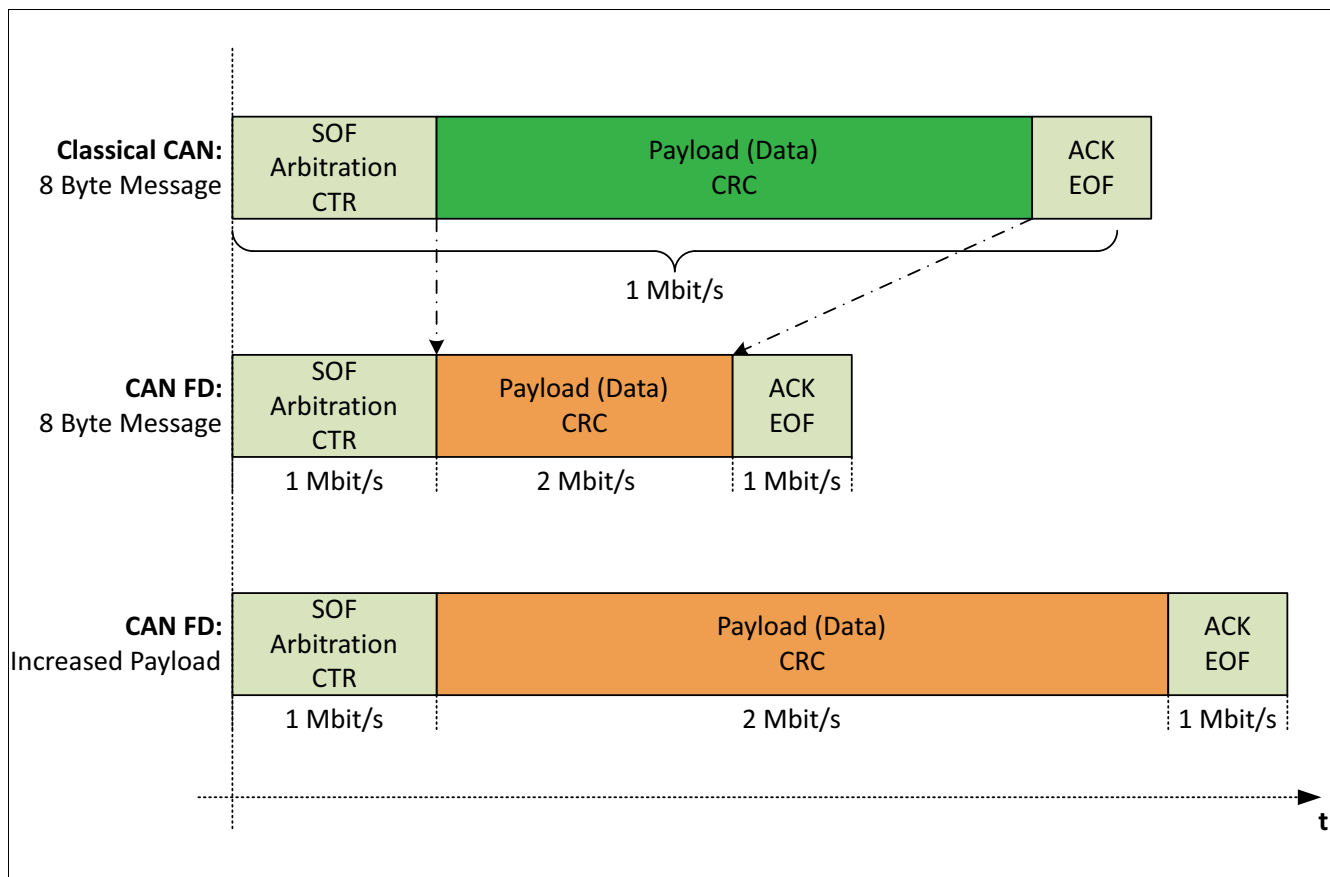


Figure 7 Classical CAN Data Rate and CAN FD Data Rate

CAN FD

4.2 TLE8250XSJ Improved CAN FD Parameters

The TLE8250XSJ from Infineon is the perfect match for CAN FD networks. TLE8250XSJ exceeds the CAN FD parameters according to ISO 11898-2 (Edition 2016) for 2 Mbit/s in order to enable smooth and safe usage within applications. The TLE8250XSJ offers improved loop delay symmetry to support CAN FD data frames up to 2 MBit/s (see [Table 5](#)).

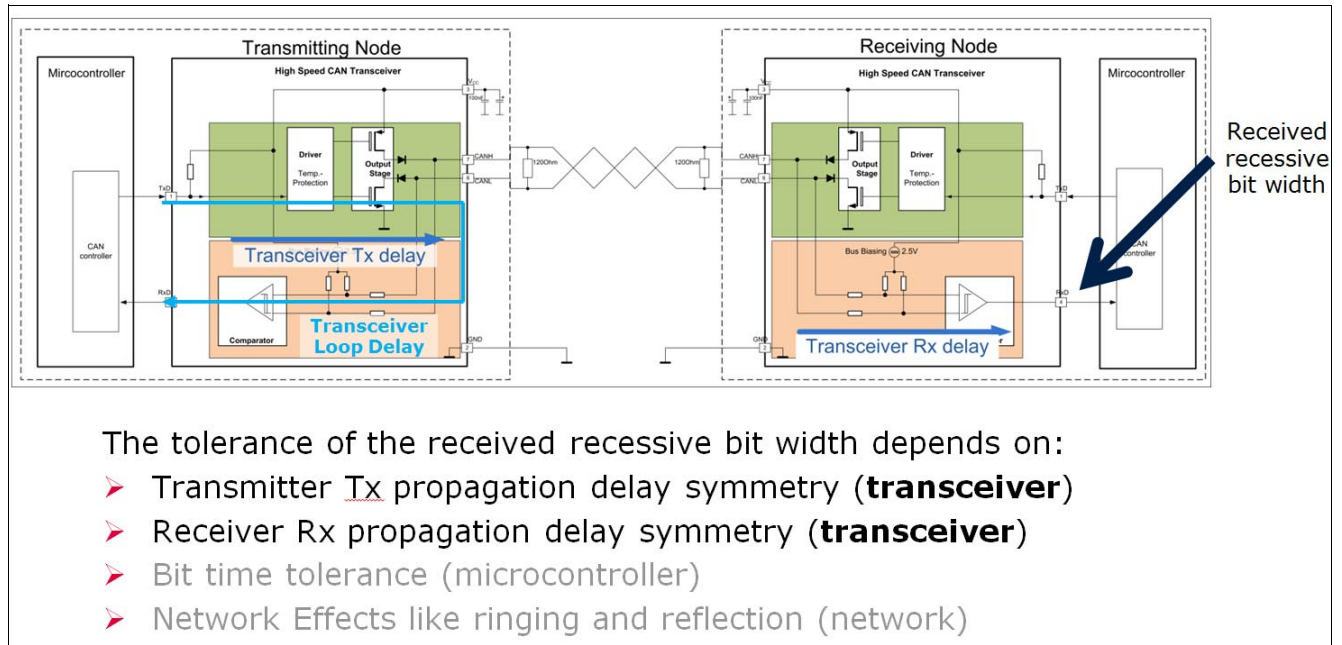


Figure 8 Transceiver Propagation Delay

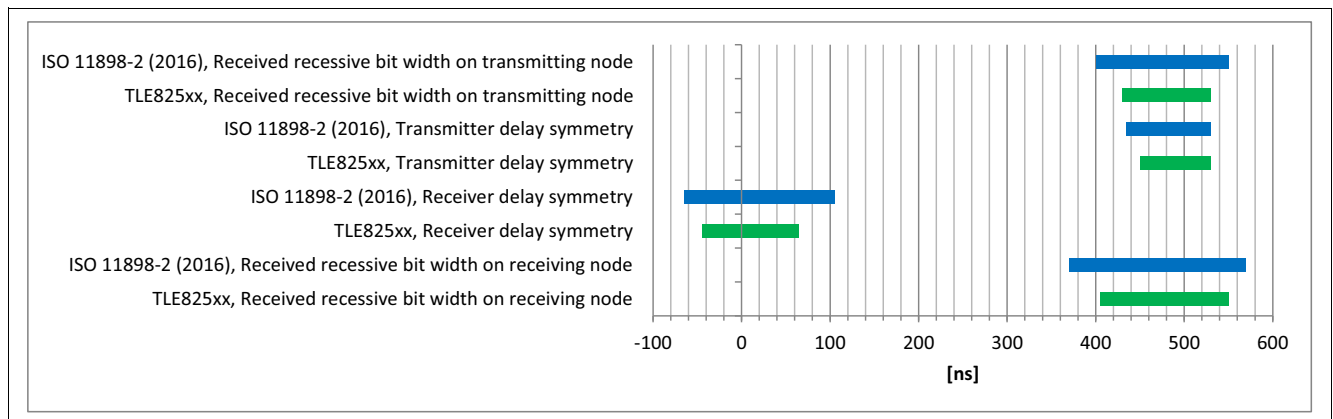


Figure 9 Improved CAN FD parameters: ISO 11898-2 (2016) vs. TLE82xx

Table 5 Improved CAN FD parameters: ISO 11898-2 (2016) vs. TLE8250XSJ

Specification	ISO 11898-2 (2016) Specification			TLE8250XSJ Specification		
Parameter	min.	max.	Unit	min.	max.	Unit
Received recessive bit width on transmitting node	400	550	ns	430	530	ns
Transmitter delay symmetry	435	530	ns	450	530	ns
Receiver delay symmetry	-65	+40	ns	-45	+20	ns
Received recessive bit width on receiving node $t_{\text{Bit(RxDrec)}}$	370	570	ns	405	550	ns

CAN FD

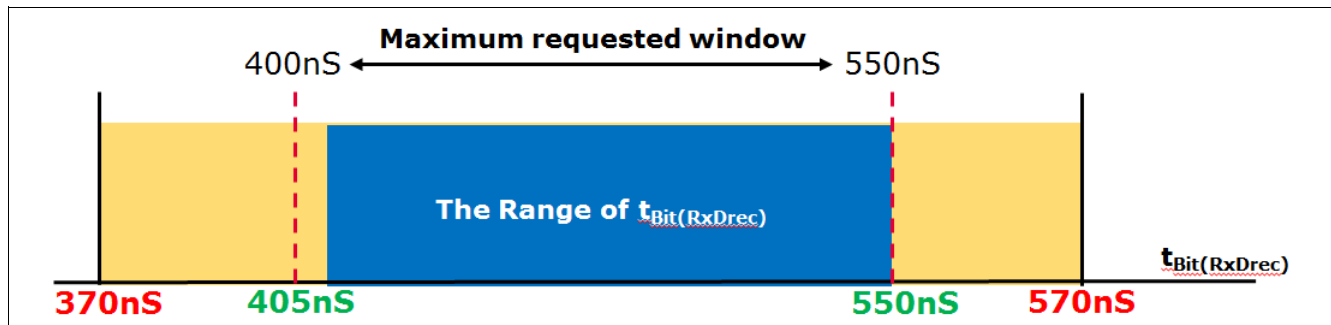


Figure 10 Requested maximum $t_{\text{Bit(RxDrec)}}$ by Japanese OEM for CAN FD

Figure 10 shows the maximum requested range of the received recessive bit width on the receiving node $t_{\text{Bit(RxDrec)}}$ by Japanese OEMs. Infineon's TLE8250XSJ Transceiver fulfills the requested maximum window of $t_{\text{Bit(RxDrec)}}$. TLE8250XSJ has improved timing parameters for CAN Flexible Data Rate (2Mbit/s), which adds additional safety margin for network effects like ringing effects and network propagation delay.

4.3 TLE8250XSJ Approval in Conjunction with Common Mode Choke

For applications using Classical CAN and CAN Flexible Data Rate, Japanese OEMs require always a Common Mode Choke. Infineon TLE8250XSJ CAN Transceiver is qualified and approved at Japanese OEMs with all major Common Mode Chokes:

- ACT45B type
- ACT45C type
- DLW43 type

Pin Description

5 Pin Description

5.1 V_{IO} Pin

The V_{IO} pin is needed for the operation with a microcontroller that is supplied by $V_{IO} < V_{CC}$, to match the voltage level between microcontroller and transceiver. It can also be used to decouple microcontroller and transmitter supply.

Benefits of using the V_{IO} pin:

- improved EMC performance
- the transmitter supply V_{CC} can be switched off separately

The digital reference supply voltage V_{IO} has two functions:

- supply of the internal logic of the transceiver (state machine)
- voltage adaption for external microcontroller ($3.0\text{ V} < V_{IO} < 5.5\text{ V}$)

As long as V_{IO} is supplied ($V_{IO} > 3.0\text{ V}$) the state machine of the transceiver supports mode changes. If a microcontroller uses low $V_{IO} < V_{CC} = 5\text{ V}$, then the V_{IO} pin must be connected to the power supply of the microcontroller. Due to the V_{IO} pin feature, the TLE8250XSJ can work with various microcontroller supplies. If V_{IO} is available, then both transceiver and microcontroller are fully functional. Below $V_{IO} < 3.0\text{ V}$ the TLE8250XSJ is in Power On Reset state. To enter Normal-operating mode $V_{IO} \geq 3.0\text{ V}$ is required.

5.2 V_{CC} Pin

The V_{CC} pin supplies the transmitter output stage.

Table 6 Transmitter state depending on V_{CC}

V_{CC}	Transmitter state	Note
$V_{CC} < V_{CC_UV}$	disabled	$3.65\text{ V} < V_{CC_UV} < 4.3\text{ V}$
$V_{CC_UV} < V_{CC} < 4.5\text{ V}$	enabled; parameters may be outside the specified range	–
$4.5\text{ V} < V_{CC} < 5.5\text{ V}$	enabled	–
$V_{CC} > 6\text{ V}$	damage of TLE8250XSJ possible	–

5.3 GND Pin

The GND pin must be connected as close as possible to module ground in order to reduce ground shift. It is not recommended to place filter elements or an additional resistor between GND pin and module ground. GND must be the same for transceiver, microcontroller and HS CAN bus system.

5.4 RxD Pin

RxD is an output pin. The data stream received from the HS CAN bus is displayed on the RxD output pin in Normal-operating mode, Receive-only mode. Do not use a series resistor within the RxD line between transceiver and microcontroller. A series resistor may add delay, which degrades the performance of the transceiver, especially in high data rate applications.

5.5 TxD Pin

TxD is an input pin. TxD pin receives the data stream from the microcontroller. If in Normal-operating mode $V_{IO} > V_{IO_UV}$, then the data stream is transmitted to the HS CAN bus. In all other modes the TxD input pin is

Pin Description

blocked. A “low” signal causes a dominant state on the bus and a “high” signal causes a recessive state on the bus. The “high” signal must be adapted to the voltage on the V_{IO} pin. This means the “high” level must not exceed V_{IO} voltage. The TxD input pin has an integrated pull-up resistor to V_{IO} . If TxD is permanently “low”, for example due to a short circuit to GND, then the TxD time-out feature will block the signal on the TxD input pin (see [Chapter 8.1](#)). Do not use a series resistor within the TxD line between transceiver and microcontroller. A series resistor may add delay, which degrades the performance of the transceiver, especially in high data rate applications.

5.6 RM Pin

The RM pin sets the mode of TLE8250XSJ and is usually directly connected to an output port of a microcontroller. To set the device to Normal-operating mode, in order to activate the data stream from the microcontroller on the TxD pin, the RM pin must be set to “low”. Because of the integrated pull-down resistor to GND, the TLE8250XSJ is in Normal-operating mode by default. If Receive-only mode is not used, then the RM pin must be connected to GND to protect the transceiver from disturbance. The user can deactivate the transmitter of TLE8250XSJ either by setting the RM pin to “high” or by switching off V_{CC} . This can be used to implement two different fail safe paths in case a failure is detected in the ECU. [Table 7](#) shows mode changes by the RM pin, assuming $V_{IO} > V_{IO_UV}$. [Chapter 2](#) describes features and modes of operation.

Table 7 Mode Selection via RM

Mode of operation	RM	V_{CC}	Note	Receiver	Transmitter
Receive-only mode	“high”	$> V_{CC_UV}$	–	enabled	disabled
Forced-power-save mode	“X” ¹⁾	$< V_{CC_UV}$	–	enabled	disabled
Normal-operating mode	“low”	$> V_{CC_UV}$	–	enabled	enabled

1) “X”: don’t care

5.6.1 RM pin not connected

If an application does not use the Receive-only mode, the RM input pin can be left unconnected. The internal pull-down resistor to GND then sets the RM signal to “low” and the TLE8250XSJ enters Normal-operating mode.

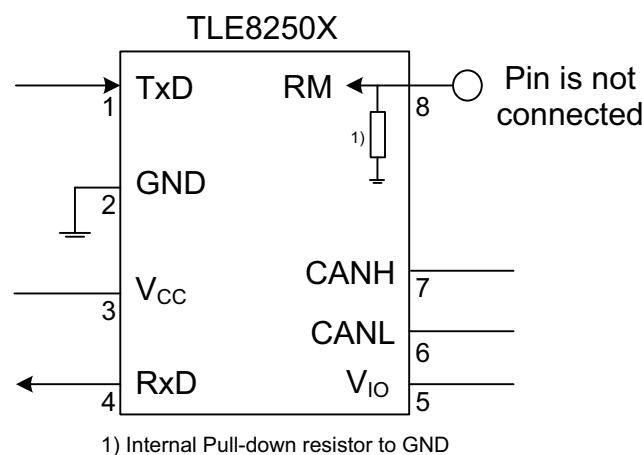


Figure 11 RM pin not connected

Pin Description

5.7 CANH and CANL Pins

CANH and CANL are the CAN bus input and output pins. The TLE8250XSJ is connected to the bus via pin CANH and CANL. Both transmitter output stage and the receiver are connected to CANH and CANL.

Data on the TxD pin is:

- transmitted to CANH and CANL
- simultaneously received by the receiver input and signalled on the RxD output pin.

For achieving optimum EME (Electromagnetic Emission) performance, transitions from dominant to recessive and from recessive to dominant are performed as smooth as possible also at high data rate. Output levels of CANH and CANL in recessive and dominant state are described in [Table 1](#). Due to the excellent ESD performance on CANH and CANL no external ESD components are necessary to fulfill OEM requirements.

6 Transceiver Supply

The internal logic of TLE8250XSJ is supplied by the V_{IO} pin. The V_{CC} pin is used to create the CANH and CANL signal. The transmitter output stage as well as the main CAN bus receiver are supplied by the V_{CC} pin. This chapter describes aspects of power consumption and voltage supply concepts of TLE8250XSJ.

6.1 Voltage Regulator

It is recommended to use one of the following Infineon low drop output (LDO) voltage regulators:

- 3.3 V V_{IO} power supply: TLS850D0TAV33 (500mA), TLS850F0TAV33 (500mA), TLS810B1LDV33 (100mA), **TLE4266-2GS V33** (150mA),
- 5 V V_{IO} and V_{CC} power supply: TLS850D0TAV50 (500mA), **TLS850F0TA V50** (500mA), **TLS810D1EJV50** (100mA), **TLS810B1LDV50** (100mA), **TLE4266-2** (150mA)
- 3.3 V and 5 V dual voltage power supply: **TLE4476D**
- Dual 5V voltage power supply: **TLE4473GV55**

Please refer to [Infineon Linear Voltage Regulators](#) for the Infineon voltage regulator portfolio and data sheets.

6.2 External Circuitry

In order to reduce EME and to improve the stability of input voltage level on V_{CC} and V_{IO} of the transceiver, it is recommended to place capacitors (low impedance and low ESR) close to V_{IO} and V_{CC} on the PCB. During sending a dominant bit to the HS CAN bus, current consumption of TLE8250XSJ is higher than during sending a recessive bit. Data transmission can change the load profile on V_{CC} . Changes in load profile may reduce the stability of V_{CC} . If several CAN transceivers are connected in parallel, and if these CAN transceivers are supplied by the same V_{CC} and/or V_{IO} power supply (for example LDO), then the impact on the stability of V_{CC} is even stronger. It is recommended to place a 100 nF capacitor as close as possible to V_{CC} and V_{IO} pin. The output of the V_{CC} and V_{IO} power supply (for example LDO) must be stabilized by a capacitor in the range of 1 to 50 μ F, depending on the load profile. Ceramic capacitors are recommended for low ESR.

6.3 Power-up Sequence for V_{IO} and V_{CC}

As TLE8250XSJ has V_{CC} and V_{IO} supply pin, this chapter describes possible scenarios for powering up the device. V_{CC} supplies the transmitter output stage and V_{IO} the internal state machine of TLE8250XSJ. There is no limitation for the start-up sequence for TLE8250XSJ:

- Scenario 1: If V_{IO} is supplied first, the internal state machine will start to work for $V_{IO} > V_{IO_UV}$. Then the mode of operation can be changed by the mode selection pins. The transmitter of TLE8250XSJ remains disabled in Normal-operating Mode if $V_{CC} > V_{CC_UV}$ and also in all other modes.
- Scenario 2: If V_{CC} is supplied first, only the transmitter output stage is supplied. But as V_{IO} is not yet supplied the transmitter is High-Z (disabled) by default, in order to not disturb the bus communication.
- Scenario 3: If V_{CC} and V_{IO} are connected to the same supply voltage (5V), the state machine will start to work for $V_{IO} > V_{IO_UV}$ (max. 3.0V) and the transmitter will be enabled if $V_{CC} > V_{CC_UV}$ (max. 4.5V).

6.4 V_{IO} Feature

TLE8250XSJ offers a V_{IO} supply pin, which is a voltage reference input for adjusting the voltage levels on the digital input and output pins to the voltage supply of the microcontroller. In order to use the V_{IO} feature, connect the power supply of the microcontroller to the V_{IO} input pin. Depending on the voltage supply of the microcontroller, TLE8250XSJ can operate with the V_{IO} reference voltage input within the voltage range from 3.0 V to 5.5 V.

Transceiver Supply

6.4.1 V_{IO} 3.0 V - 5.5 V Power Supply Concept

The V_{IO} pin supplies the internal logic of the TLE8250XSJ. TLE8250XSJ can operate with the V_{IO} reference voltage input in the range from 3.0 V to 5.5 V. The V_{CC} pin (typ. = 5 V) supplies the transmitter of TLE8250XSJ. Therefore the V_{CC} supply input pin must be connected to a 5 V voltage regulator. Competitor devices use V_{CC} to supply the internal logic and the transmitter output stage and V_{IO} as a simple level shifter. Infineon's HS CAN transceivers can work in V_{CC} undervoltage condition or even with V_{CC} completely switched off in Forced-power-save mode.

6.4.2 V_{IO} 3.3 V Power Supply

In order to reduce power consumption of ECU, the microcontroller might not be supplied by V_{CC} but by a lower voltage (for example 3.3 V). Therefore the TLE8250XSJ offers a V_{IO} supply pin, which is a voltage reference input in order to adjust the voltage levels on the digital input and output pins to the voltage supply of the microcontroller. The V_{IO} feature enables the TLE8250XSJ to operate with a microcontroller, which is supplied by a voltage lower than V_{CC} . With the V_{IO} reference voltage input the TLE8250XSJ can operate from 3.0 V to 5.5 V.

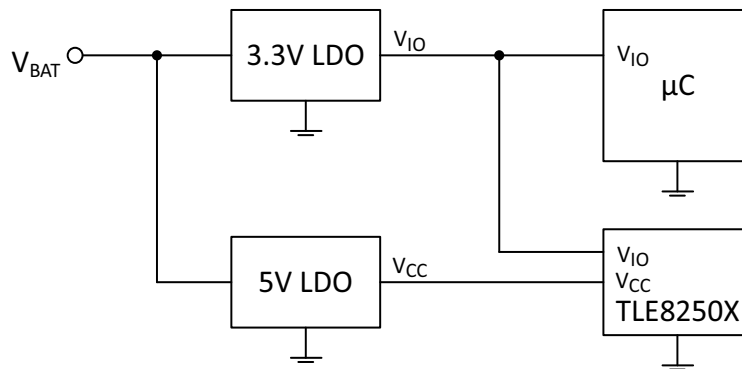


Figure 12 3.3 V Power Supply Concept

6.4.3 V_{IO} 5 V Supply

TLE8250XSJ can also operate with a 5 V supply because of the V_{IO} input voltage range from 3.0 V to 5.5 V. If the microcontroller uses $V_{CC} = 5$ V supply, then V_{IO} is connected to V_{CC} . The V_{IO} input must be connected to the supply voltage of the microcontroller.

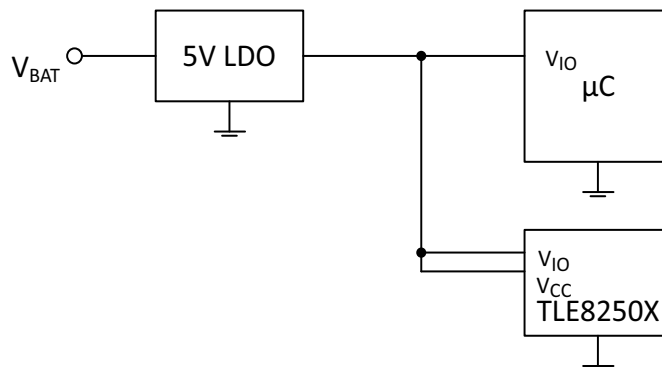


Figure 13 5 V Power Supply Concept

6.4.4 Dual 5 V Supply Concept

In order to decouple the microcontroller and the HS CAN Bus from each other with respect to noise and disturbances, it is possible to use a dual 5 V voltage regulator like [TLE4473GV55](#). In this case two independent 5 V LDOs supply V_{IO} and V_{CC} . This power supply concept improves EMC behavior and reduces noise.

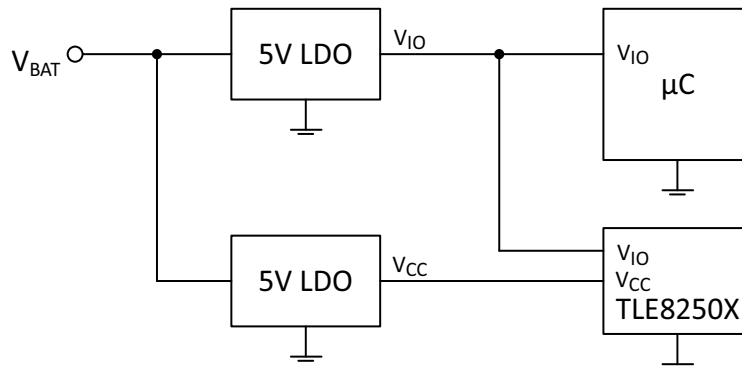


Figure 14 Dual 5 V Power Supply Concept

6.5 Current Consumption

Current consumption depends on the mode of operation:

- Normal-operating mode:
Maximum current consumption of TLE8250XSJ on the V_{CC} supply is specified as 60 mA in dominant state and 4 mA in recessive state. Maximum current consumption of TLE8250XSJ on the V_{IO} supply is specified as 1 mA. To estimate theoretical current consumption in Normal-operating mode, a duty cycle of 50% can be assumed, with fully loaded bus communication of 50% dominant and 50% recessive. In Normal-operating mode the TLE8250XSJ consumes in worst case maximum:

$$I_{CC_AVG} = (I_{CC_REC} + I_{CC_DOM}) / 2 + I_{IO} = 32.5 \text{ mA}$$
Typically the current consumption is less than 15 mA.
- Receive-only mode:
In Receive-only mode the TLE8250XSJ has a worst case maximum current consumption of $I_{ROM} = 3 \text{ mA}$. Typically the current consumption is less than 3 mA.
- Power-save mode Forced-power-save mode:
In Power-save mode most of the functions are turned off. The maximum current consumption is specified as 8 μA .

6.6 Loss of Battery (Unsupplied Transceiver)

When TLE8250XSJ is unsupplied, CANH and CANL act as high impedance. The leakage current $I_{CANH,IK}$, $I_{CANL,IK}$ at CANH pin or CANL pin is limited to $\pm 5 \mu\text{A}$ in worst case. When unsupplied, TLE8250XSJ behaves like a 1 M Ω resistor towards the bus. Therefore the device perfectly fits applications that use both Clamp 15 and Clamp 30.

6.7 Loss of Ground

If loss of ground occurs, then the transceiver is unsupplied and behaves like in unpowered state. Due to the internal input resistors on CANH and CANL on the unpowered transceiver, the HS CAN Bus Signal gets shifted. In applications with inductive load connected to the same GND, for example a motor, the transceiver can be damaged due to loss of ground. Excessive current can flow through the CAN transceiver when the inductor demagnetizes after loss of ground. The ESD structure of the transceiver cannot withstand that kind of Electrical Overstress (EOS). In order to protect the transceiver and other components of the module, an inductive load must be equipped with a free wheeling diode.

Transceiver Supply

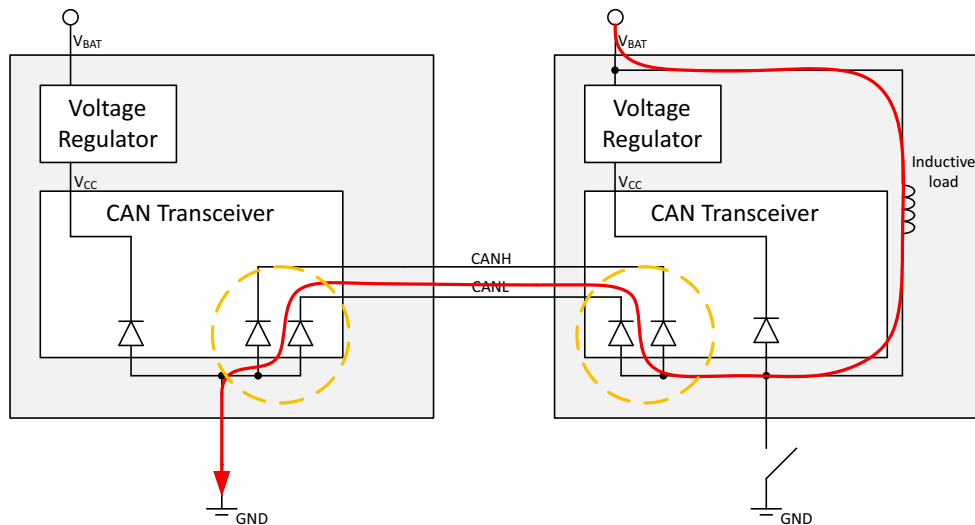


Figure 15 Loss of GND with Inductive Load

6.8 Ground Shift

Due to ground shift the GND levels of CAN transceivers within a network may vary. Ground shift occurs in high current applications or in modules with long GND wires. The receiver input stage acts like a resistor (R_i) to GND. Because the transmitting node has its GND shifted to V_{Shift} , the recessive voltage level V_{rec} from the chassis ground is no longer 2.5 V but $V_{rec} + V_{Shift}$. The same ground shift voltage V_{Shift} must be taken into account for the dominant signal. Because CAN uses a differential signal and because of the wide common mode range of +/- 12 V for Infineon transceivers, any CANH and CANL DC value within absolute maximum ratings works.

The recessive CAN bus level V_{rec} during a ground shifted node transmitting is equal to the average recessive voltage level of all transceivers:

$$V_{rec} = [(V_{rec_1} + V_{Shift_1}) + (V_{rec_2} + V_{Shift_2}) + (V_{rec_3} + V_{Shift_3}) + \dots + (V_{rec_n} + V_{Shift_n})] / n$$

n : number of connected CAN nodes

$V_{rec_1}, V_{rec_2}, \dots, V_{rec_n}$: specific recessive voltage level of the transceiver at nodes 1, 2, .. n

$V_{Shift_1}, V_{Shift_2}, \dots, V_{Shift_n}$: specific ground shift voltage level of the transceiver at nodes 1, 2, .. n

The supply current of a ground shifted transceiver increases by $I_{CC_Shift} = V_{Shift} / (R_{i_n} / n)$, assuming all input resistances at CANH and CANL of the transceivers are identical.

The higher the ground shift of one node to the other, the higher the Electromagnetic Emission.

7 Transceiver Control

The modes of the TLE8250XSJ are controlled by the pin RM and by transmitter voltage V_{CC} .

7.1 Mode Change by RM

The mode of operation is set by the mode selection pin RM. By default the RM input pin is “low” due to the internal pull-down resistor to GND.

If $V_{CC} > V_{CC_UV}$, then the TLE8250XSJ is in Receive-only mode. In order to change the mode to Normal-operating mode, RM must be switched to “low” and V_{CC} must be available.

7.2 Mode Change Delay

The HS CAN transceiver TLE8250XSJ changes the mode of operation within the transition time period t_{Mode} . The transition time period t_{Mode} must be considered in developing software for the application. After the mode change from Receive-only mode to Normal-operating Mode the transmitter is enabled. When the mode change is completed, the TLE8250XSJ releases the RxD output pin. shows this scenario.

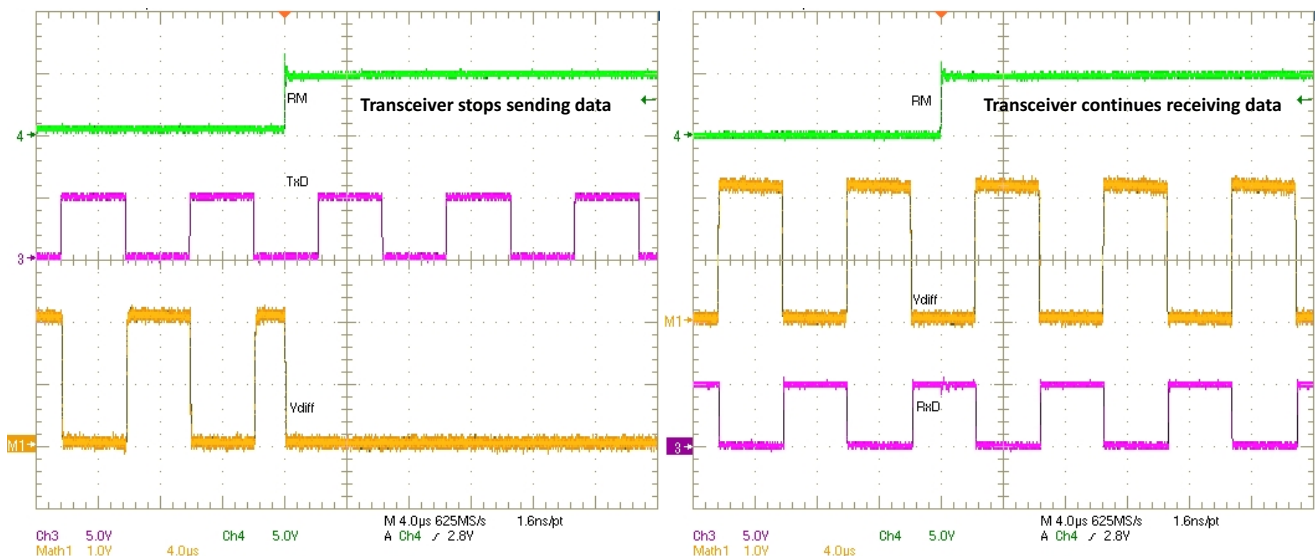


Figure 16 Receiving and Transmitting Node during Mode Change (Normal-Operating Mode to Receive-Only Mode)

The RxD output pin is not blocked nor be set to “high” during the following mode changes:

- Normal-operating mode → Receive-only mode
- Receive-only mode → Normal-operating mode

Transceiver Control

7.3 Mode Change due to V_{CC} Undervoltage

A mode change due to V_{CC} undervoltage is only possible in Normal-operating mode and in Receive-only mode. If V_{CC} undervoltage persists longer than $t_{Delay(UV)}$, then the TLE8250XSJ changes from Normal-operating mode or Receive-only mode to Forced-power-save mode. As soon as TLE8250XSJ detects an undervoltage, it disables the transmitter output stage so that no faulty data is sent to the HS CAN bus. In order to reduce current consumption during $V_{CC} < V_{CC(UV)}$ fault condition, the TLE8250XSJ has a optimized current consumption in Forced-power-save mode. If V_{CC} recovers, then $V_{CC} > V_{CC_UV}$ TLE8250XSJ

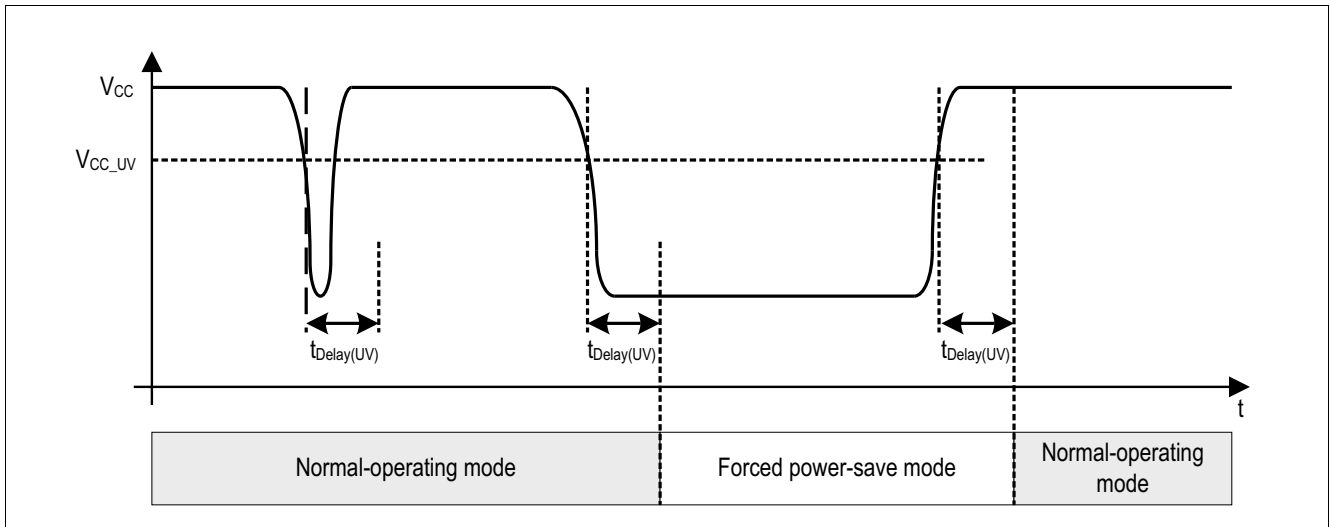


Figure 17 V_{CC} Undervoltage and Recovery

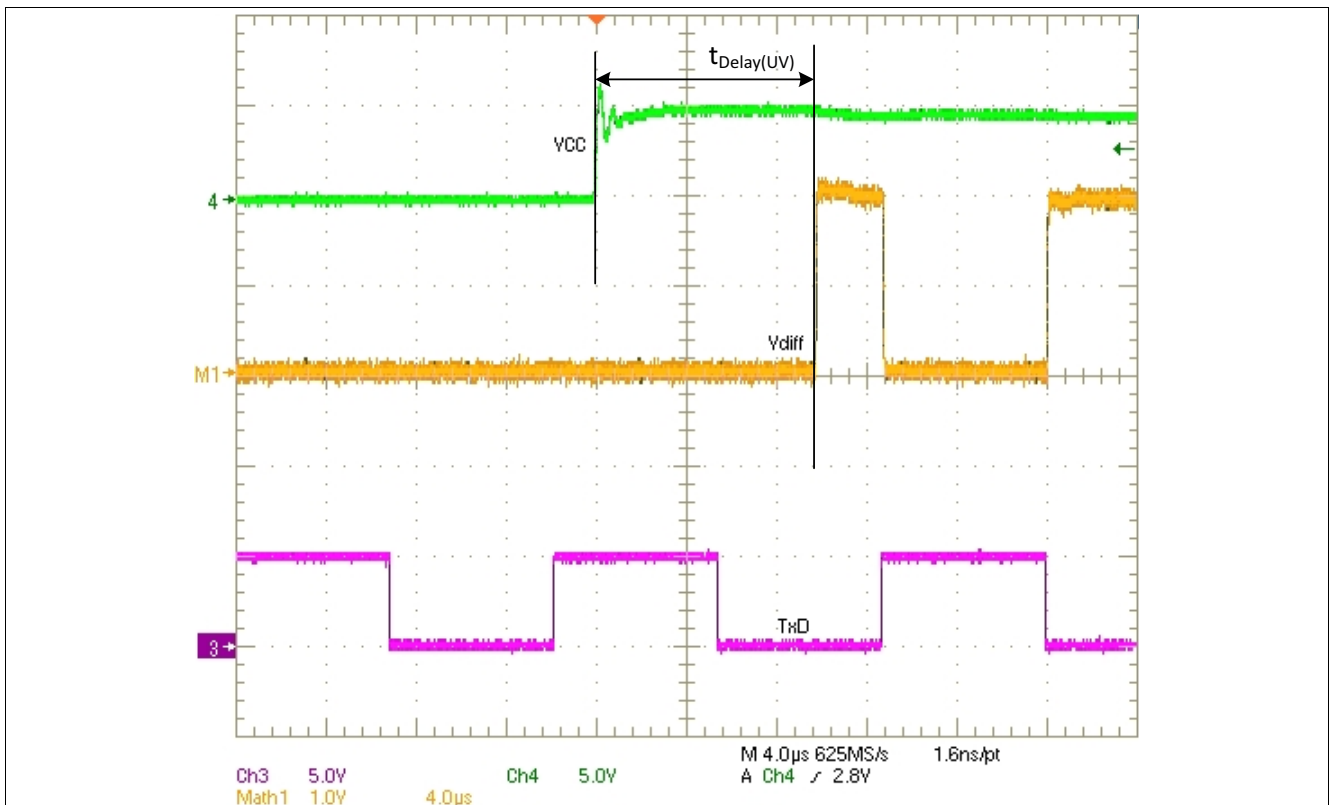


Figure 18 Recovery of V_{CC} in Forced Power-Save Mode

8 Failure Management

This chapter describes typical bus communication failures.

8.1 TxD Dominant Time-out Detection

The TxD dominant time-out detection of TLE8250XSJ protects the CAN bus from being permanently driven to dominant level. When detecting a TxD dominant time-out, the TLE8250XSJ disables the transmitter in order to release the CAN bus. Without the TxD dominant time-out detection, a CAN bus would be clamped to the dominant level and therefore would block any data transmission on the CAN bus. This failure may occur for example due to TxD pin shorted to ground.

The TxD dominant time-out detection can be reset after a dominant to recessive transition at the TxD pin. A “high” signal must be applied to the TxD input for at least $t_{\text{TxD_release}} = 200 \text{ ns}$ to reset the TxD dominant timer.

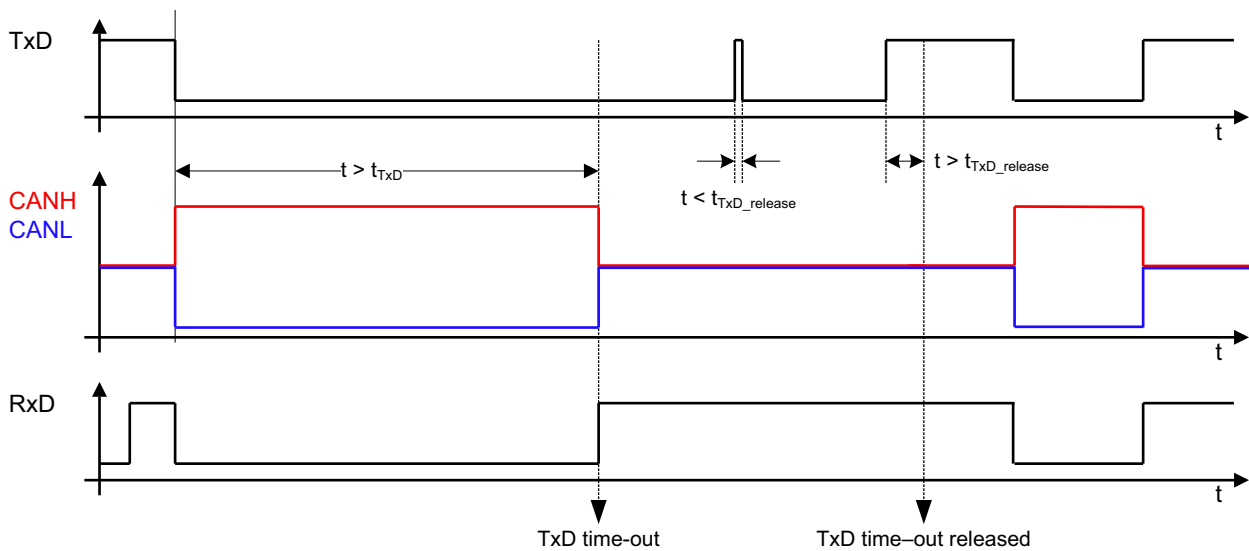


Figure 19 Resetting TxD Dominant Time-out Detection

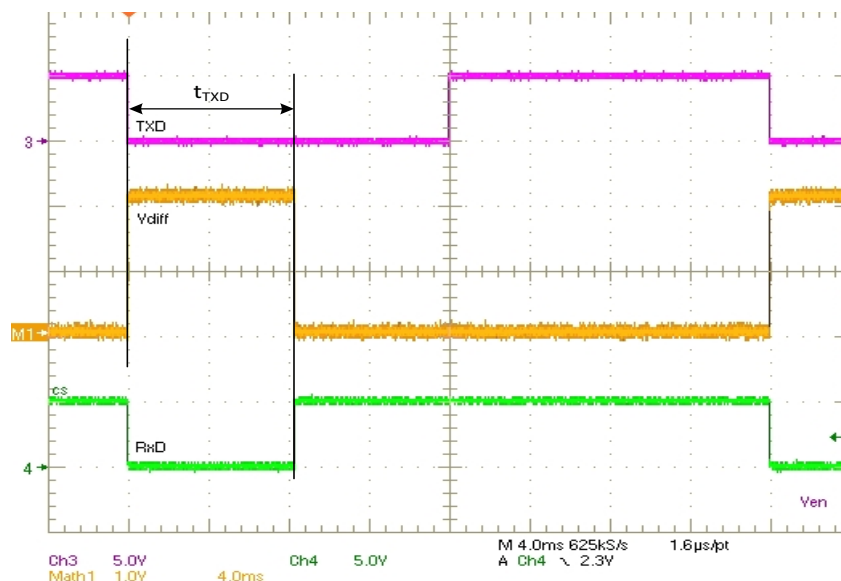


Figure 20 Measurement: TxD Dominant Time-out Detection

8.2 Minimum Baud Rate and Maximum TxD Dominant Phase

Due to the TxD dominant time-out detection of the TLE8250XSJ the maximum TxD dominant phase is limited by the minimum TxD dominant time-out time $t_{TxD} = 4.5\text{ms}$. The CAN protocol allows a maximum of 11 subsequent dominant bits at TxD pin (worst case dominant bits followed immediately by an error frame). With a minimum value of 4.5 ms given in the datasheet and maximum possible 11 dominant bits, the minimum baud rate of the application must be higher than 2.44 kbit/s.

8.3 Short Circuit

Figure 21 shows short circuit types on the HS CAN bus. The CANH and CANL pins are short circuit proof to GND and to supply voltage. A current limiting circuit protects the transceiver from damage. If the device heats up due to a permanent short at CANH or CANL, then the overtemperature protection switches off the transmitter. Depending on the type of short circuit on CANH and CANL, communication might be still possible. If only CANL is shorted to GND or only CANH is shorted to V_{BAT} , then dominant and recessive states may be recognized by the receiver. Timings and/or differential output voltages might be not valid according to ISO11898 but still in the range for the receiver working properly.

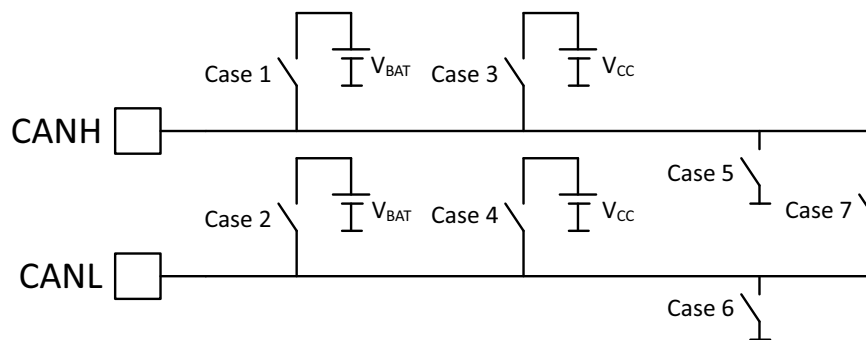


Figure 21 HS CAN Bus Short Circuit Types

Communication on the HS CAN bus is blocked in the following cases:

- CANH and CANL shorted (Case7)
- CANH shorted to GND (Case 5)
- CANL shorted to V_{BAT} (Case 2) or V_{CC} (Case 4)

If a short circuit occurs, then the V_{CC} supply current for the transceiver can increase significantly. It is recommended to dimension the voltage regulator for the worst case, especially when V_{CC} also supplies the microcontroller. V_{CC} supply current increases in dominant state. The recessive current remains unchanged.

CANH shorted to GND

The datasheet specifies a maximum short circuit current of 100mA. When transmitting a dominant state to the bus, 5V is shorted to GND through the transmitter output stage. Power dissipation with 10% duty cycle (DCD) is:

$$P = DCD \times U \times I = 0.1 \times 5V \times 100\text{mA} = 0.05W.$$

The average fault current with worst case parameters and assuming a realistic duty cycle of 10% is:

$$I_{CC,Fault} = I_{CC,rec} \times 0.9 + I_{CANH,SC} \times 0.1 = 13.6\text{mA}.$$

CANL shorted to V_{BAT}

If CANL is shorted to V_{BAT} , then the current through the CANL output stage is even higher and the device heats up faster. The datasheet specifies a maximum short circuit current of 100mA. When transmitting a dominant state to the bus, V_{BAT} is shorted to GND through the transmitter output stage. Assuming a realistic duty cycle

Failure Management

of 10% for this case and the power dissipation is:

$$P = DCD \times U \times I = 0.1 \times V_{BAT} \times 100\text{mA} = 0.1 \times 18\text{V} \times 100\text{mA} = 0.18\text{W}.$$

CANH shorted to V_{BAT}

Short circuit of CANH to V_{BAT} can result in a permanent dominant state on the HS CAN bus, due to the voltage drop at the termination resistors of the network. Therefore the termination resistor has to be chosen accordingly. If a short circuit of CANH to V_{BAT} occurs, then the power loss in the termination resistor must be taken into account. **Figure 22** shows the current in case CANH is shorted to V_{BAT} . When transmitting a dominant state to the bus, the current flows through the termination resistor and CANL to GND. Power loss in the termination resistor and CANL assuming a battery voltage of 18 V and a duty cycle of 10% is:

$$P_{\text{Loss_Termination}} = 0.1 \times (R_{\text{Termination}} \times I_{\text{CANL_SC}}) \times I_{\text{CANL_SC}} = (60\Omega \times 100\text{mA}) \times 100\text{mA} = 0.6\text{W}$$

$$P_{\text{Loss_CANL}} = 0.1 \times (V_{BAT} - (R_{\text{Termination}} \times I_{\text{CANL_SC}})) \times I_{\text{CANL_SC}} = 0.1 \times (18\text{V} - 6\text{V}) \times 100\text{mA} = 0.1 \times 12\text{V} \times 100\text{mA} = 0.12\text{W}$$

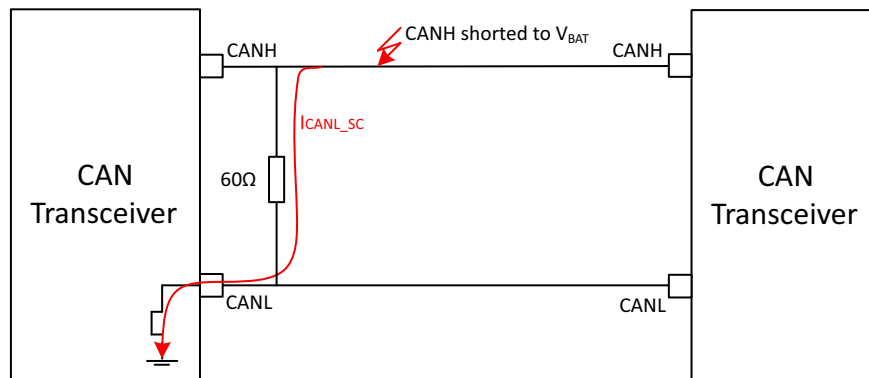


Figure 22 Current Flowing in Case of a Short Circuit CANH to V_{BAT}

8.4 TLE8250XSJ Junction Temperature

In Normal-operating mode highest power dissipation occurs with 50% duty cycle (D) at an ambient temperature of 150 °C:

$$P_{\text{NM,MAX}} = D \times (I_{\text{CC_R}} \times V_{\text{CC,max}}) + D \times (I_{\text{CC_D}} \times V_{\text{CC,max}}) + (I_{\text{O}} \times V_{\text{IO,max}}) = \\ = 0.5 \times (4 \text{ mA} \times 5.5 \text{ V}) + 0.5 \times (60 \text{ mA} \times 5.5 \text{ V}) + (1.5 \text{ mA} \times 5.5 \text{ V}) = 184.25 \text{ mW}.$$

Junction temperature increases due to power dissipation and depending on the package.

However, typical conditions are more like this: ambient temperature is below 150 °C, overall duty cycle is less than 50%, and supply voltages V_{CC} and V_{IO} have their typical values instead of maximum values.

Power dissipation is much lower for such typical conditions:

$$P_{\text{NM,AVG}} = D \times (I_{\text{CC_R,Typ}} \times V_{\text{CC,AVG}}) + D \times (I_{\text{CC_D,Typ}} \times V_{\text{CC,AVG}}) + (I_{\text{O,Typ}} \times V_{\text{IO,AVG}}) = \\ = 0.9 \times (2 \text{ mA} \times 5 \text{ V}) + 0.1 \times (38 \text{ mA} \times 5 \text{ V}) + (1 \text{ mA} \times 3.3 \text{ V}) = 23.3 \text{ mW}.$$

Table 8 Increase of Junction Temperature ΔT_j

Package	R_{thja} in K/W	ΔT_j in K	Conditions
PG-DSO-8	120	22.1	$P_{\text{NM,MAX}} = 184.25 \text{ mW};$ $T_{\text{amb}} = 150 \text{ °C};$ 50% duty cycle; $V_{\text{CC}} = V_{\text{CC,max}}; V_{\text{IO}} = V_{\text{IO,max}}$
PG-DSO-8	120	2.8	$P_{\text{NM,AVG}} = 23.3 \text{ mW};$ $T_{\text{amb}} = 85 \text{ °C};$ 10% duty cycle; $V_{\text{CC}} = V_{\text{CC,typ}}; V_{\text{IO}} = V_{\text{IO,typ}}$

Failure Management

Table 8 Increase of Junction Temperature ΔT_j

Package	R_{thja} in K/W	ΔT_j in K	Conditions
PG-DSO-8	120	6	Short Circuit CANH to GND 10% duty cycle;
PG-DSO-8	120	21.6	Short Circuit CANL to V_{BAT} 10% duty cycle;

If a short circuit occurs, then the TLE8250XSJ heats up. The higher the duty cycle, the higher the power dissipation and thermal shutdown can occur due to high temperature. The receiver is still enabled with only the transmitter disabled. The behavior is identical to Receive-only mode.

9 Thermal Simulation

This chapter provides simulation results for thermal resistance junction for $T_A = -40^\circ\text{C}$, 25°C , 85°C , 105°C and 125°C . Top of package fixed to $T_A: R_{th_jctop}$. Bottom of package fixed to $T_A: R_{th_jcbot}$

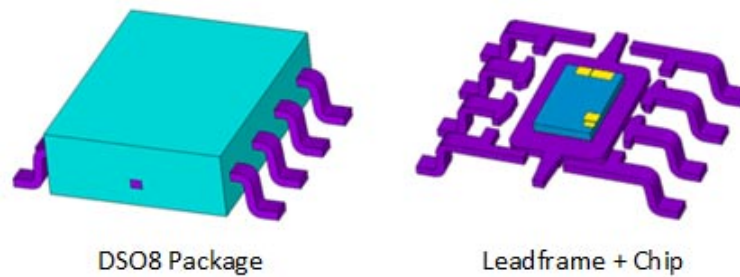


Figure 23 Package and Leadframe

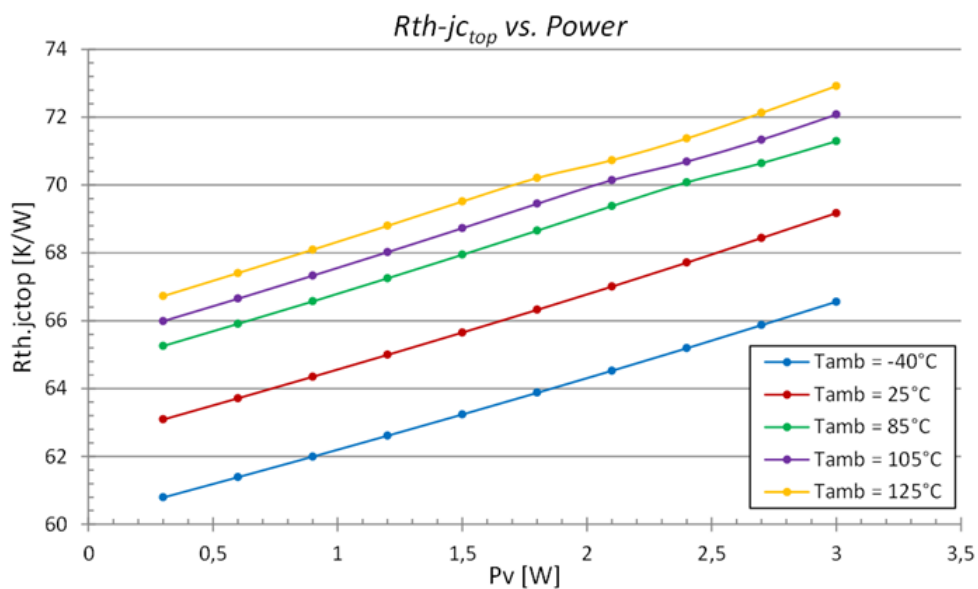


Figure 24 Simulation Result (R_{th_jctop} vs. Power)

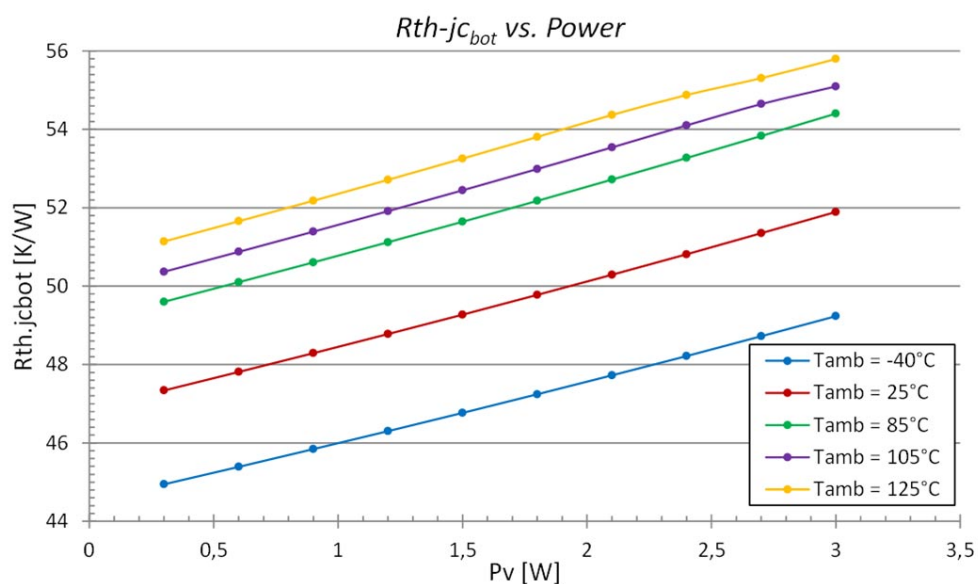


Figure 25 Simulation Result (R_{th_jcbot} vs. Power)

10 PCB Layout Recommendations for CAN FD

The following layout rules should be considered to achieve best performance of the transceiver and the ECU:

- TxD and RxD connections to microcontroller should be as short as possible.
- For each microcontroller the TxD driver output stage current capability may vary depending on the selected port and pin. The driver output stage current capability should be strong enough to guarantee a maximum propagation delay from μC port to transceiver TxD pin of less than 30ns.
- Place two individual 100nF capacitors close to V_{CC} and V_{IO} pins for local decoupling. Due to their low resistance and lower inductance compared to other capacitor types, it is recommended to use ceramic capacitors.
- If a common mode choke is used, it has to be placed as close as possible to the bus pins CANH and CANL.
- Avoid routing CANH and CANL in parallel to fast-switching lines or off-board signals in order to reduce noise injection to the bus.
- It is recommended to place the transceiver as close as possible to the ECU connector in order to minimize track length of bus lines.
- Avoid routing digital signals in parallel to CANH and CANL.
- CANH and CANL tracks should have the same length. They should be routed symmetrically close together with smooth edges.
- GND connector should be placed as close as possible to the transceiver.
- Avoid routing transceiver GND and microcontroller GND in series in order to reduce coupled noise to the transceiver. This also applies for high current applications, where the current should not flow through the GND line of transceiver and microcontroller in serial.
- Avoid routing transceiver V_{CC} supply and microcontroller V_{CC} supply in series in order to reduce coupled noise to the transceiver.
- Same dimensions and lengths for all wire connections from the transceiver to CMC and/or termination.
- In case an external ESD protection circuit is used, make sure the total capacitance is lower than 50pF. Use equal ESD protection for CANH and CANL in order to improve signal symmetry.
- For CAN FD application it is recommended to use a Common Mode Choke with 100 μH impedance and a Split termination with a capacitance of 4.7nF in order to achieve excellent EME performance in automotive applications.

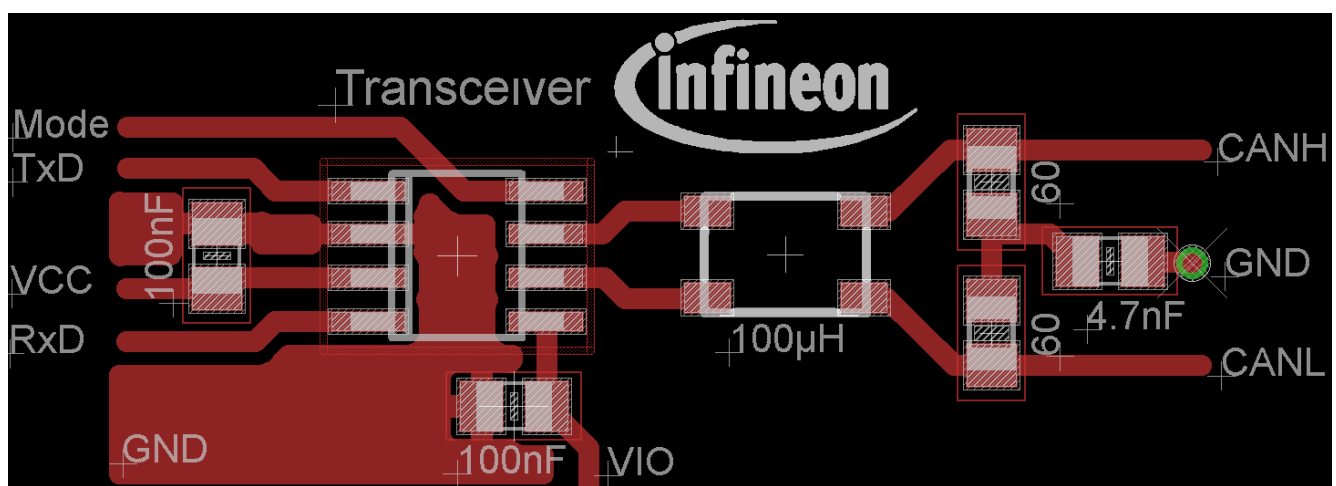


Figure 26 Example CAN transceiver PCB layout

11 Pin FMEA

This chapter provides an Pin FMEA (Failure Mode and Effect Analysis) for typical failure situations. Typical failure scenarios for dedicated pins of TLE8250XSJ are:

- Short circuit to battery voltage V_{BAT}
- Short circuit to supply voltage V_{CC}
- Short circuit to reference voltage V_{IO}
- Short circuit to PCB Ground GND
- Short circuit between neighbored pins
- Pin is not connected

The possible failures are classified according to possible failure effects (see [Table 9](#))

Table 9 Classification of failure effects

Class	Possible effects
A	- Transceiver damaged - HS CAN bus affected
B	- No damage to transceiver - No CAN bus communication possible
C	- No damage to the transceiver - Bus communication possible - Affected node excluded from communication
D	- No damage to the transceiver - HS CAN bus communication possible - Reduced functionality of transceiver

Table 10 Pin FMEA Overview

Pin	Potential Failure	Potential Effects of Failure	Class
TxD	Short Circuit to GND	No damage to the transceiver. Transmitter is disabled after TxD dominant time-out. HS CAN bus communication blocked for t_{TxD_TO} . If failure does not recover transmitter will stay disabled and node cannot transmit data to the HS CAN bus. The receiver works as specified in the datasheet.	B
TxD	Short Circuit to V_{CC} / V_{IO}	No damage to the transceiver.	C
TxD	Short Circuit to V_{BAT}	Violation of absolute maximum ratings. Device gets damaged.	A
TxD	open	No damage to the transceiver. Due to the internal pull-up resistor the TxD stays "recessive".	C
GND	Short Circuit to V_{CC} / V_{IO}	No damage to the transceiver. Transceiver stays unsupplied and is passive to the HS CAN Bus.	C
GND	Short Circuit to V_{BAT}	No damage to the transceiver. Transceiver stays unsupplied and is passive to the HS CAN Bus.	C
GND	open	No damage to the transceiver. Transceiver stays unsupplied and is passive to the HS CAN Bus.	C
V_{CC}	Short Circuit to V_{BAT}	Violation of absolute maximum ratings. Device gets damaged.	A

Pin FMEA

Table 10 Pin FMEA Overview

Pin	Potential Failure	Potential Effects of Failure	Class
V_{CC}	open	No damage to the transceiver. Transceiver stays unsupplied.	C
RxD	Short Circuit to V_{CC}	RxD remains “dominant”. If $V_{IO} < V_{CC}$ the device gets damaged due to violation of absolute maximum ratings.	A
RxD	Short Circuit to V_{IO}	RxD remains “dominant”. The RxD signal does not reflect the signal on the HS CAN bus. In this case the microcontroller is able to place a message on the CAN bus at any time and corrupts the CAN messages on the bus. The device is stressed if a “dominant” signal is driven. In this case the RxD output short circuits the V_{IO} to GND. The device gets damaged due to violation of absolute maximum ratings.	A
RxD	Short Circuit to V_{BAT}	Violation of absolute maximum ratings. Device gets damaged.	A
RxD	Short Circuit to GND	The device is stressed if a “recessive” signal is driven. In this case the RxD output short circuits the V_{IO} to GND. The device gets damaged due to violation of absolute maximum ratings.	A
RxD	open	No damage to the transceiver. Due to the internal pull-up resistor the RxD stays “recessive”. The RxD signal does not reflect the signal on the HS CAN bus. In this case the microcontroller is able to place a message on the CAN bus at any time and corrupts the CAN messages on the bus.	C
V_{IO}	Short Circuit to V_{CC}	No damage to the transceiver. Microcontroller might be destroyed.	D
V_{IO}	Short Circuit to V_{BAT}	Violation of absolute maximum ratings. Device gets damaged.	A
V_{IO}	Short Circuit to GND	No damage to the transceiver. Transceiver stays unsupplied and is passive to the HS CAN Bus.	C
CANL	Short Circuit to GND	No damage to the transceiver. Violation of bit timing parameters possible. Degraded EMC performance.	D
CANL	Short Circuit to V_{BAT}	No bus communication possible. No damage to the transceiver.	B
CANL	Short Circuit to V_{CC} / V_{IO}	No bus communication possible. No damage to the transceiver.	B
CANL	open	No damage to the transceiver. No bus communication possible.	B
CANL	Short Circuit to CANH	No damage to the transceiver. No bus communication possible.	B
CANH	Short Circuit to GND	No damage to the transceiver. No bus communication possible.	B
CANH	Short Circuit to V_{BAT}	No damage to the transceiver. Violation of bit timing parameters possible. Degraded EMC performance.	D
CANH	Short Circuit to V_{CC} / V_{IO}	No damage to the transceiver. Violation of bit timing parameters possible. Degraded EMC performance.	D
CANH	open	No damage to the transceiver. No bus communication possible	B
RM	Short Circuit to GND	No damage to the transceiver. The Device will enter Normal-operating Mode.	D
RM	Short Circuit to V_{BAT}	Violation of absolute maximum ratings. Device gets damaged.	A

Pin FMEA

Table 10 Pin FMEA Overview

Pin	Potential Failure	Potential Effects of Failure	Class
RM	Short Circuit to V_{CC} / V_{IO}	If $V_{IO} < V_{CC}$ the device gets damaged due to violation of absolute maximum ratings. Device will enter Receive-only Mode.	D
RM	open	No damage to the transceiver. Device will enter Normal-operating Mode.	D

References

12 References

- 1) [Data Sheet TLE8250XSJ, HS CAN Transceiver, Infineon Technologies AG](#)
- 2) [White Paper - The CAN FD Physical Layer, Infineon Technologies AG](#)
- 3) [Infineon Automotive Transceivers Homepage](#)

Terms and Abbreviations

Table 11 **Terms and Abbreviations**

CAN	Controller Area Network
CMC	Common mode choke
CSMA/CA	Carrier Sense Multiple Access/ Collision Avoidance
EMC	Electromagnetic compatibility
EME	Electromagnetic emission
EMI	Electromagnetic interference
EOS	Electrical overstress
ESD	Electrostatic discharge
ESR	Equivalent Series Resistance
FD	Flexible Data Rate
“high”	logical high
“low”	logical low

Revision History

13 Revision History

Revision	Date	Changes
1.3	2017-04-05	Added Chapter 9 “Thermal Simulation” results for TLE8250XSJ in DSO-8 package
1.2	2016-12-27	Added power up sequence description in Chapter 6.3 for of TLE8250XSJ
1.1	2016-07-20	Chapter 12 : Added link to Data Sheet of TLE8250XSJ
1.0	2016-07-15	Application Note created

Trademarks of Infineon Technologies AG

μHVIC™, μIPM™, μPFC™, AU-ConvertIR™, AURIX™, C166™, CanPAK™, CIPOS™, CIPURSE™, CoolDP™, CoolGaN™, COOLiR™, CoolMOS™, CoolSET™, CoolSiC™, DAVE™, DI-POL™, DirectFET™, DrBlade™, EasyPIM™, EconoBRIDGE™, EconoDUAL™, EconoPACK™, EconoPIM™, EiceDRIVER™, eupec™, FCOS™, GaNpowIR™, HEXFET™, HITFET™, HybridPACK™, iMOTION™, IRAM™, ISOFACE™, IsoPACK™, LEDriviR™, LITIX™, MIPAQ™, ModSTACK™, my-d™, NovalithIC™, OPTIGA™, OptiMOS™, ORIGA™, PowIRaudio™, PowIRstage™, PrimePACK™, PrimeSTACK™, PROFET™, PRO-SIL™, RASIC™, REAL3™, SmartLEWIS™, SOLID FLASH™, SPOC™, StrongIRFET™, SupIRBuck™, TEMPFET™, TRENCHSTOP™, TriCore™, UHVIC™, XHP™, XMC™.

Trademarks updated November 2015

Other Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2017-04-05

Published by

Infineon Technologies AG

81726 Munich, Germany

© 2016 Infineon Technologies AG.

All Rights Reserved.

Do you have a question about any aspect of this document?

Email: erratum@infineon.com

Document reference

Z8F55275752

IMPORTANT NOTICE

The information contained in this application note is given as a hint for the implementation of the product only and shall in no event be regarded as a description or warranty of a certain functionality, condition or quality of the product. Before implementation of the product, the recipient of this application note must verify any function and other technical information given herein in the real application. Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind (including without limitation warranties of non-infringement of intellectual property rights of any third party) with respect to any and all information given in this application note.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.