

XC161CJ/CS

High End Performance



THE XC161CJ is a new derivative of the popular C166 microcontroller family.

BASED ON the enhanced C166S V2 architecture it outperforms existing 16-bit solutions. The XC161CJ is an improved and new-generation representative of the Infineon family of the full featured 16-bit single-chip CMOS microcontroller. It combines the extended functionality and performance of the C166S V2 Core with powerful On-Chip peripheral subsystems and on-chip Flash memory.

THE ARCHITECTURE of XC161CJ has been optimized for high instruction throughput and minimum response time to external interrupts.

INTELLIGENT peripheral systems have been integrated to reduce the need for CPU intervention. The high flexibility of this architecture allows to serve the diverse and varying needs of different application areas such as automotive, industrial control, or data communications.

ALL THIS combined in a P/PG-TQFP-144 package serves the requirements for highest system integration.

Applications

- Automotive Dashboard
- Robotic Control
- Automotive Body Control Modules
- Car Radio
- Central Gateway

Features

- High performance 16-bit C166S V2 CPU with 5-Stage Pipeline
- Single clock cycle instruction execution with 25 ns instruction time at 40 MHz CPU clock
- 25 ns multiplication (16 x 16 bit) time at 40 MHz CPU clock
- DSP support with Built-in advanced MAC unit
- 16 MByte total linear address space for code and data
- Flexible Synchronous External Bus Interface

- 16-Priority-Level Interrupt System on 8 group levels
- On-chip debug controller and related interface to JTAG controller
- Gated clock concept (function related) for reduced power consumption and improved EMC
- 8/12 KByte on Chip RAM
- 128 /256 KByte advanced Program Flash Memory (CJ/CS)
- Serial Data Link Module (SDLM), compliant with J1850 (only for CJ)
- Flexible System Control and Power Management
- Real Time Clock with alarm interrupt
- 12-Channel 10-bit A/D Converter, conversion time < 3 μs
- Two 16-channel Capture/Compare Units with 2 independent time bases each
- I²C Bus module with 10-bit addressing and 400 Kbit/s
- Serial Data Link Module (SDLM), compliant with J1850
- Two Multifunctional General Purpose Timer units
- Two Asynchronous/Synchronous Serial Channels (USART)
- Two High Speed Synchronous Serial Channels (SPI)
- TwinCAN module, two Full-CAN nodes with 32 message buffers and gateway function
- Up to 99 I/O Lines with individual bit addressability
- Package: P/PG-TQFP-144
Plastic Thin Quad Flat Package
- Temperature Range: -40°C to +125°C
- Supply Voltage:
 - Core Supply: 2.5 V
 - Ports: 5.0 V


www.infineon.com/microcontrollers

Microcontrollers




Never stop thinking

XC161CJ Block Diagram

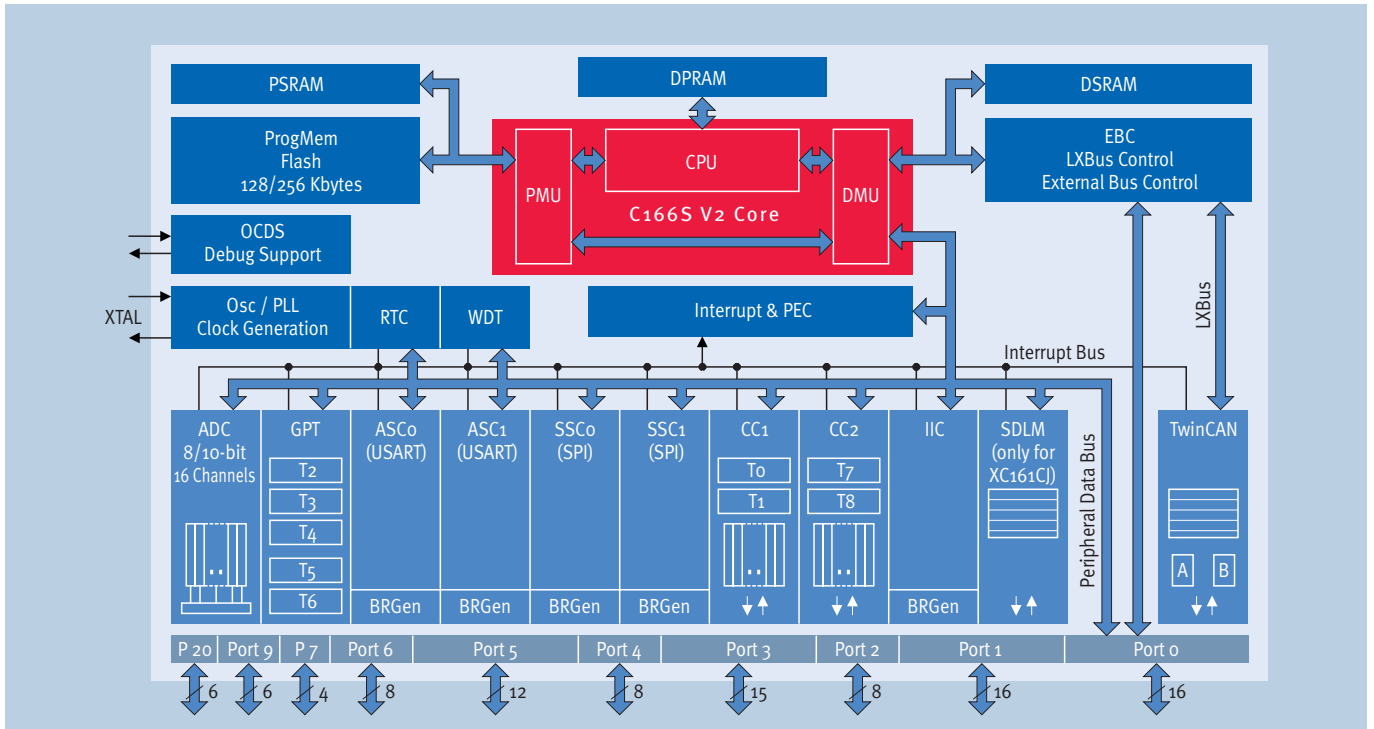

Type	Package
SAF-XC161CJ-16FF	P/PG-TQFP-144
SAK-XC161CJ-16FF	P/PG-TQFP-144
SAF-XC161CS-32FF	P/PG-TQFP-144
SAK-XC161CS-32FF	P/PG-TQFP-144

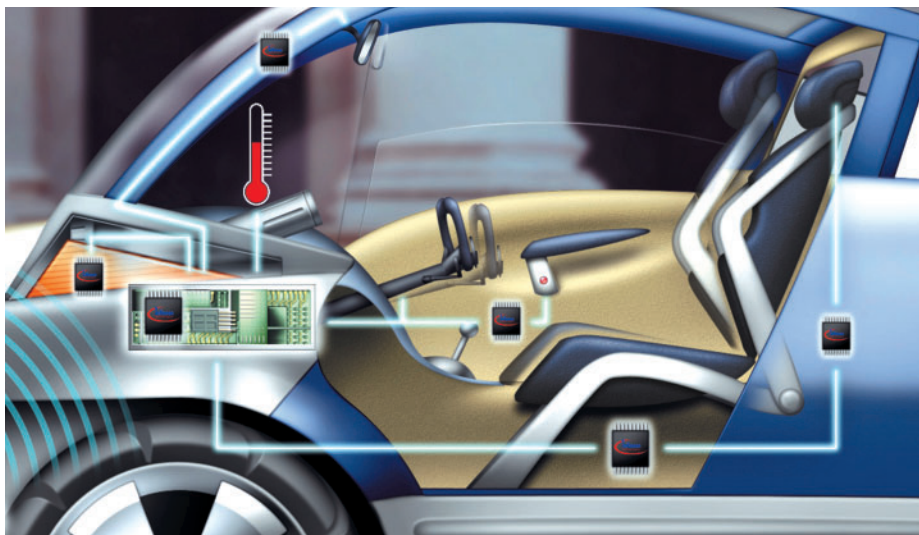

XC161CJ
The Best Solution for
Automotive Body and
Dashboard Application

How to reach us:
<http://www.infineon.com>

Published by
Infineon Technologies AG
81726 München, Germany

© Infineon Technologies AG 2006.
All Rights Reserved.

Legal Disclaimer

The information given in this Product Brief shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Ordering No. B158-H8011-G1-X-7600
Printed in Germany
PS 0606 nb